Subwavelength-diameter silica wires for microscale optical components

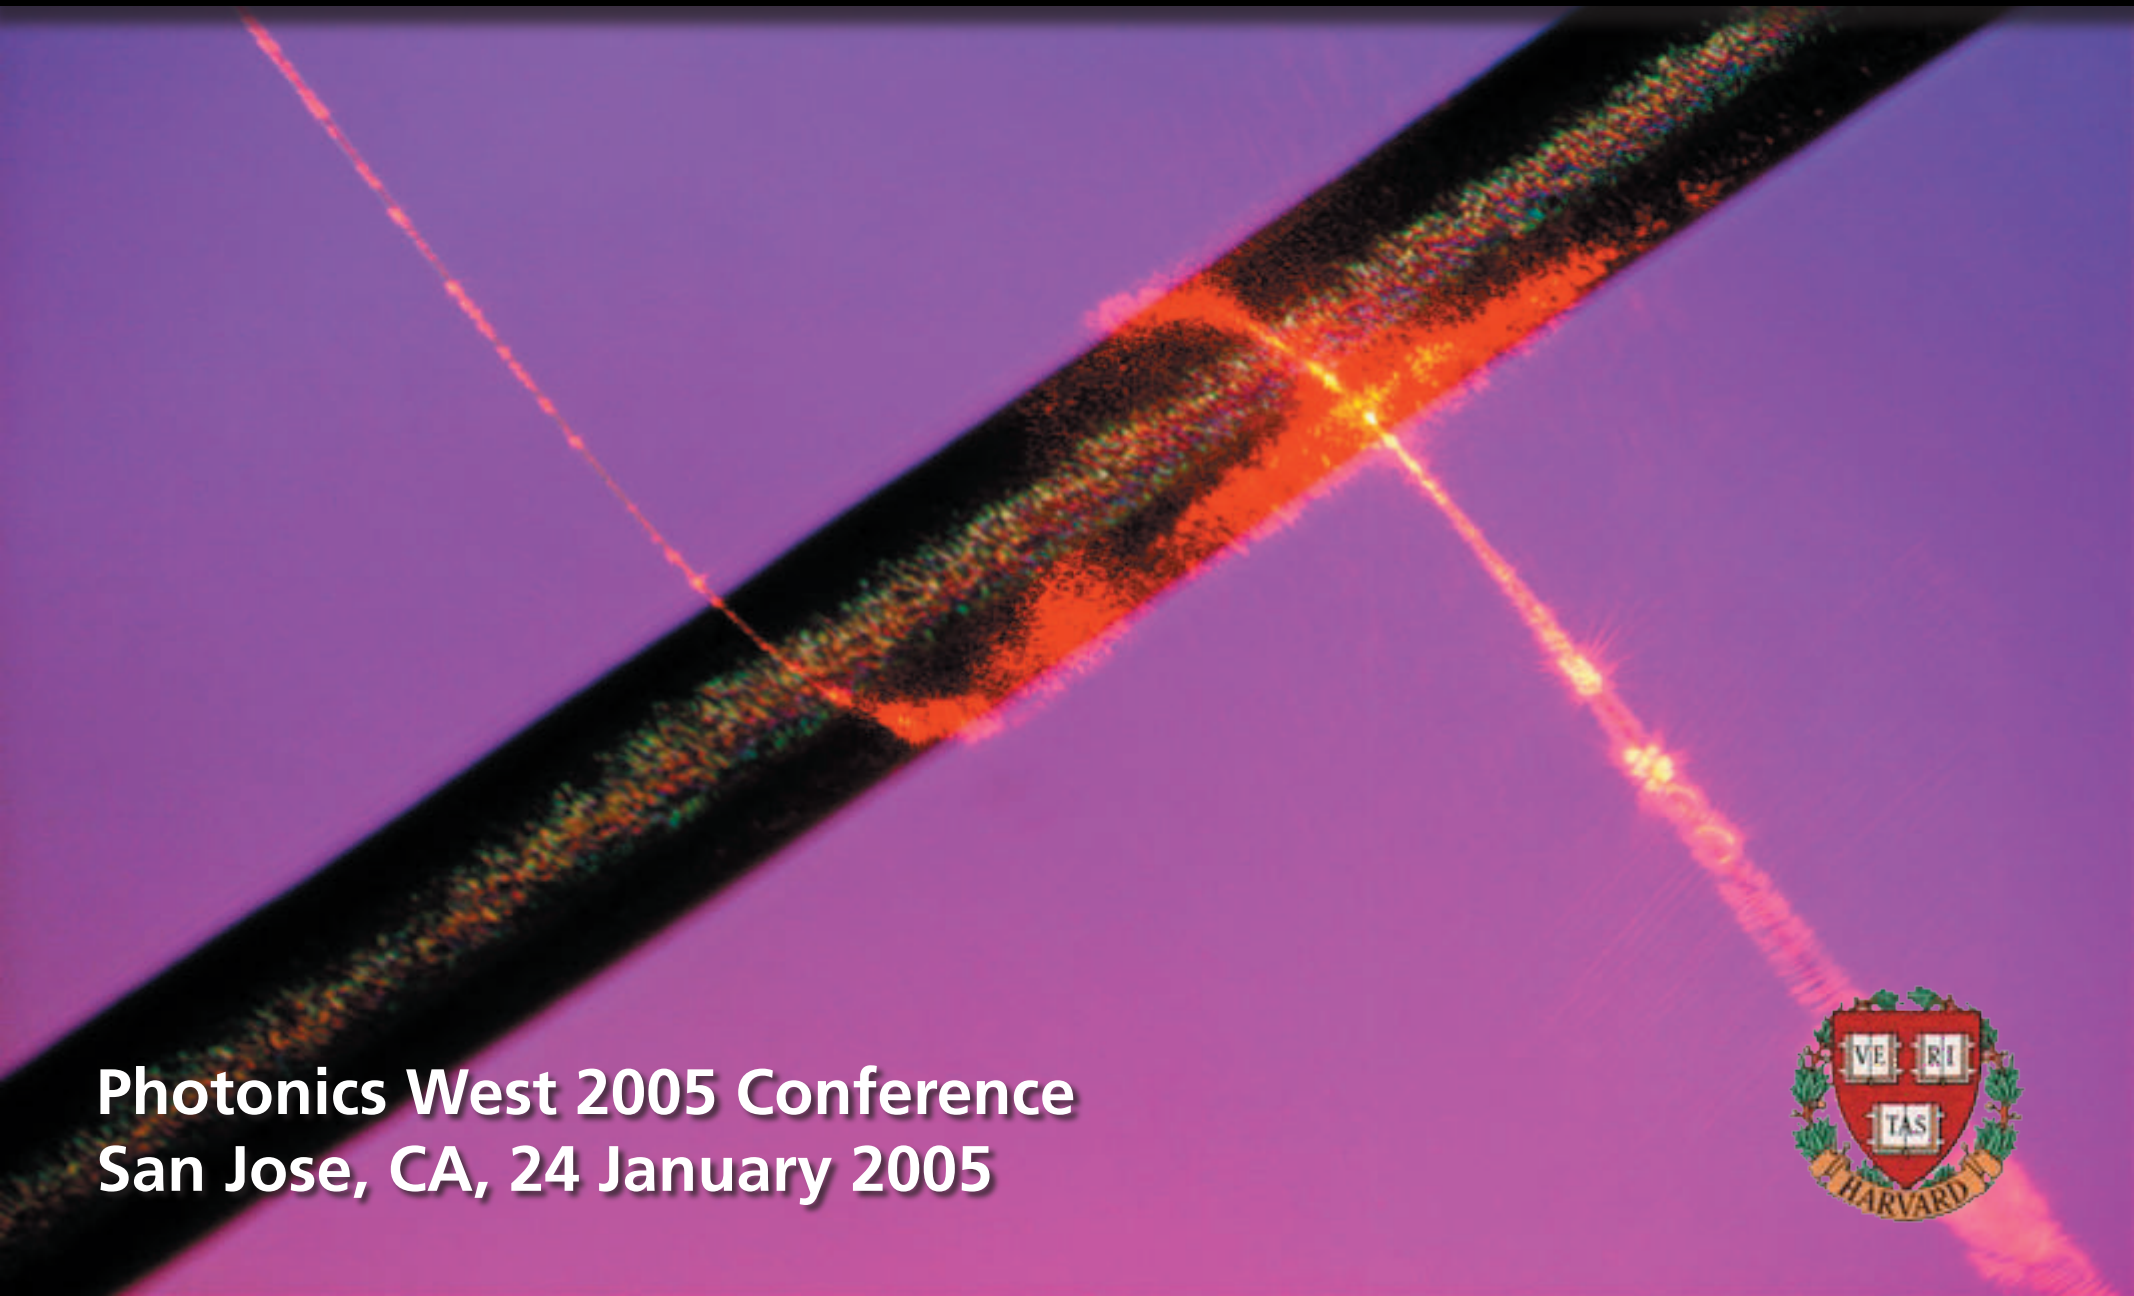

Photonics West 2005 Conference
San Jose, CA, 24 January 2005

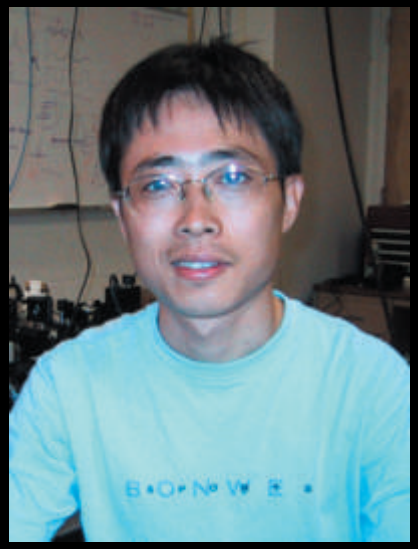

Limin Tong

Rafael Gattass

Geoff Svacha

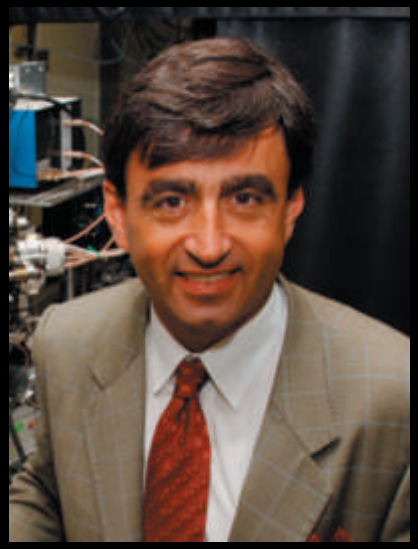

Eric Mazur

and also....

at Harvard:

Jonathan Aschom
Mengyan Shen
Iva Maxwell
James Carey
Brian Tull
Dr. Yuan Lu
Dr. Richard Schalek
Prof. Federico Capasso
Prof. Cynthia Friend

at Zhejiang University:

Dr. Sailing He
Dr. Jingyi Lou
Xuewen Chen
Liu Liu
Zhanghua Han

Dr. Ray Mariella (LLNL)

Outline

- waveguiding
- nanowire fabrication
- optical properties

Waveguiding

single mode condition for 600-nm light:

$$M \doteq 2\,\frac{d}{\lambda}(n_1^2 - n_2^2)^{1/2}$$

without cladding: $d < 268\ \mathrm{nm}$

Add cladding with 0.4% index difference:

$$d < 5\ \mu\mathrm{m}$$

Waveguiding

commercial single-mode fiber (Corning Titan®)

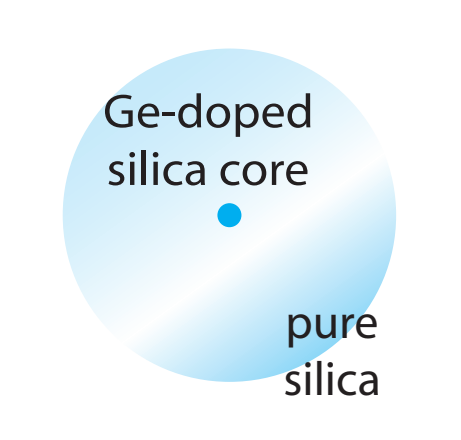

	core	cladding
index	$n_1 = 1.468$	$n_2 = 1.462$
diameter:	$8.3\ \mu\text{m}$	$125.0 \pm 1.0\ \mu\text{m}$

operating wavelength: $\lambda = 1310\ \text{nm}/1550\ \text{nm}$

Waveguiding

drawbacks of clad fibers:

- weak confinement
- no tight bending
- coupling requires splicing

Waveguiding

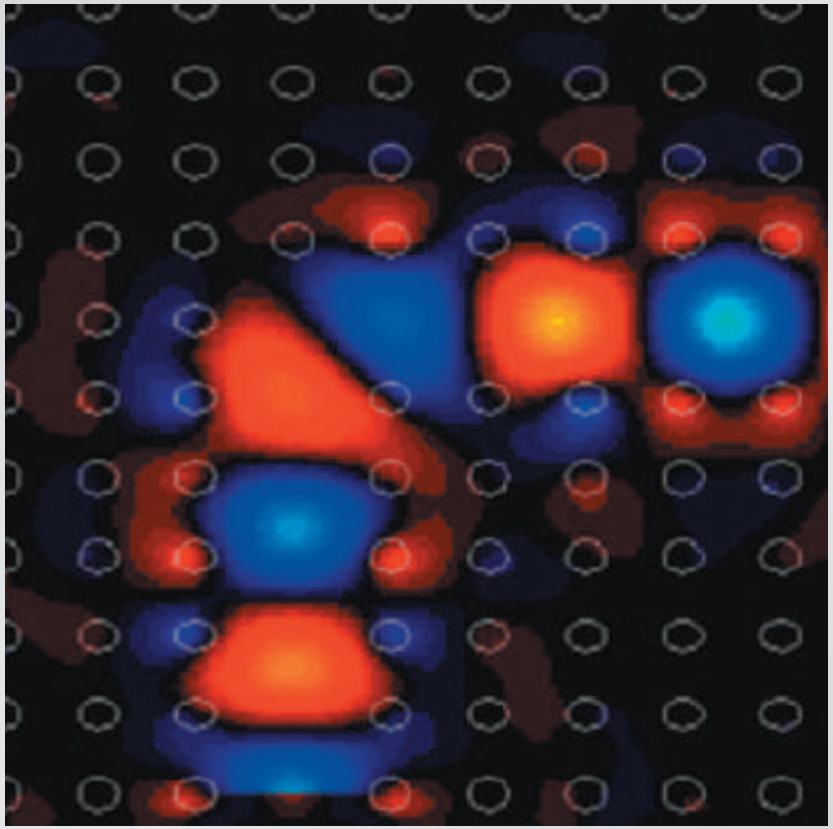

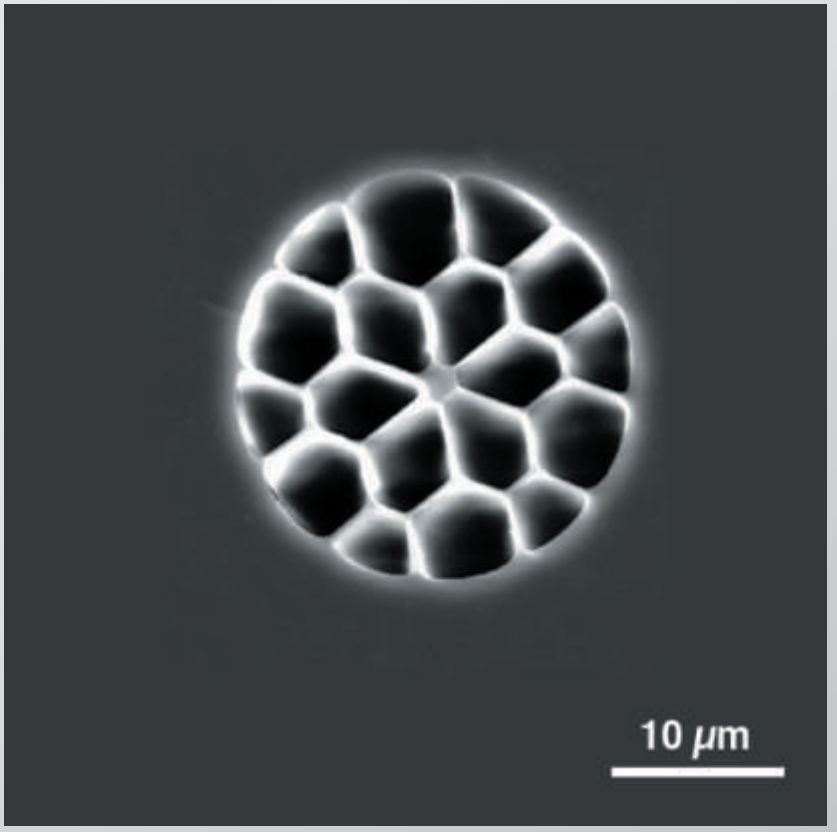

Outline

- waveguiding
- nanowire fabrication
- optical properties

Nanowire fabrication

two-step drawing process

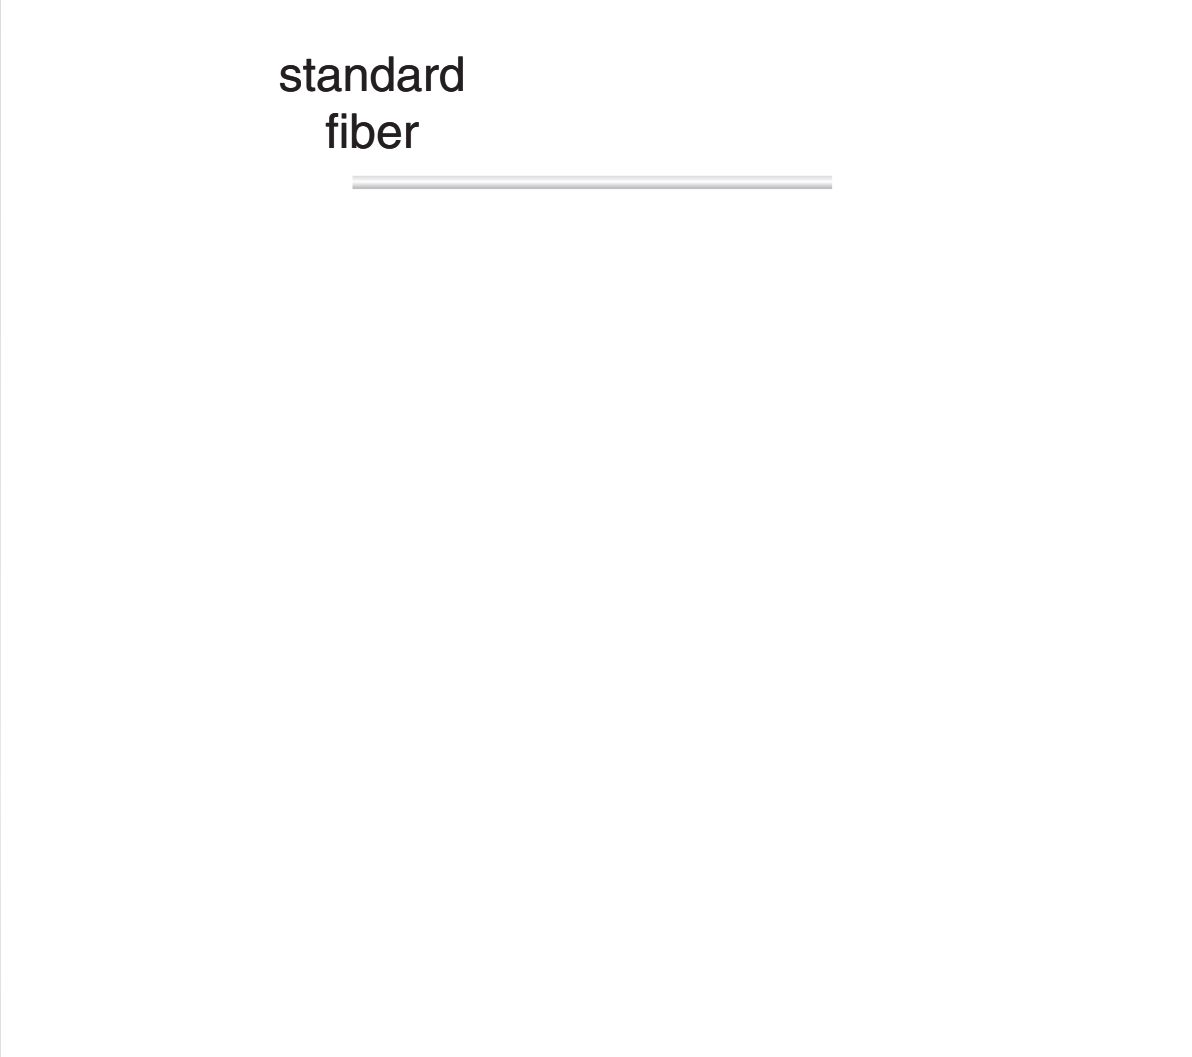

Nanowire fabrication

two-step drawing process

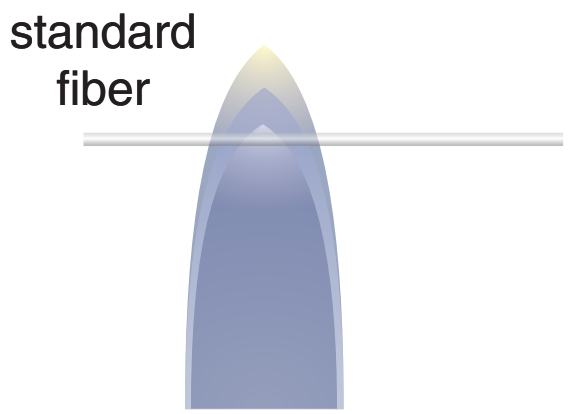

Nanowire fabrication

two-step drawing process

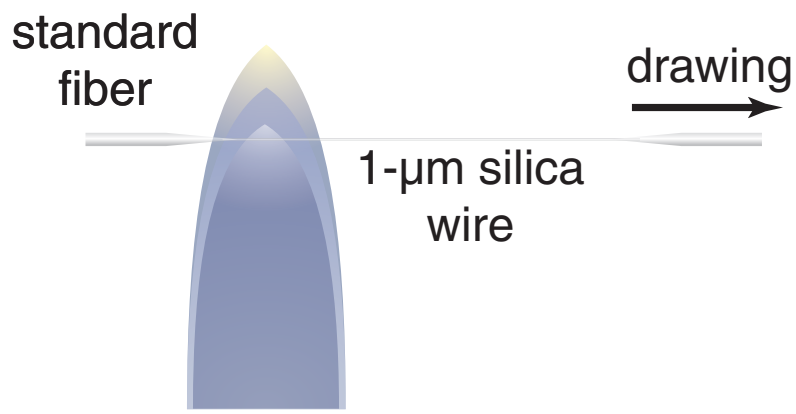

Nanowire fabrication

two-step drawing process

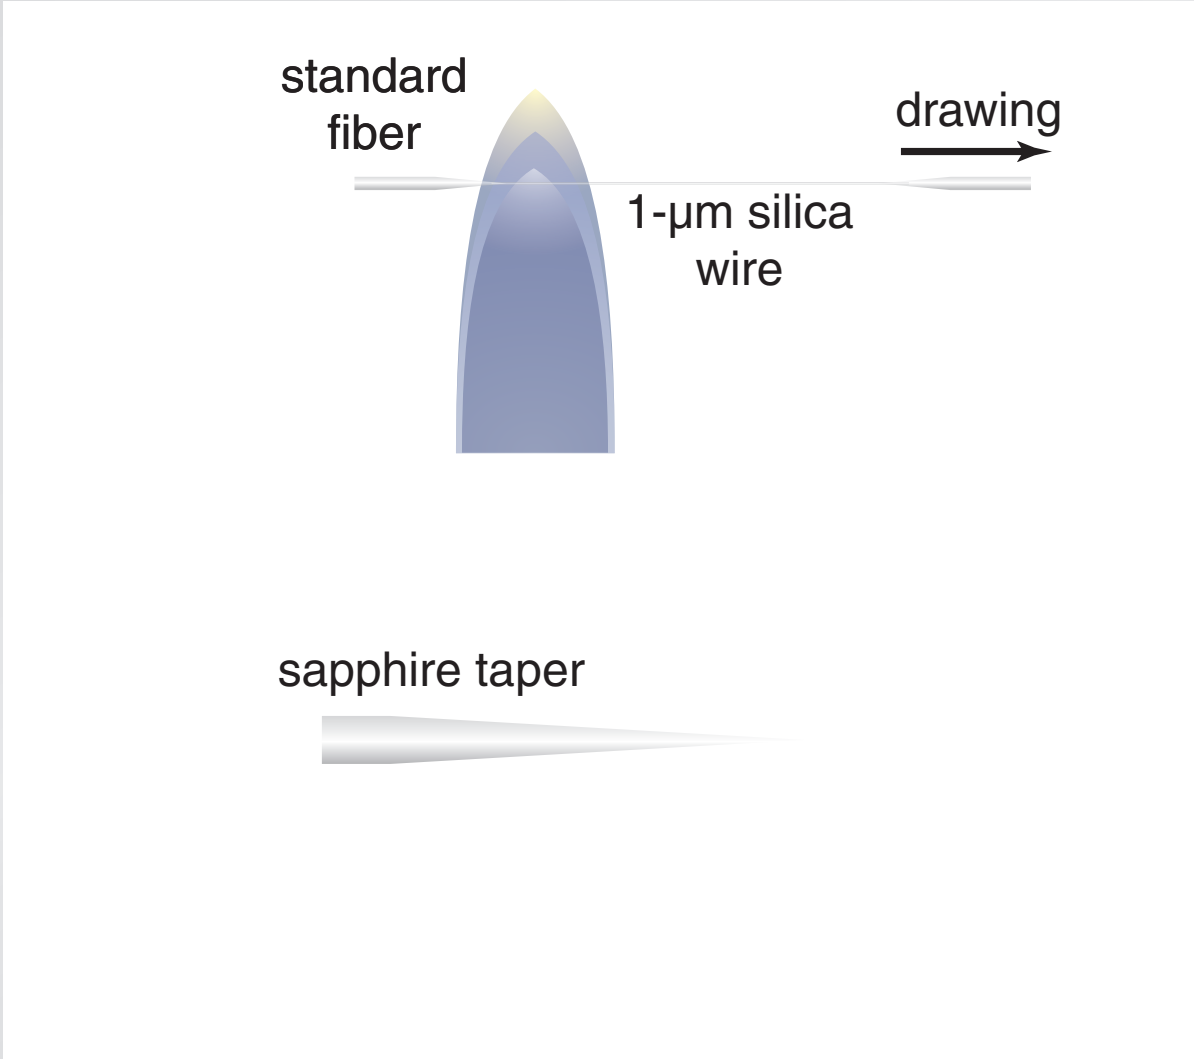

Nanowire fabrication

two-step drawing process

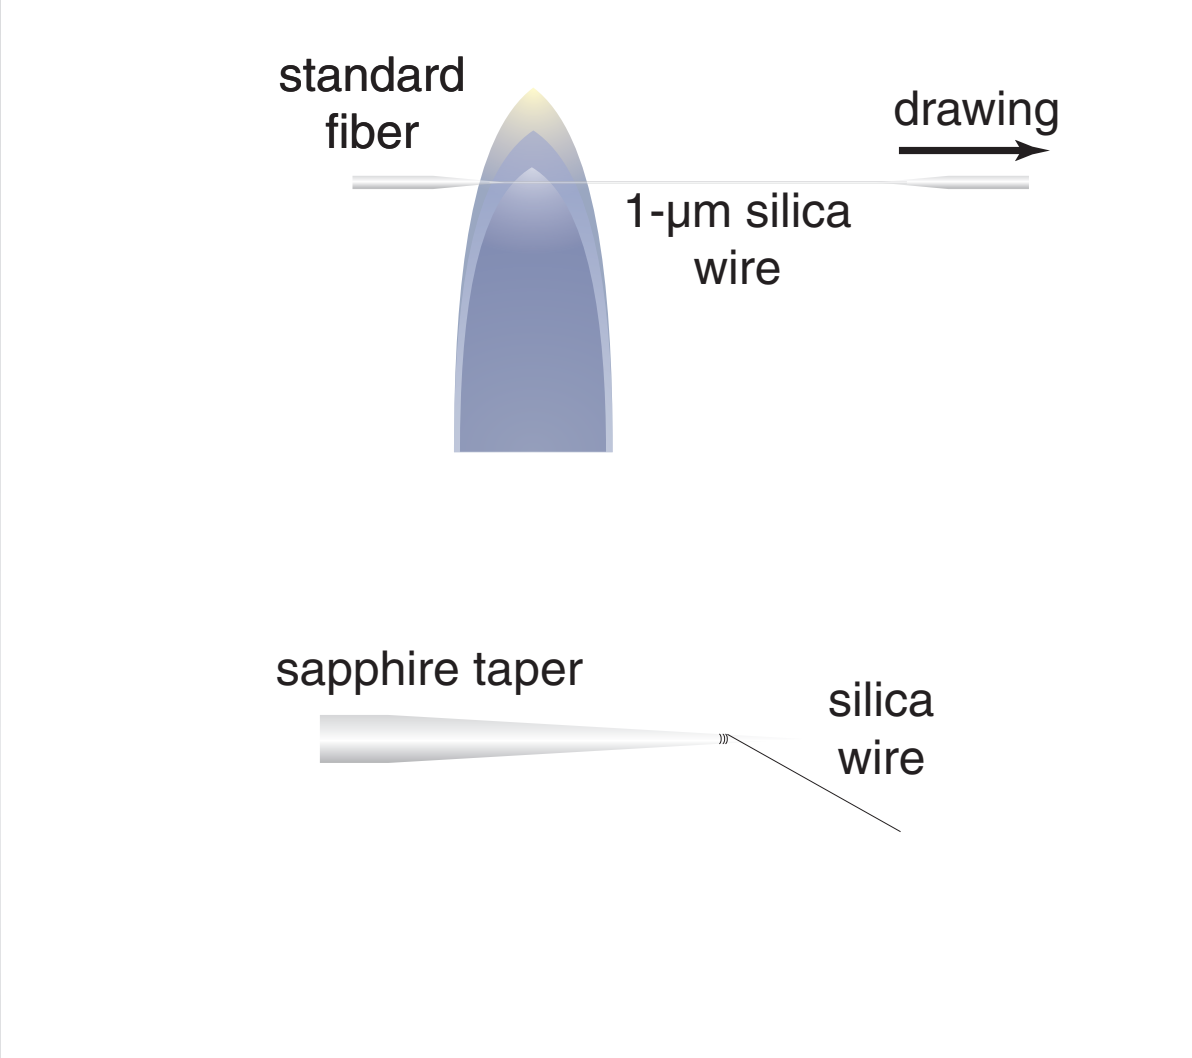

Nanowire fabrication

two-step drawing process

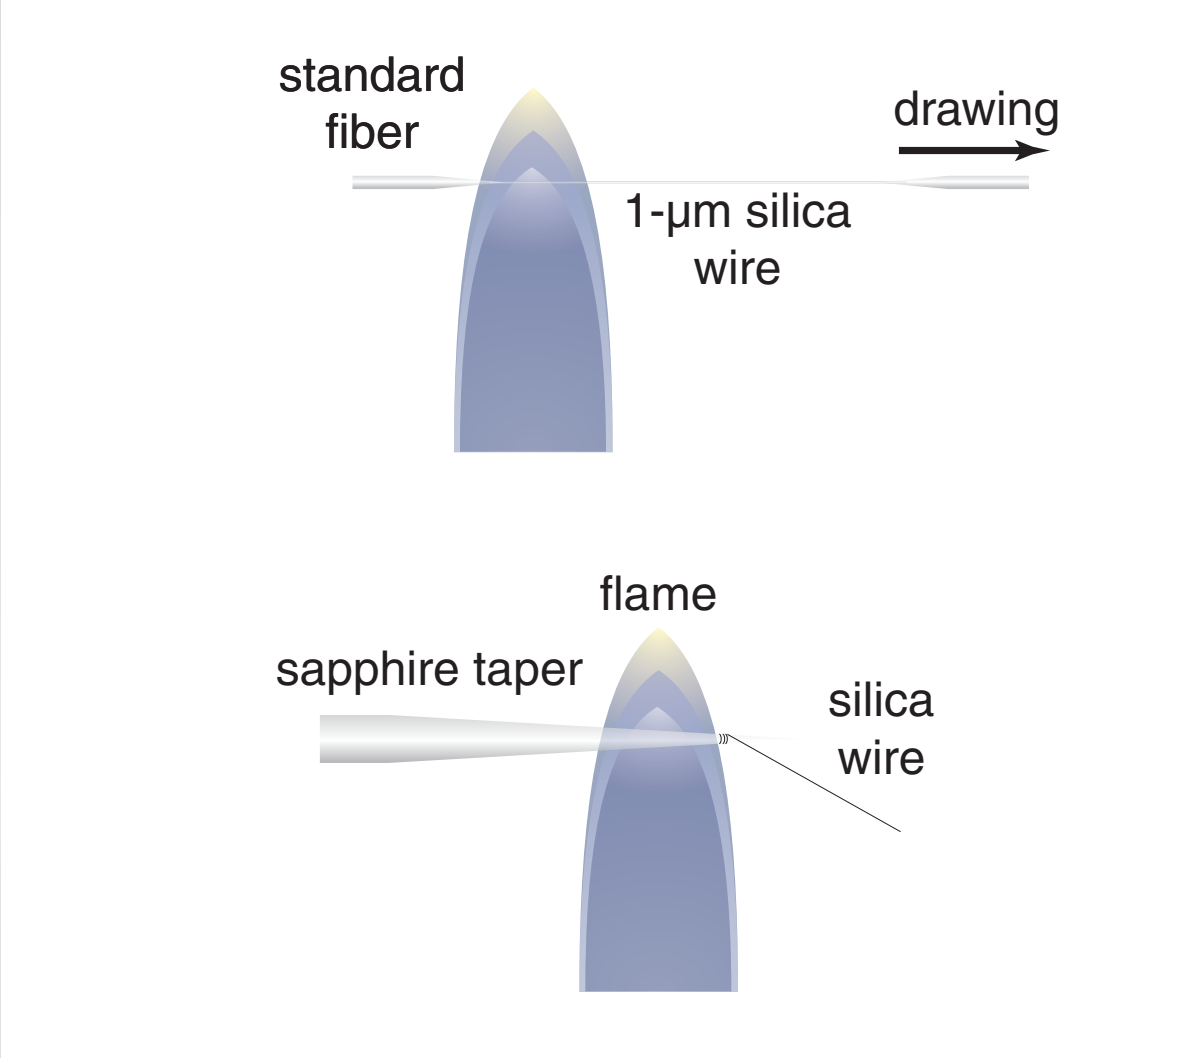

Nanowire fabrication

two-step drawing process

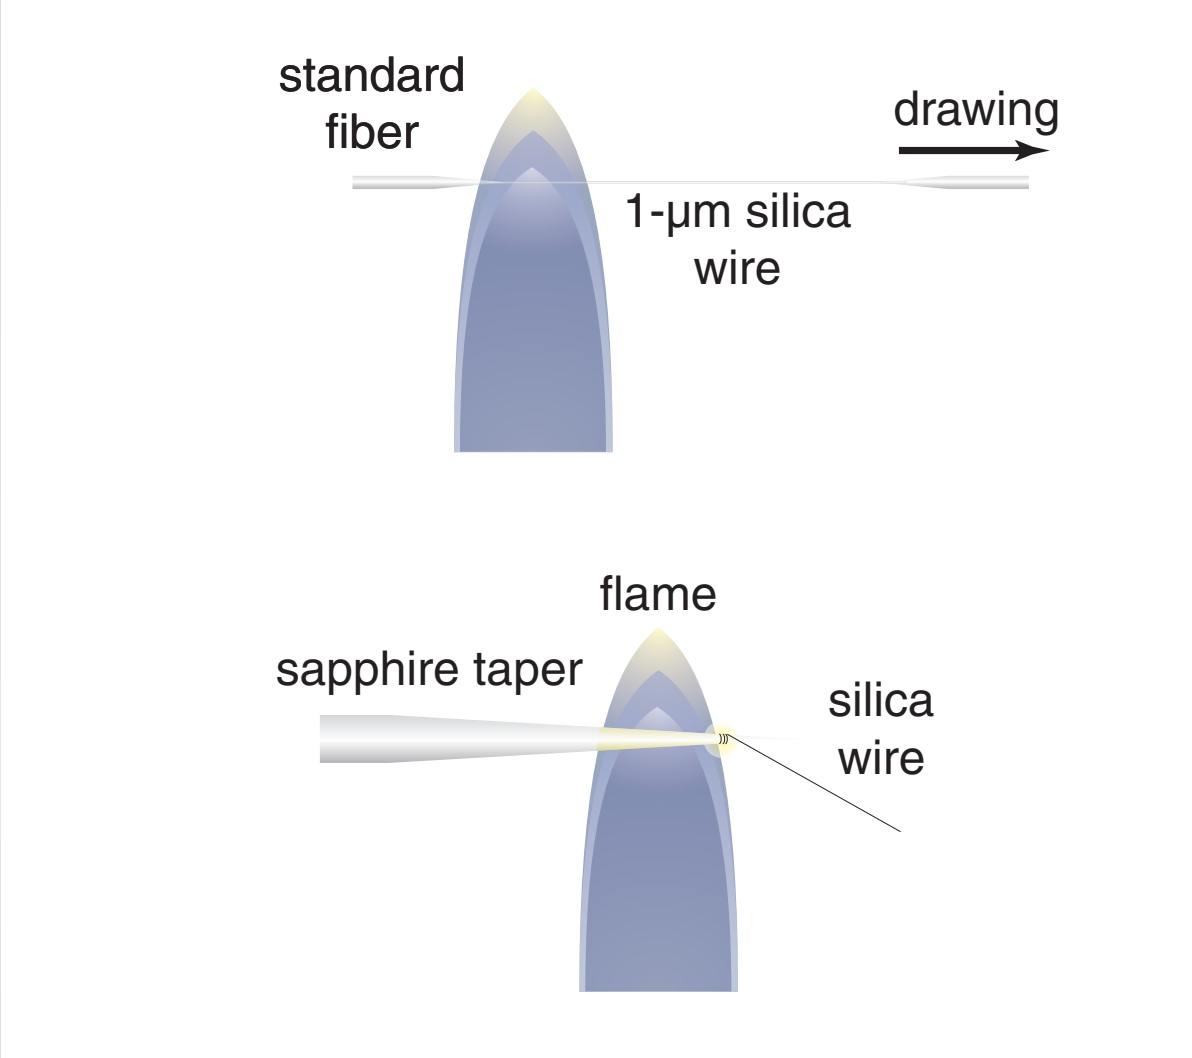

Nanowire fabrication

two-step drawing process

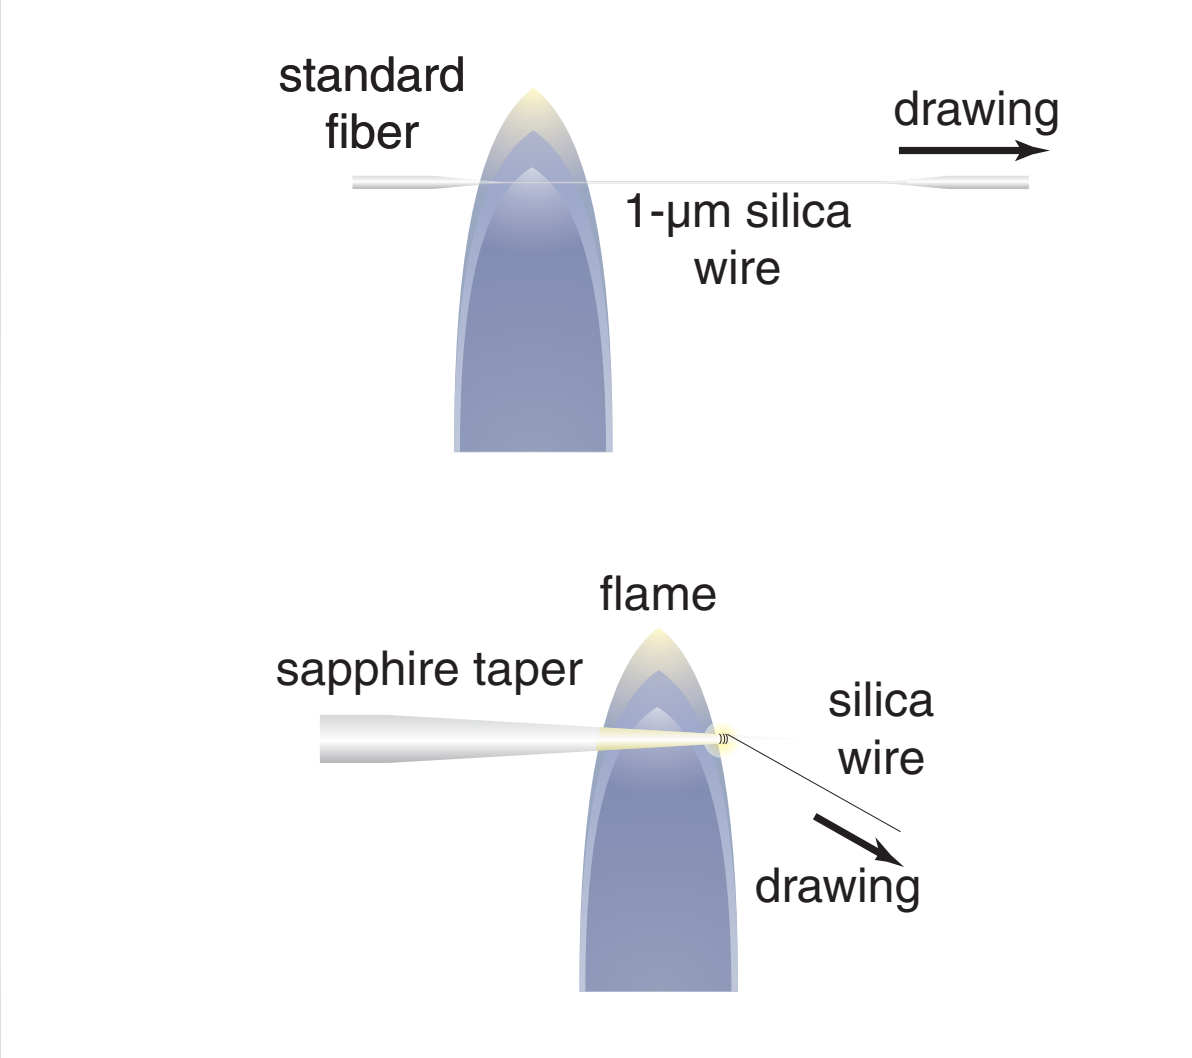

Nanowire fabrication

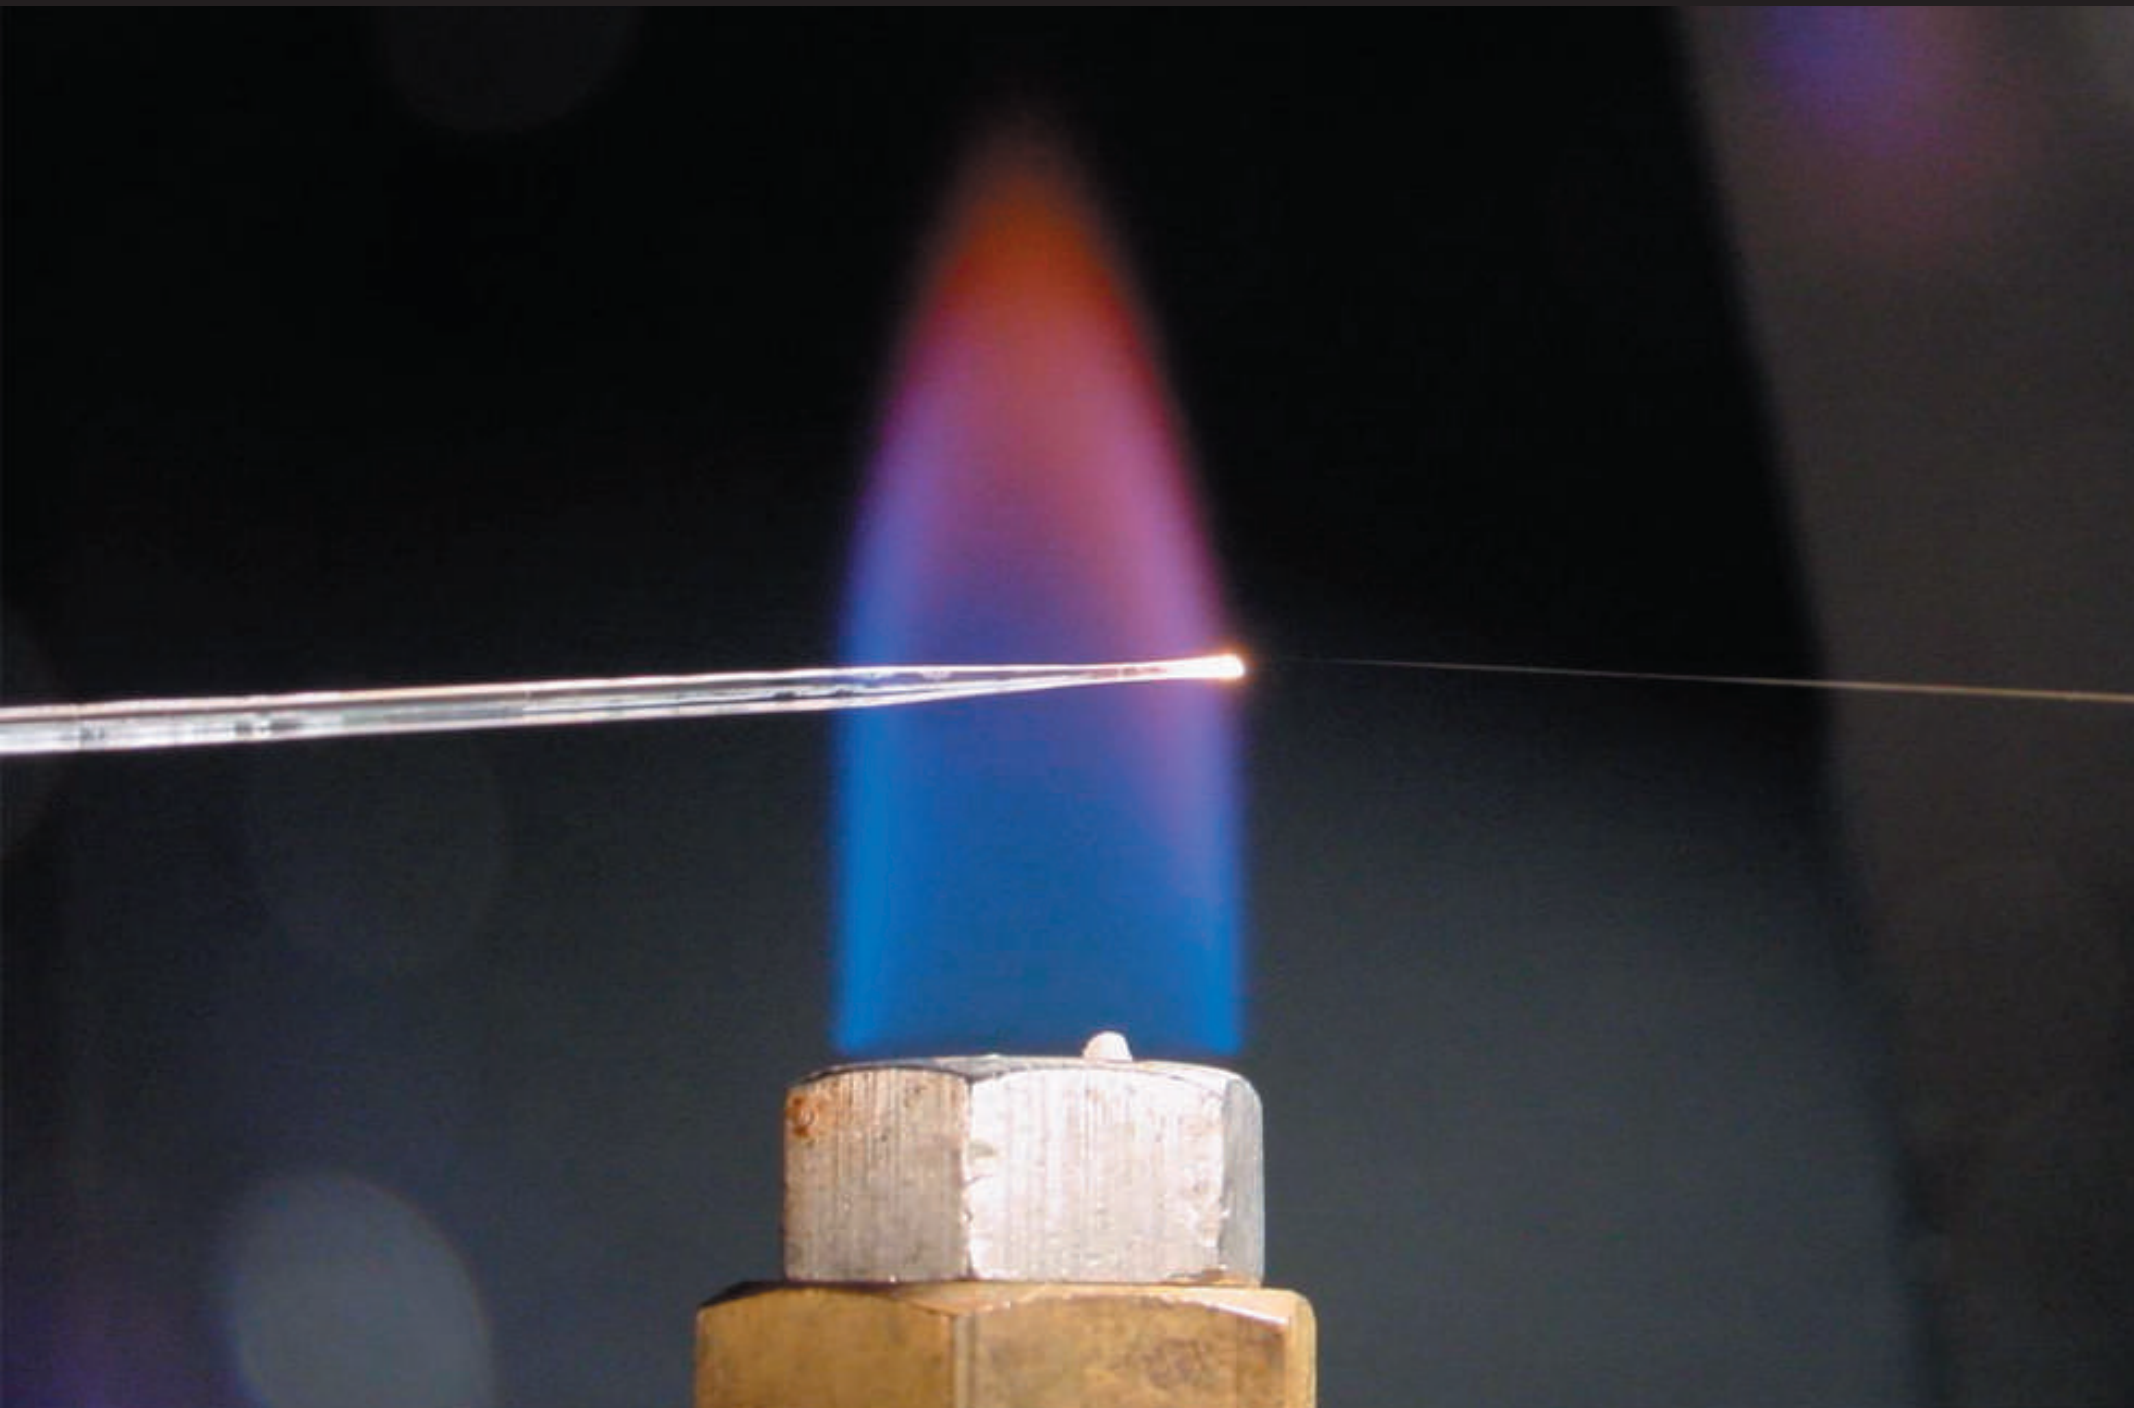

Nanowire fabrication

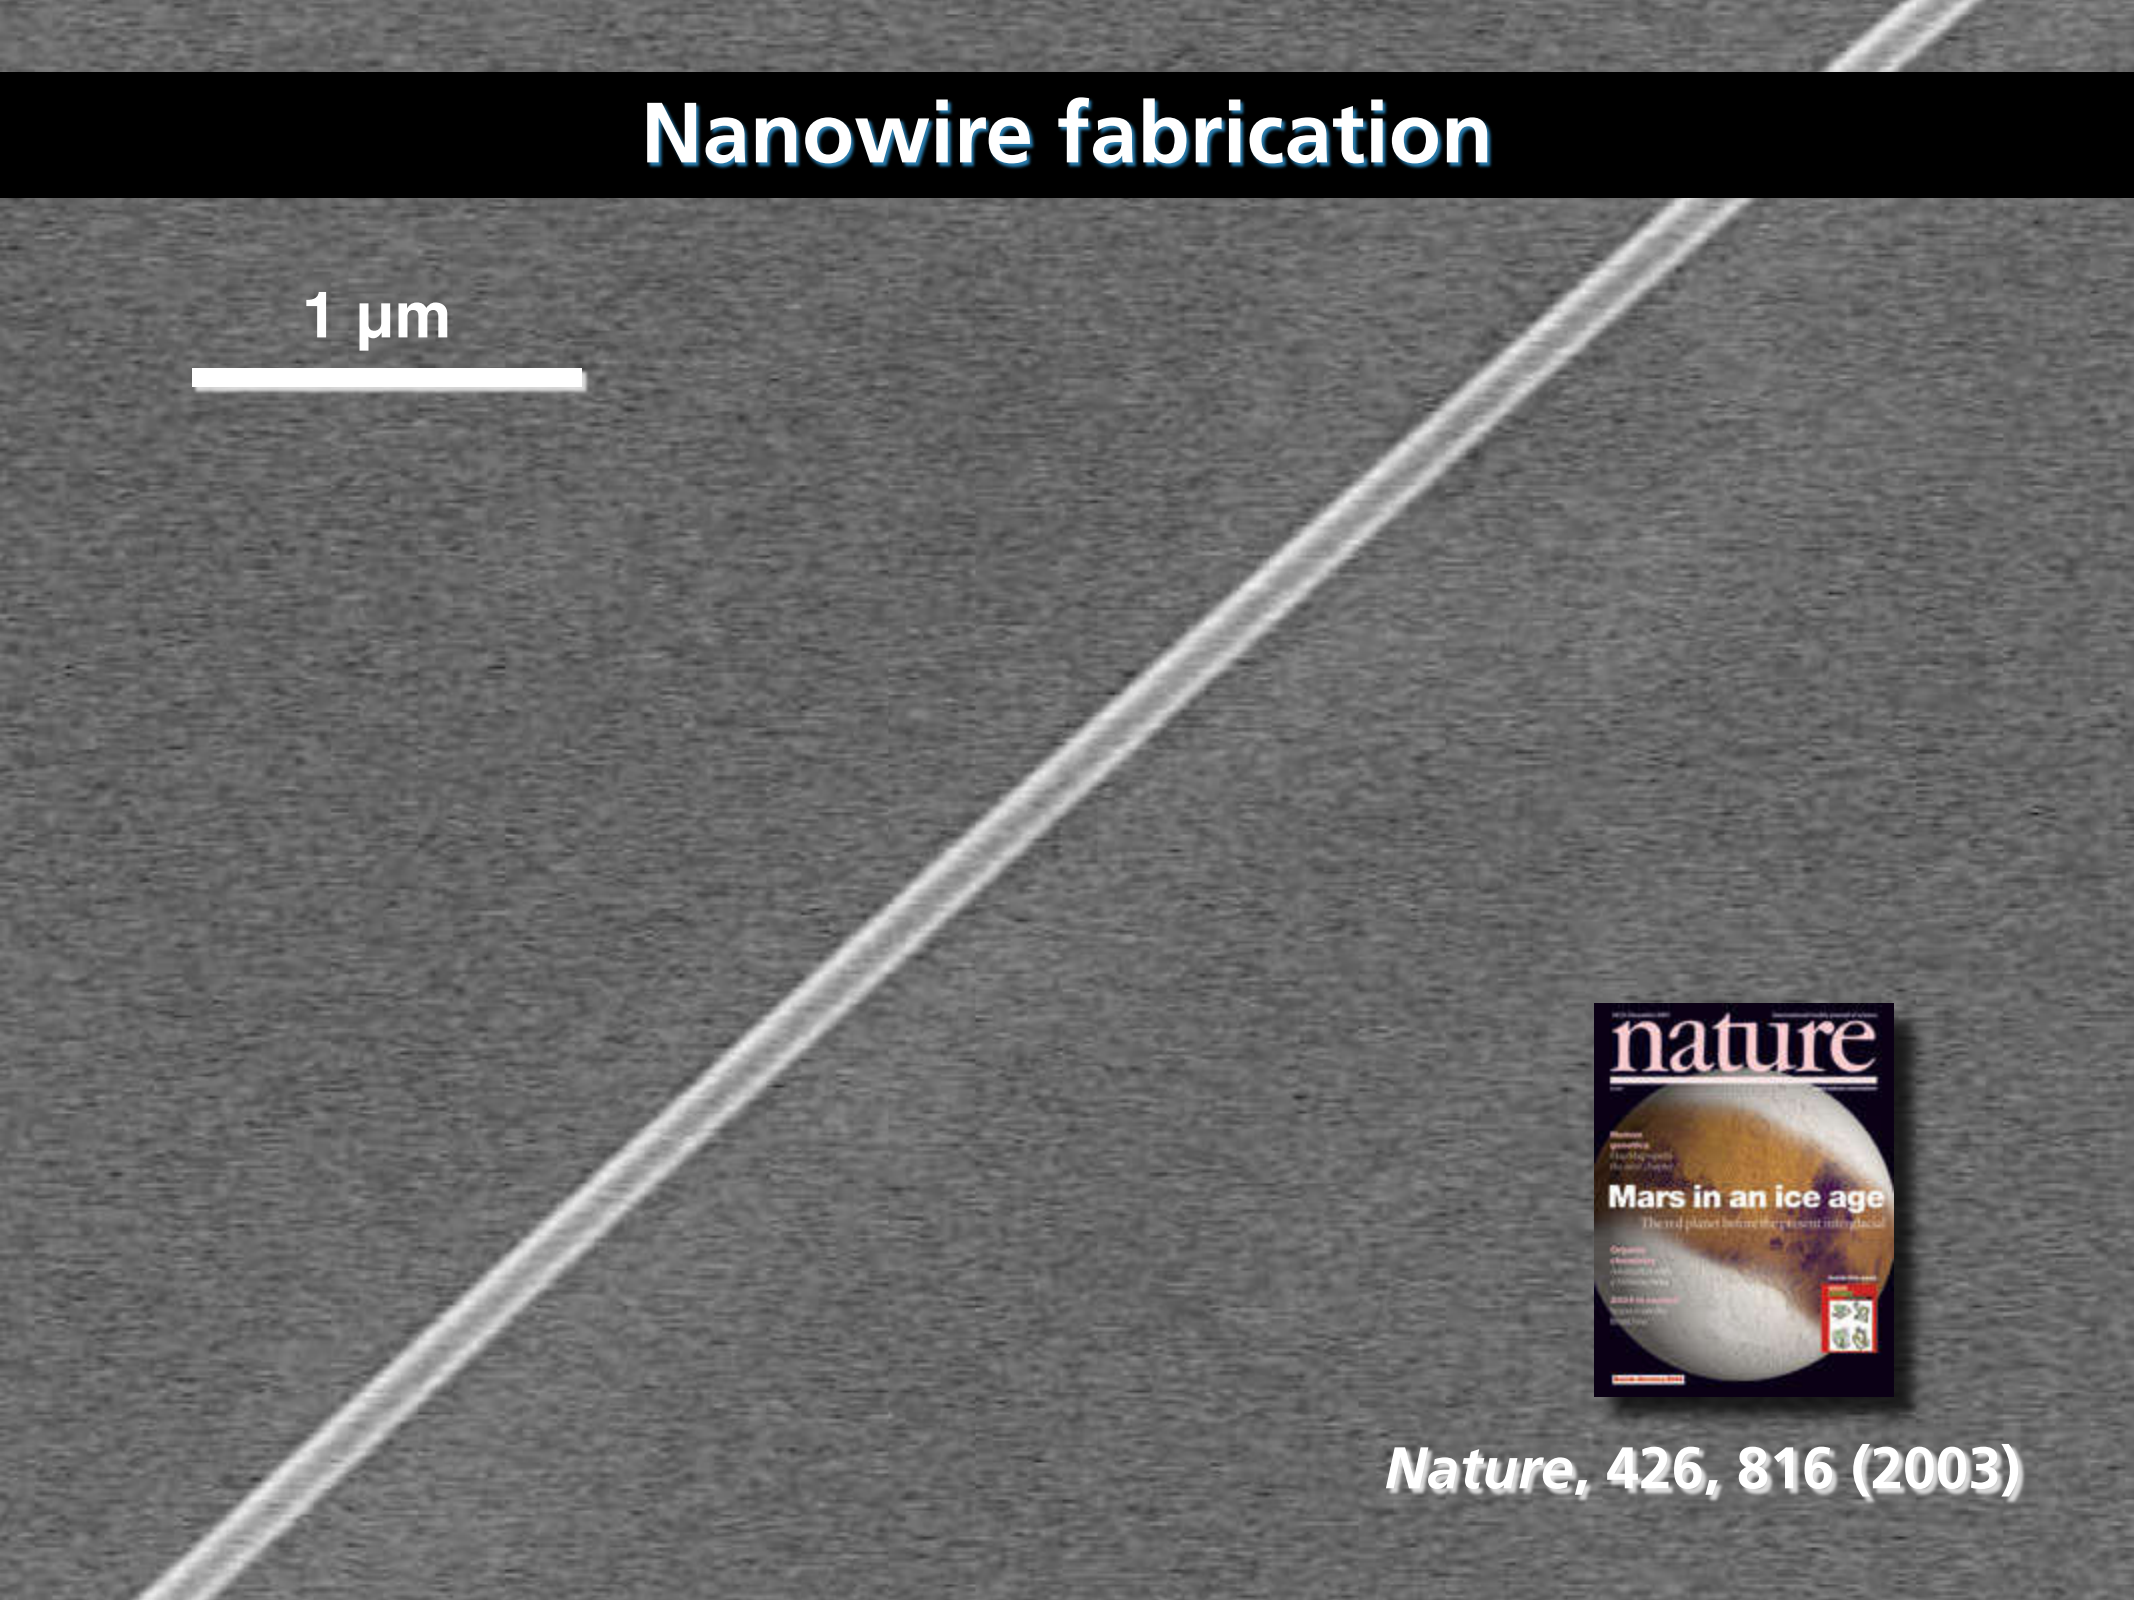

Nature, 426, 816 (2003)

Nanowire fabrication

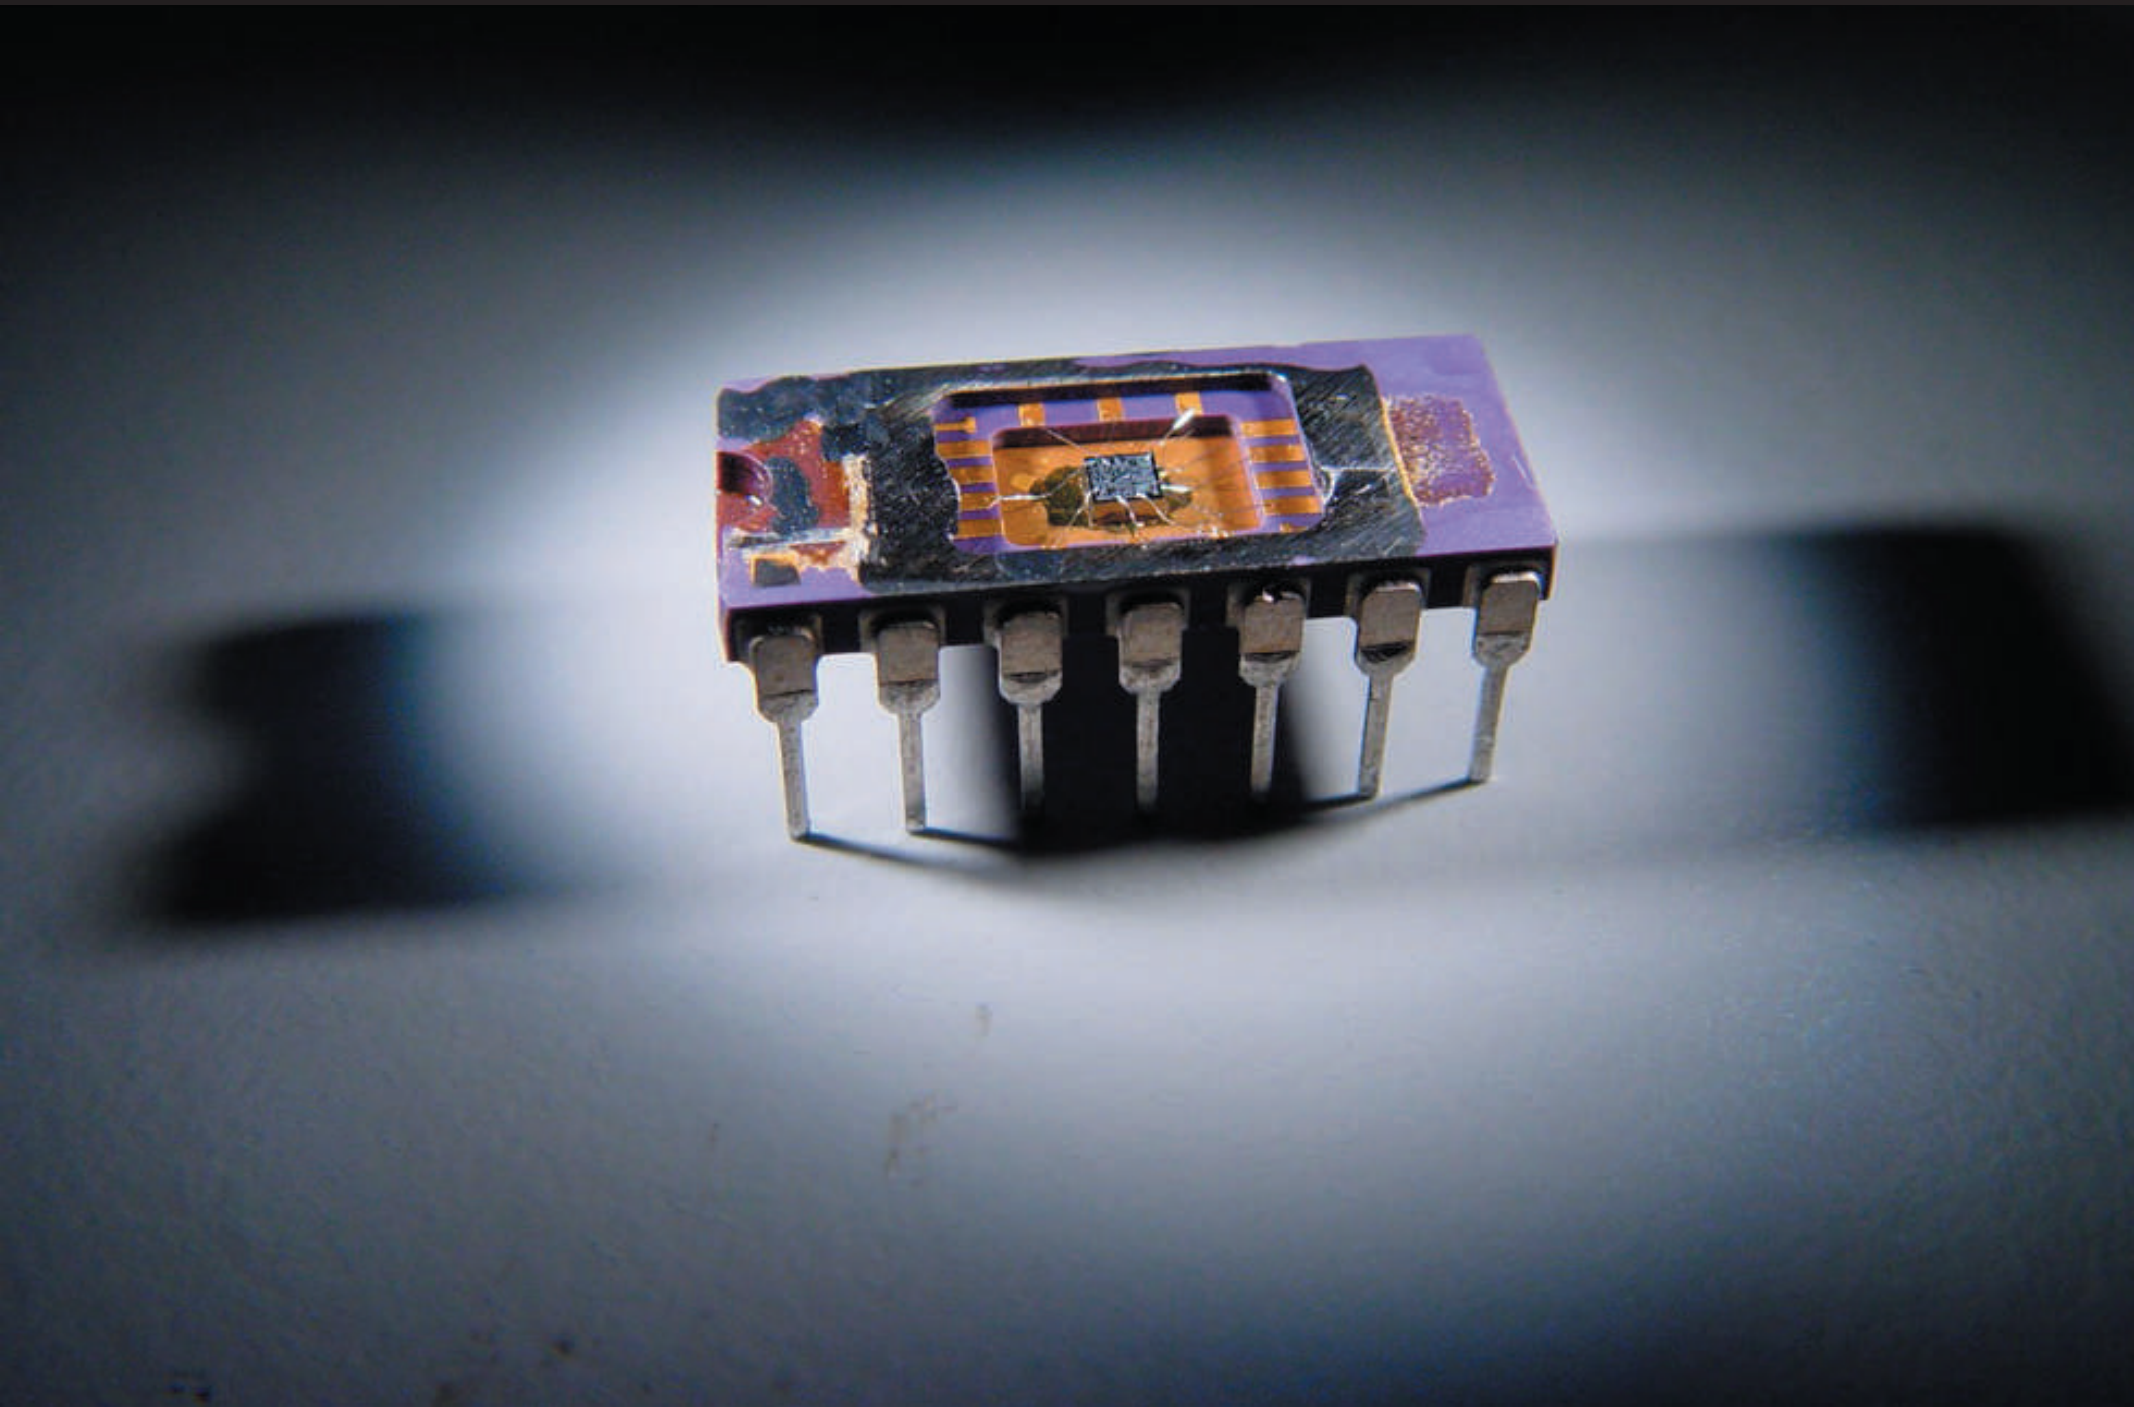

Nanowire fabrication

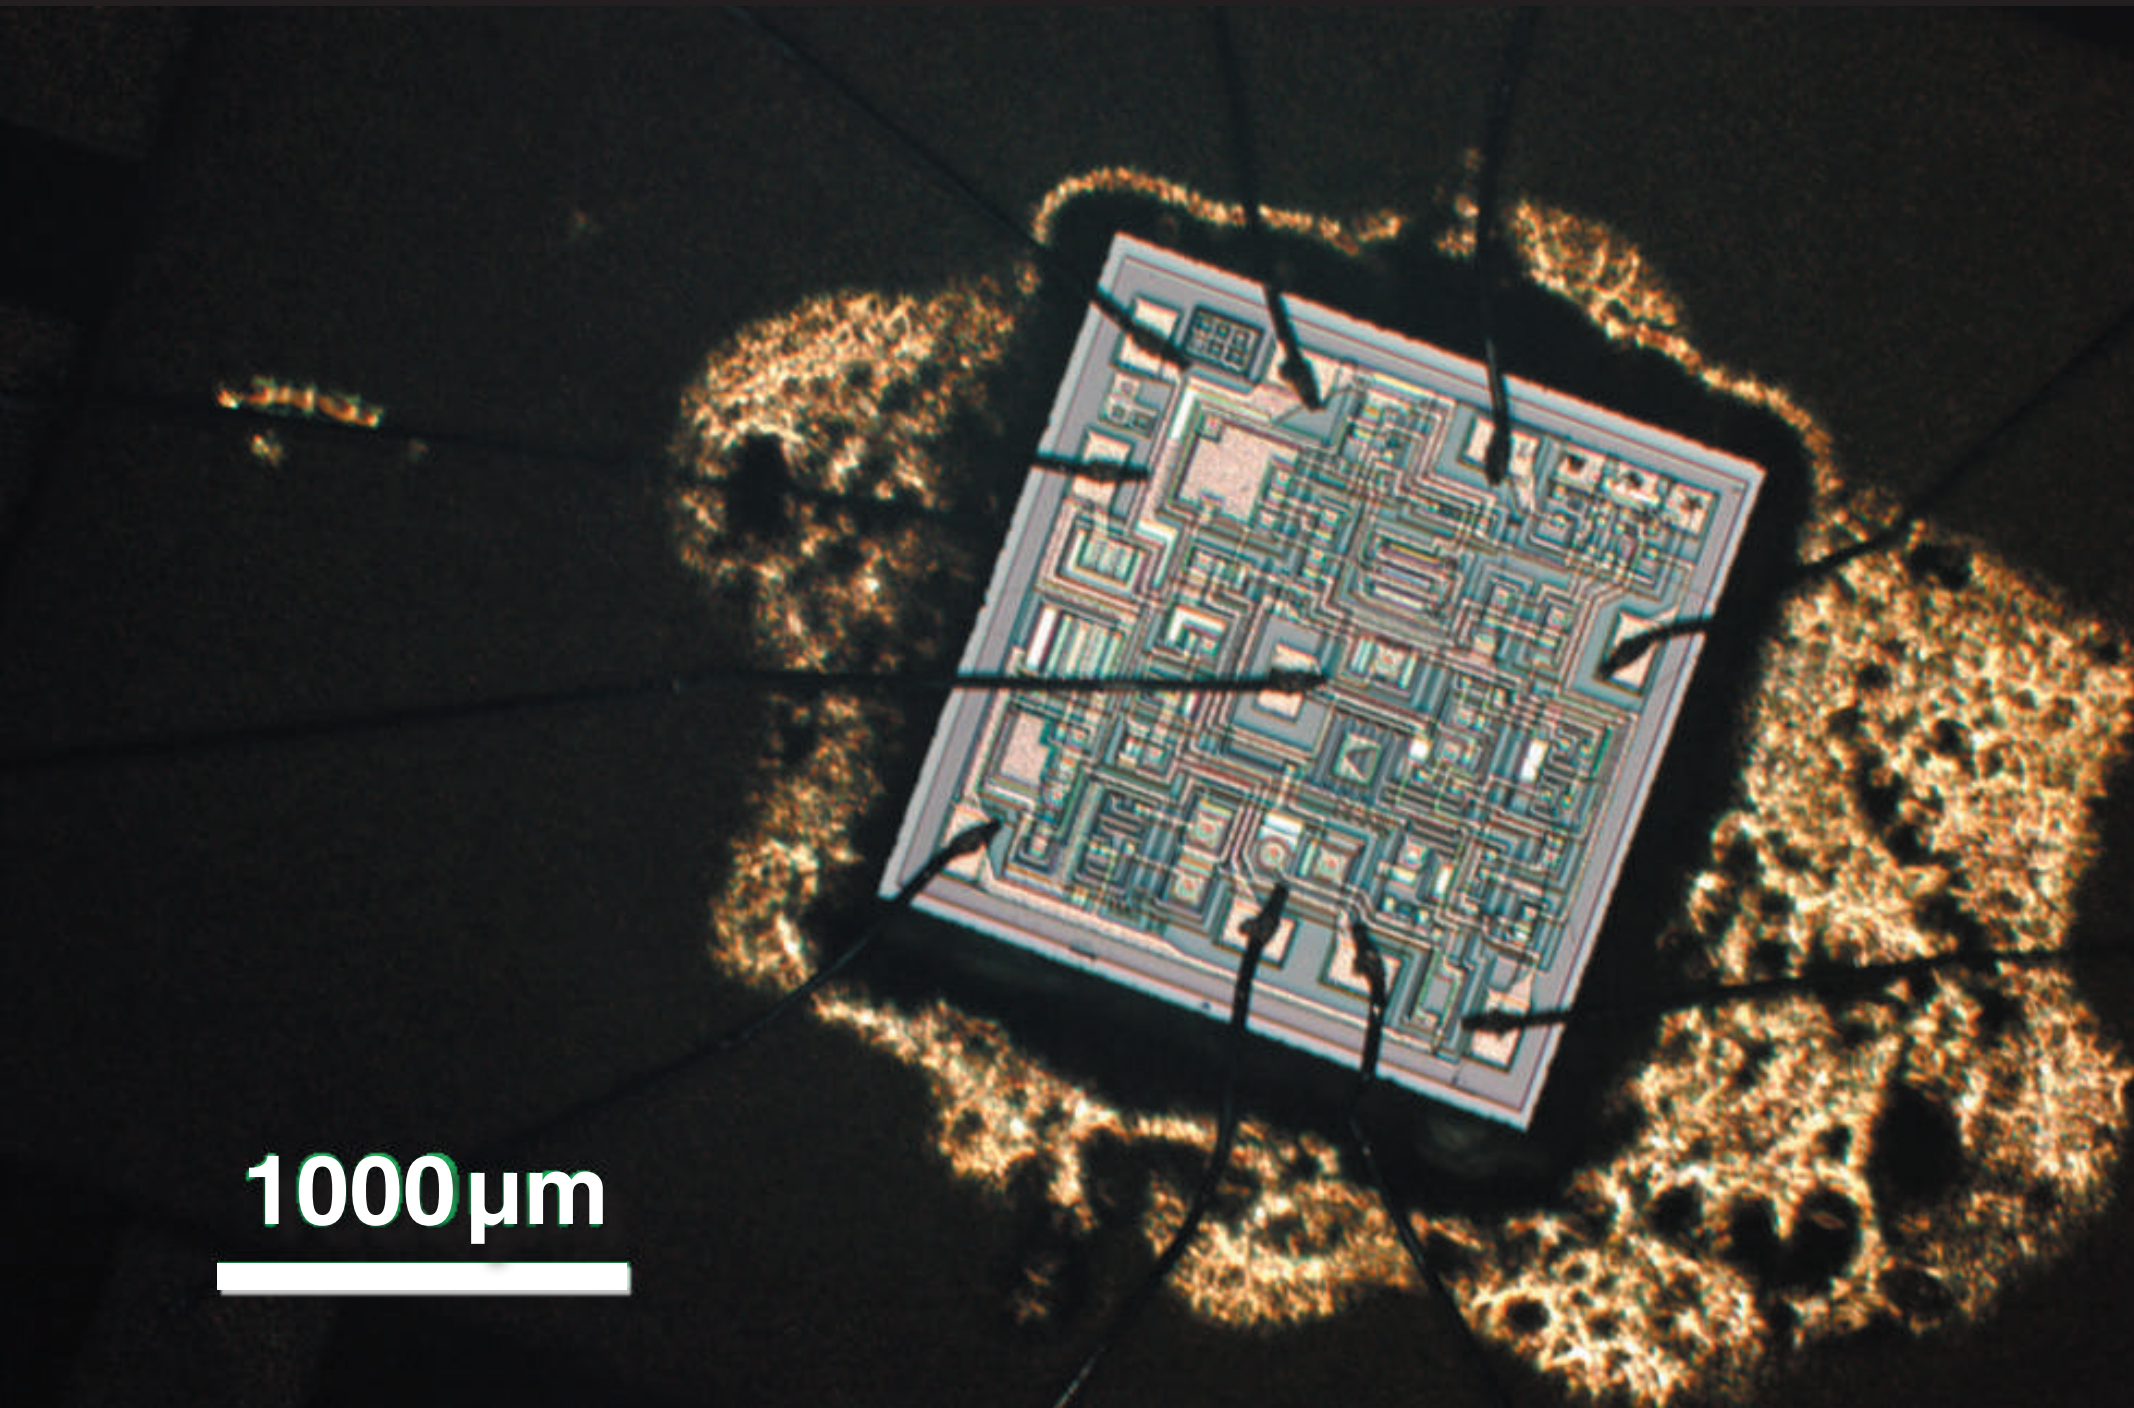

Nanowire fabrication

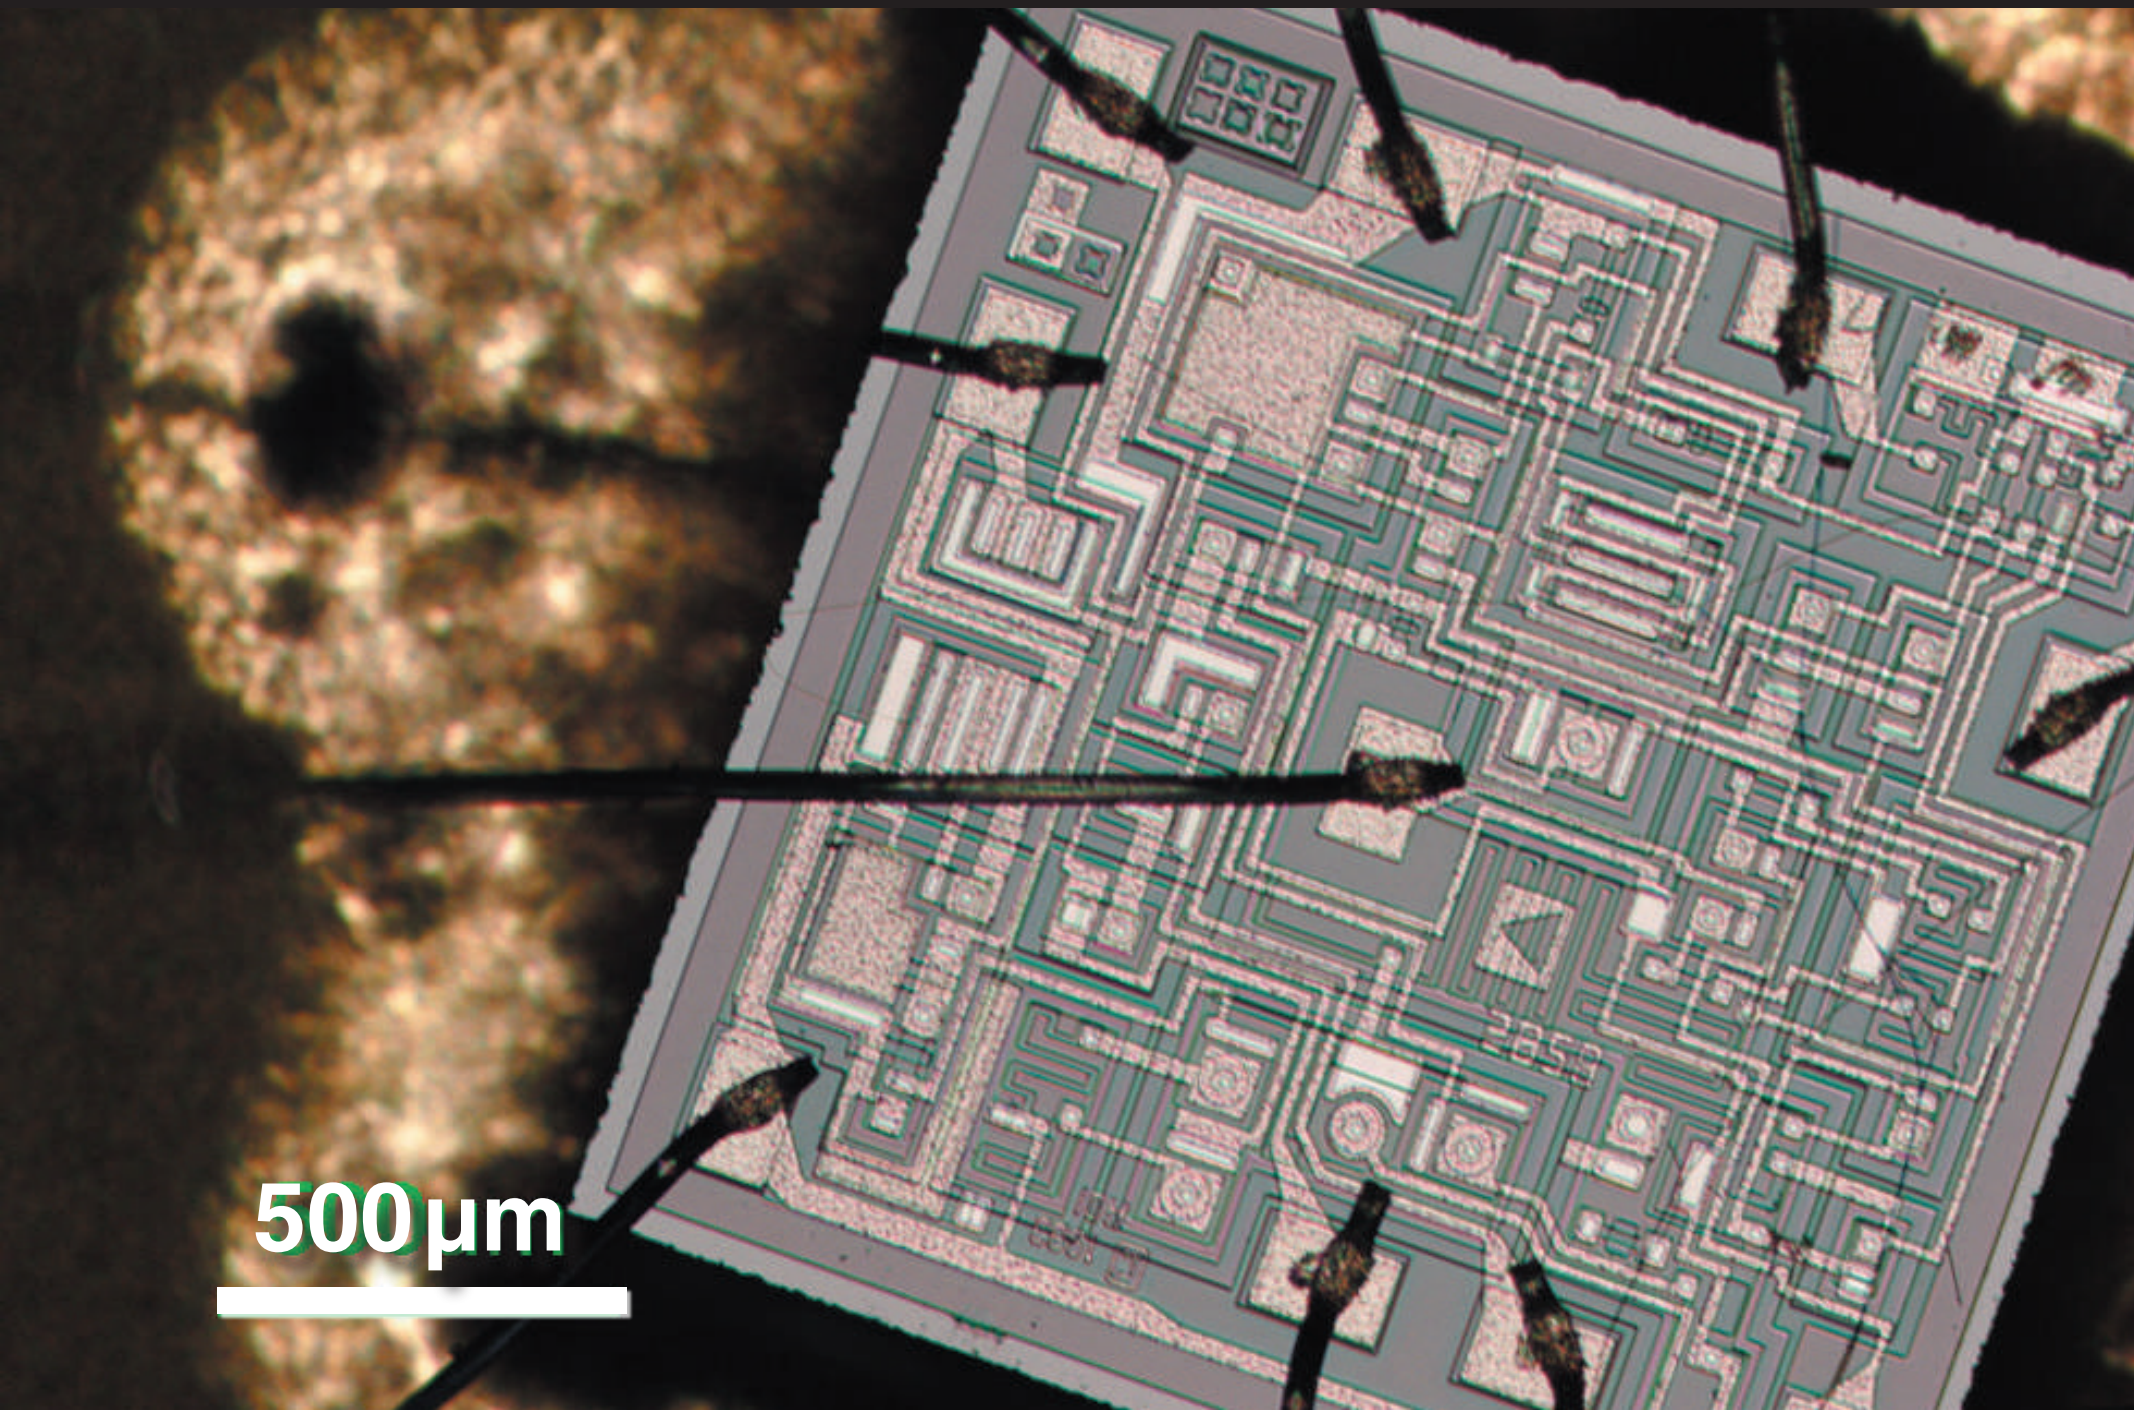

Nanowire fabrication

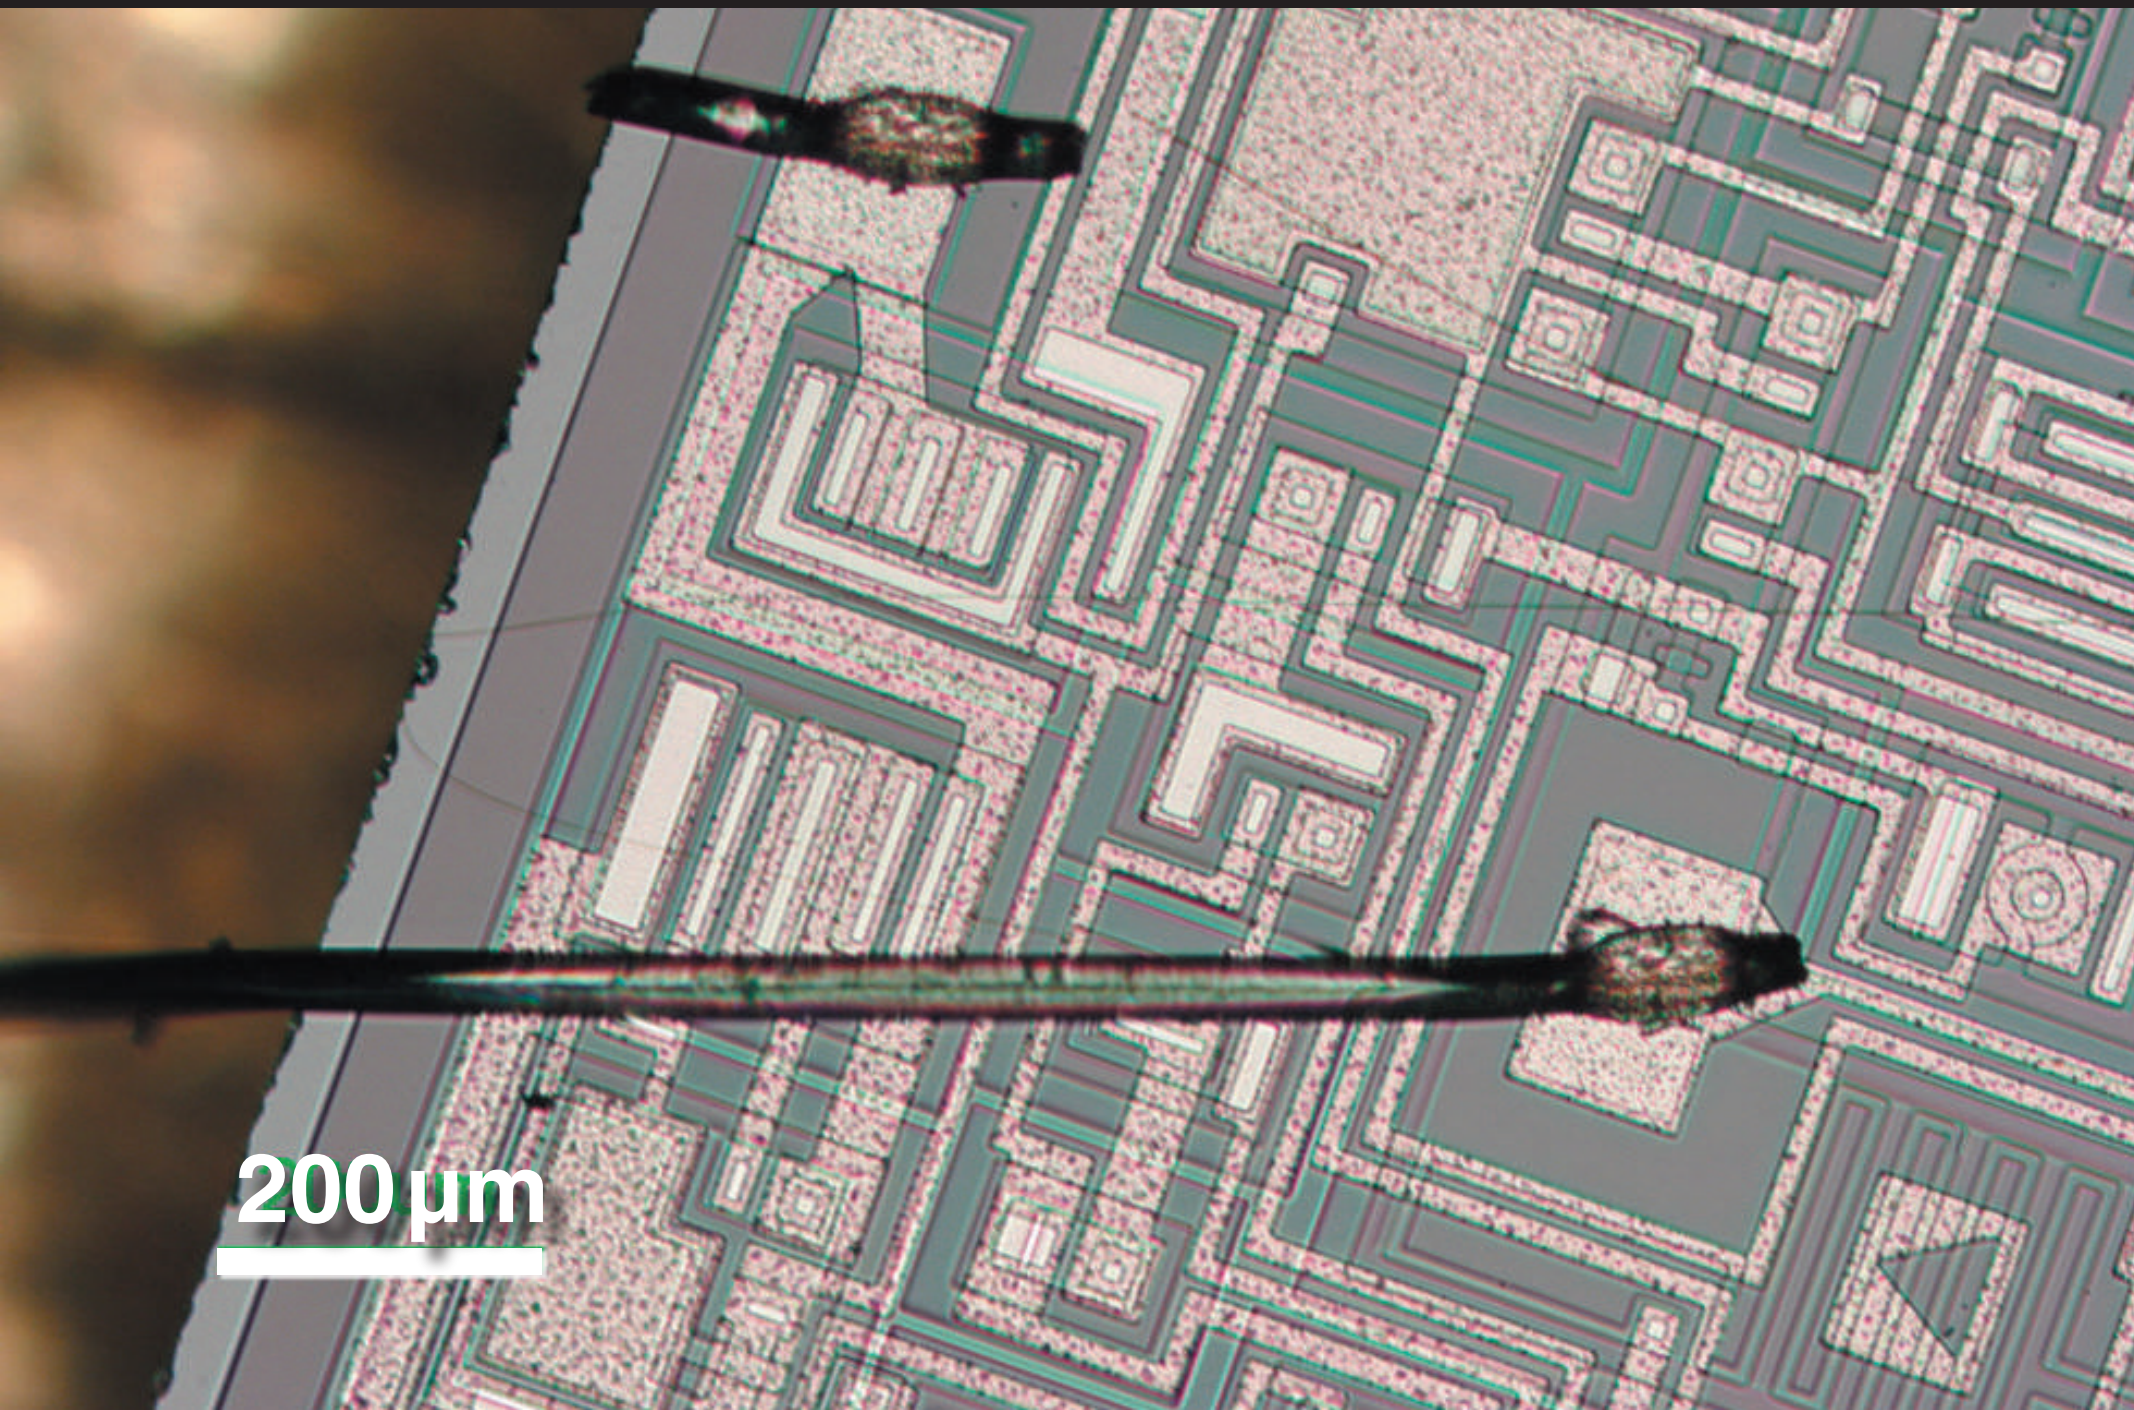

Nanowire fabrication

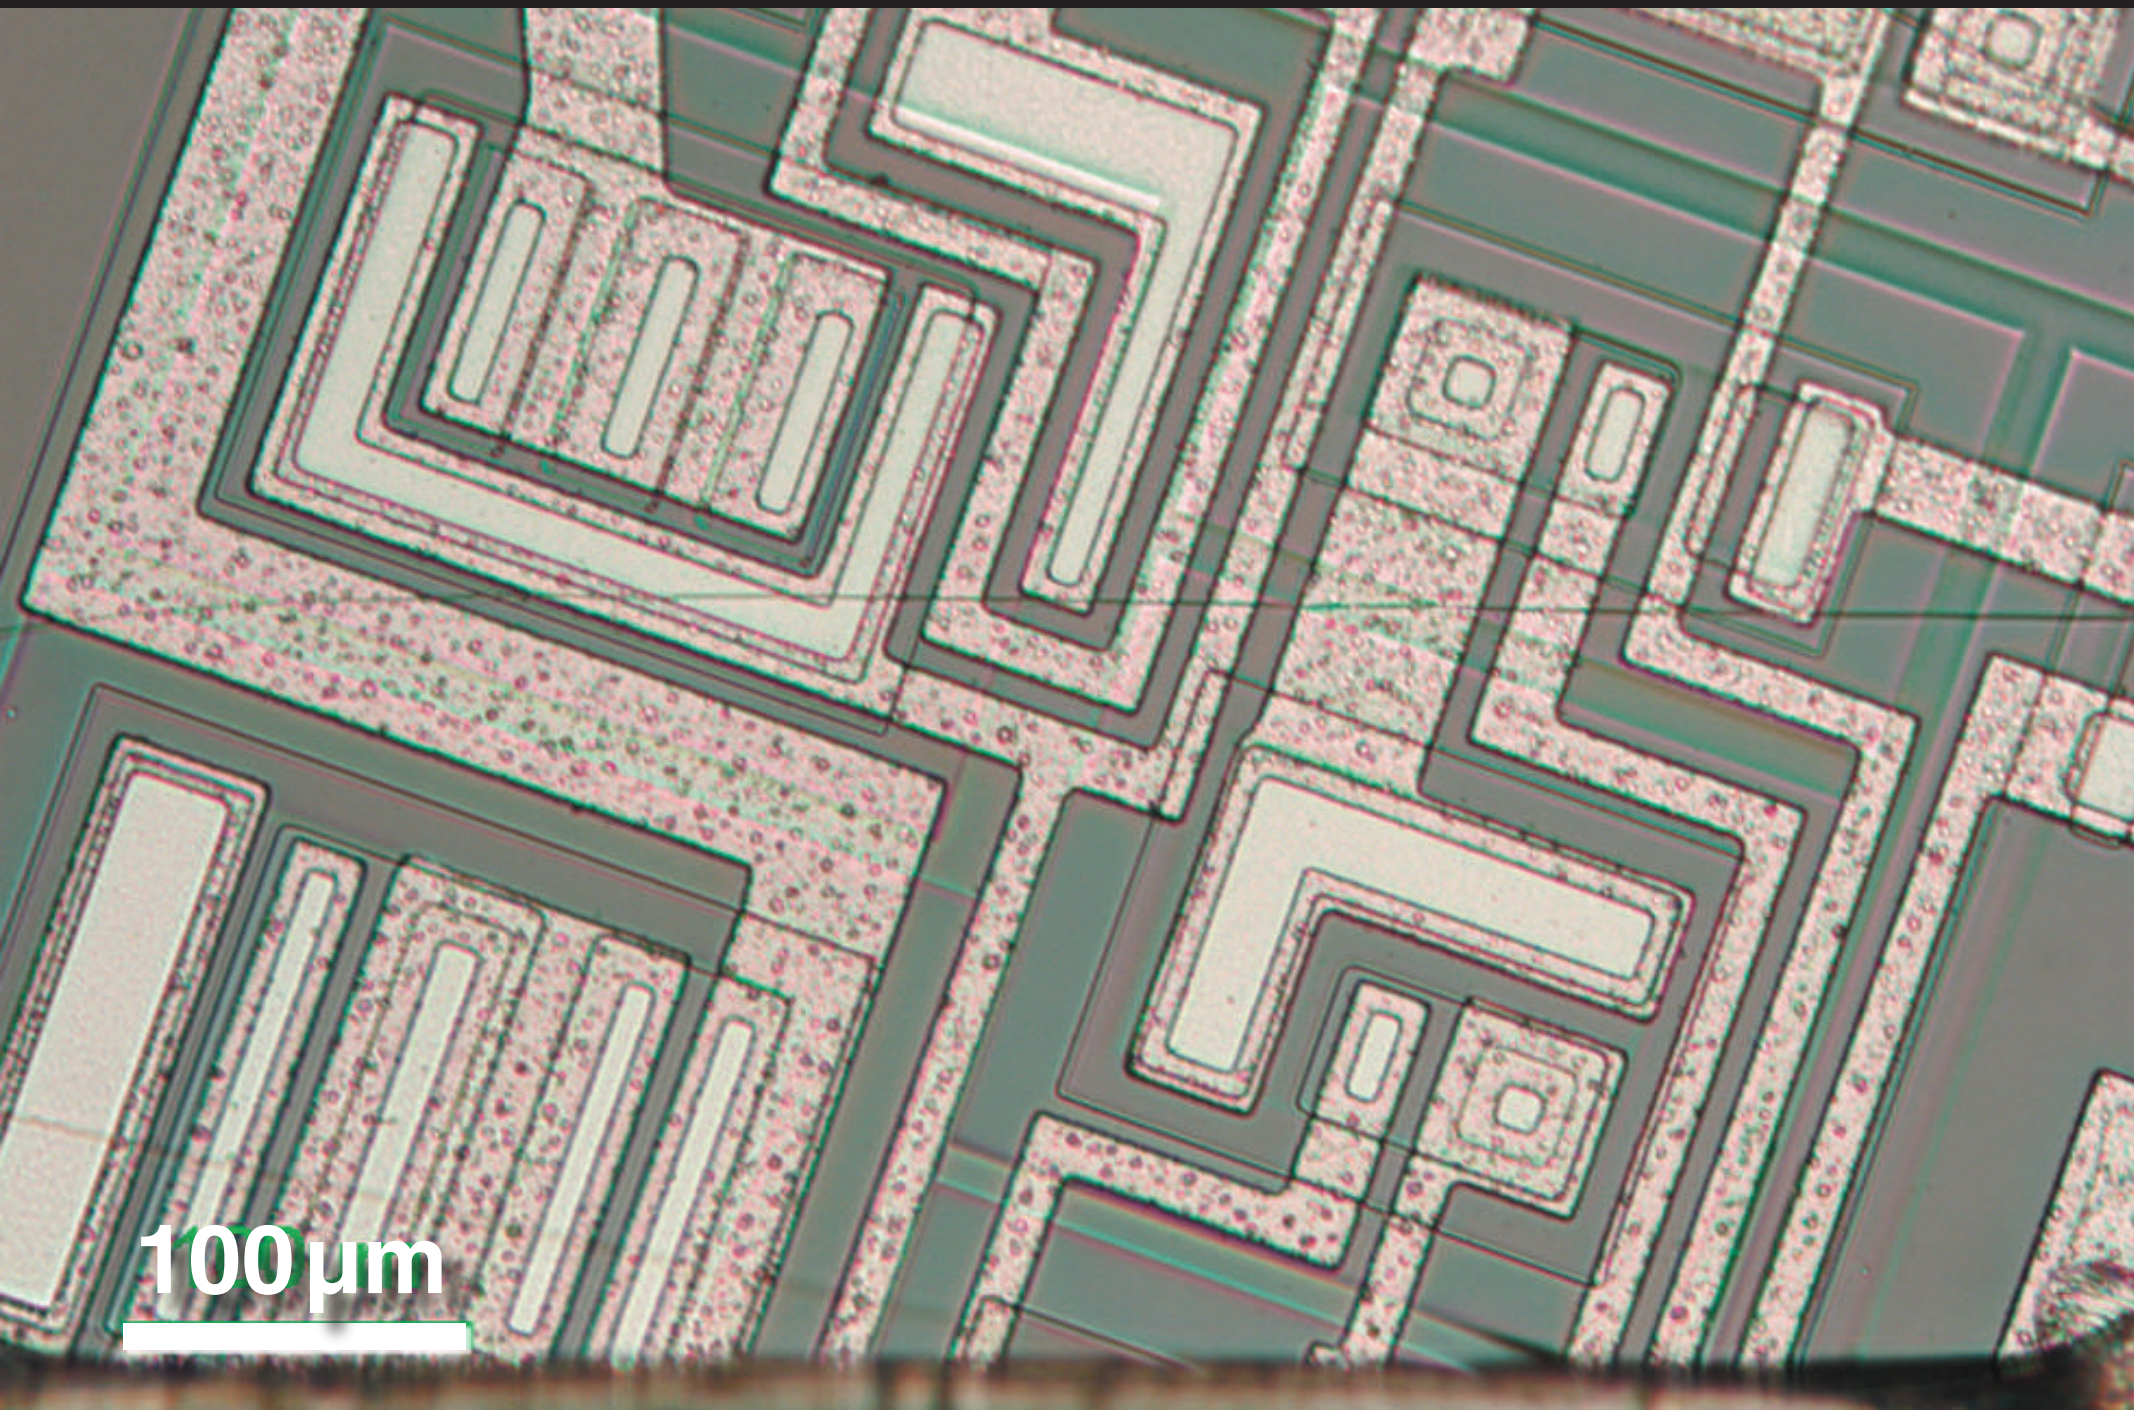

Nanowire fabrication

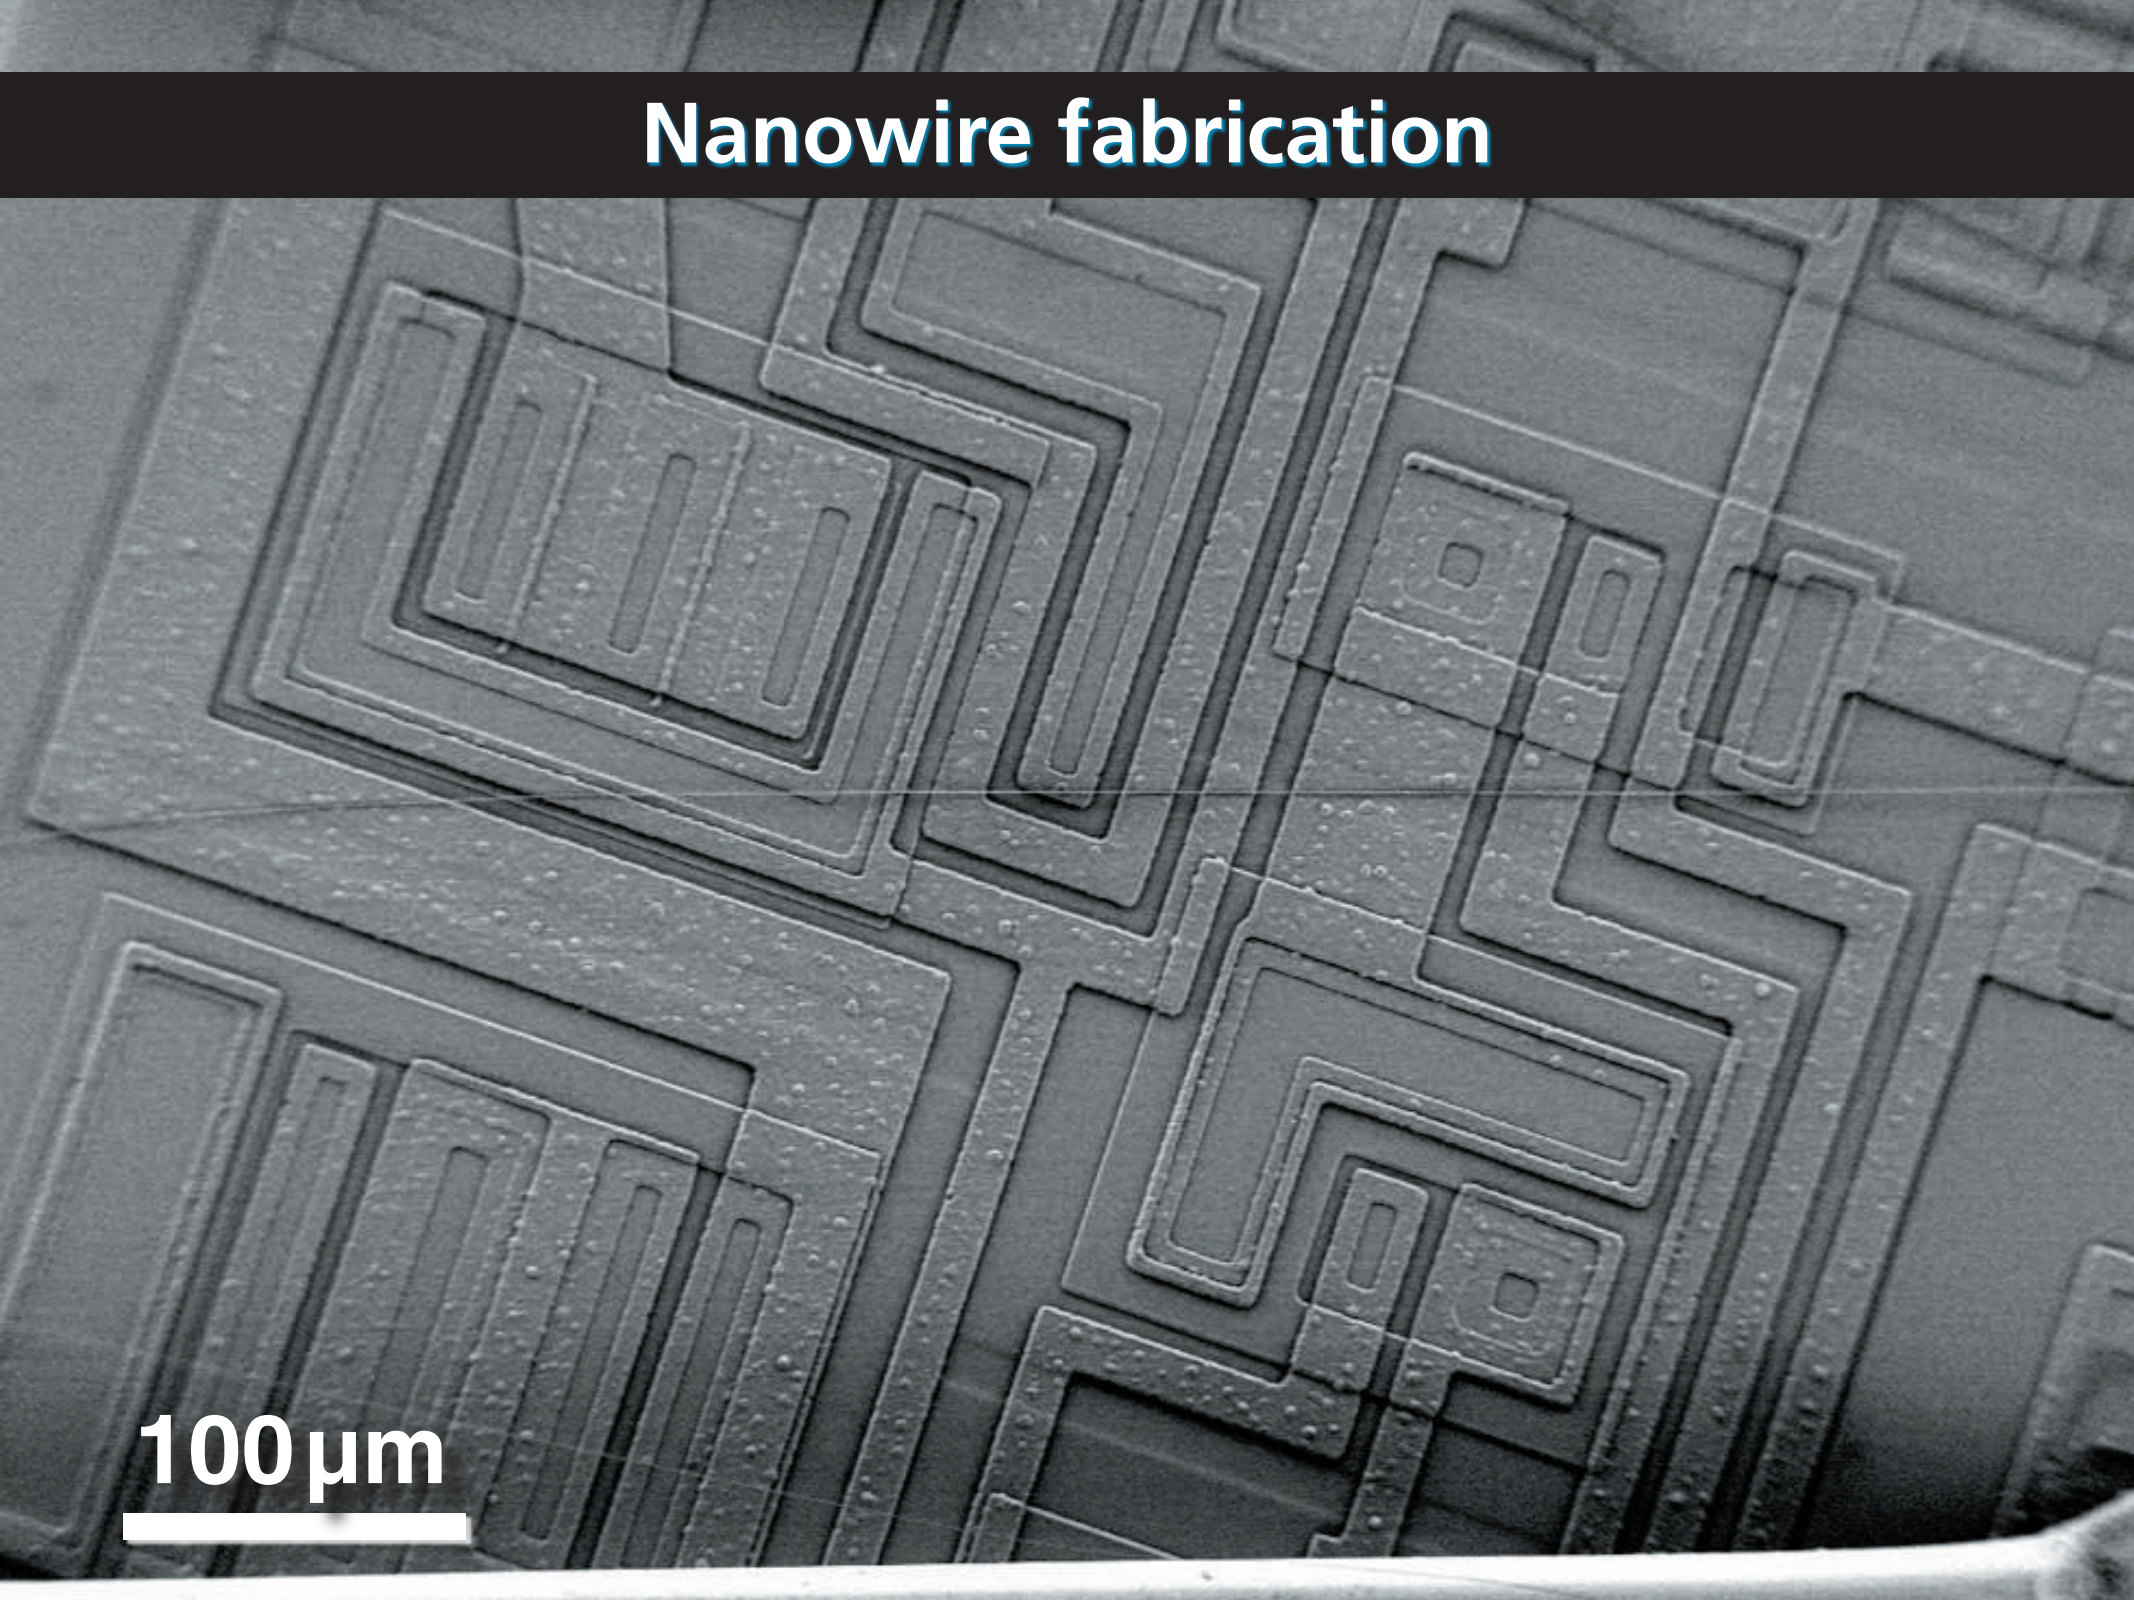

Nanowire fabrication

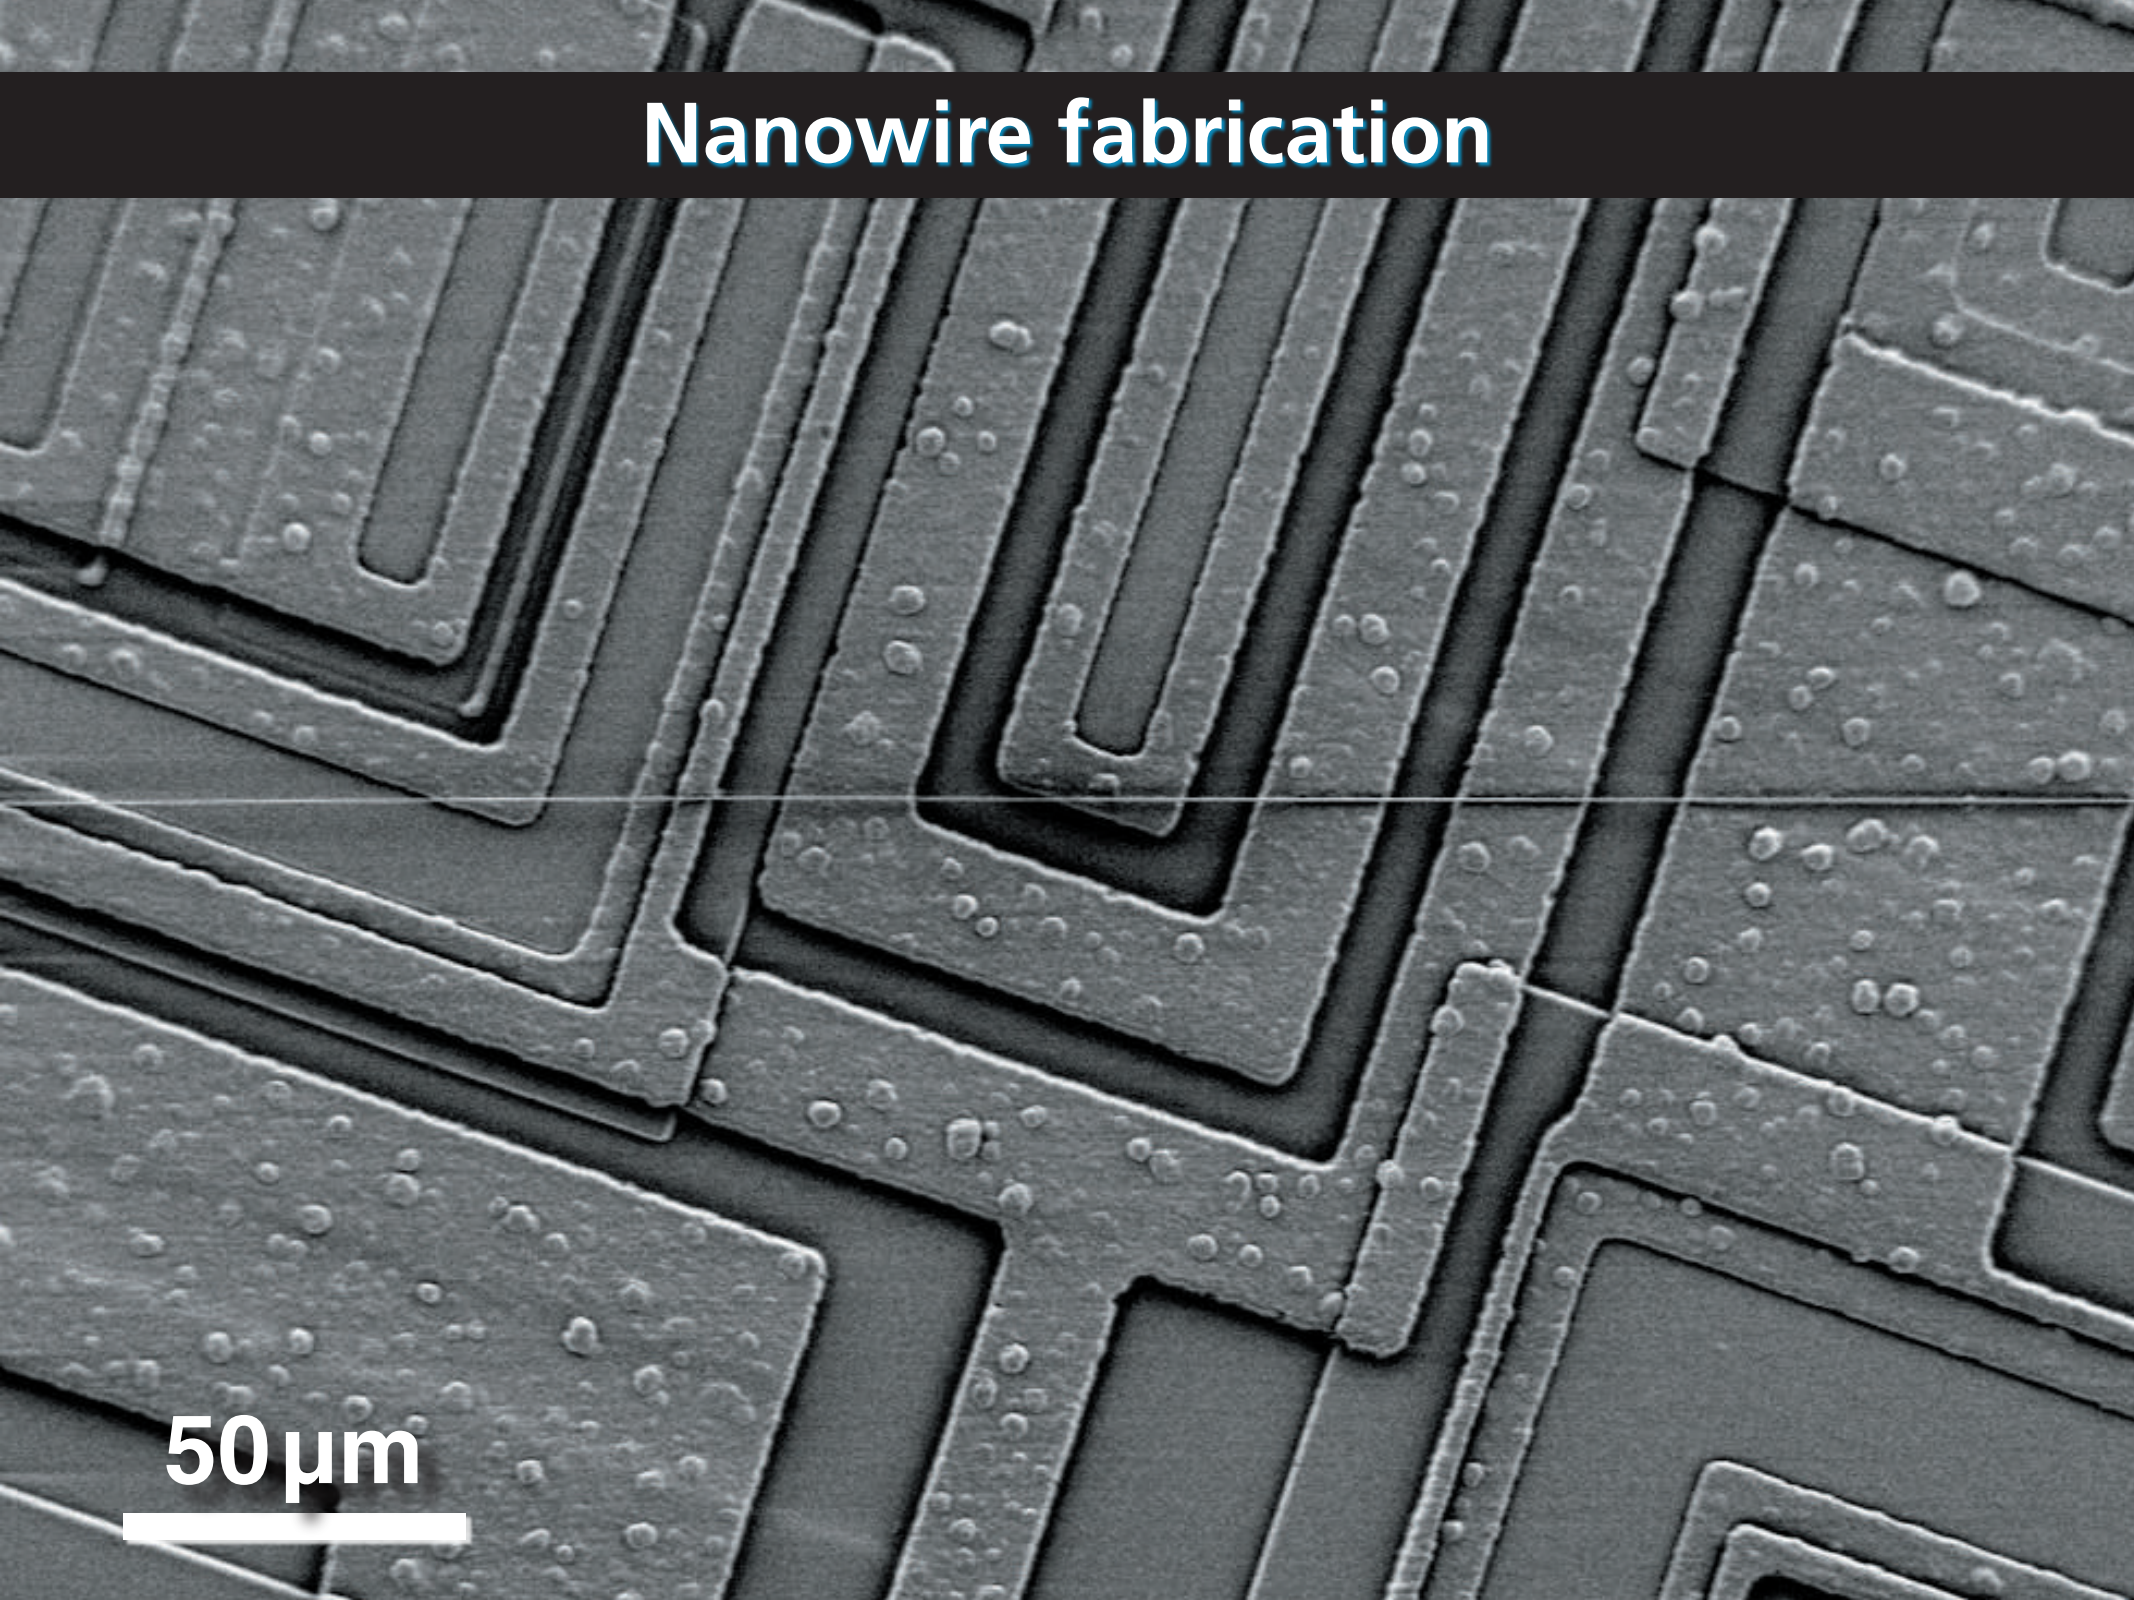

Nanowire fabrication

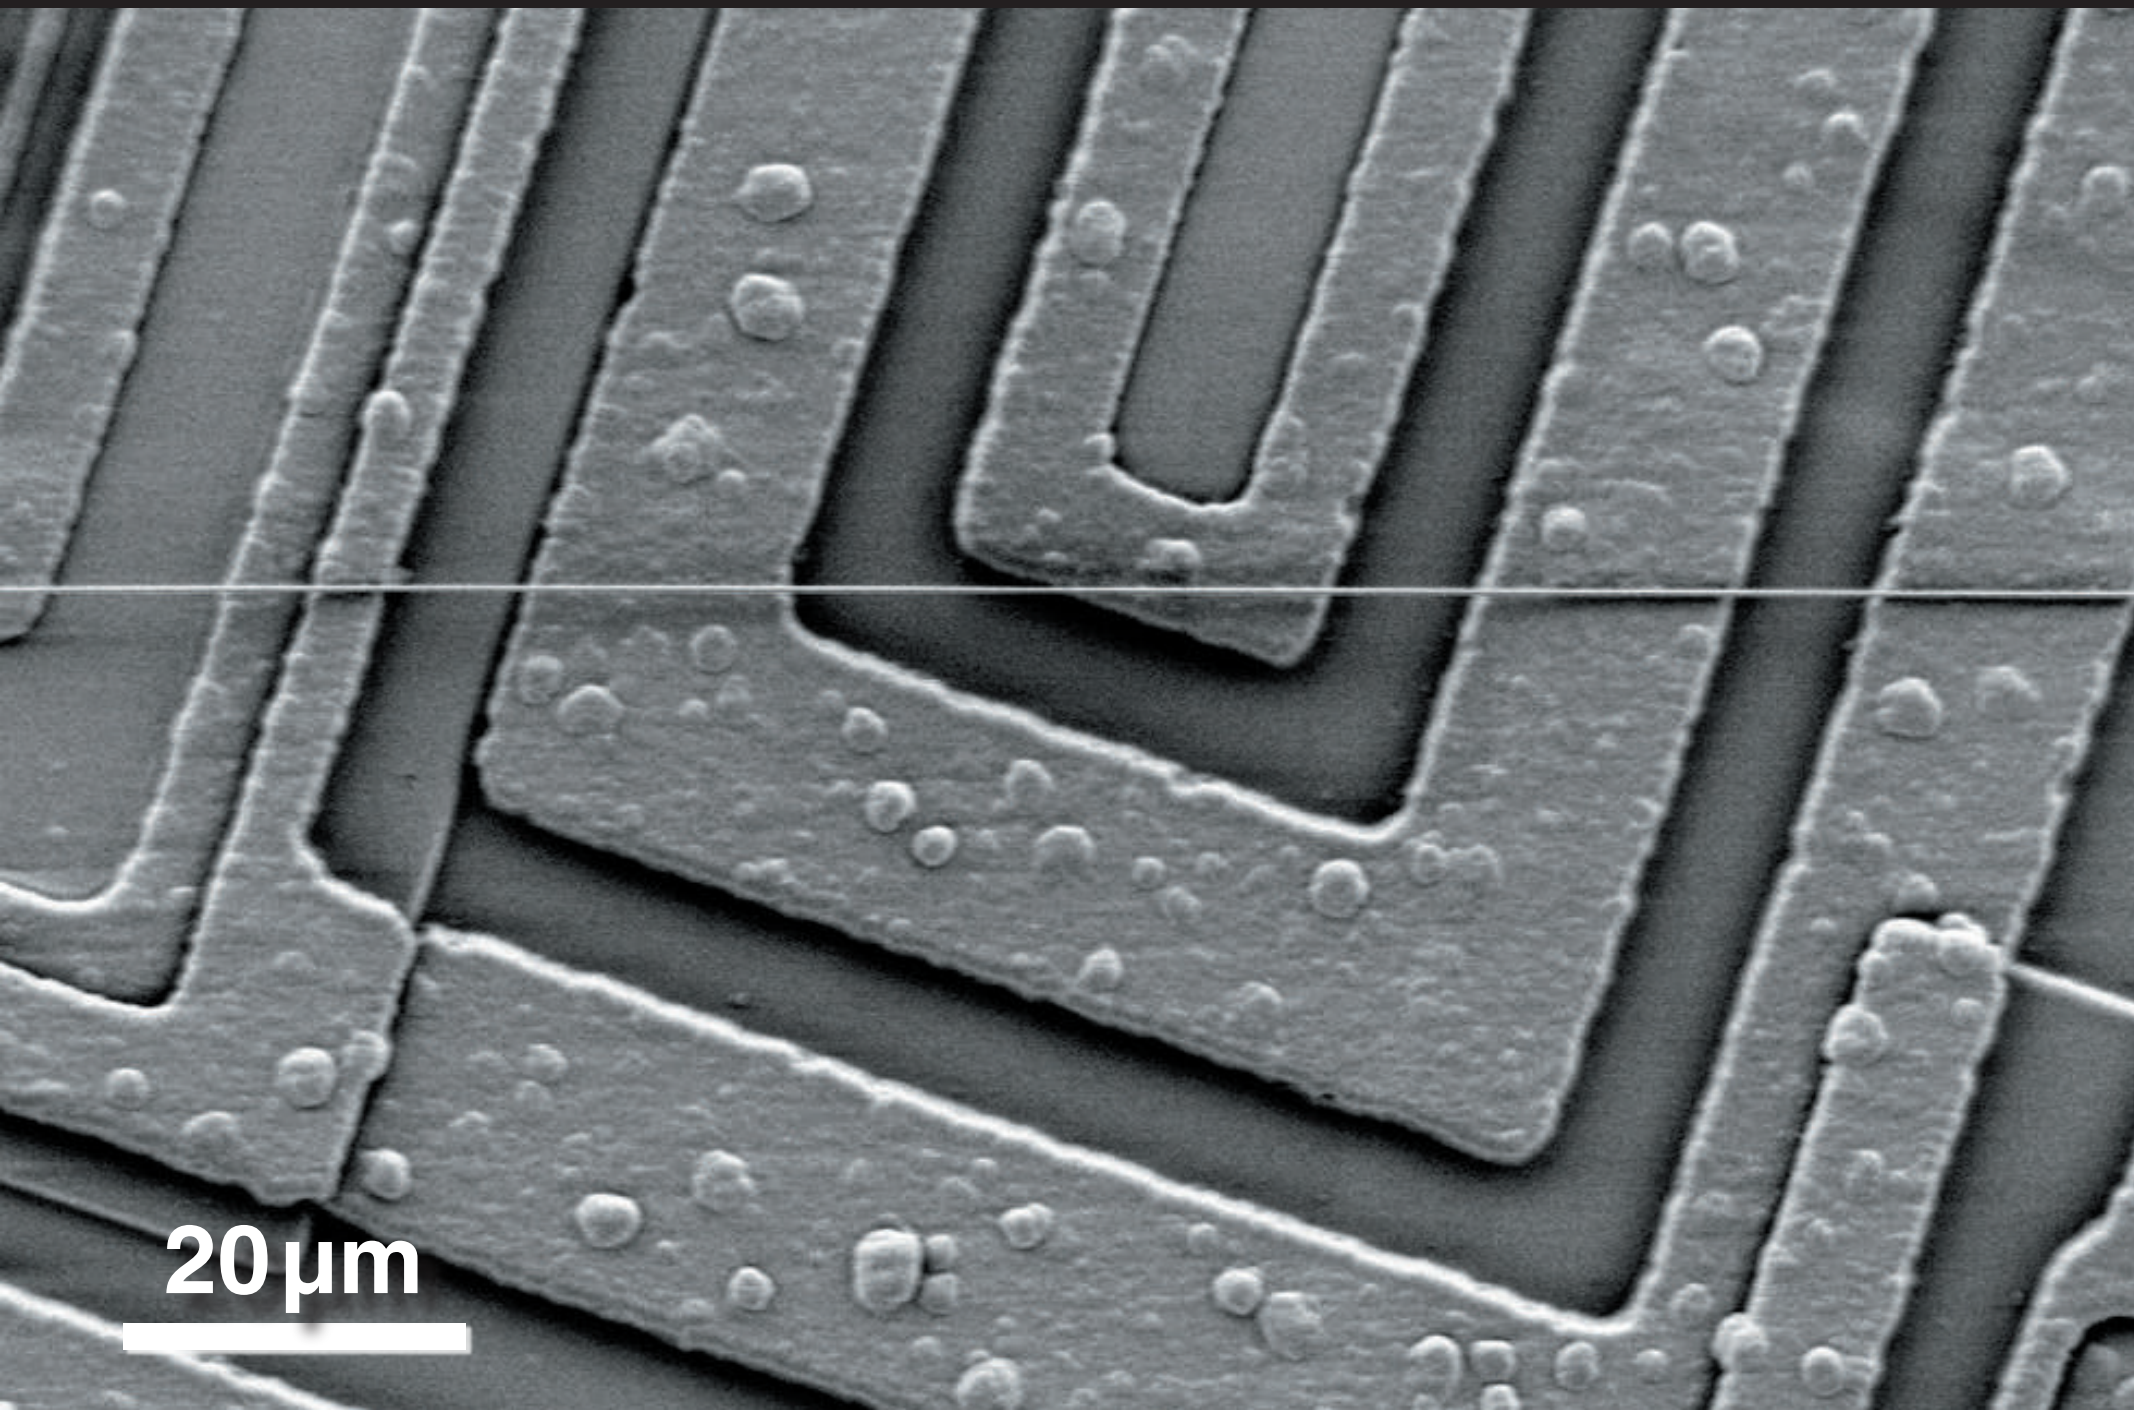

Nanowire fabrication

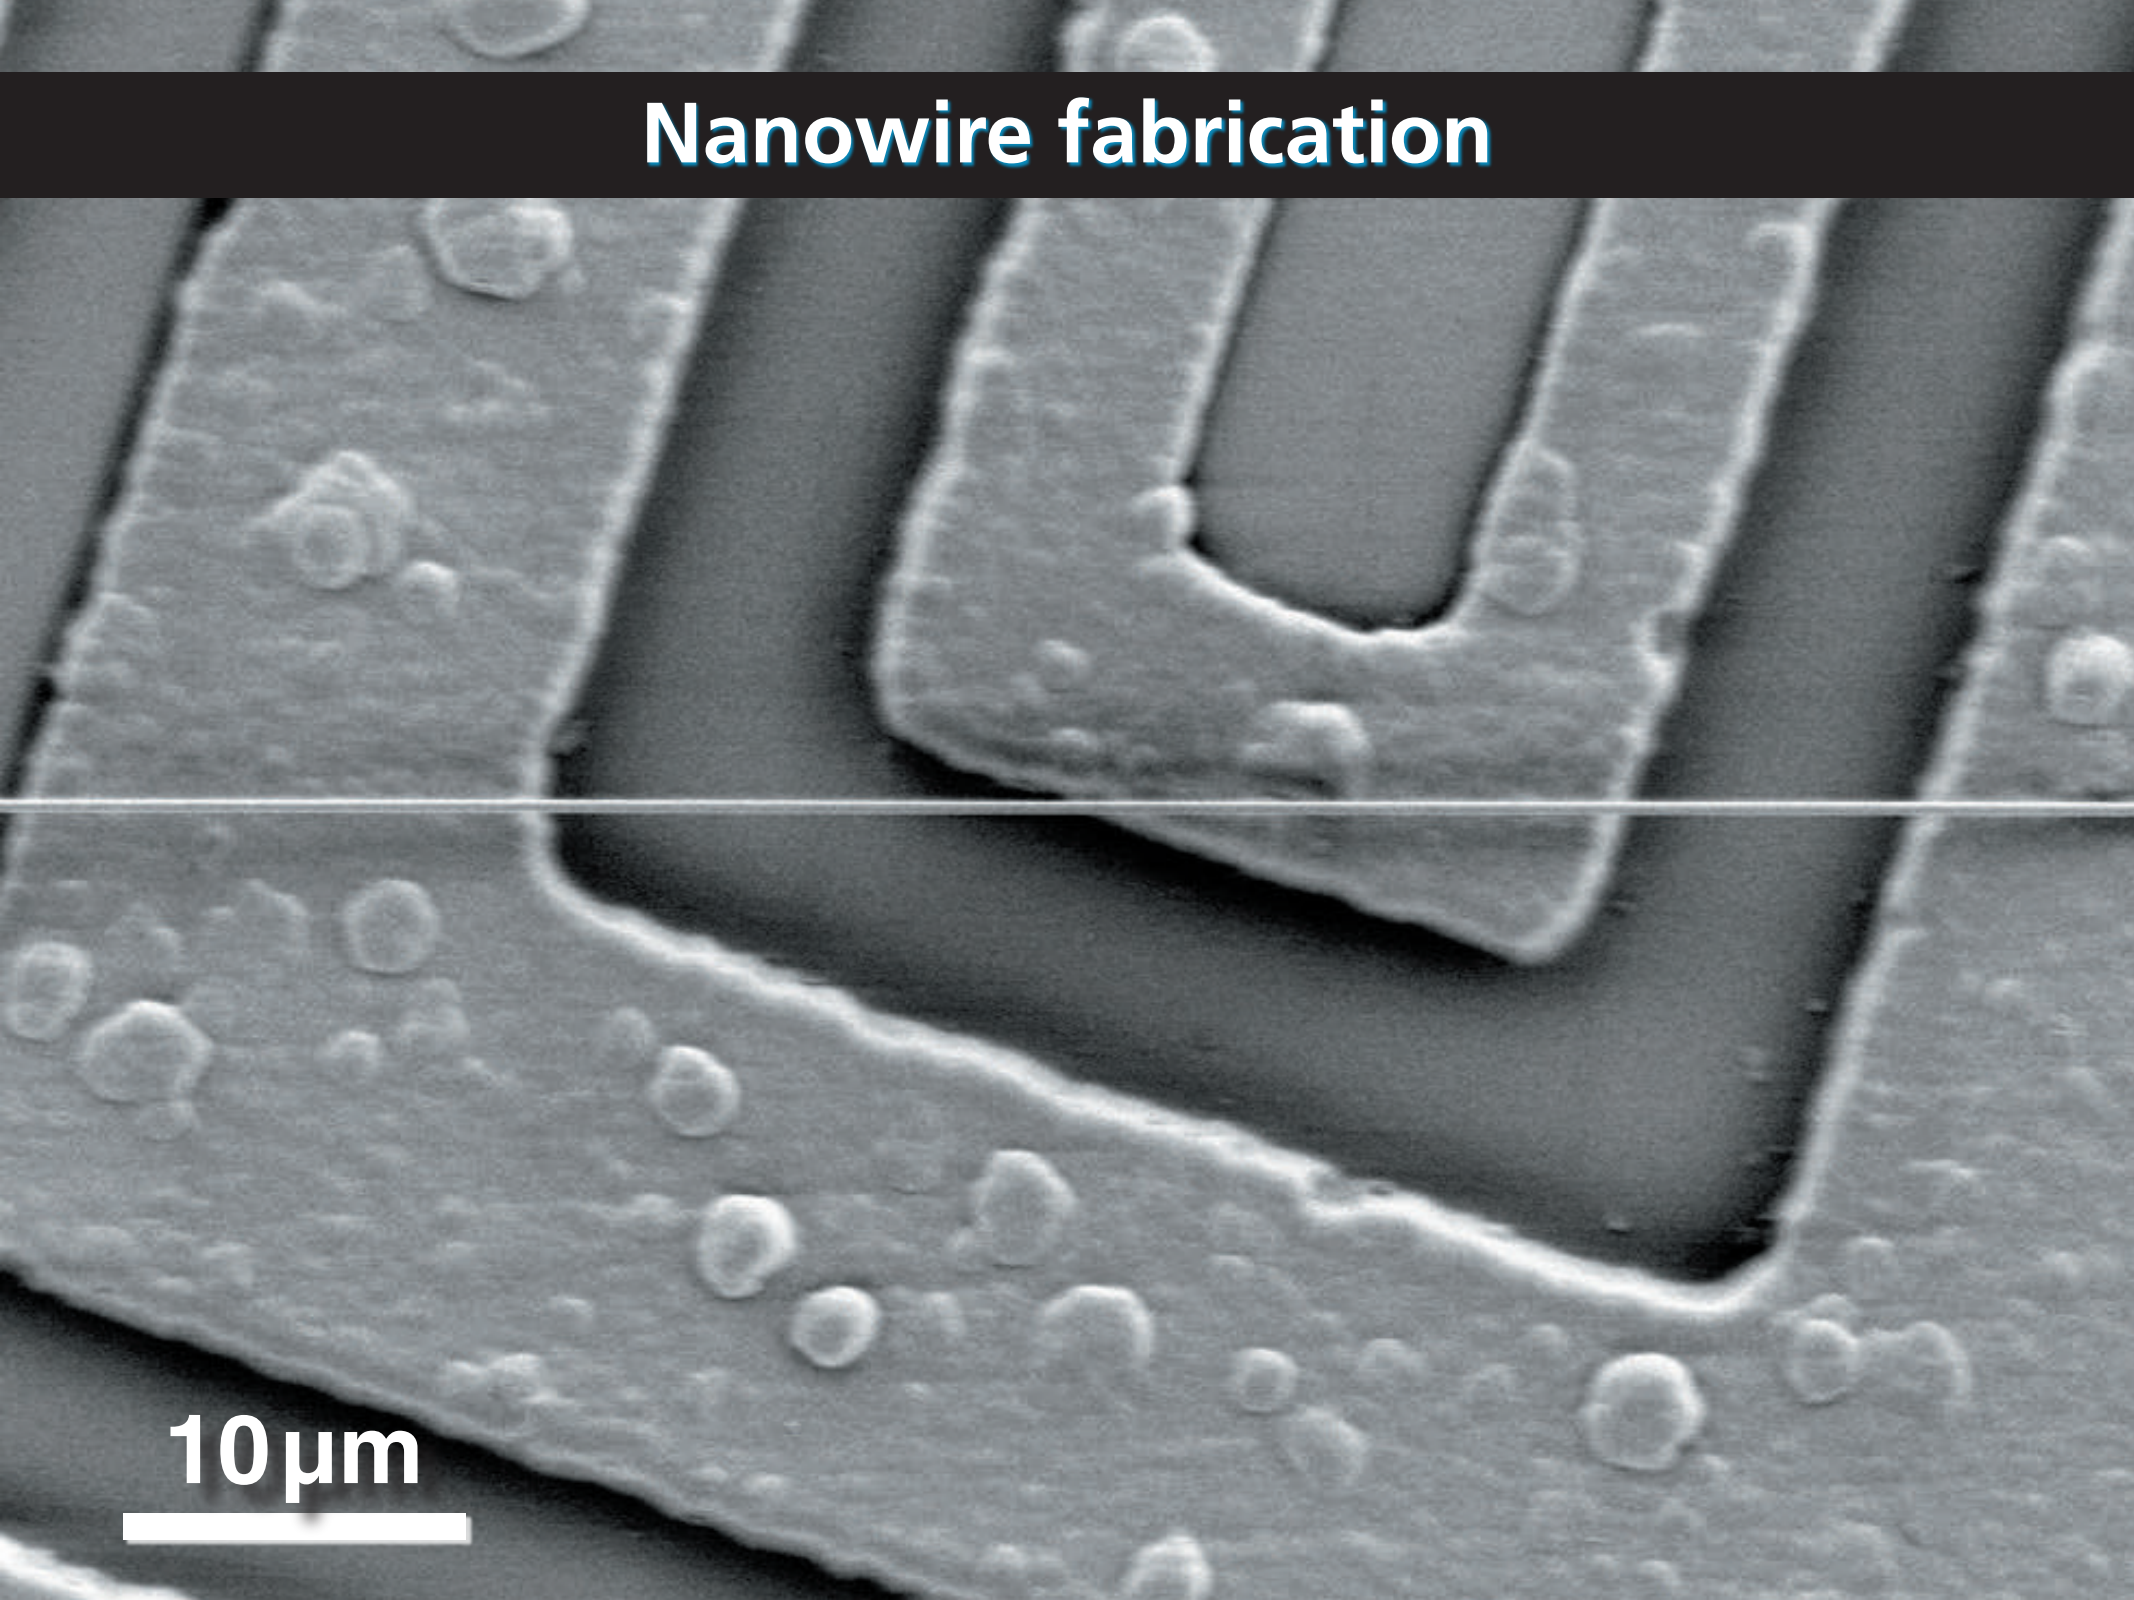

Nanowire fabrication

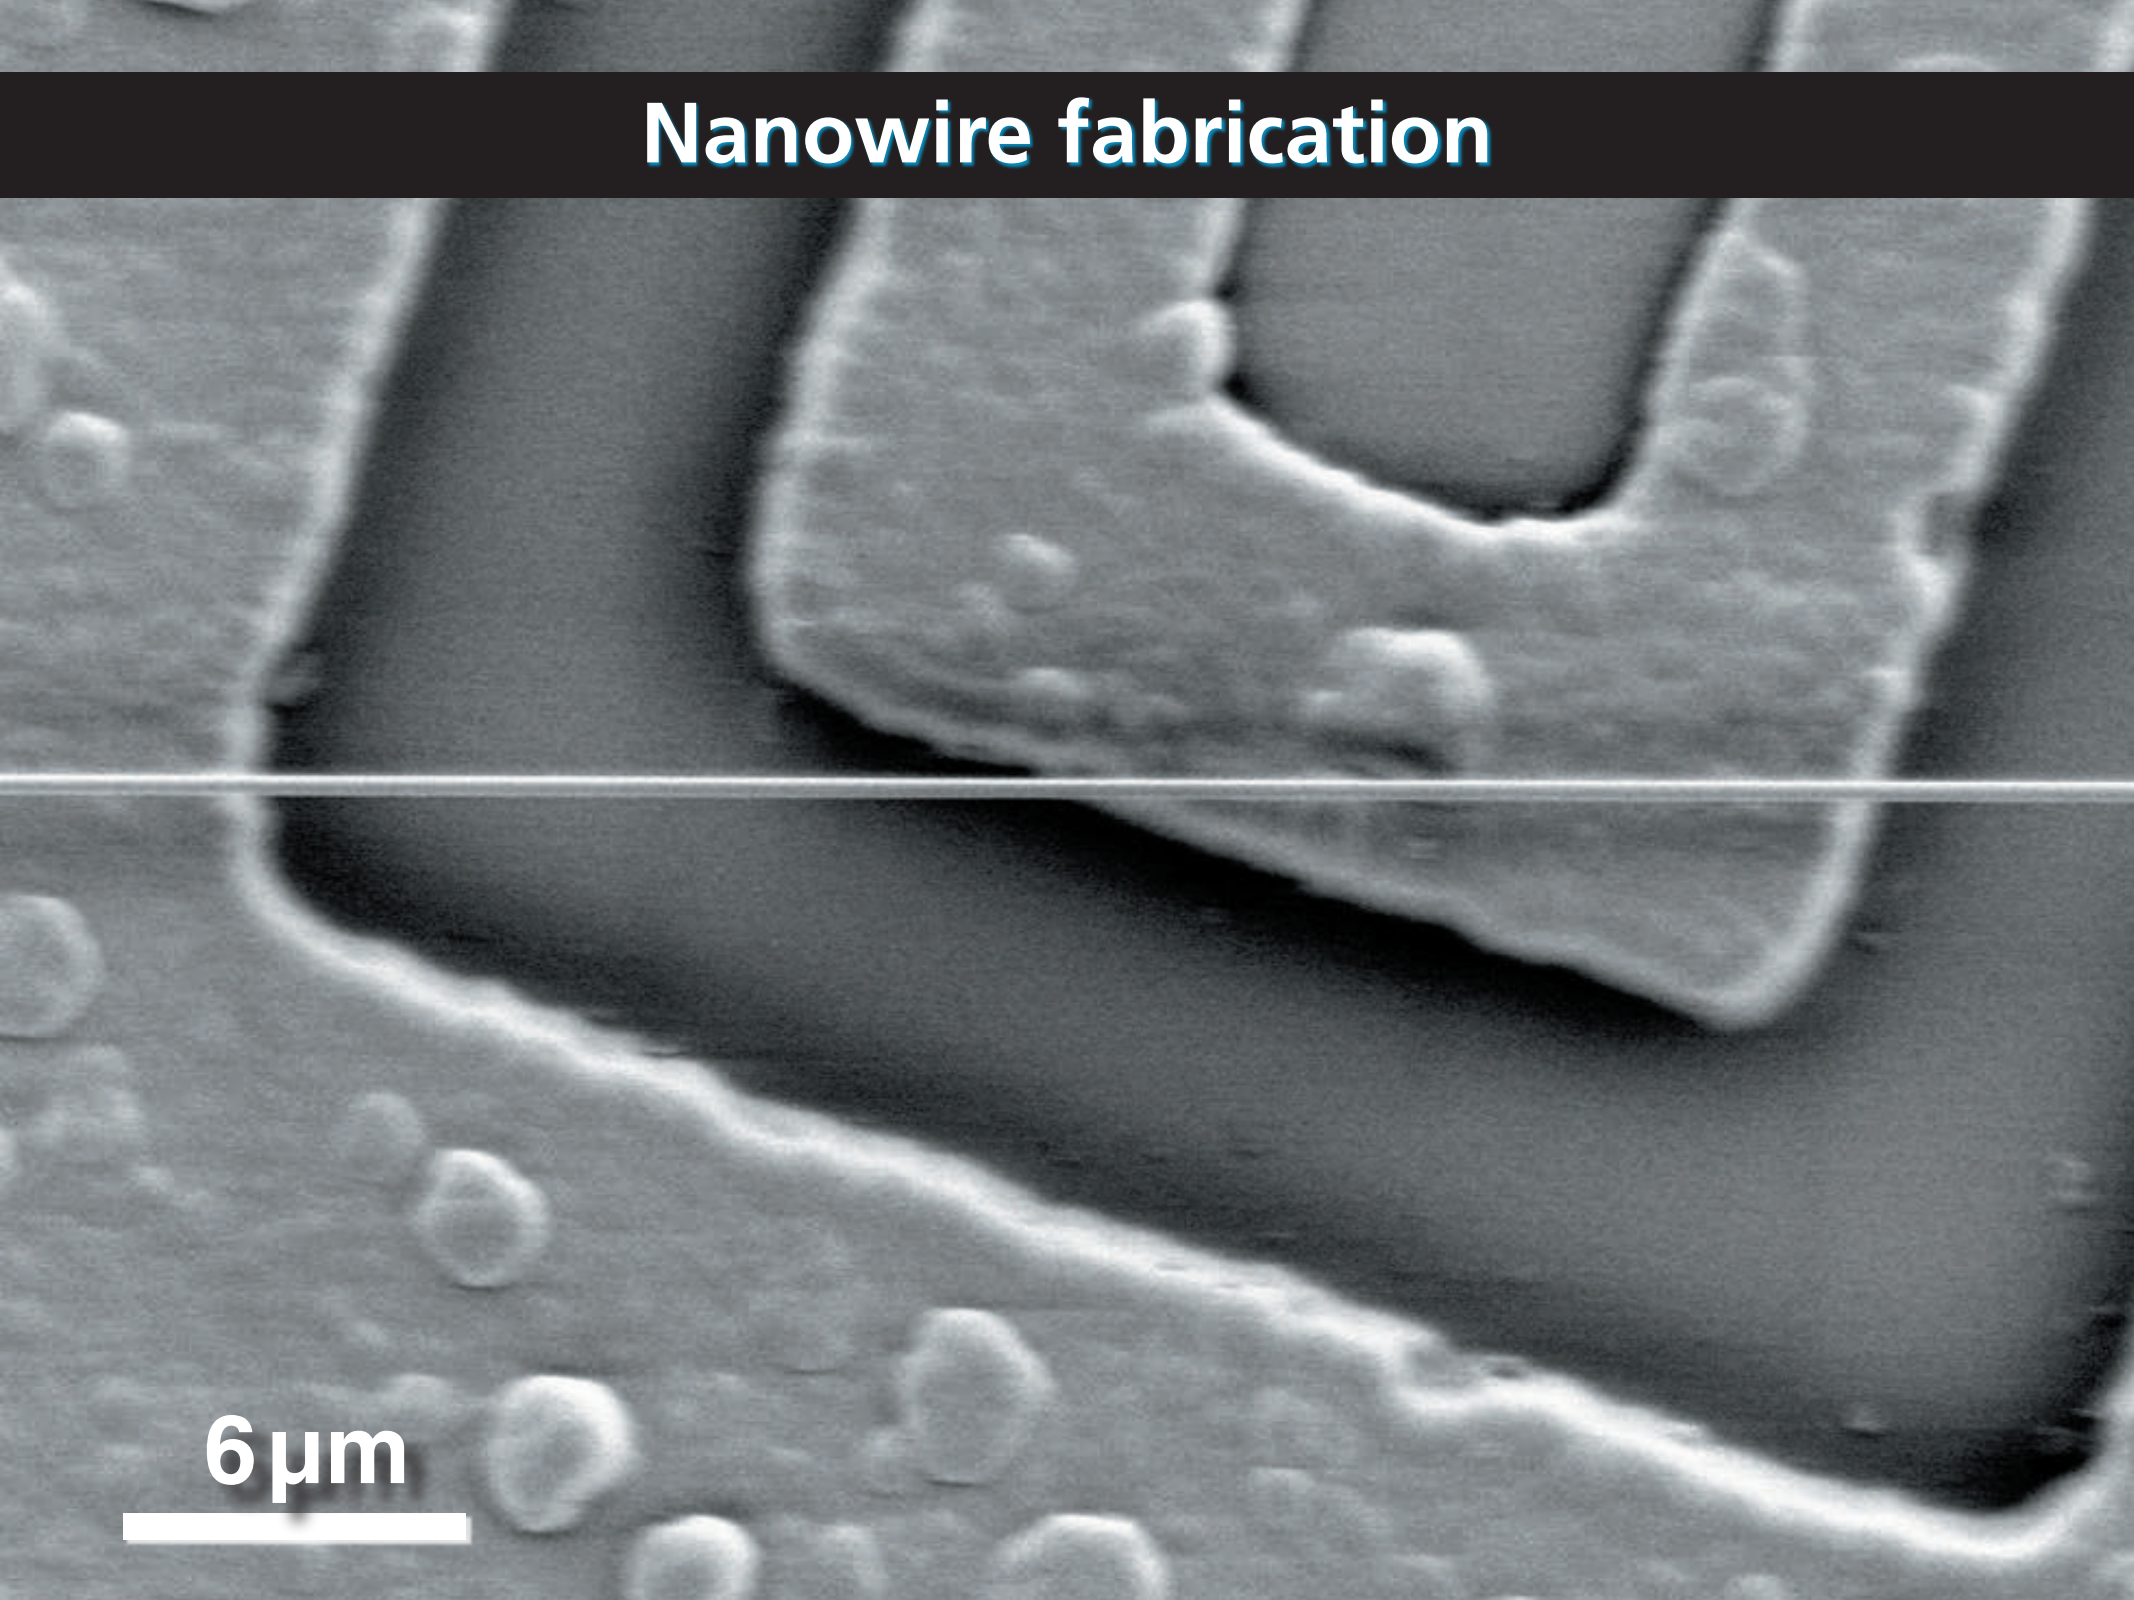

Nanowire fabrication

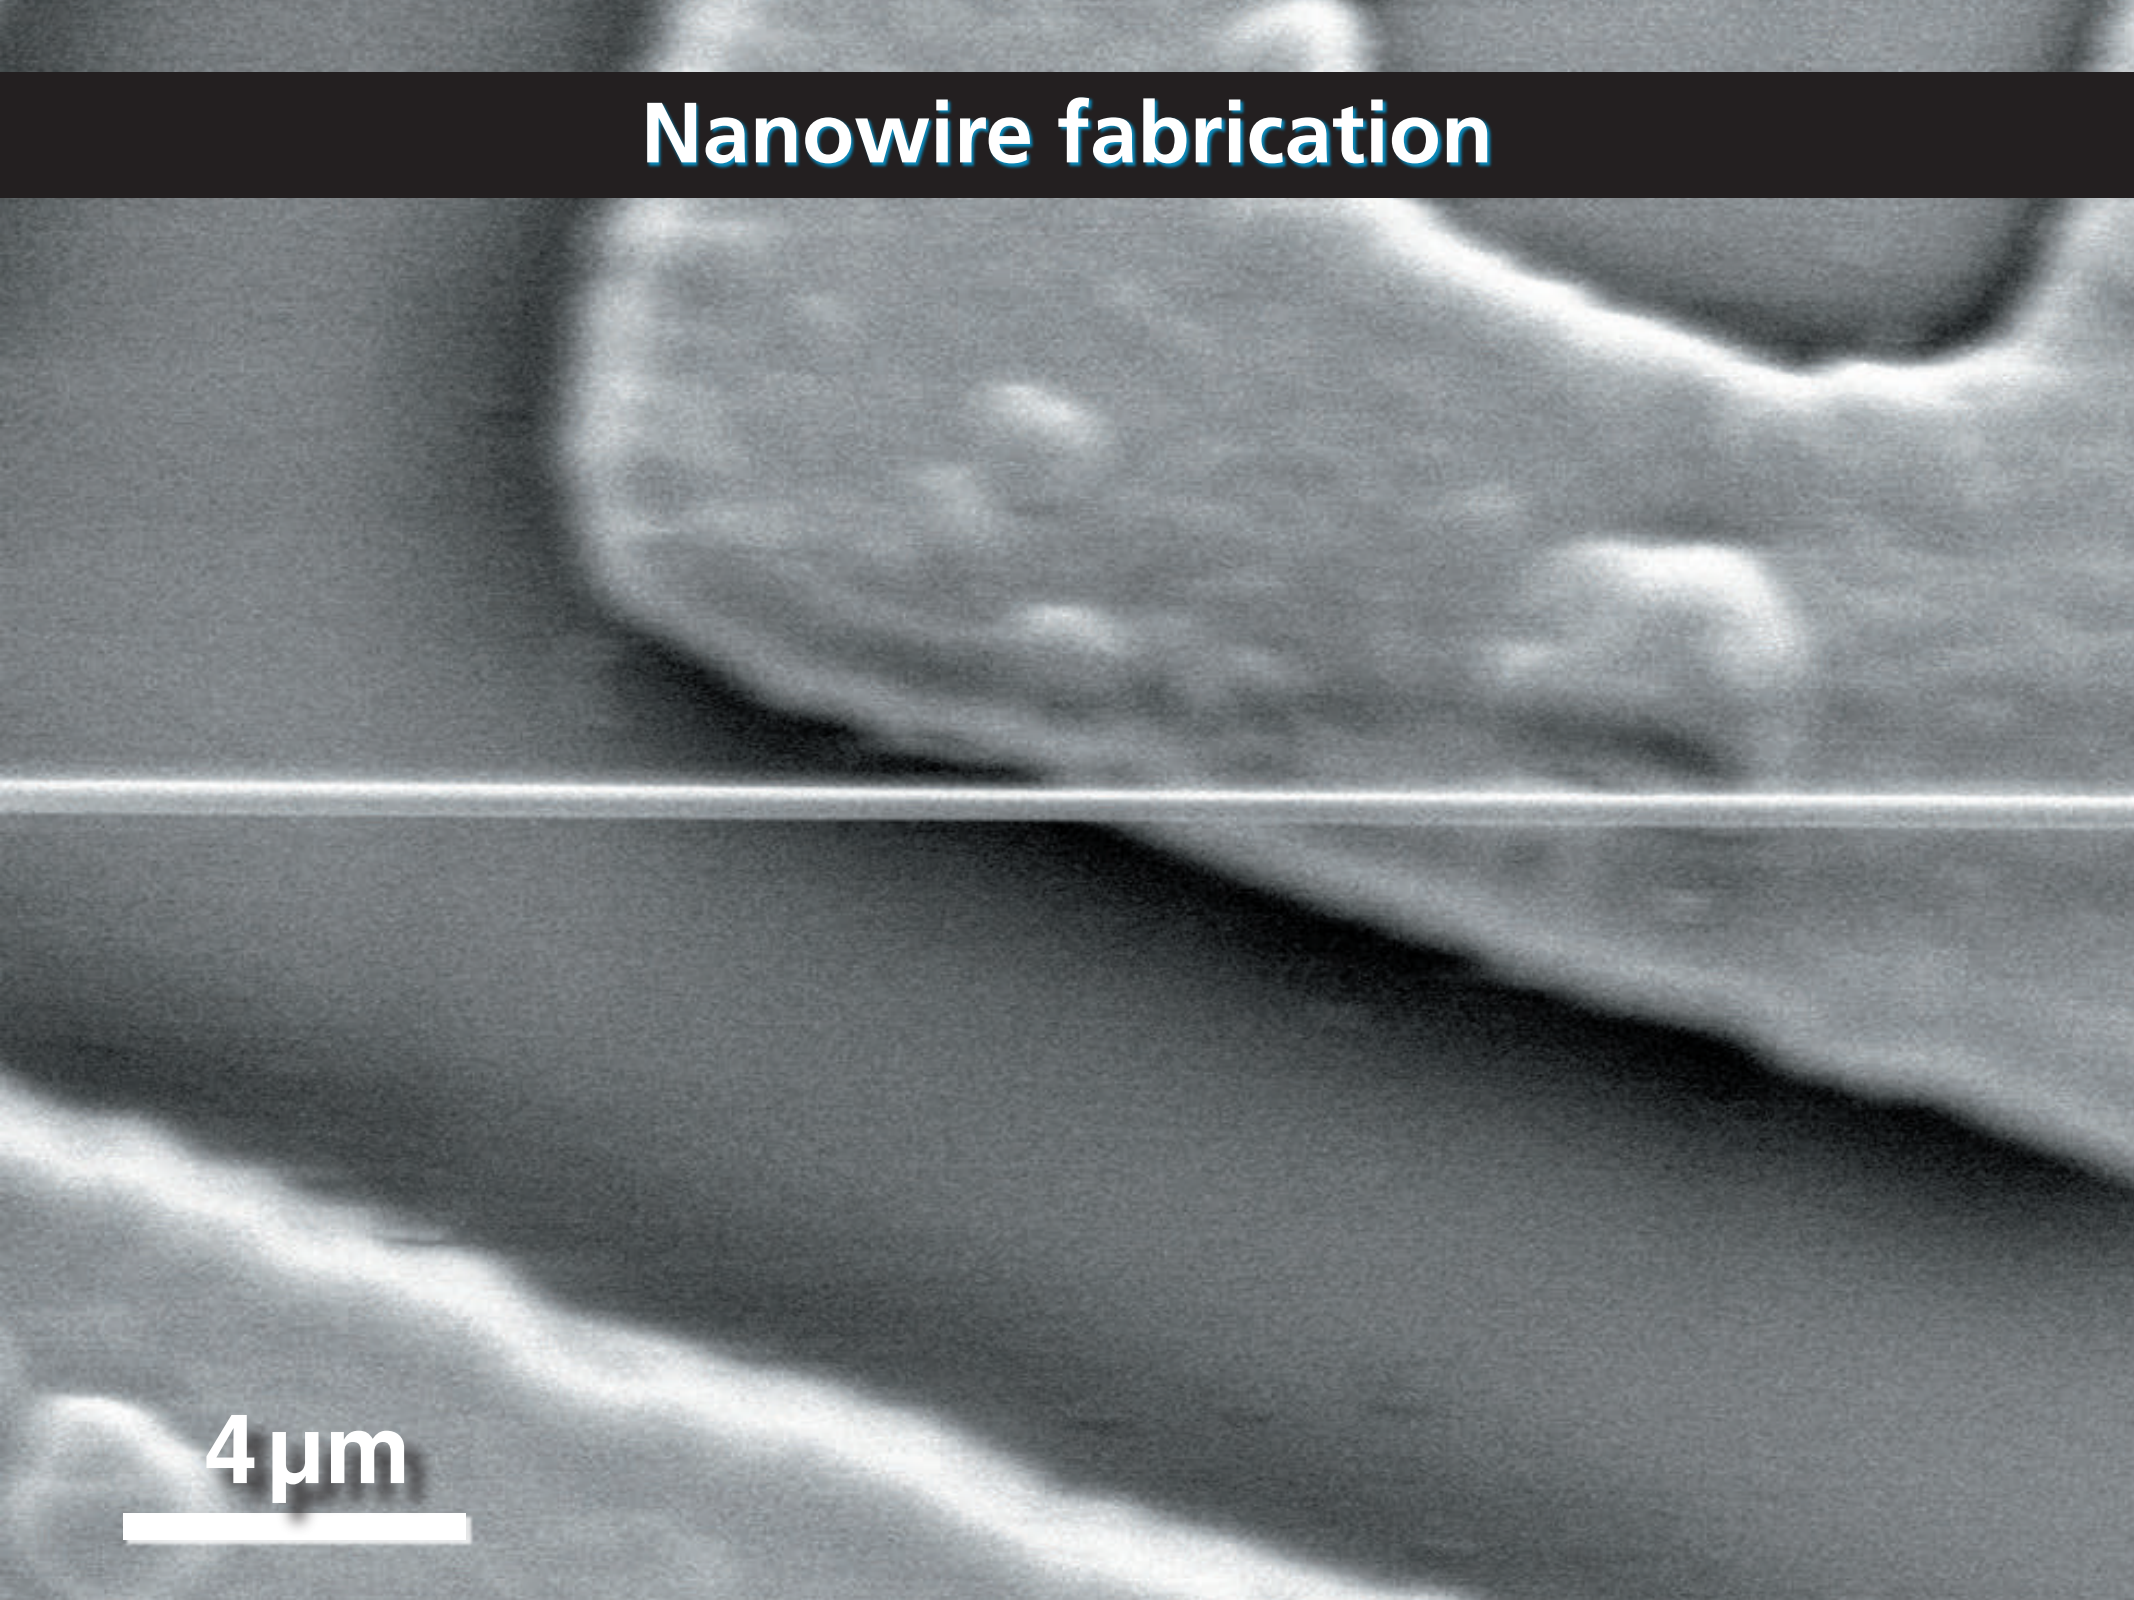

Nanowire fabrication

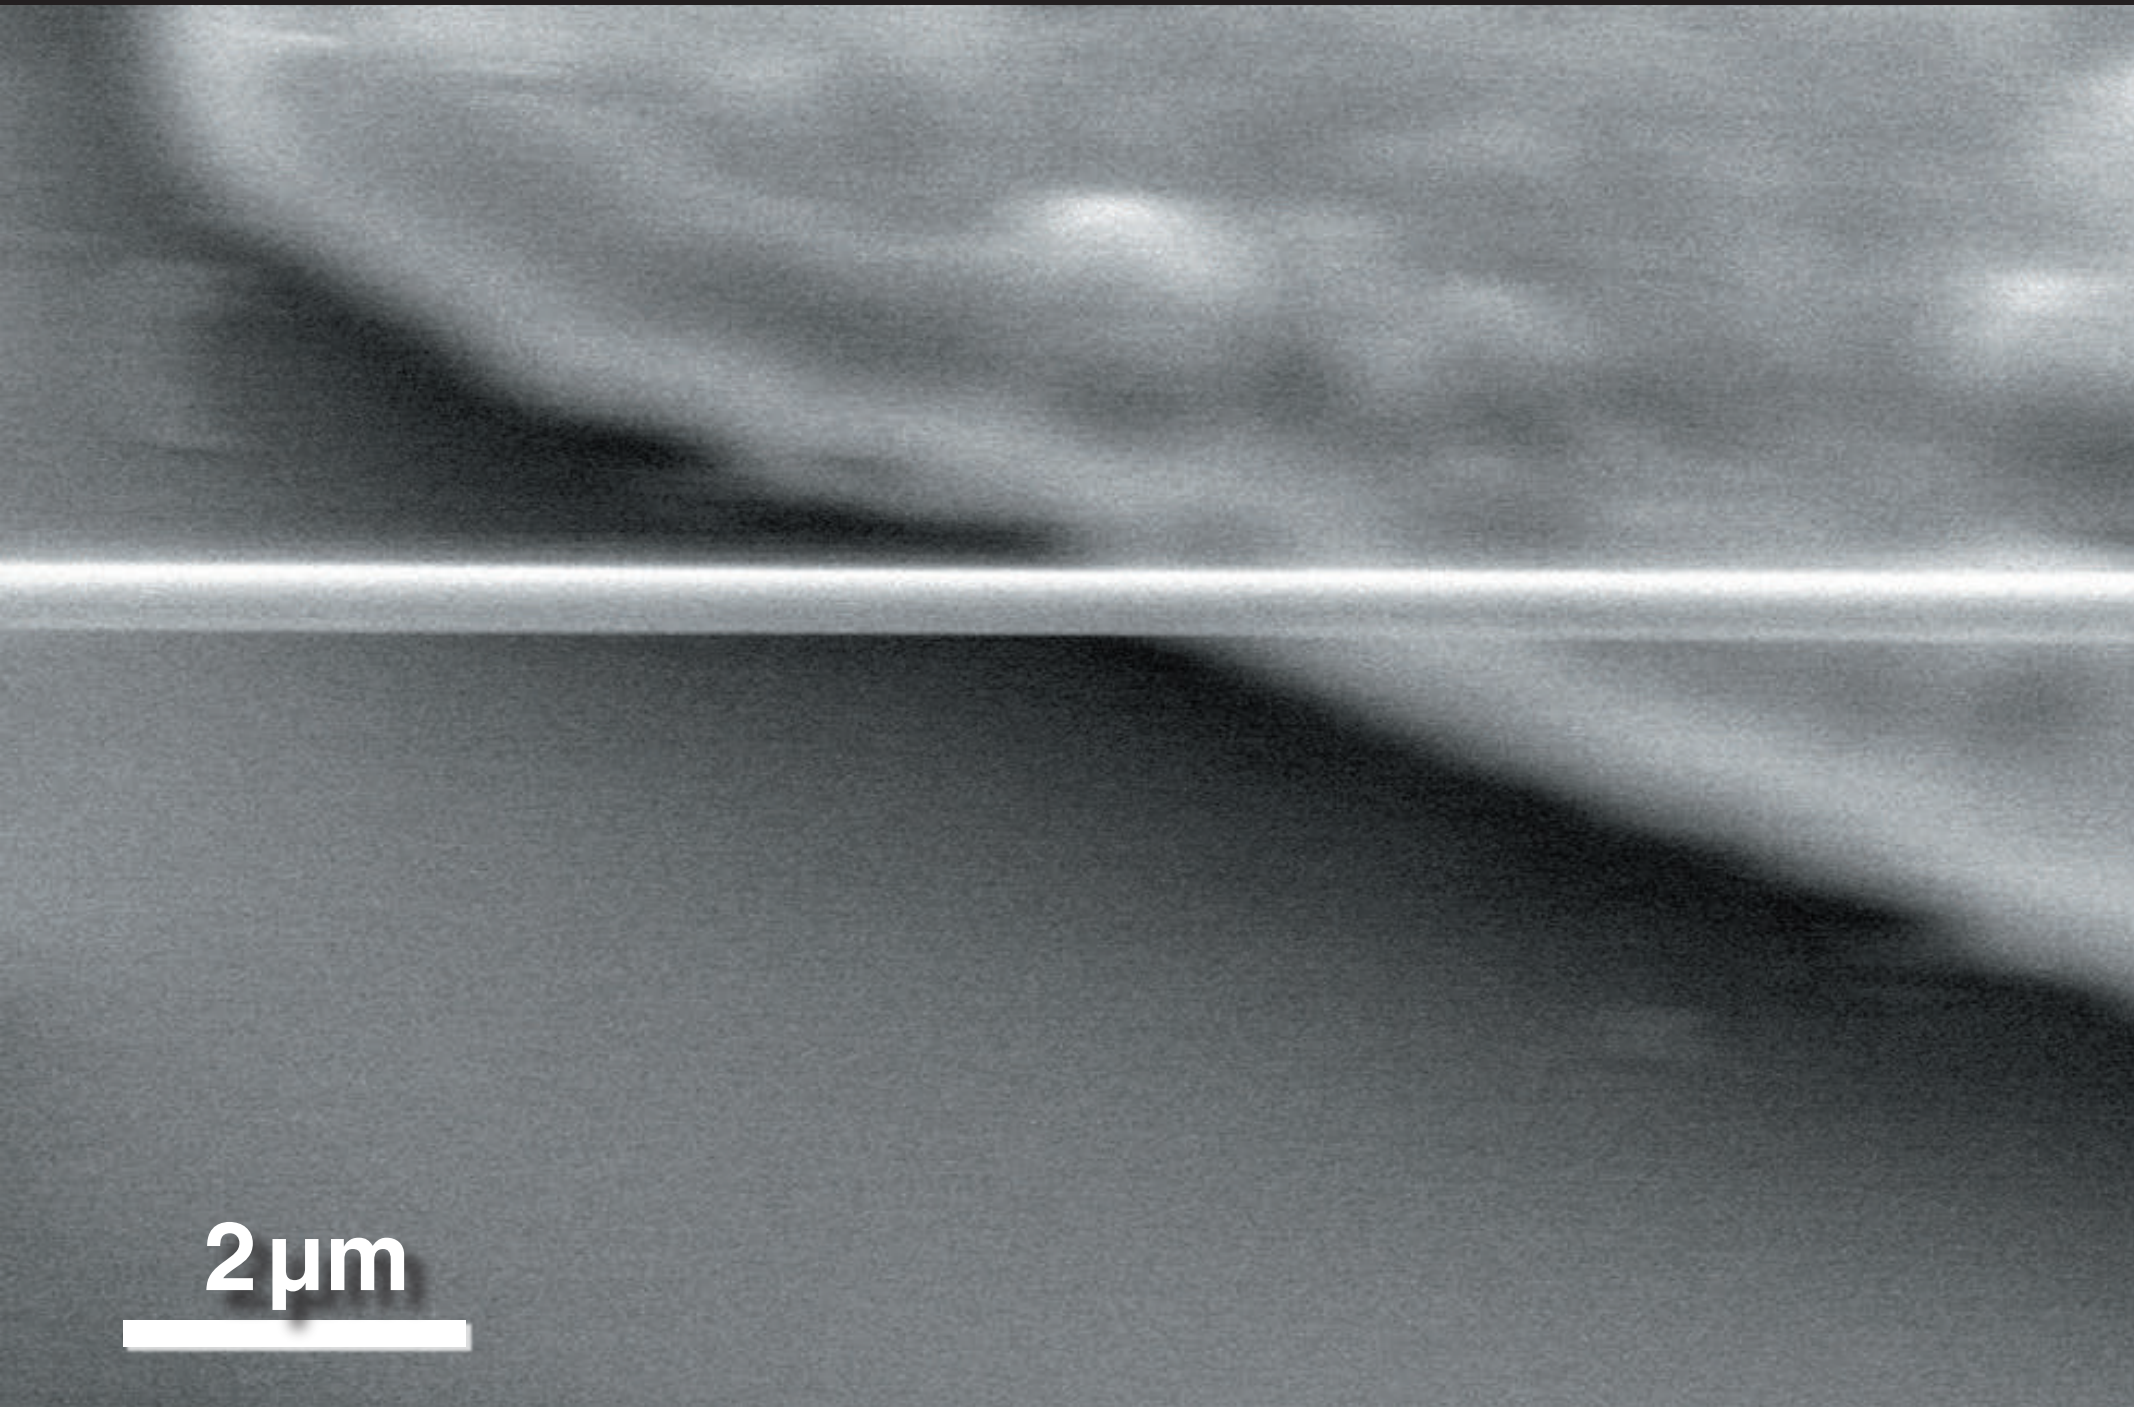

Nanowire fabrication

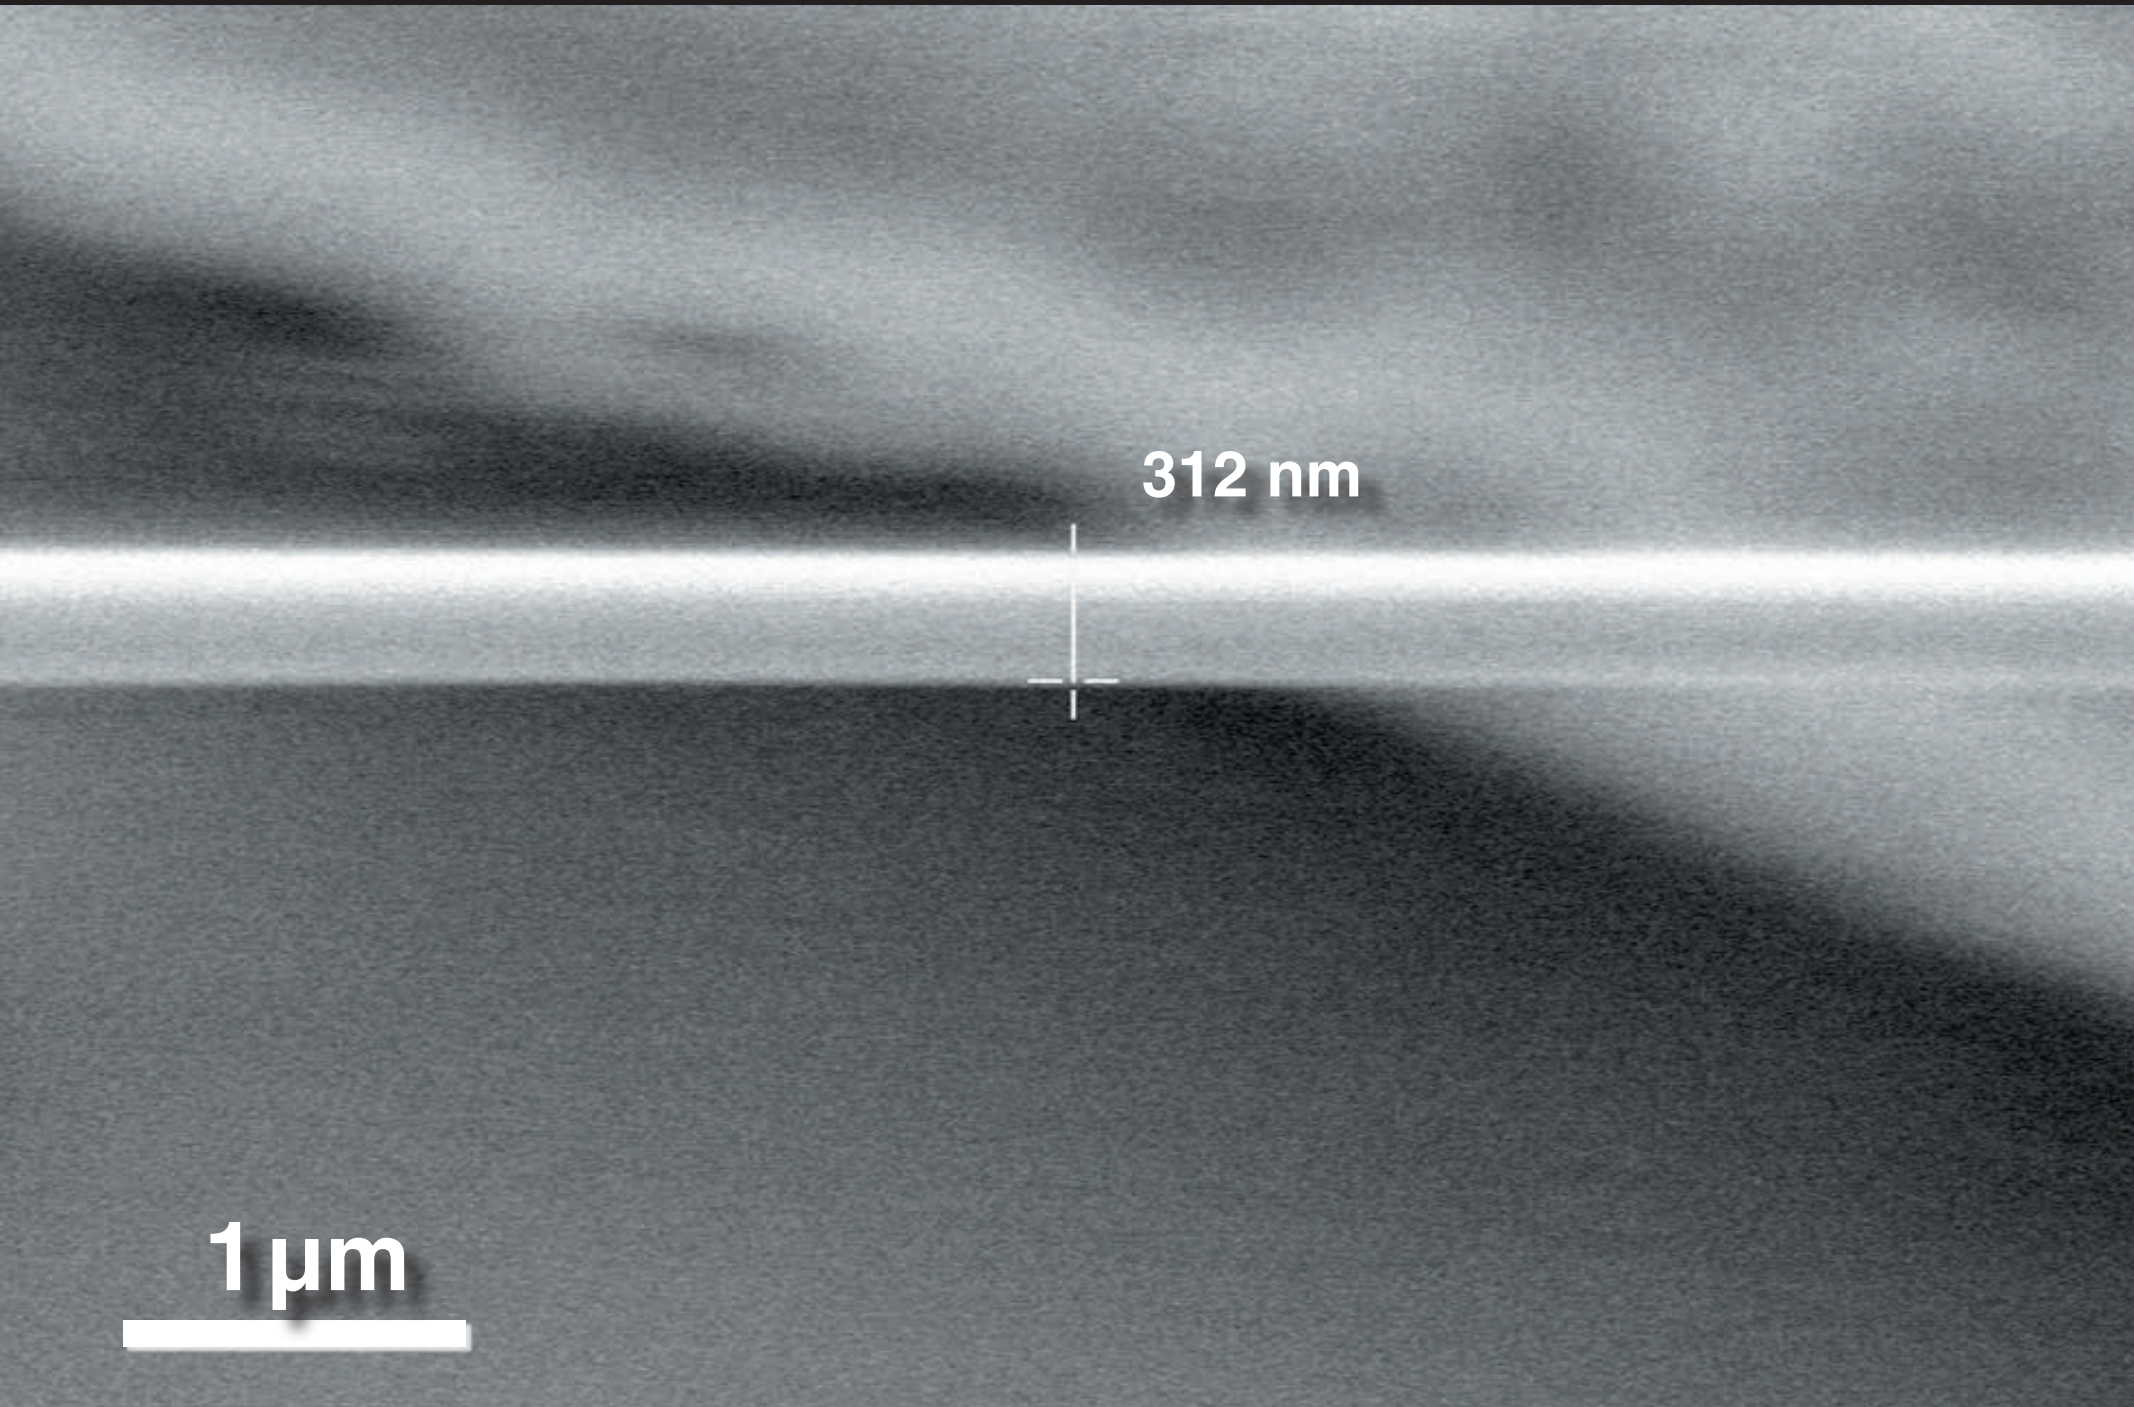

Waveguiding

Specifications

diameter D:	down to 20 nm
length L:	up to 90 mm
aspect ratio D/L:	up to 10^6
diameter uniformity $\Delta D/L$:	2×10^{-6}

Nanowire fabrication

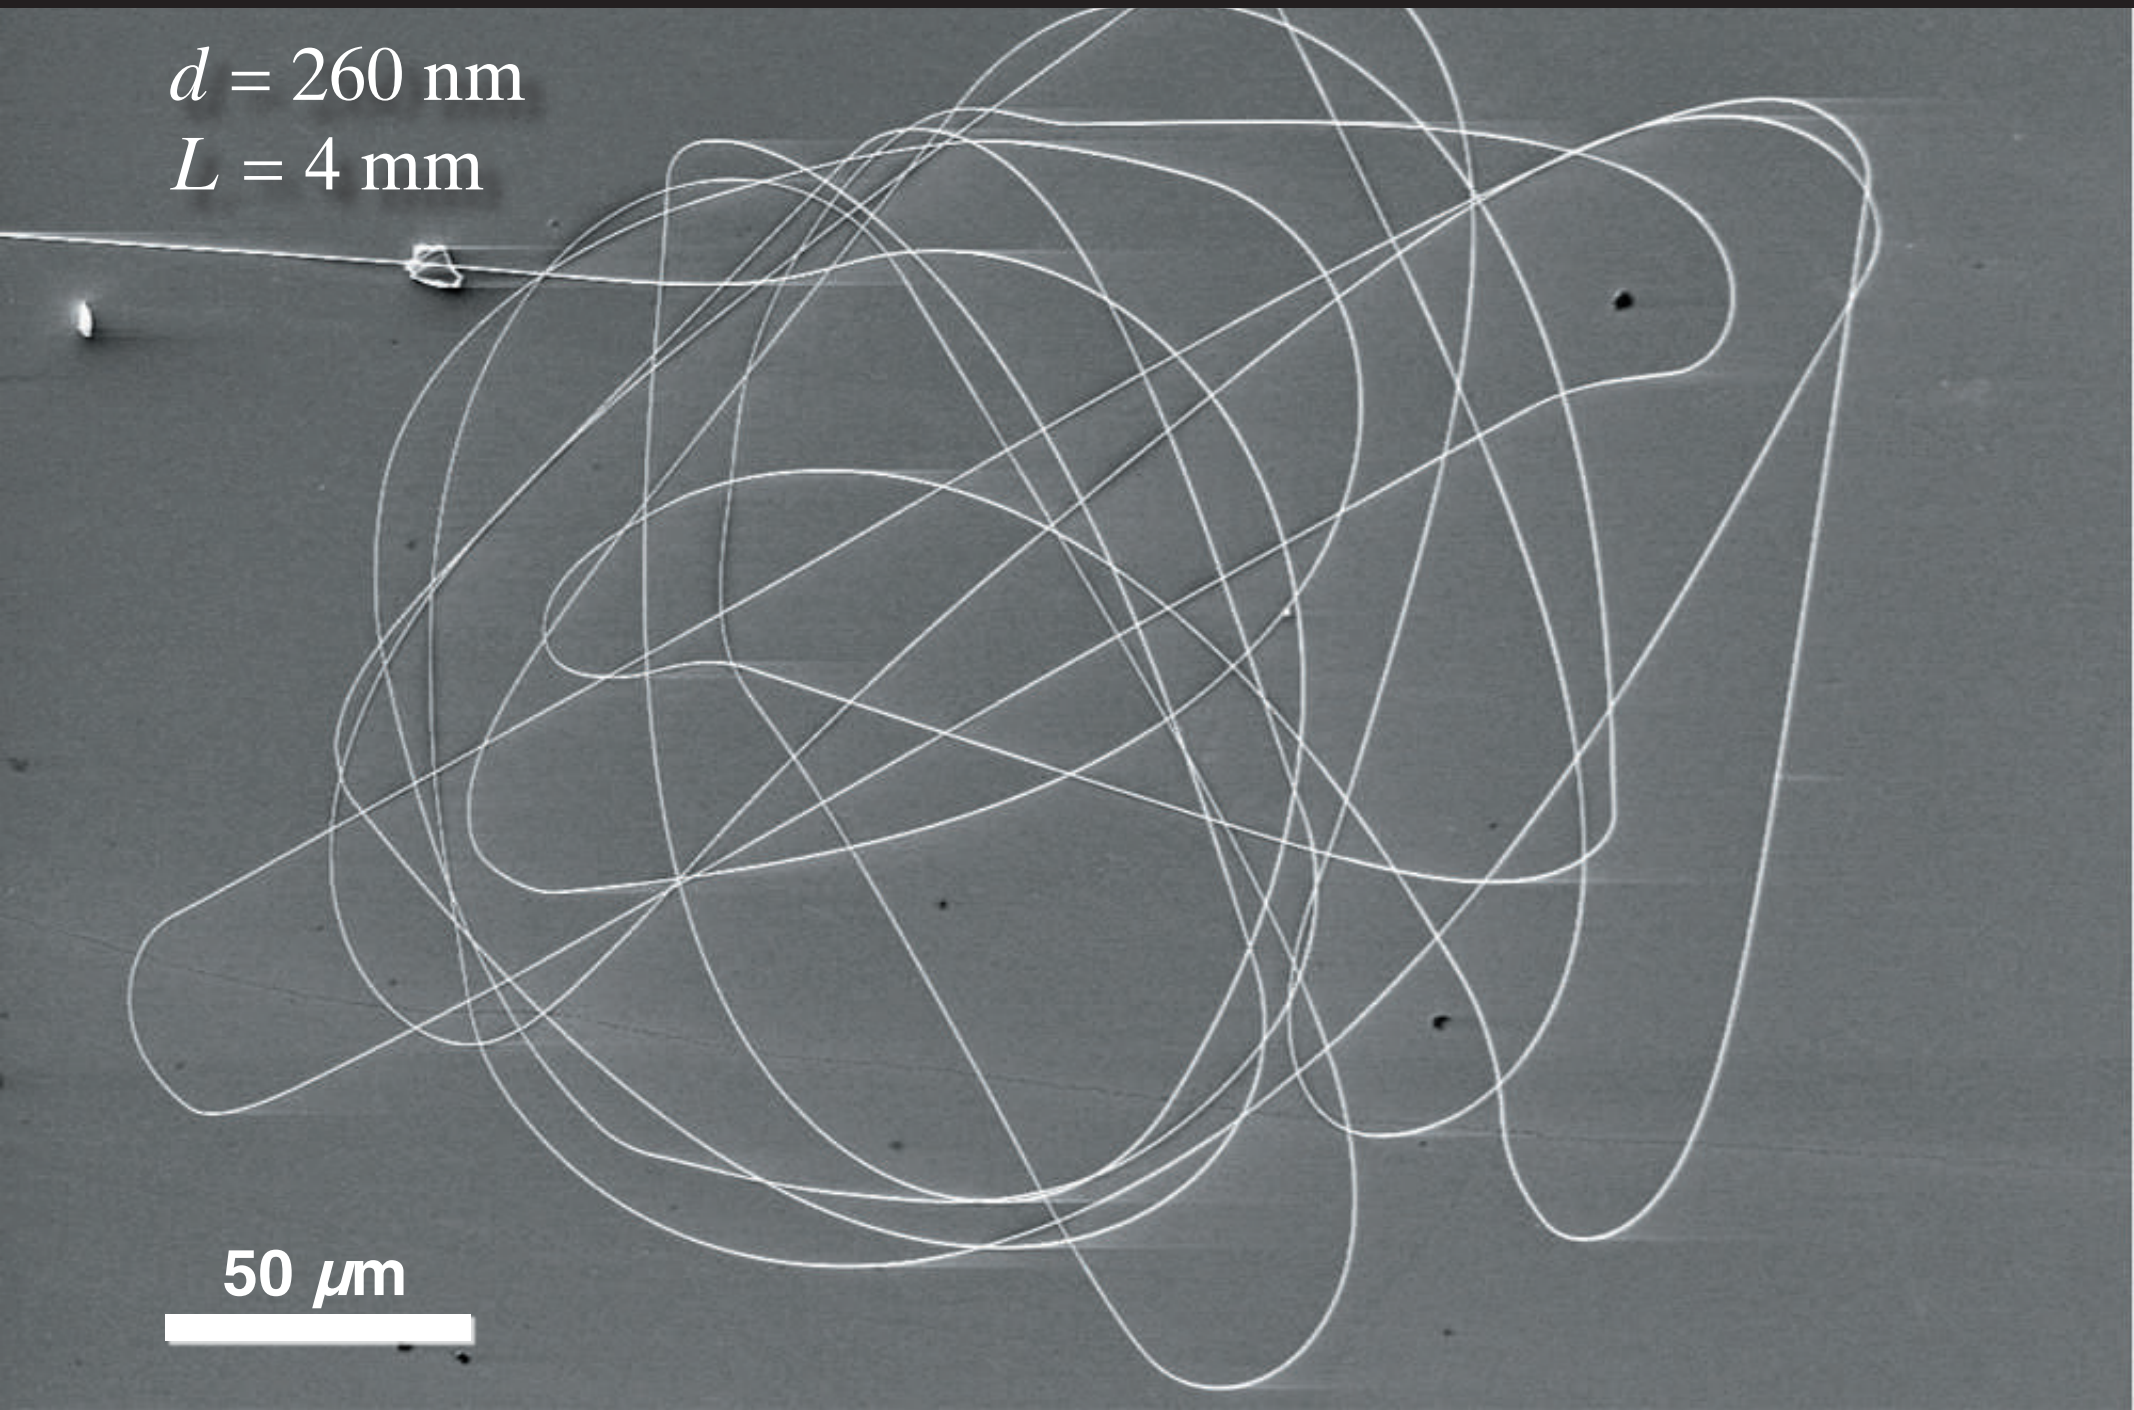

Nanowire fabrication

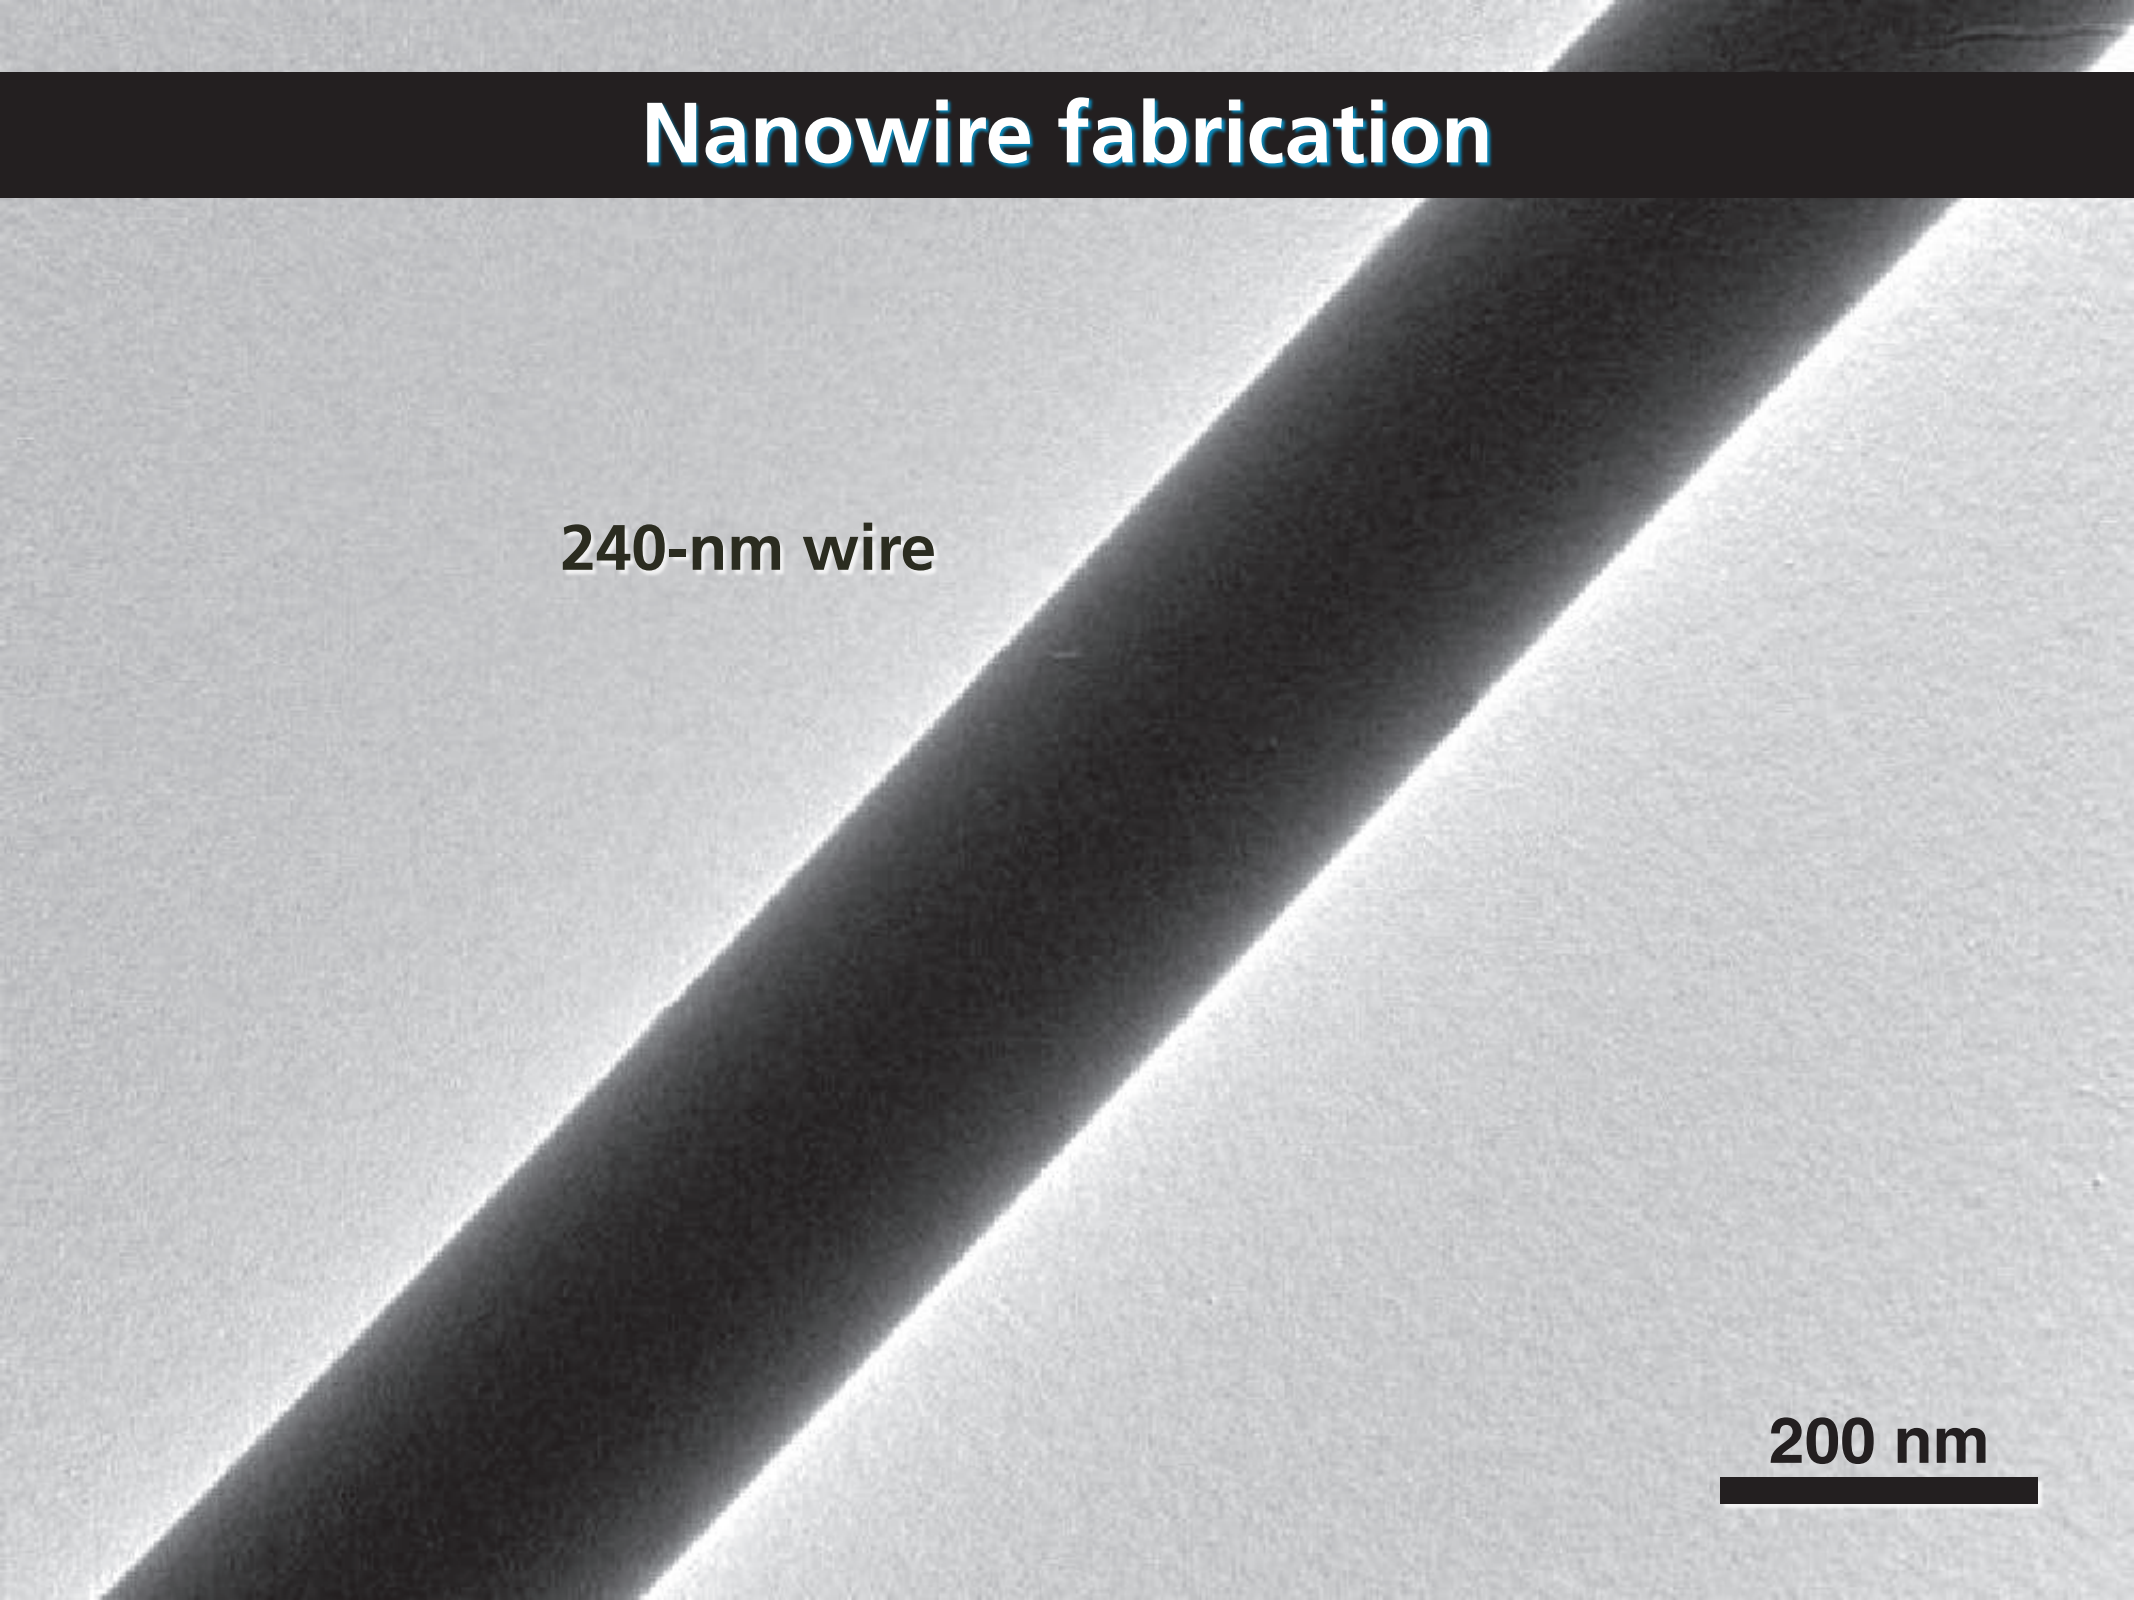

Nanowire fabrication

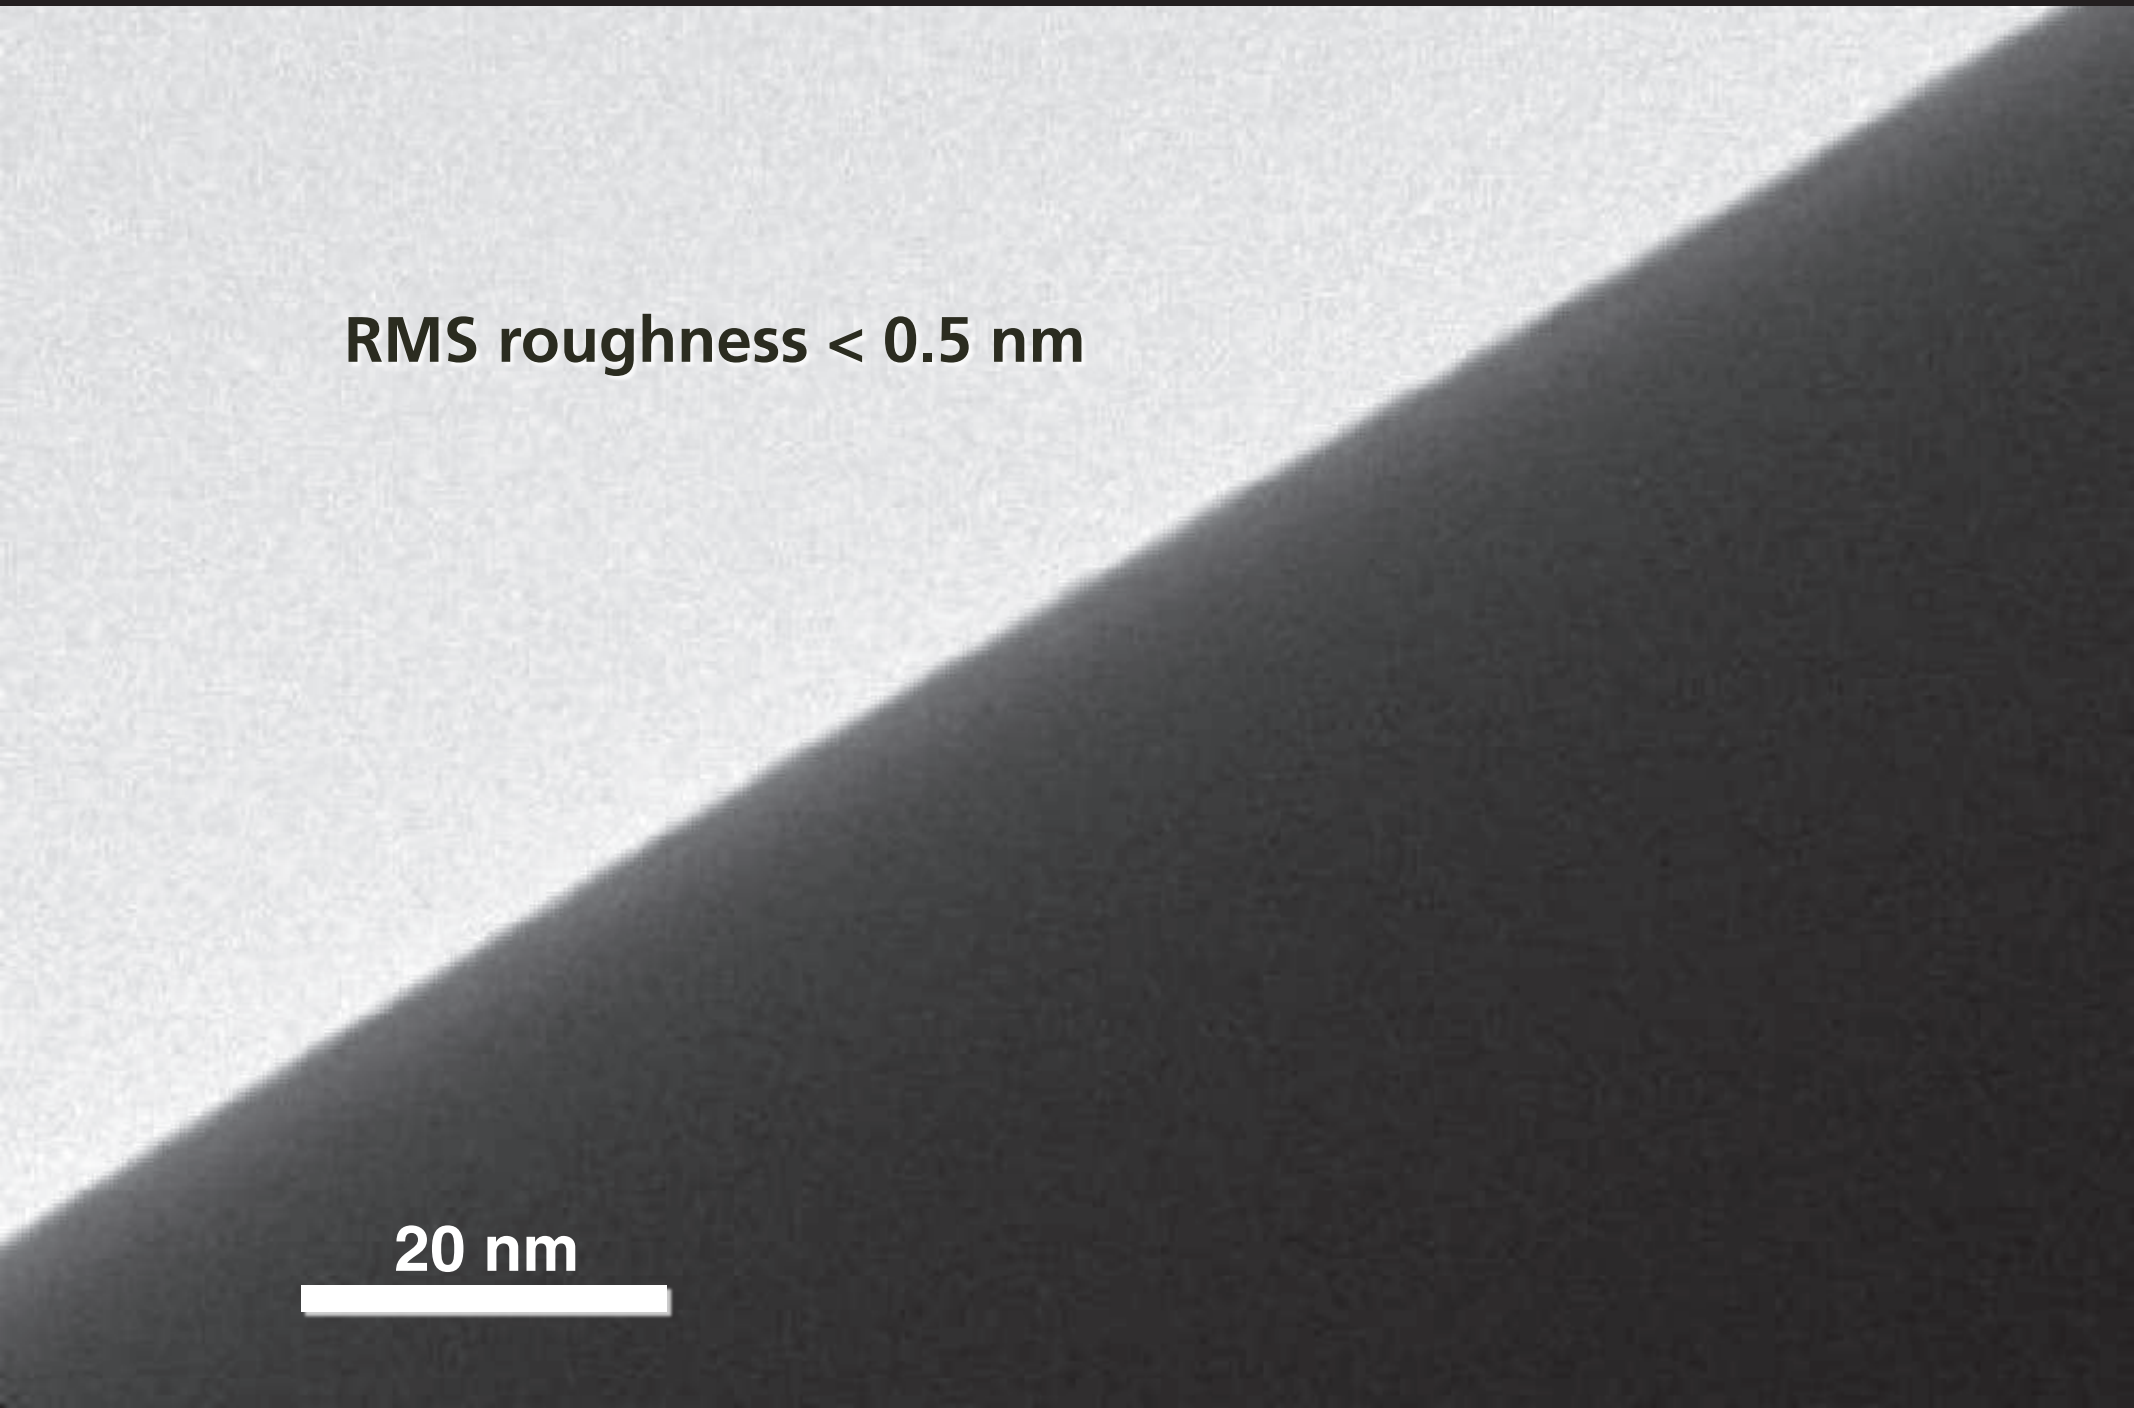

Nanowire fabrication

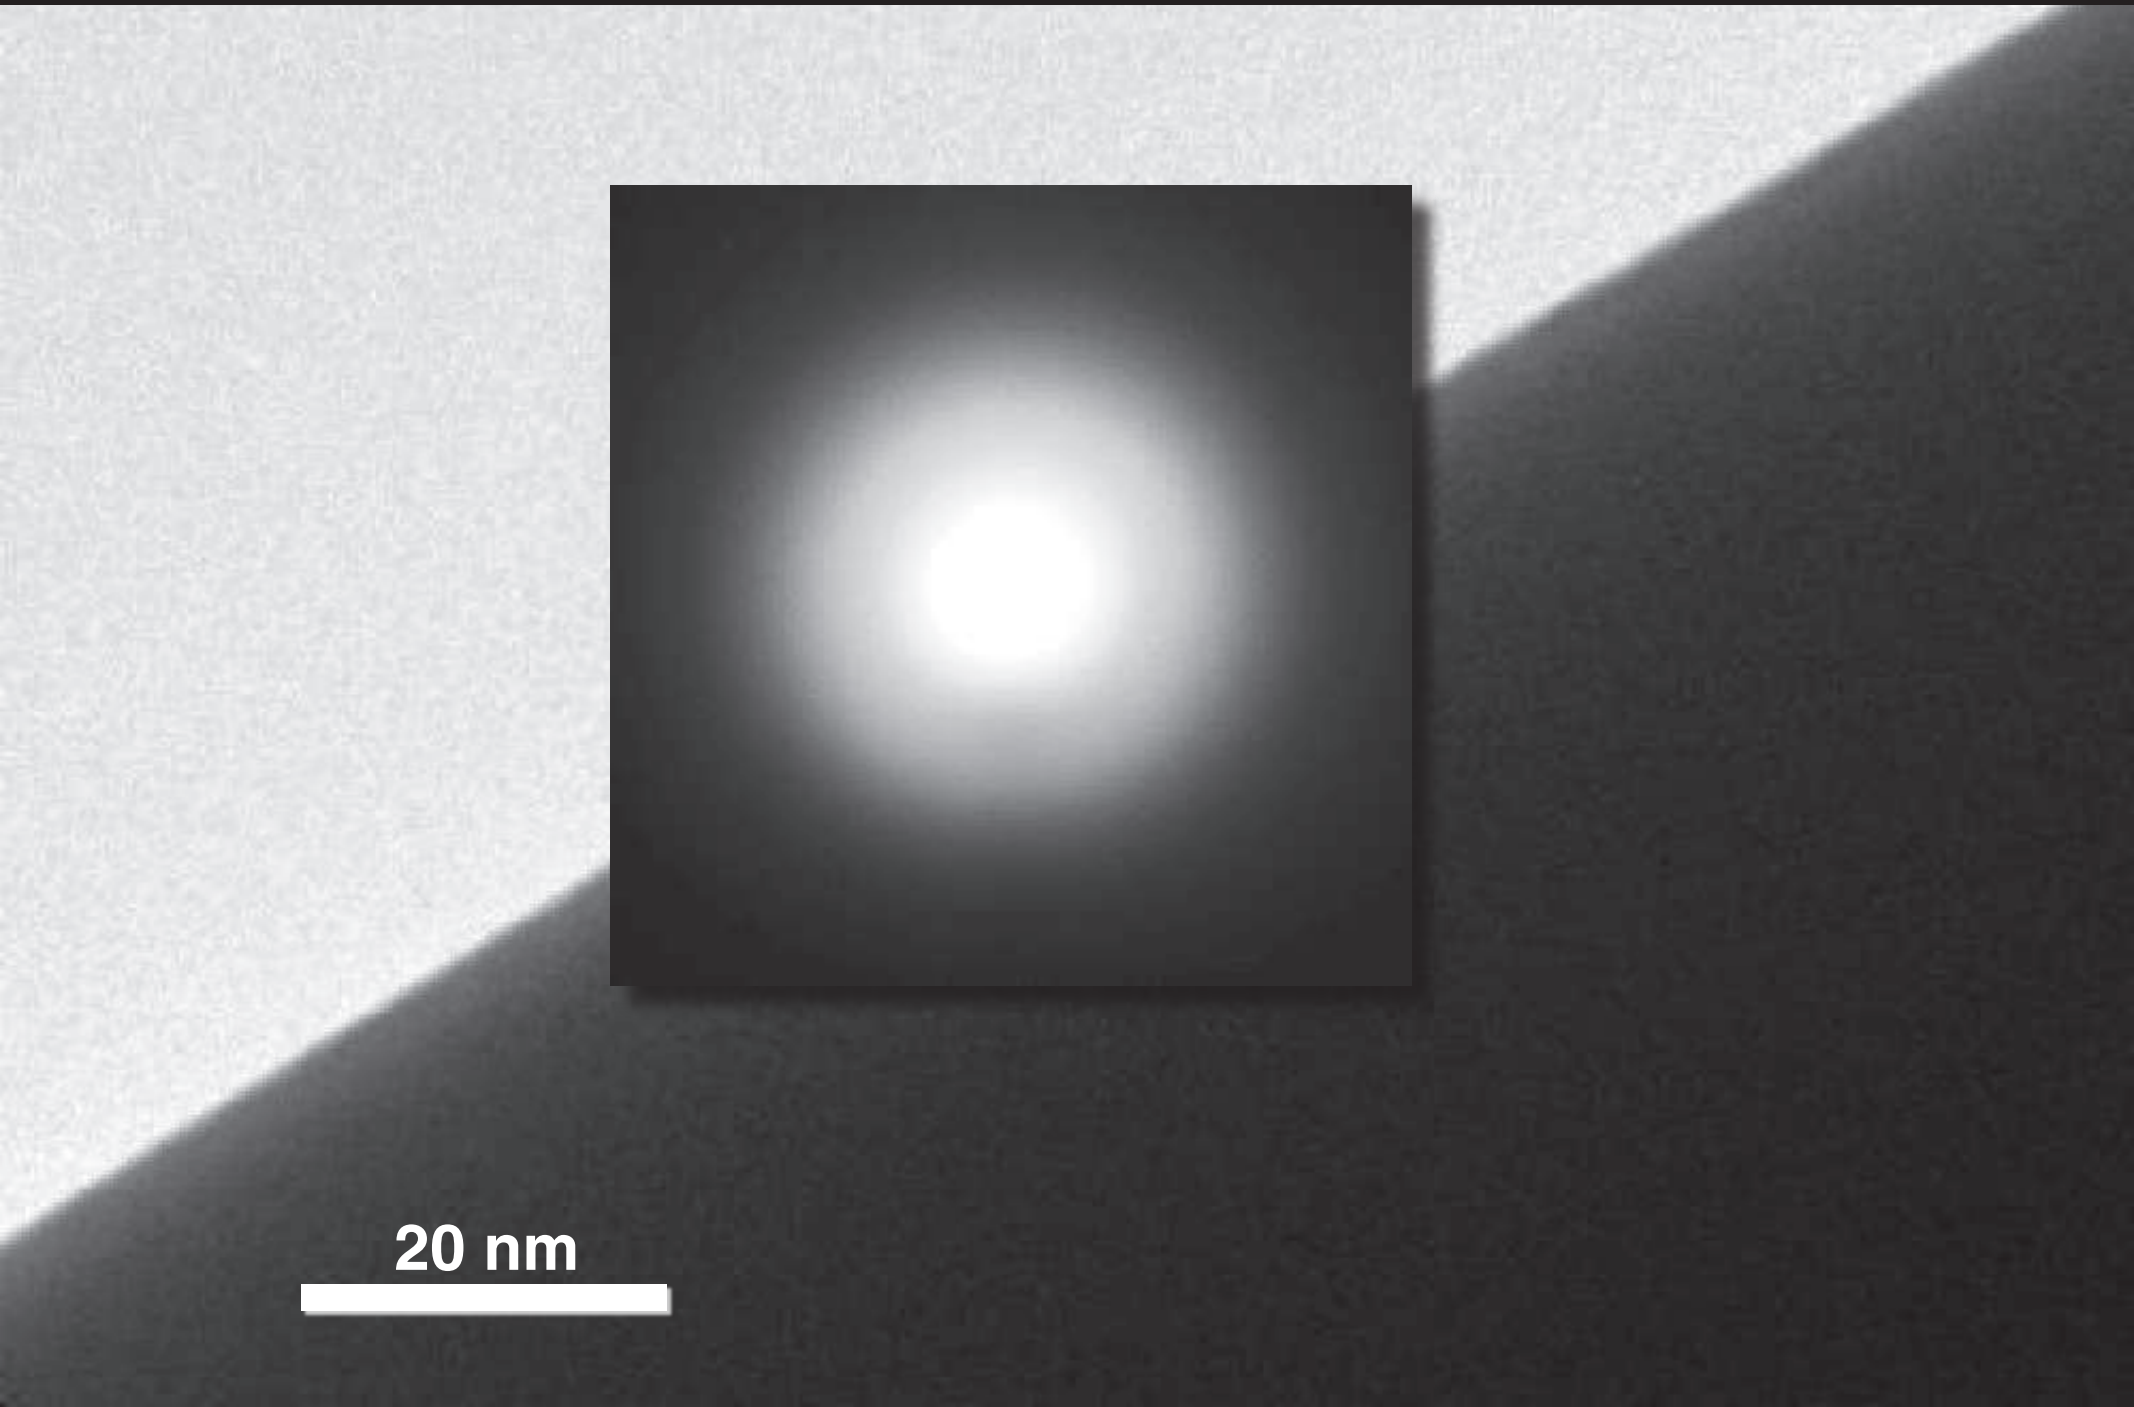

Nanowire fabrication

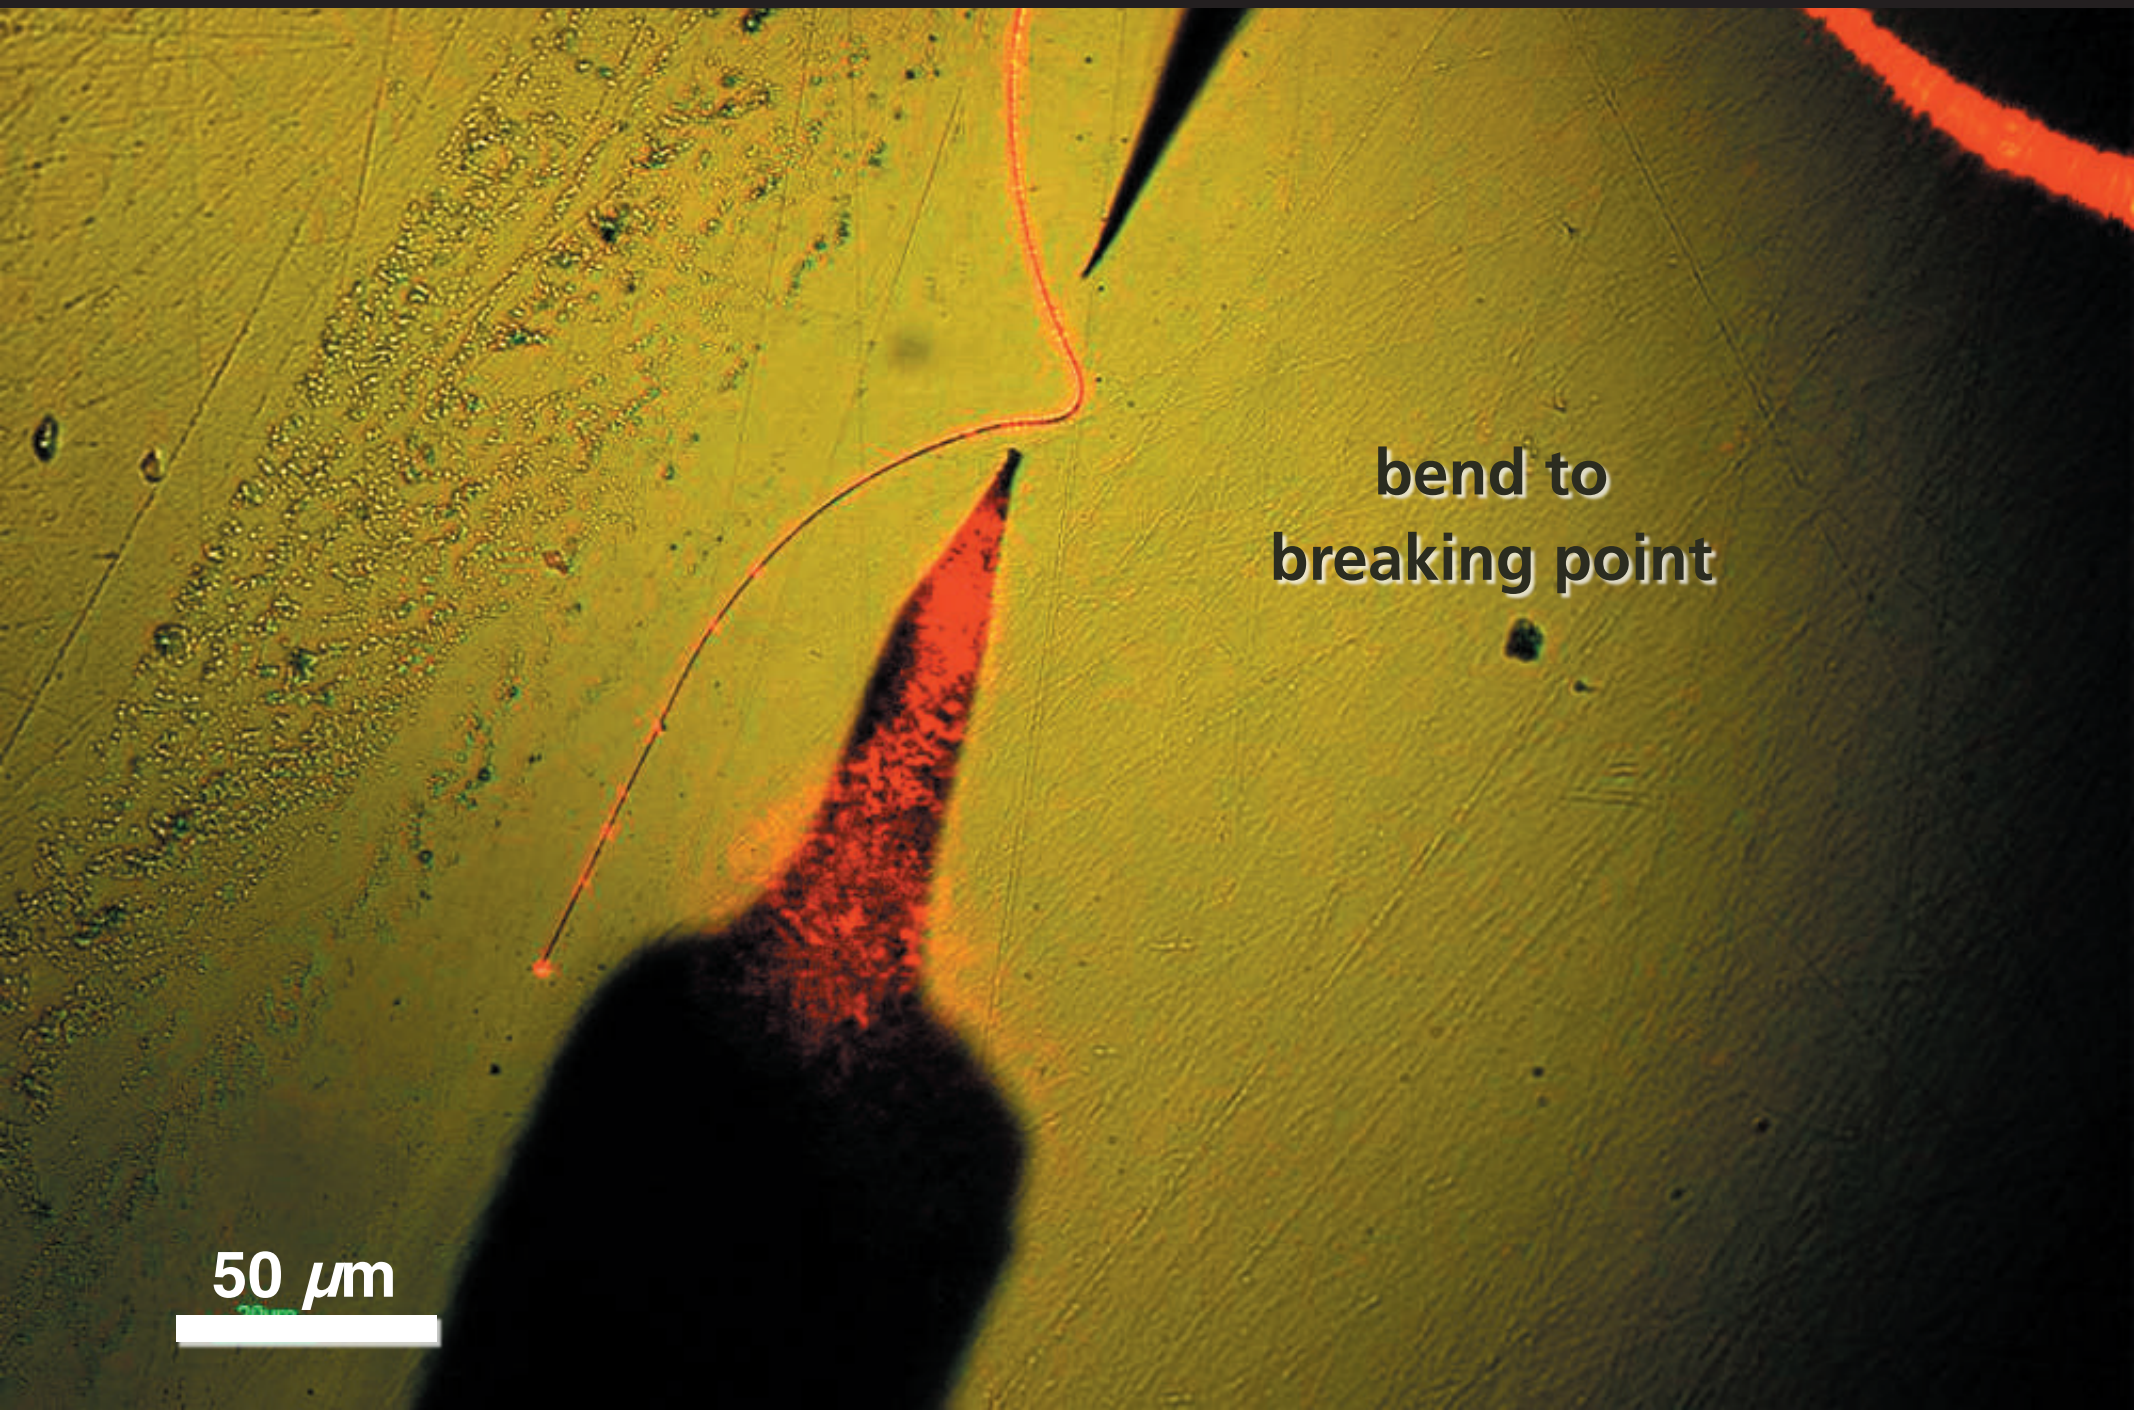

Nanowire fabrication

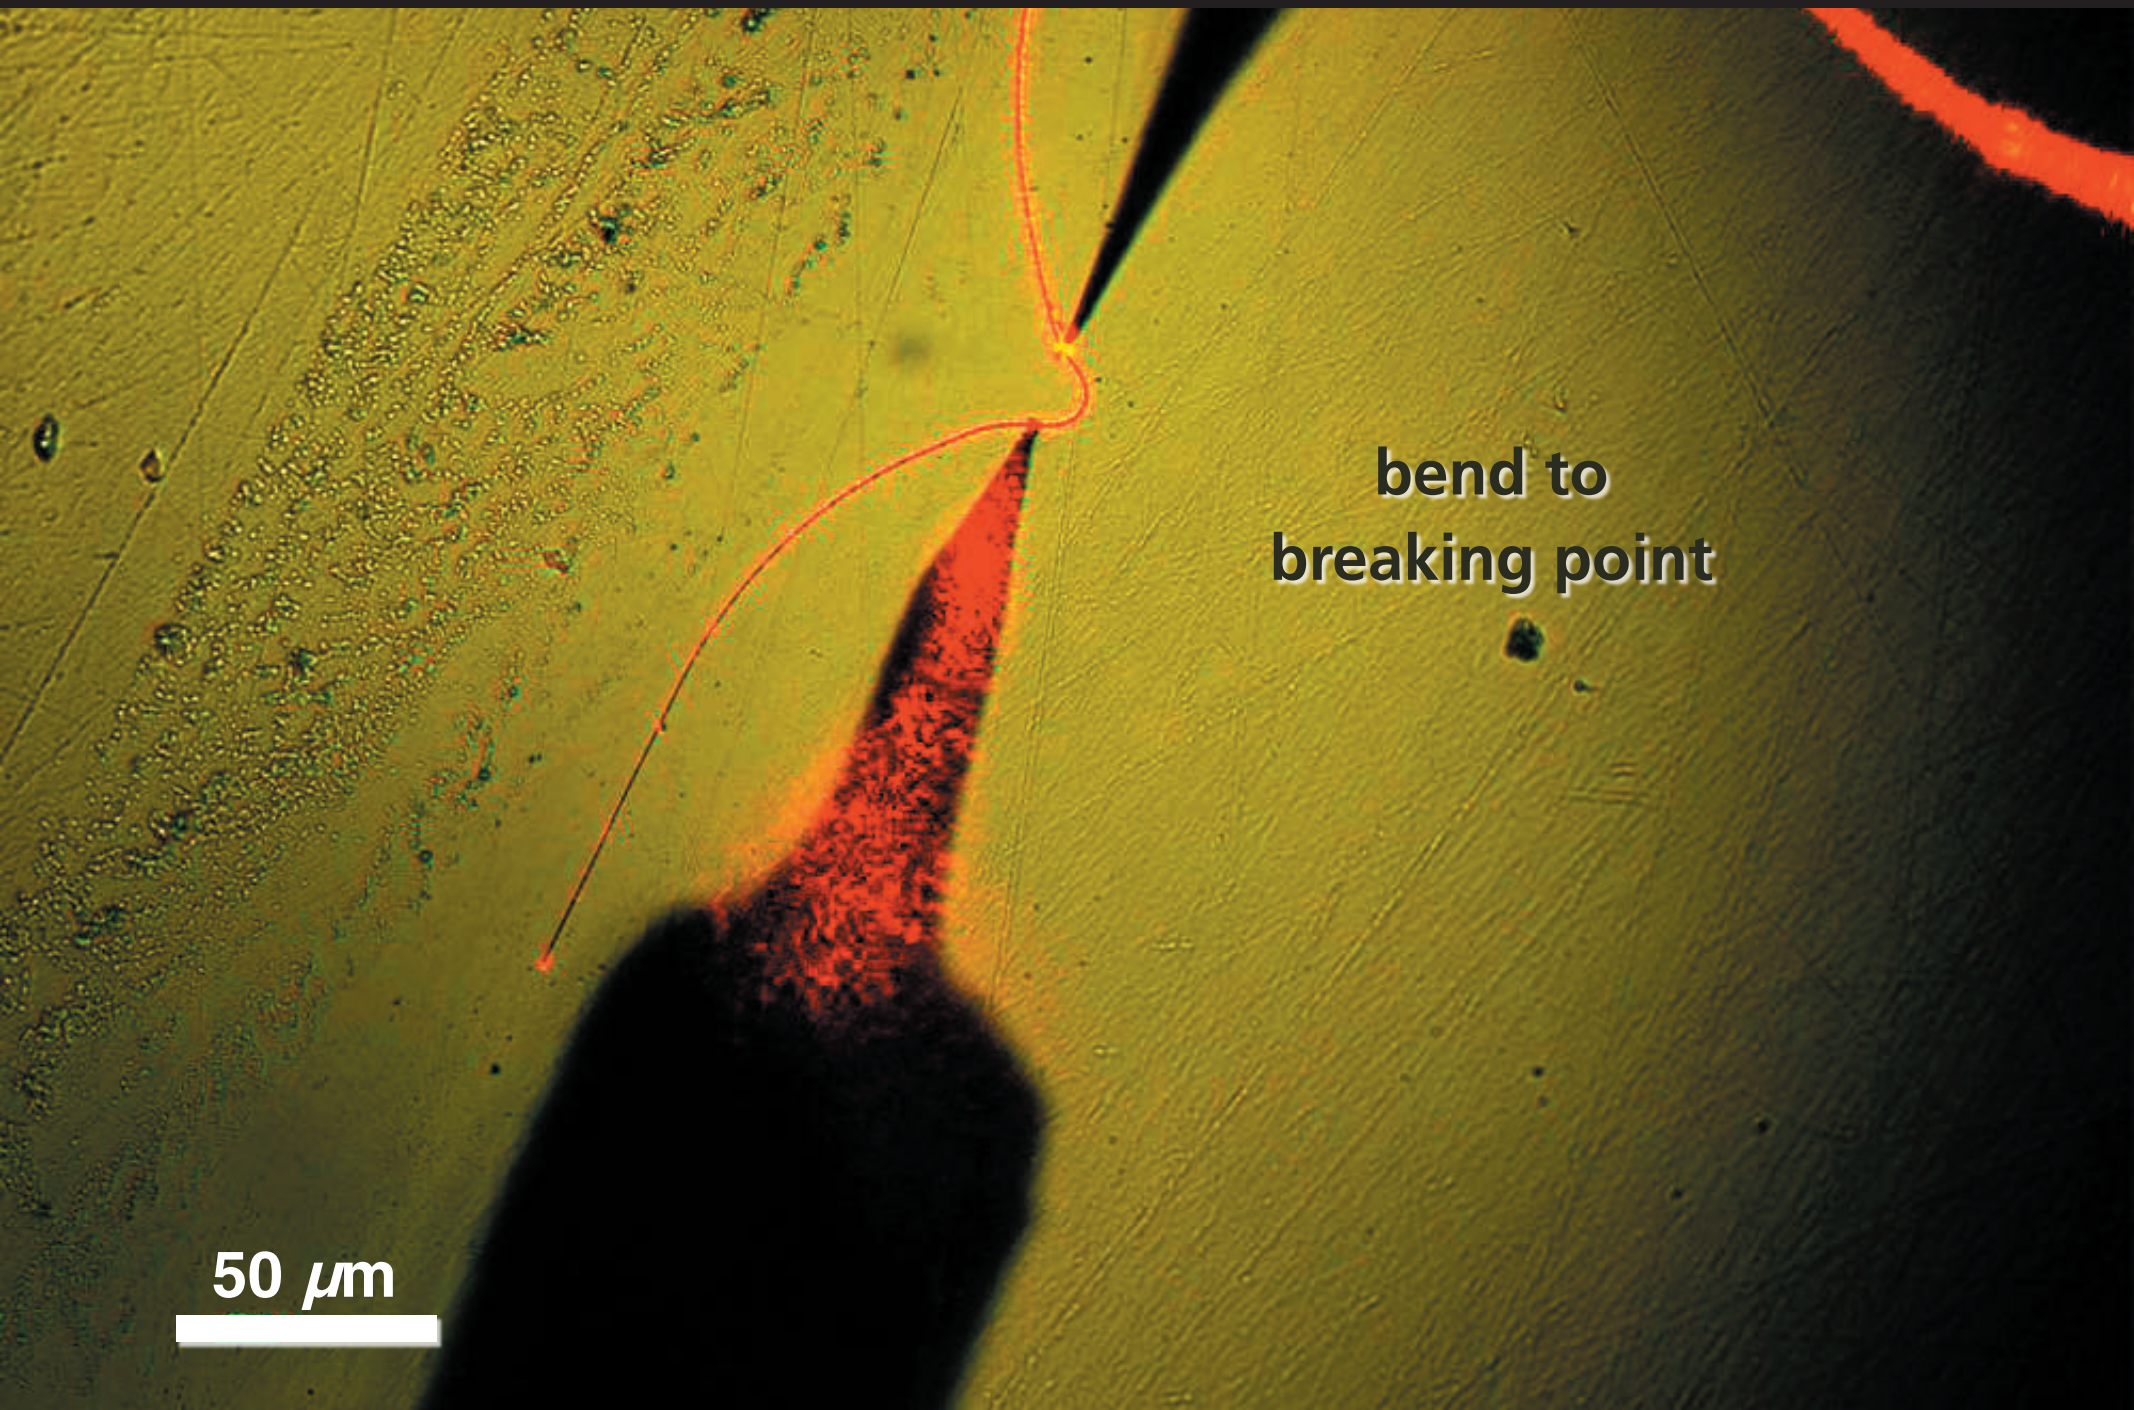

Nanowire fabrication

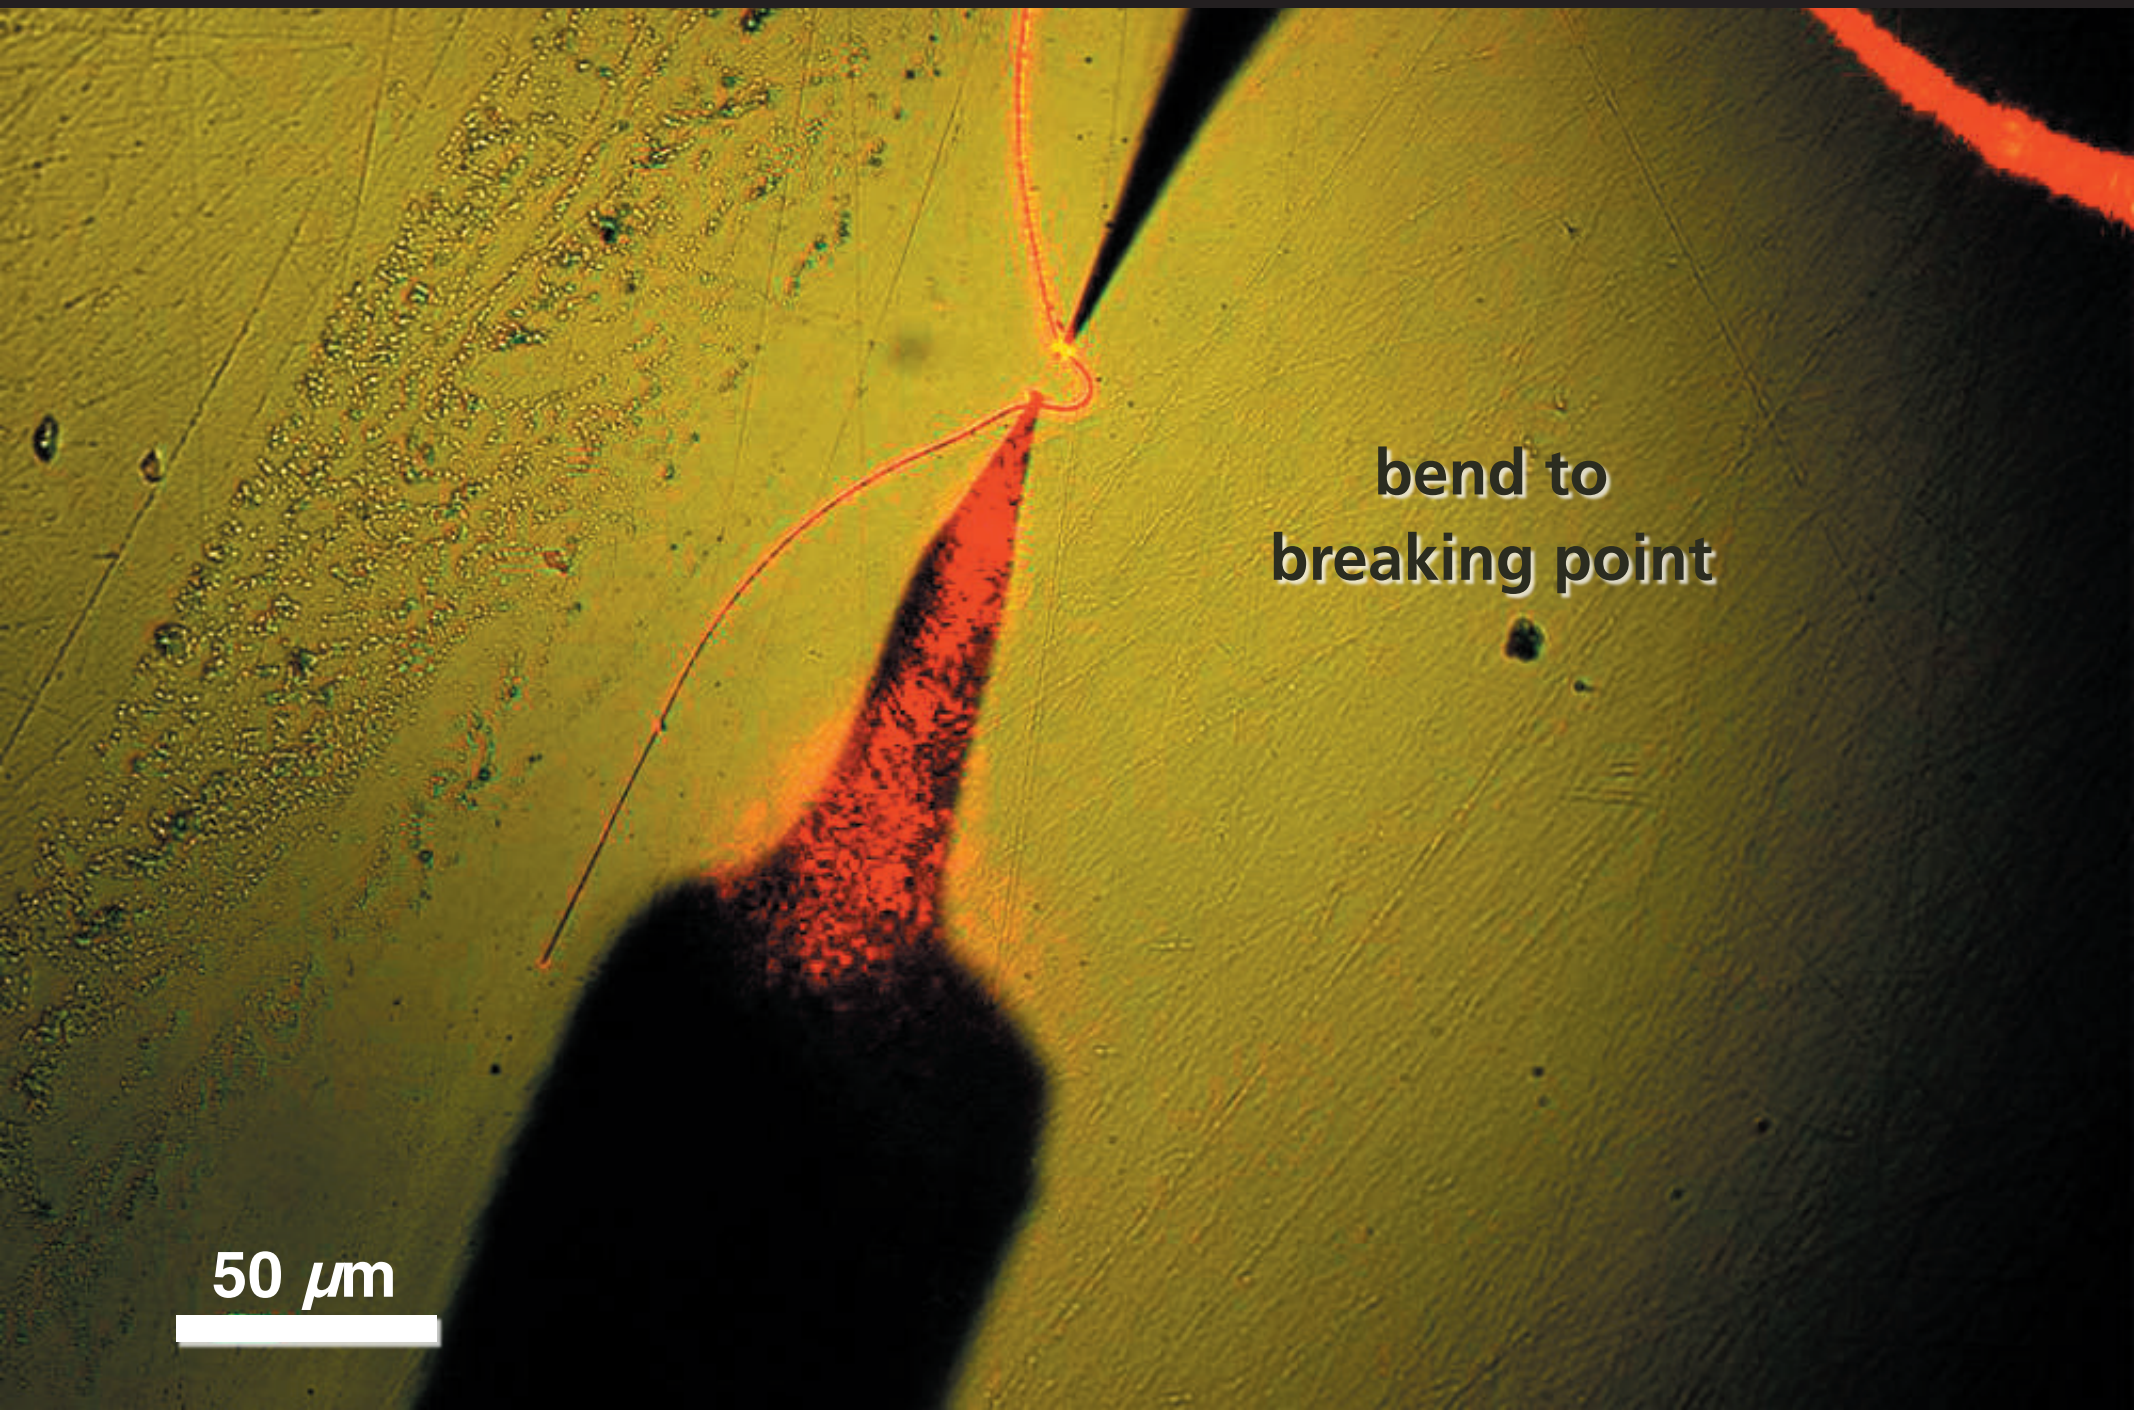

Nanowire fabrication

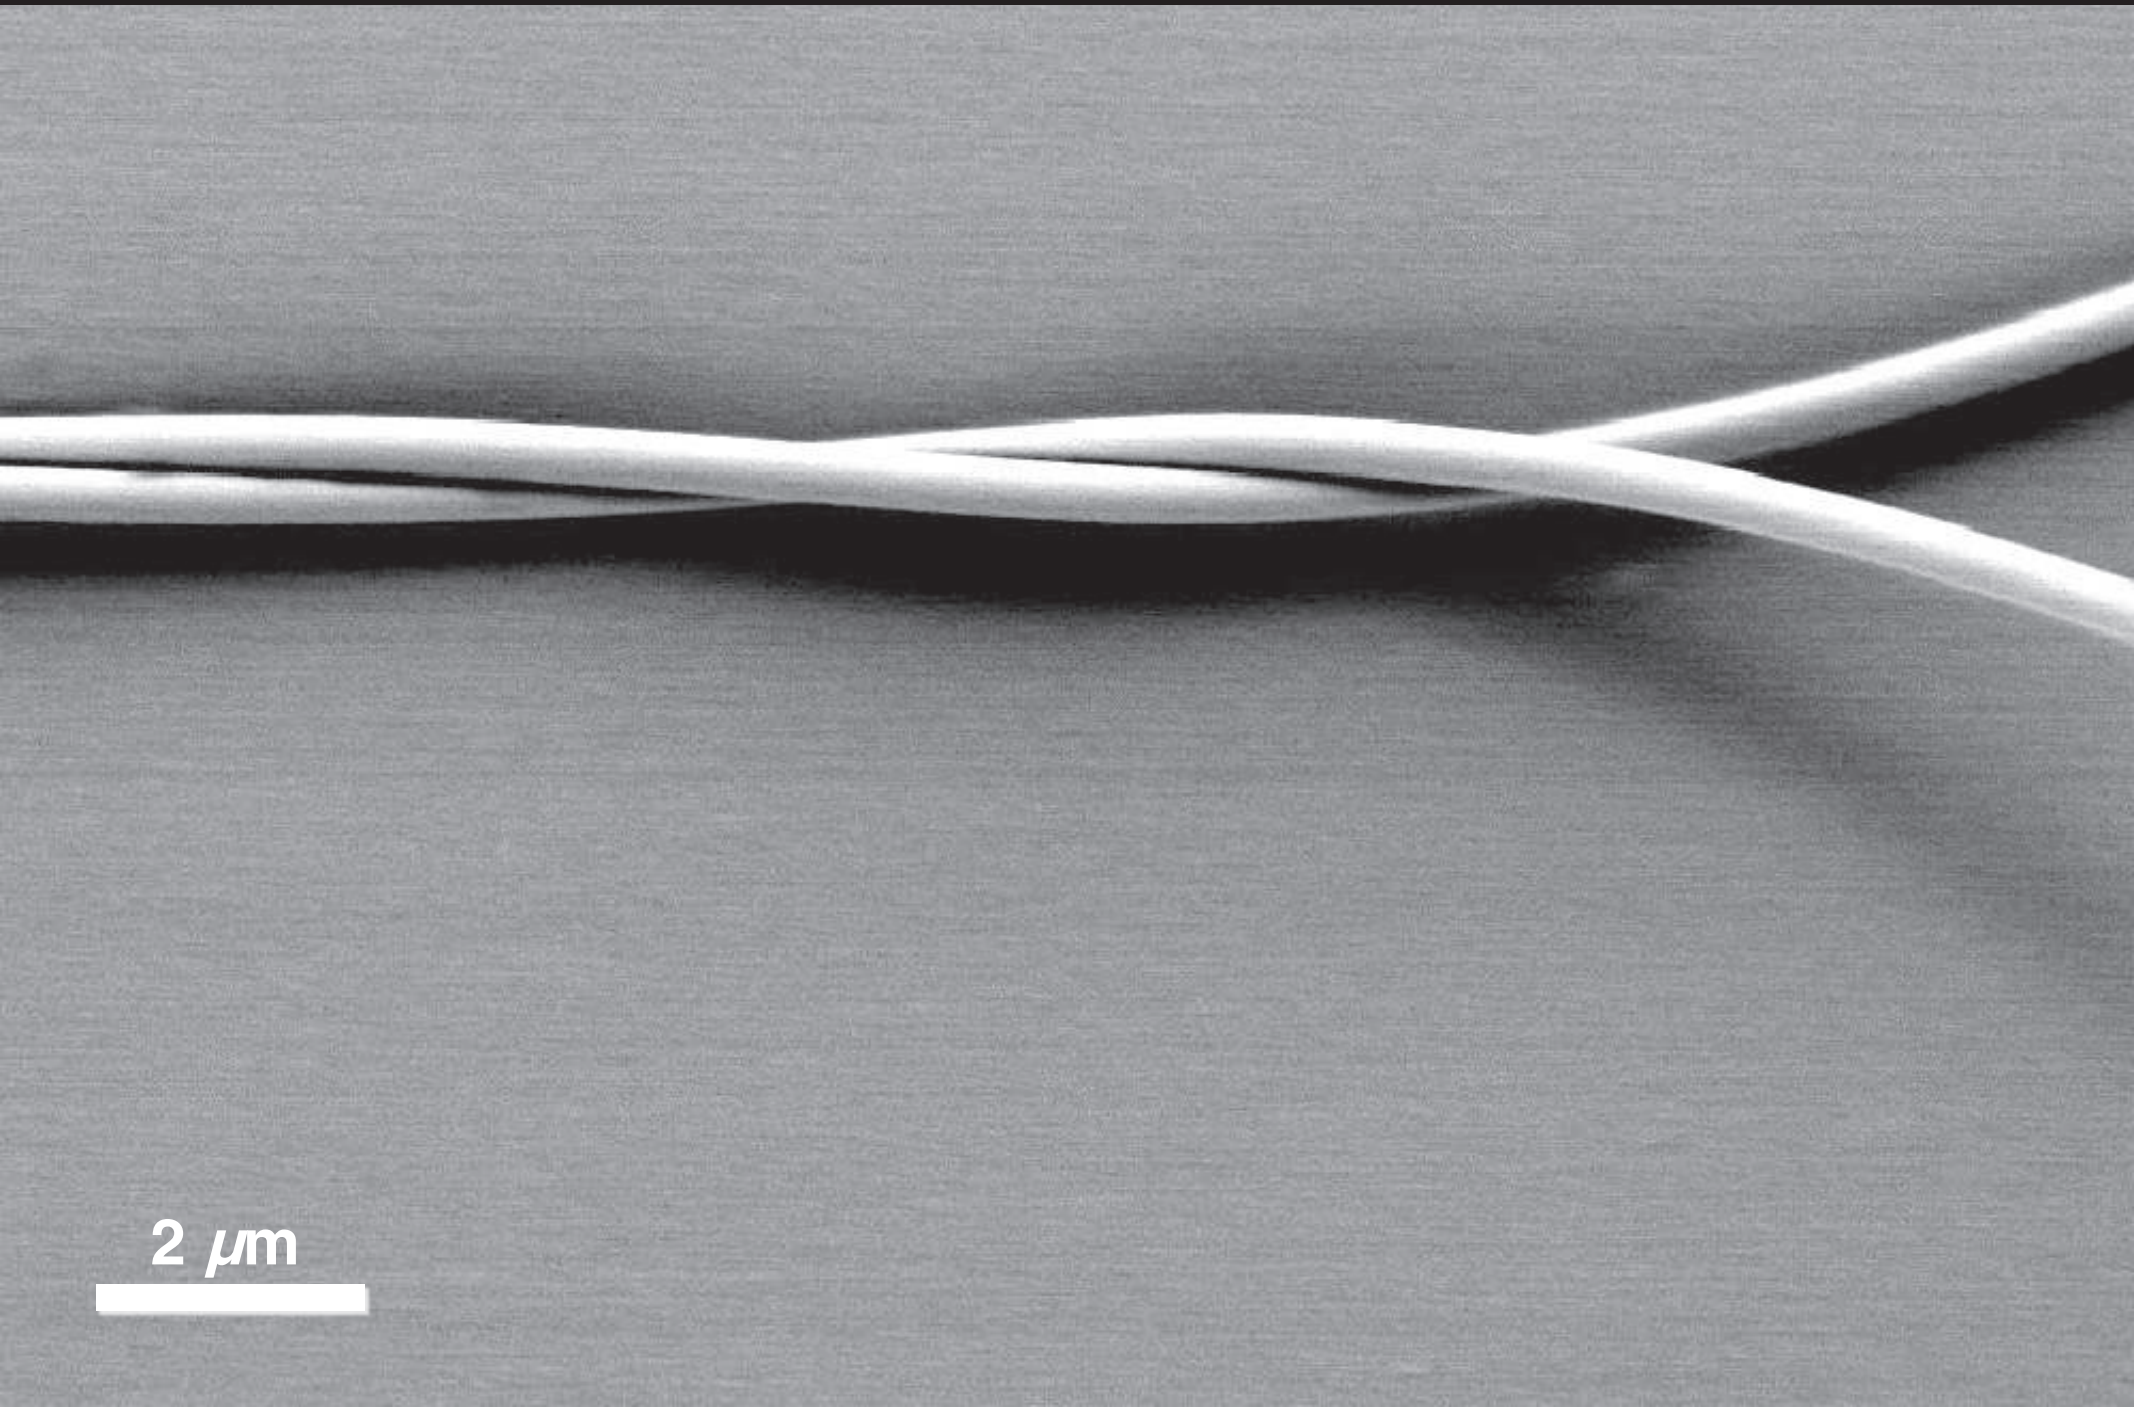

Nanowire fabrication

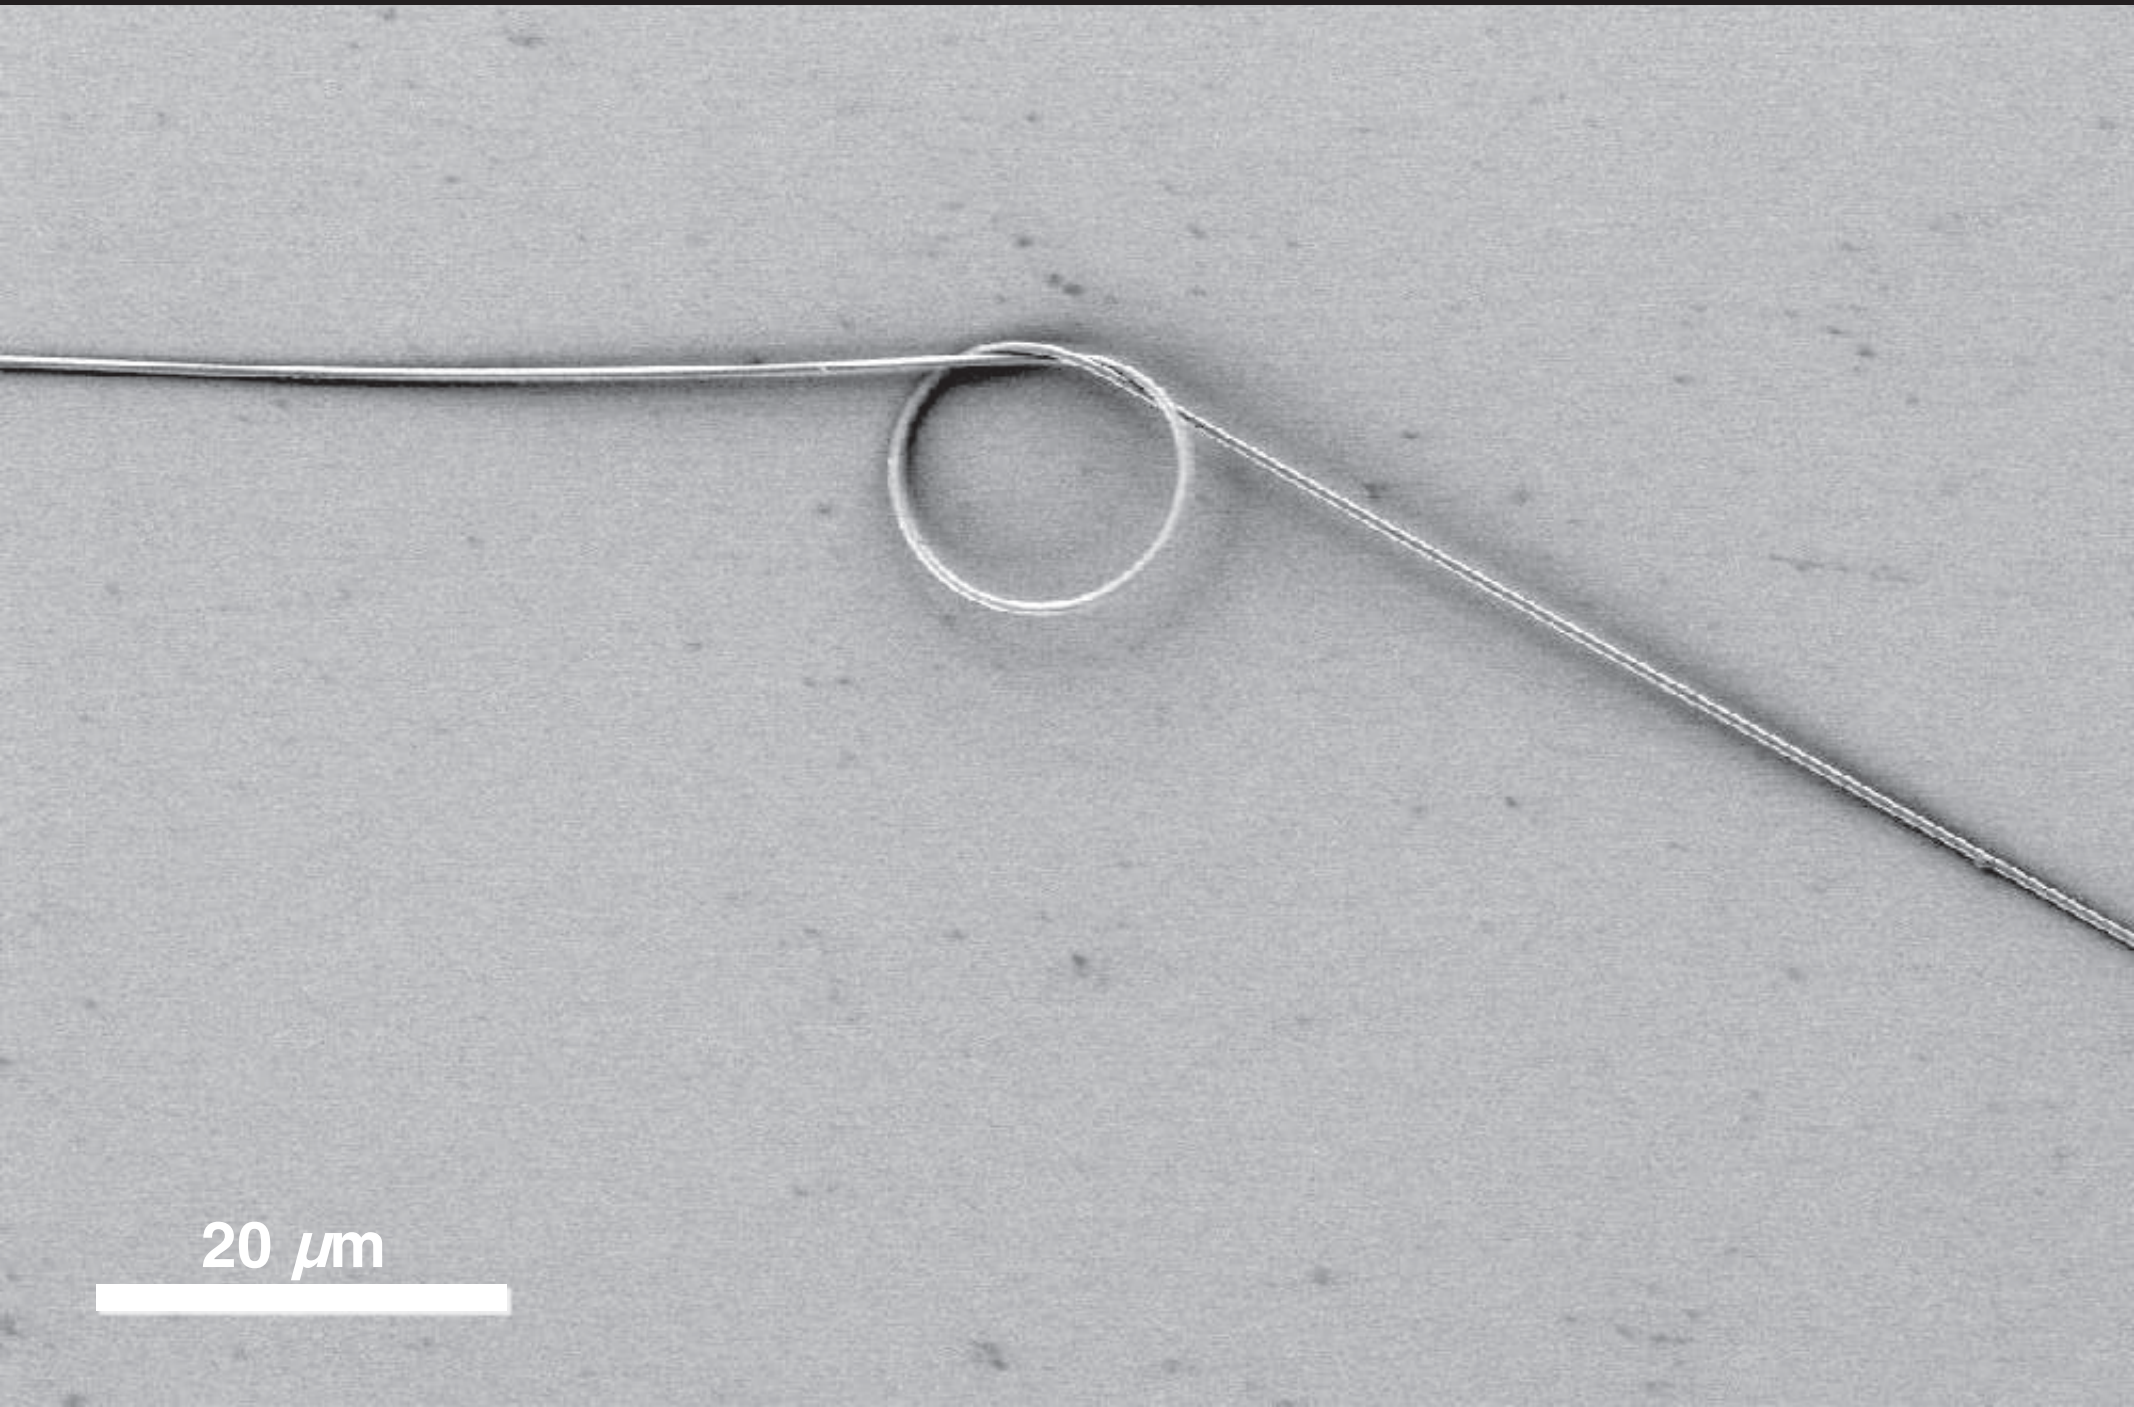

Nanowire fabrication

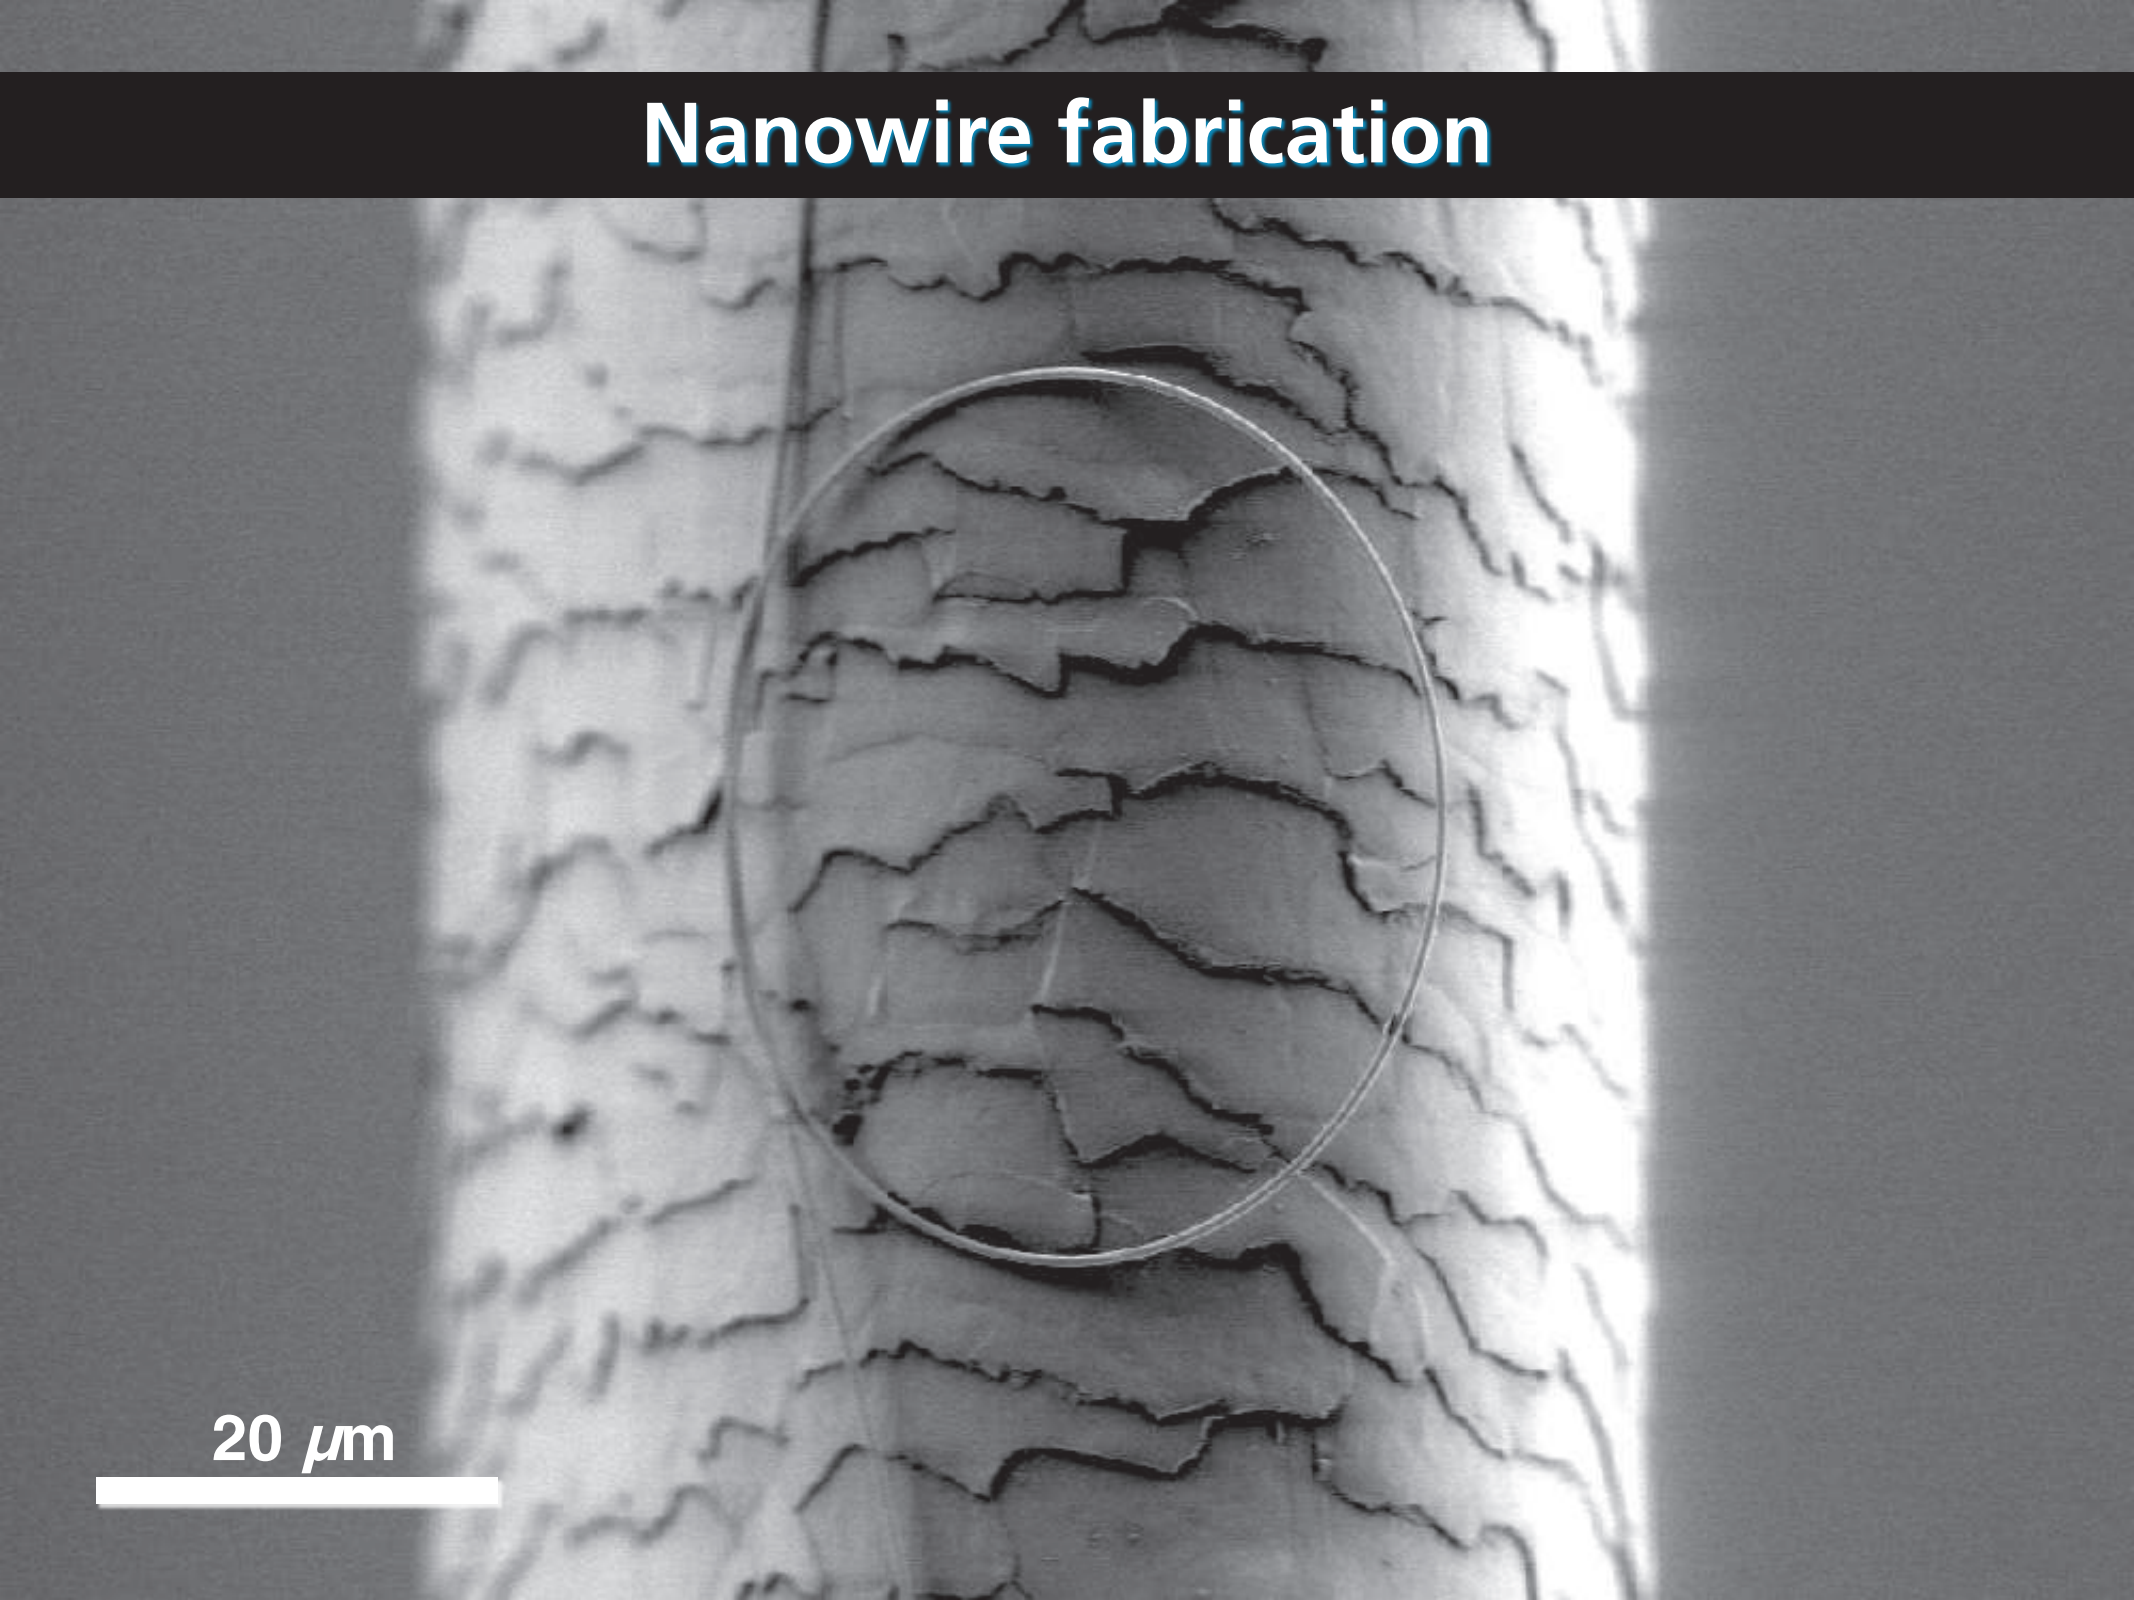

Outline

- waveguiding
- nanowire fabrication
- optical properties

Optical properties

coupling light into nanowires

Optical properties

coupling light into nanowires

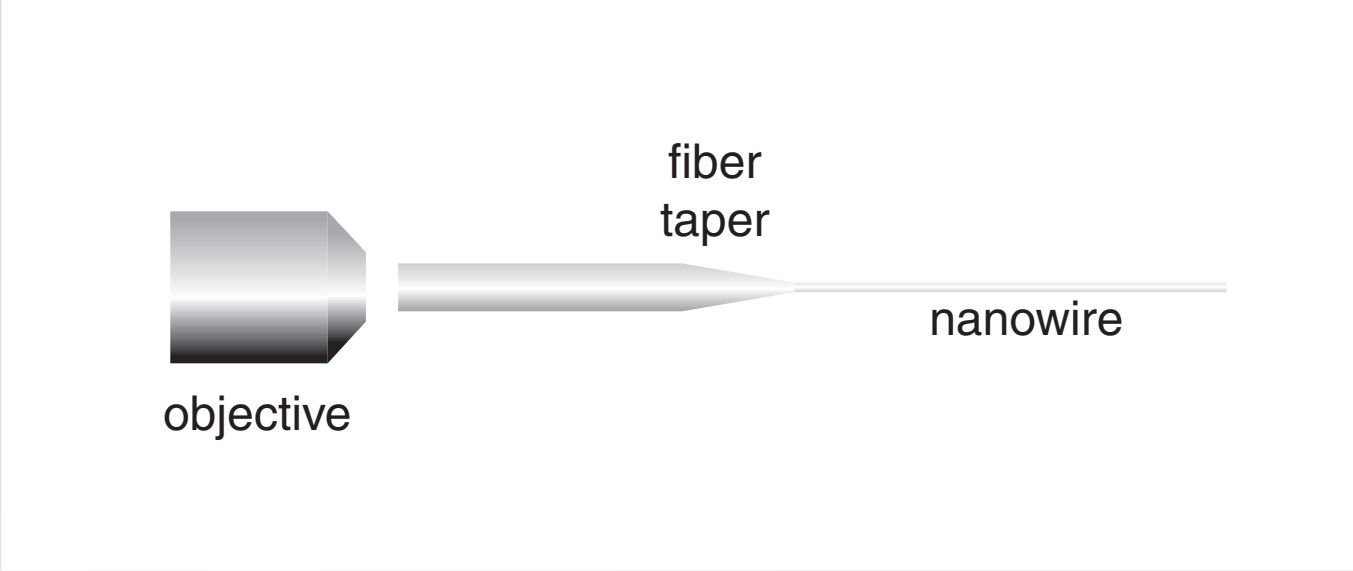

Optical properties

coupling light into nanowires

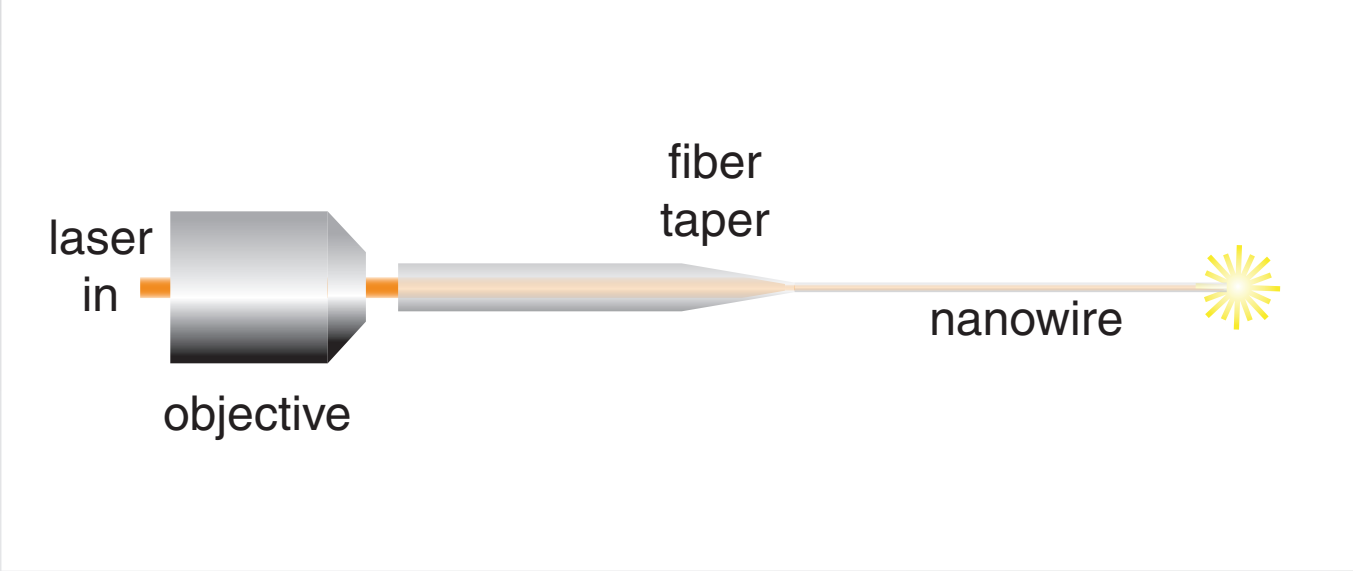

Optical properties

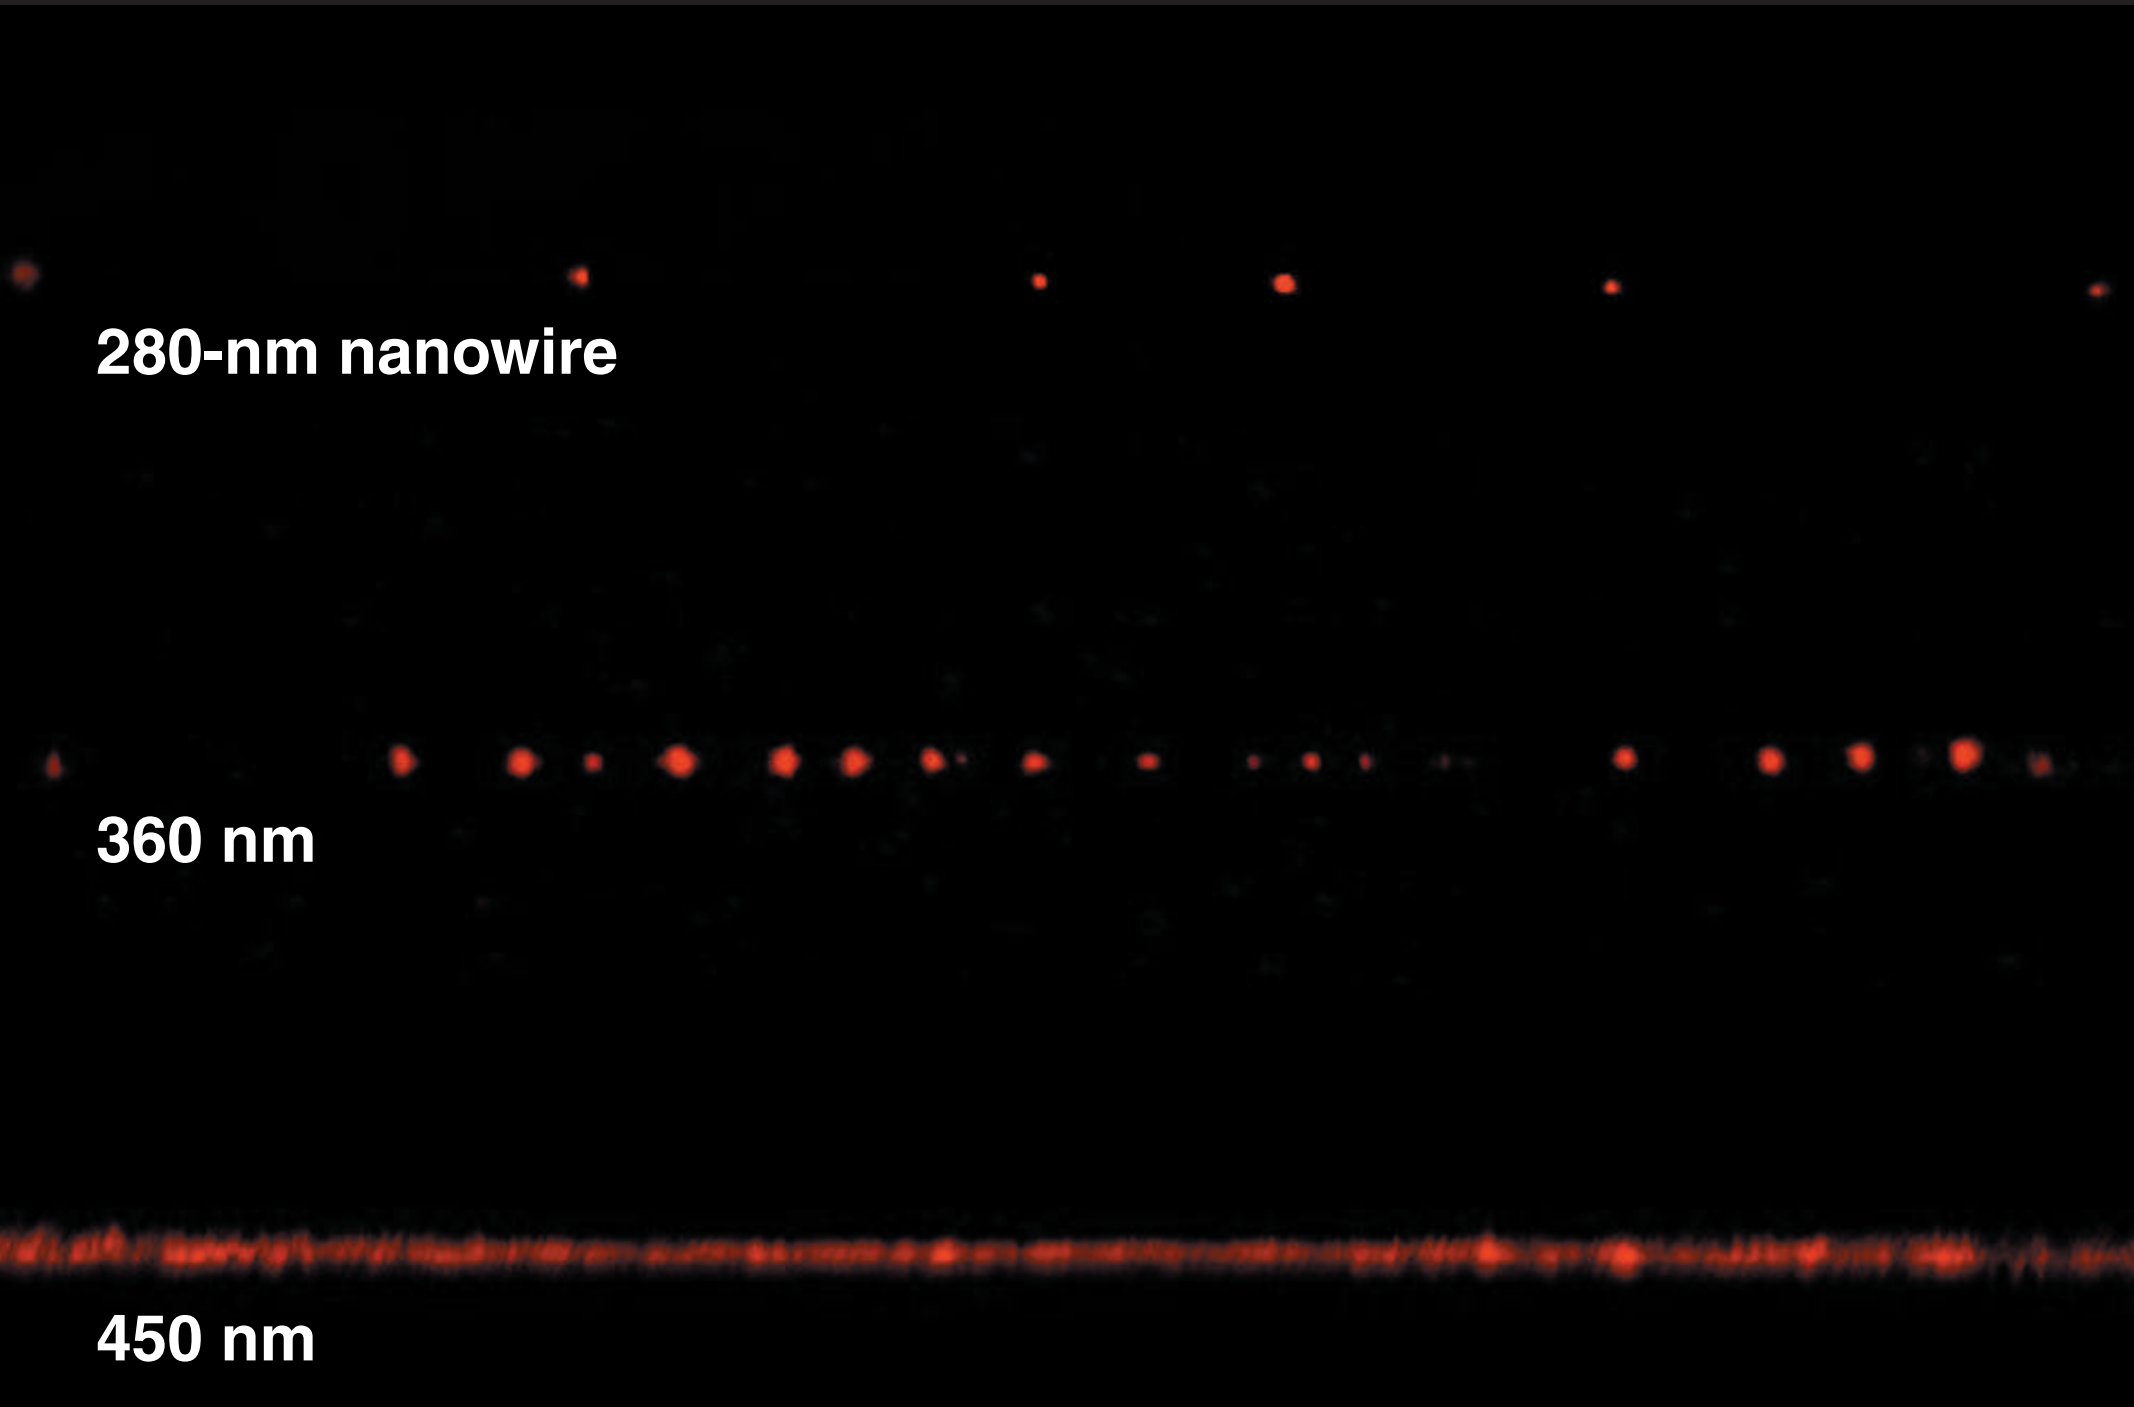

Optical properties

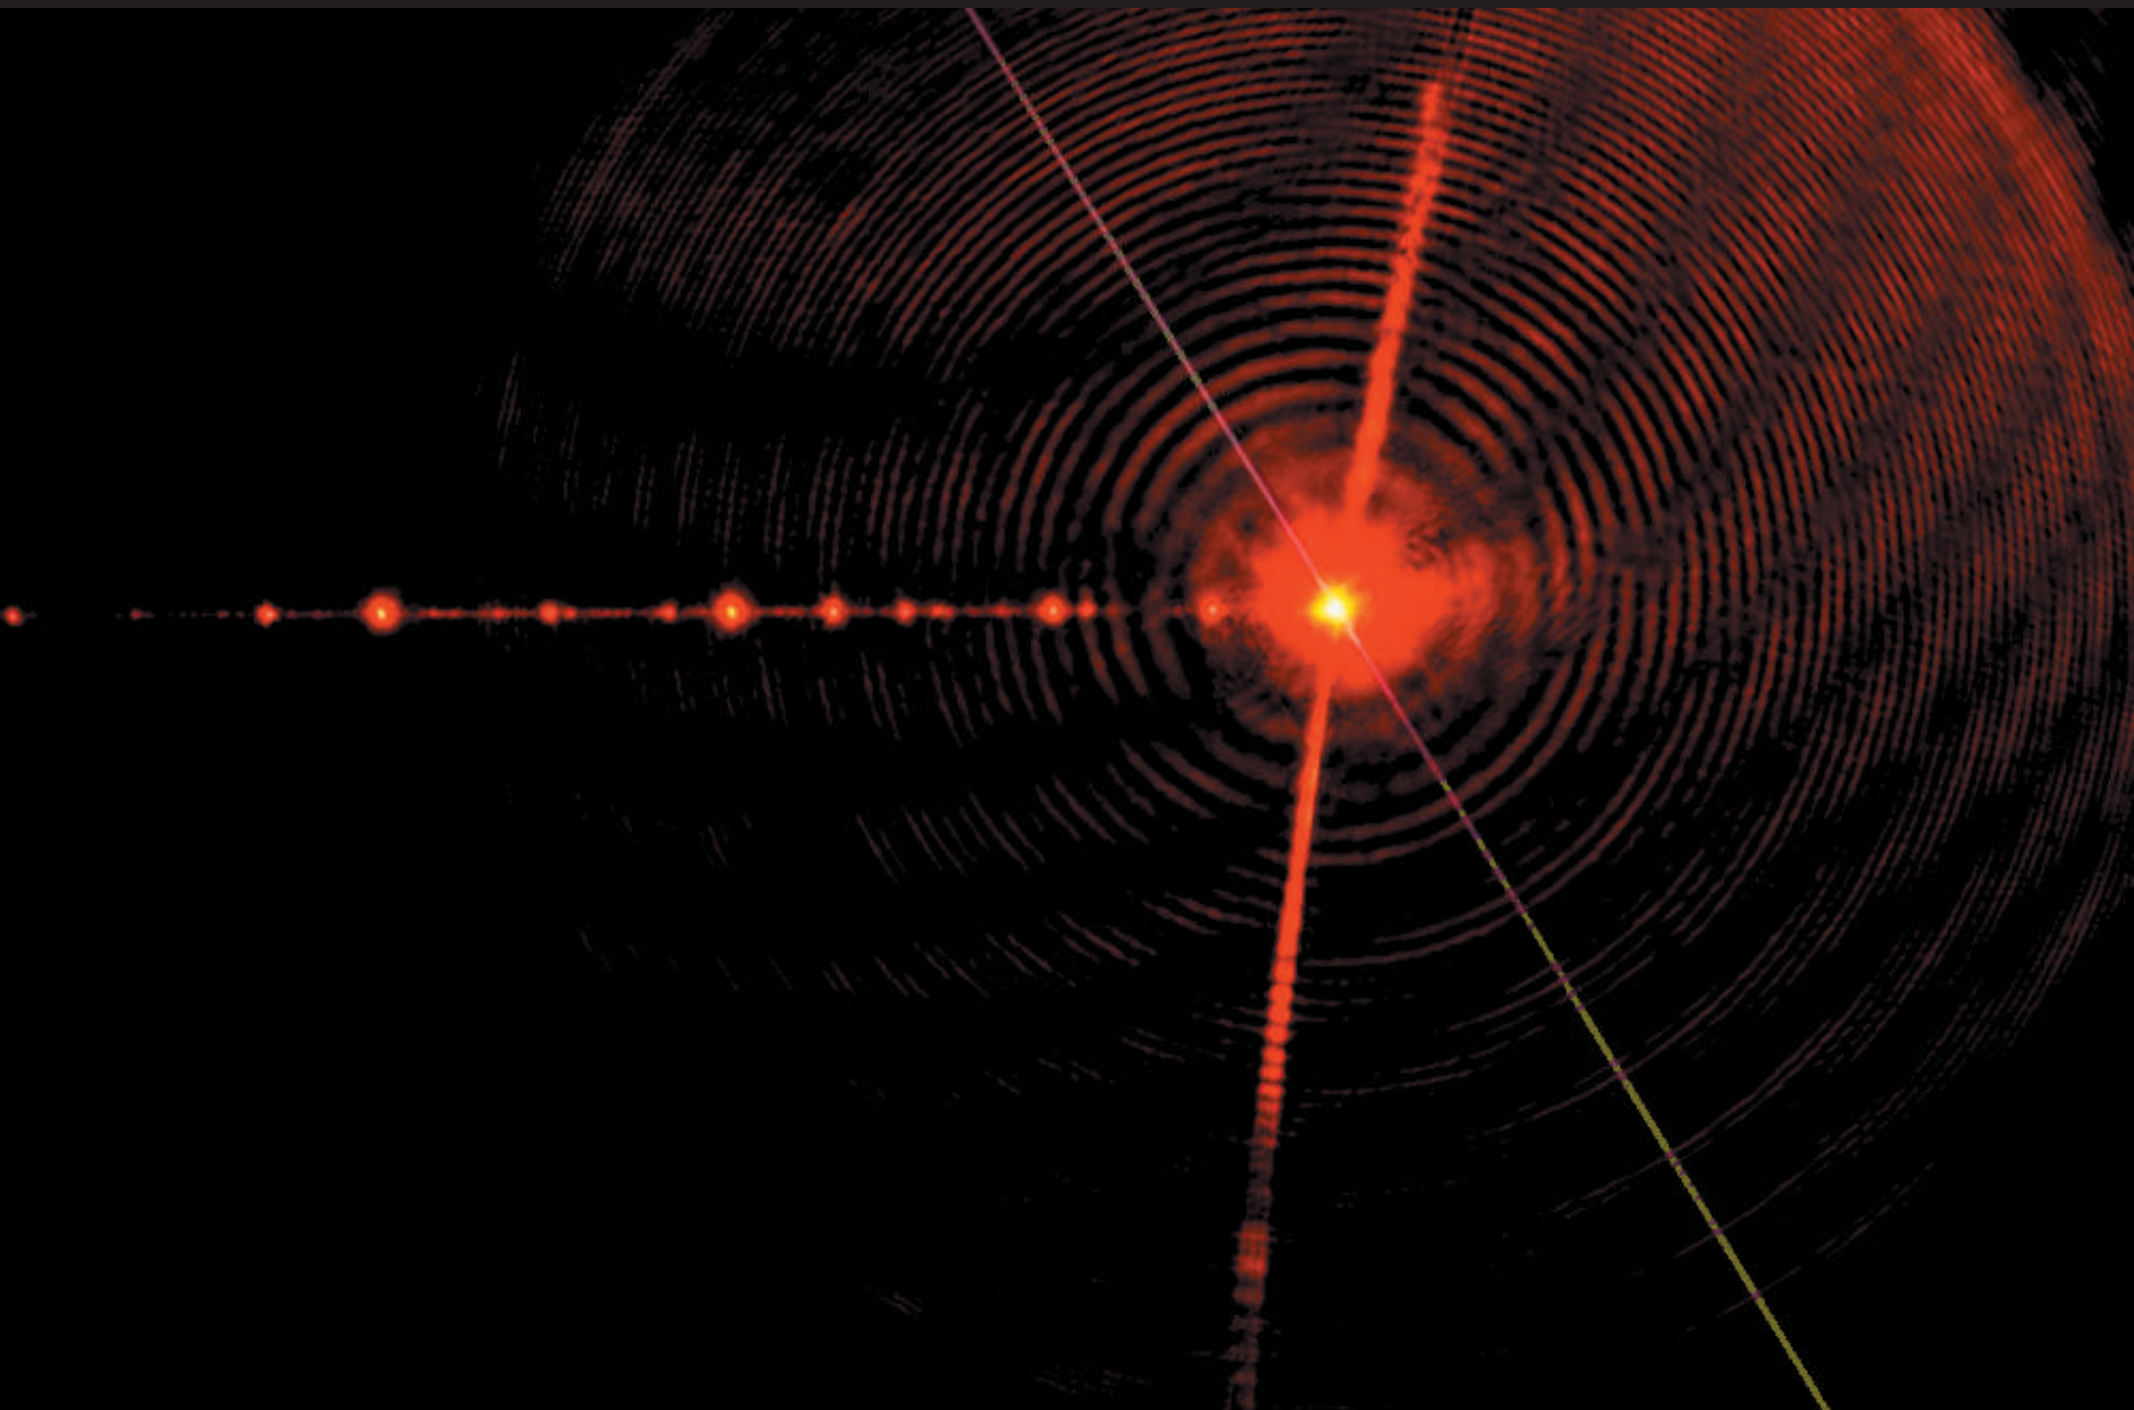

Optical properties

Optical properties

Poynting vector profile for 800-nm nanowire

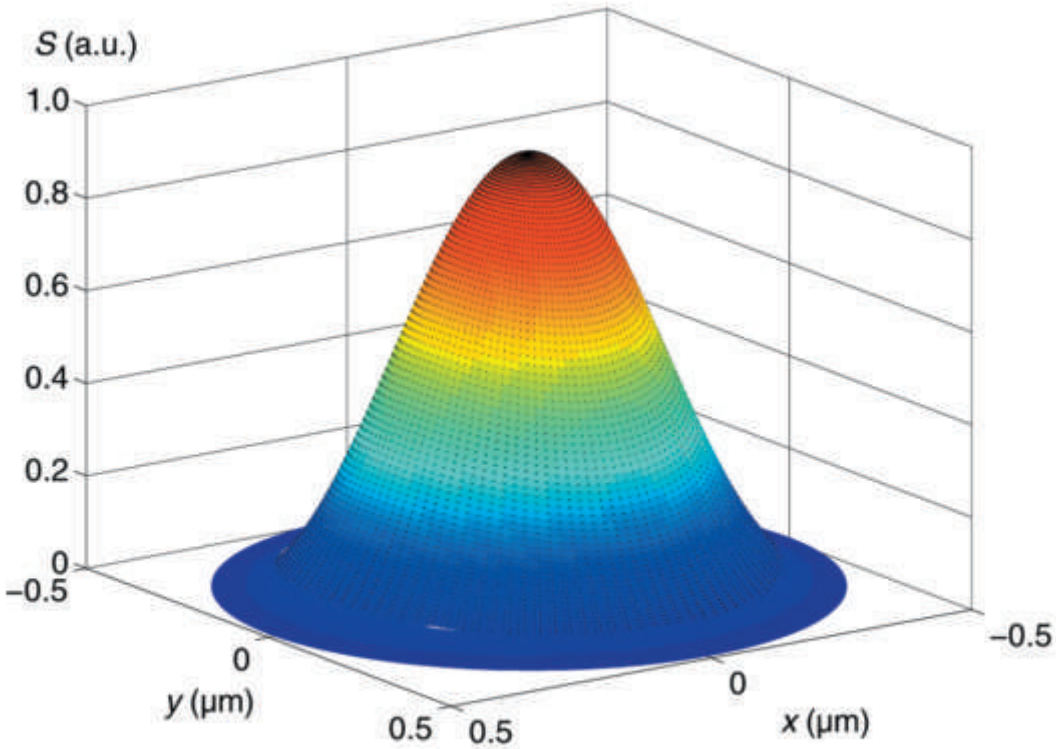

Optical properties

Poynting vector profile for 800-nm nanowire

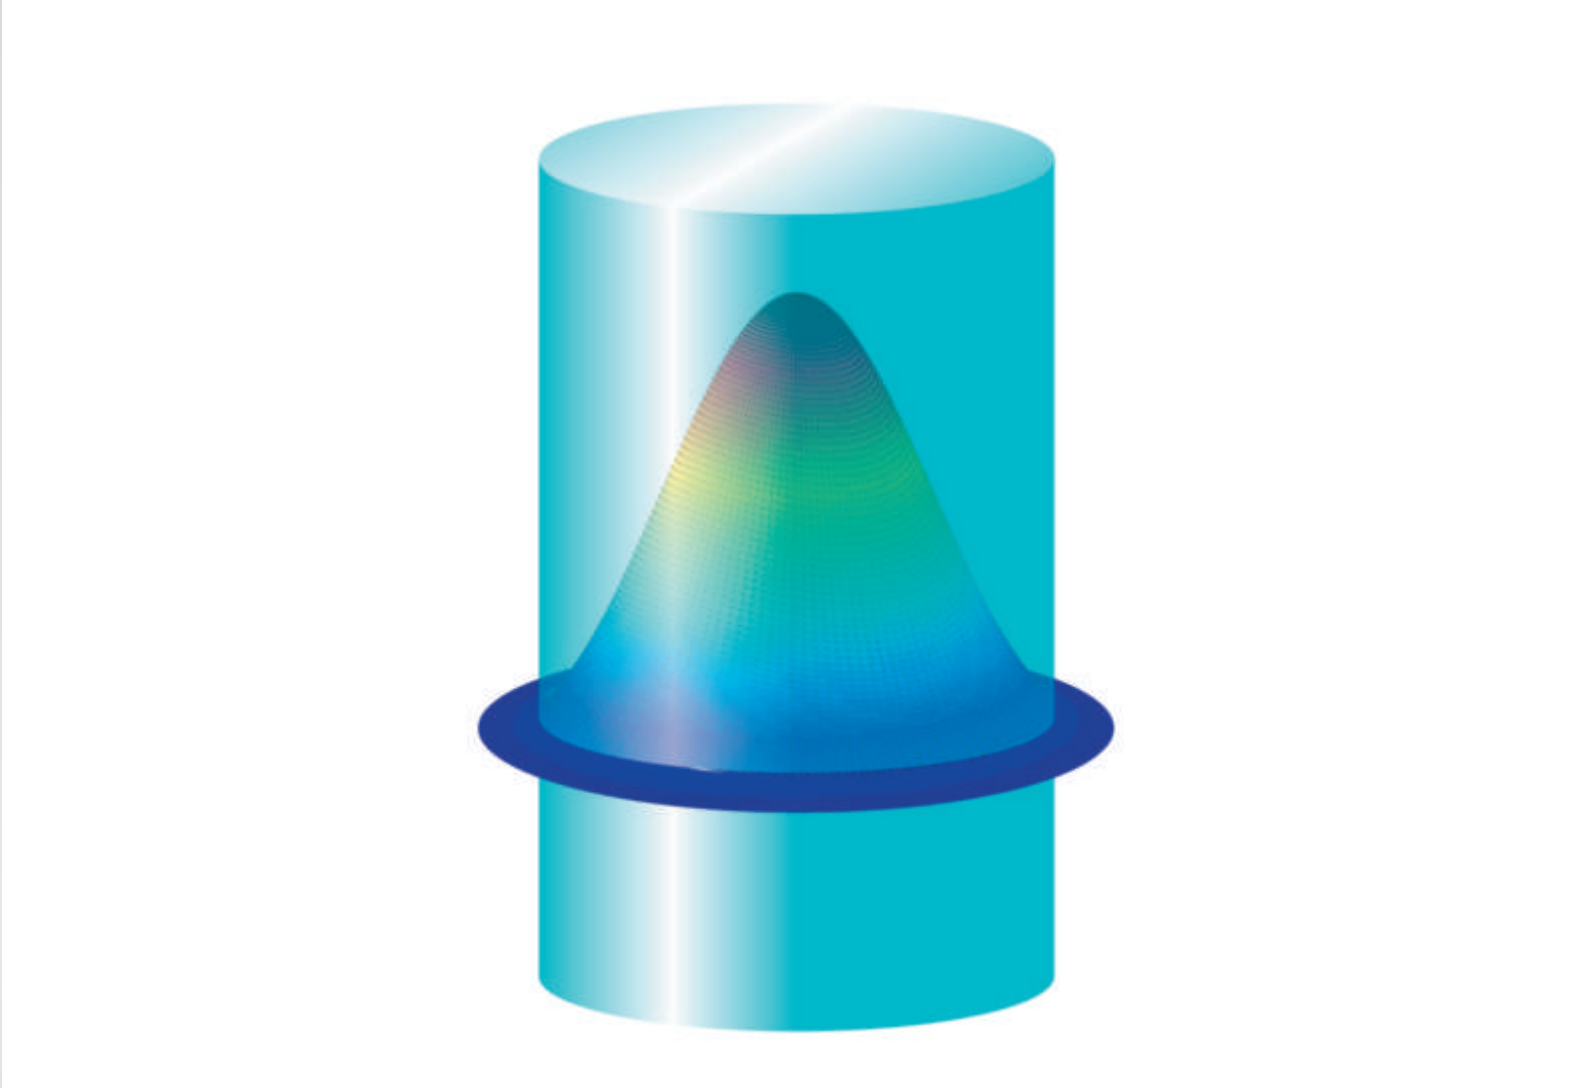

Optical properties

Poynting vector profile for 800-nm nanowire

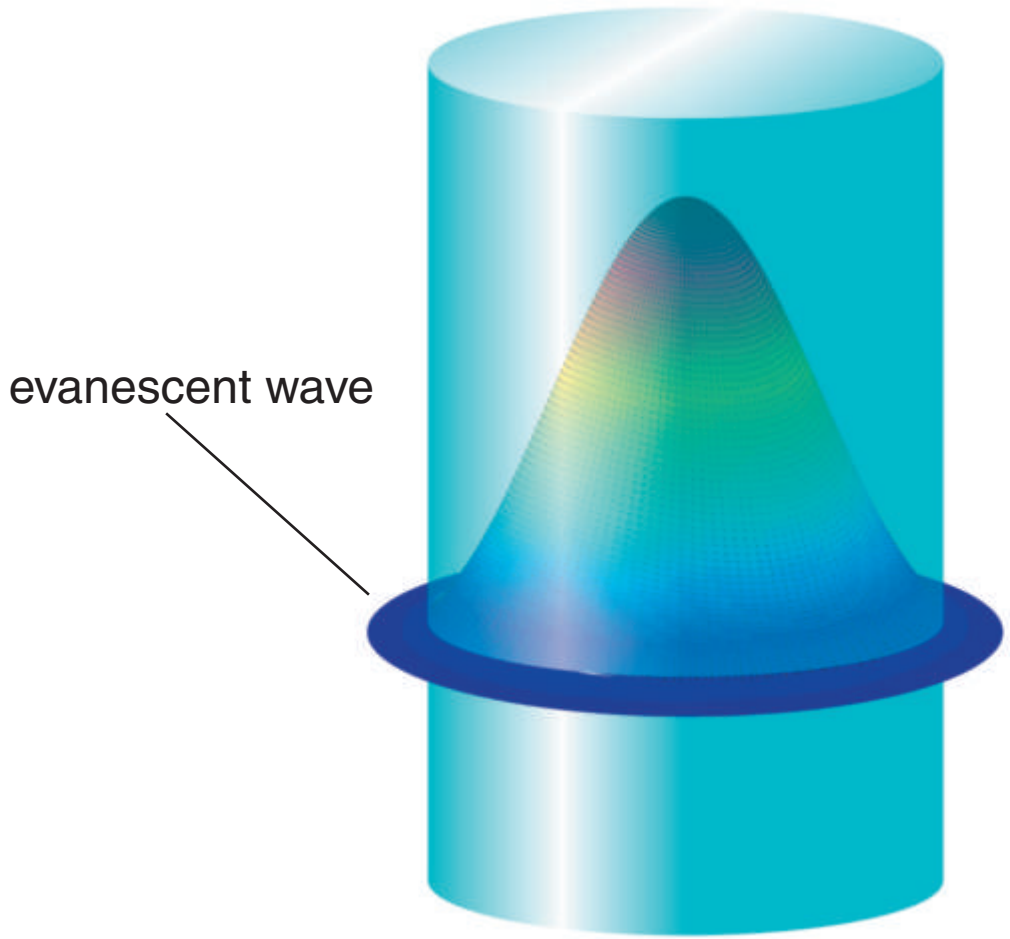

Optical properties

Poynting vector profile for 600-nm nanowire

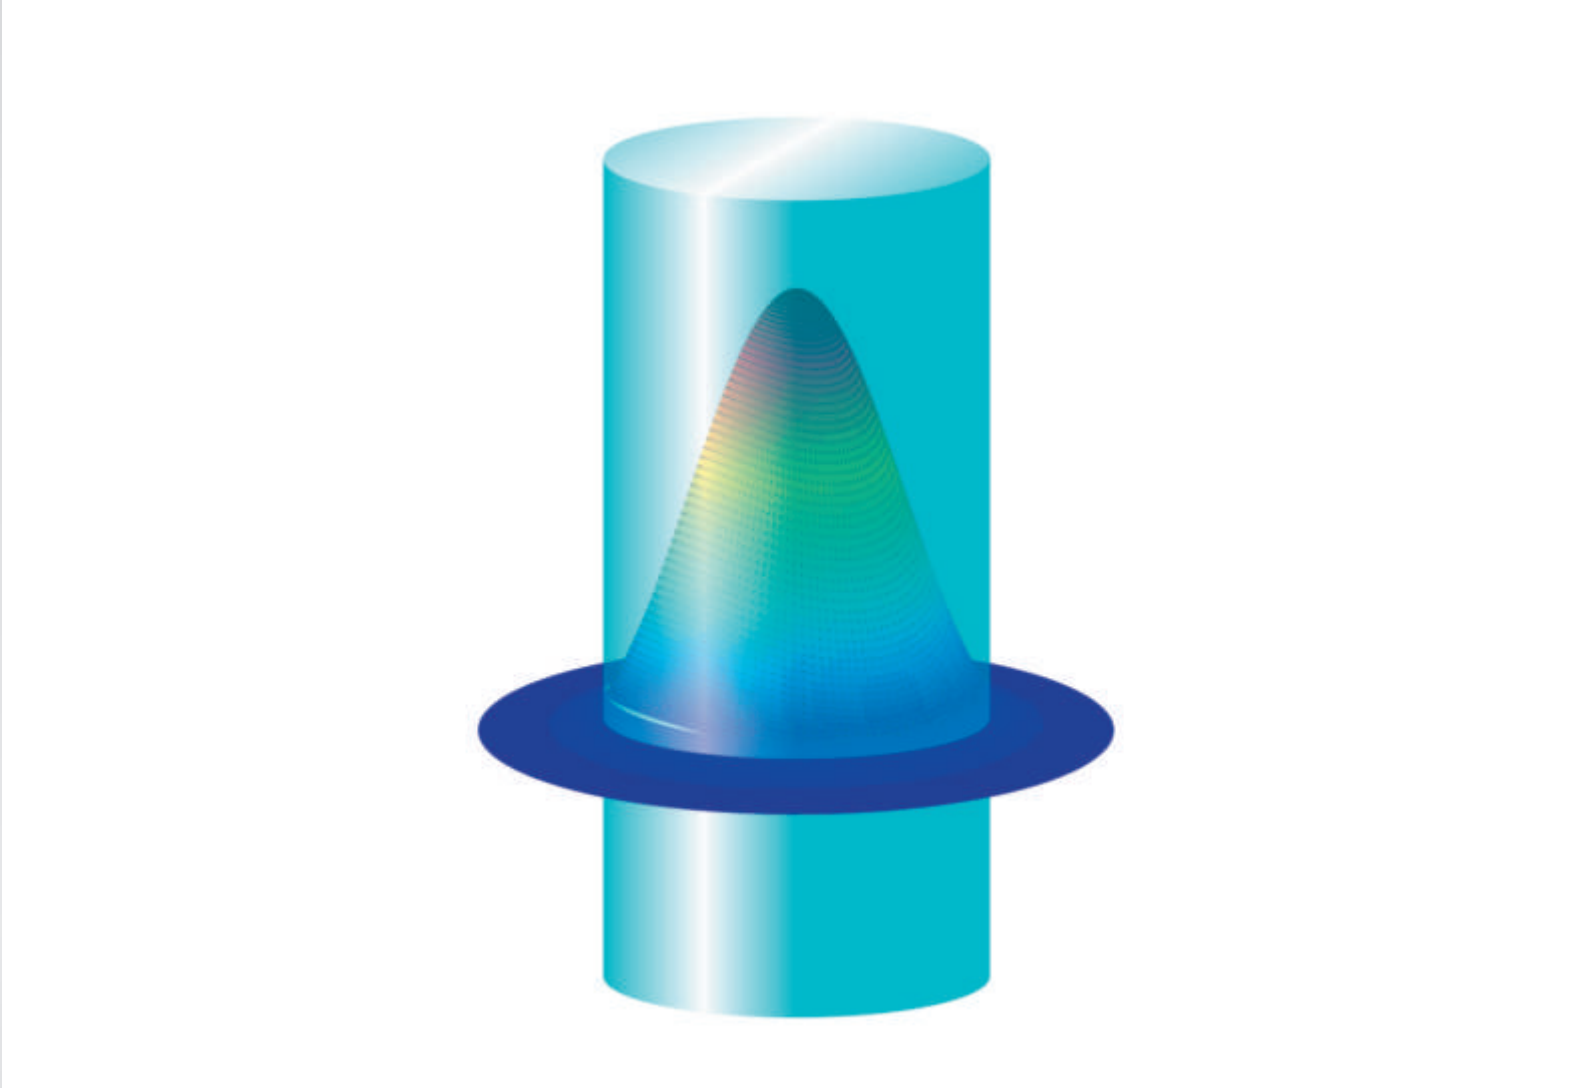

Optical properties

Poynting vector profile for 500-nm nanowire

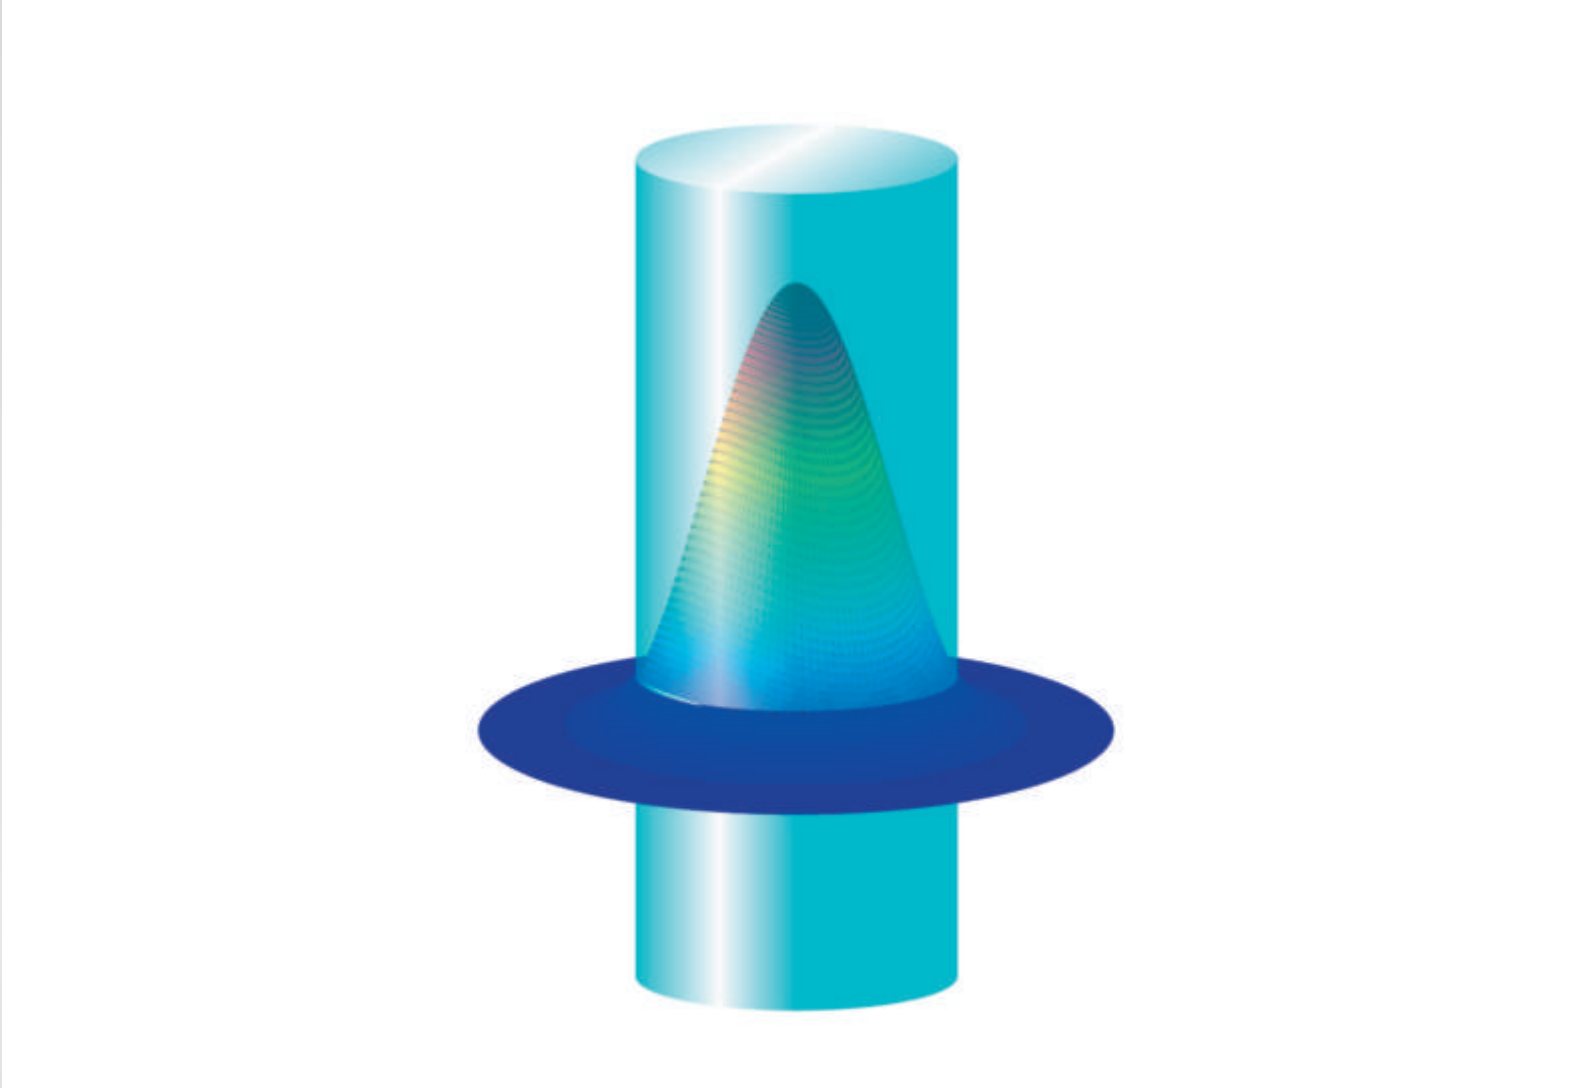

Optical properties

Poynting vector profile for 400-nm nanowire

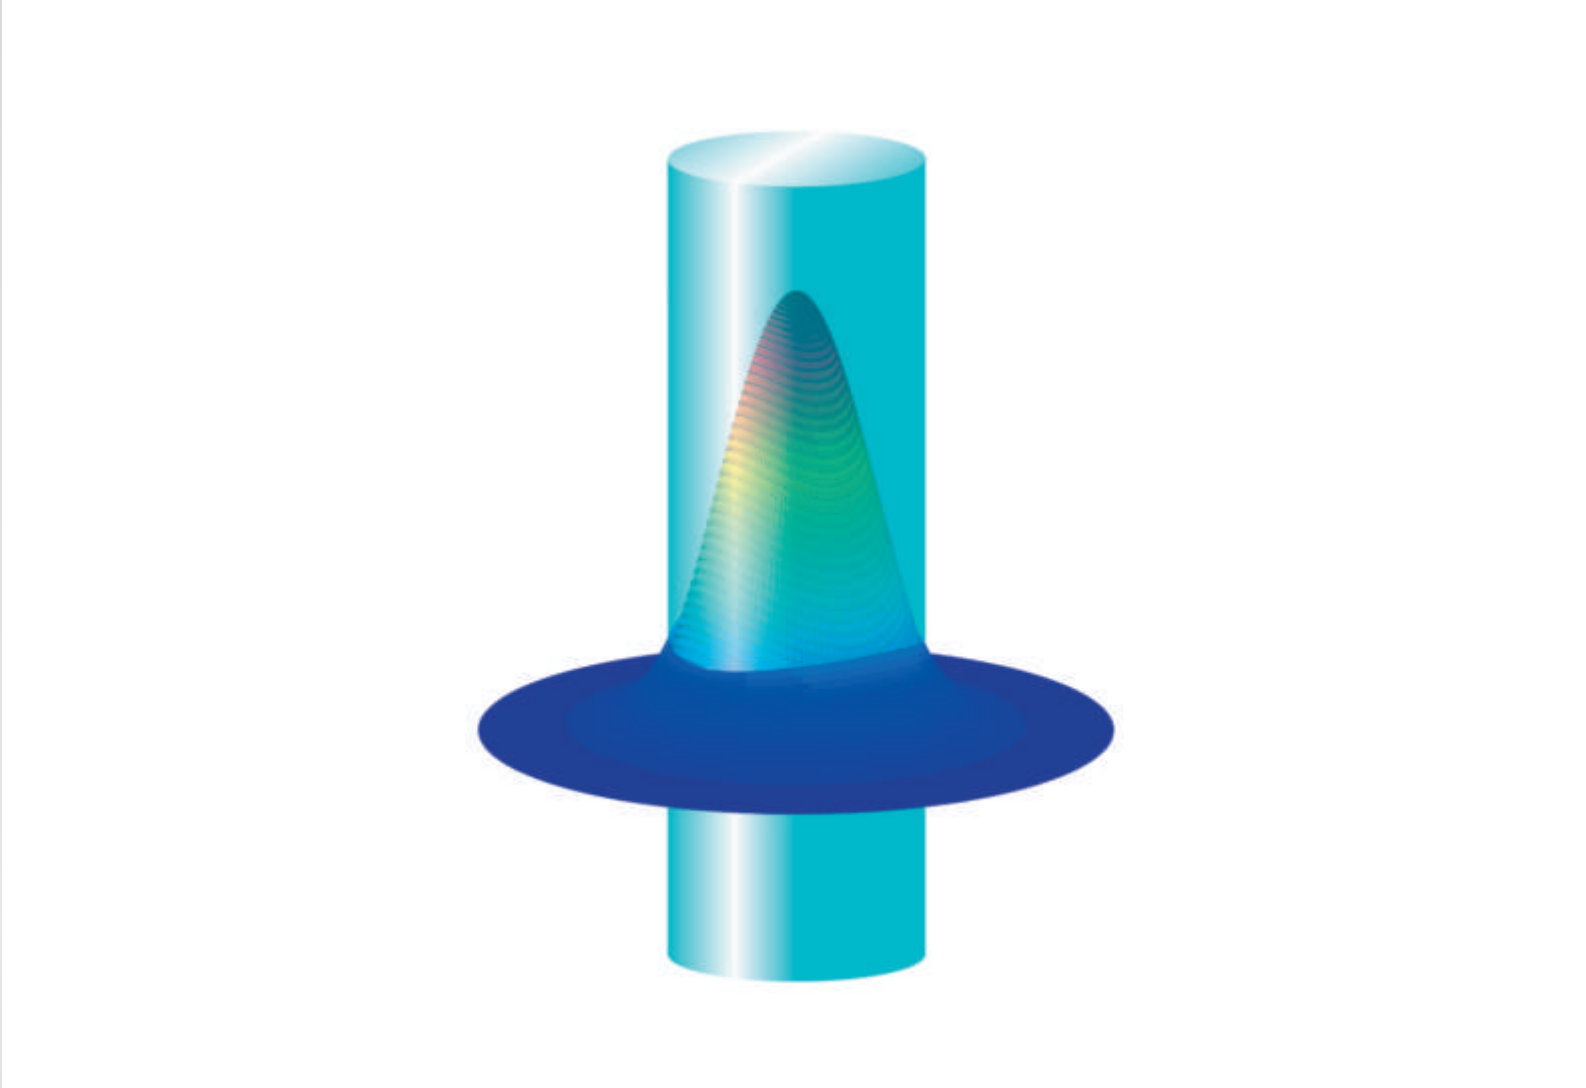

Optical properties

Poynting vector profile for 300-nm nanowire

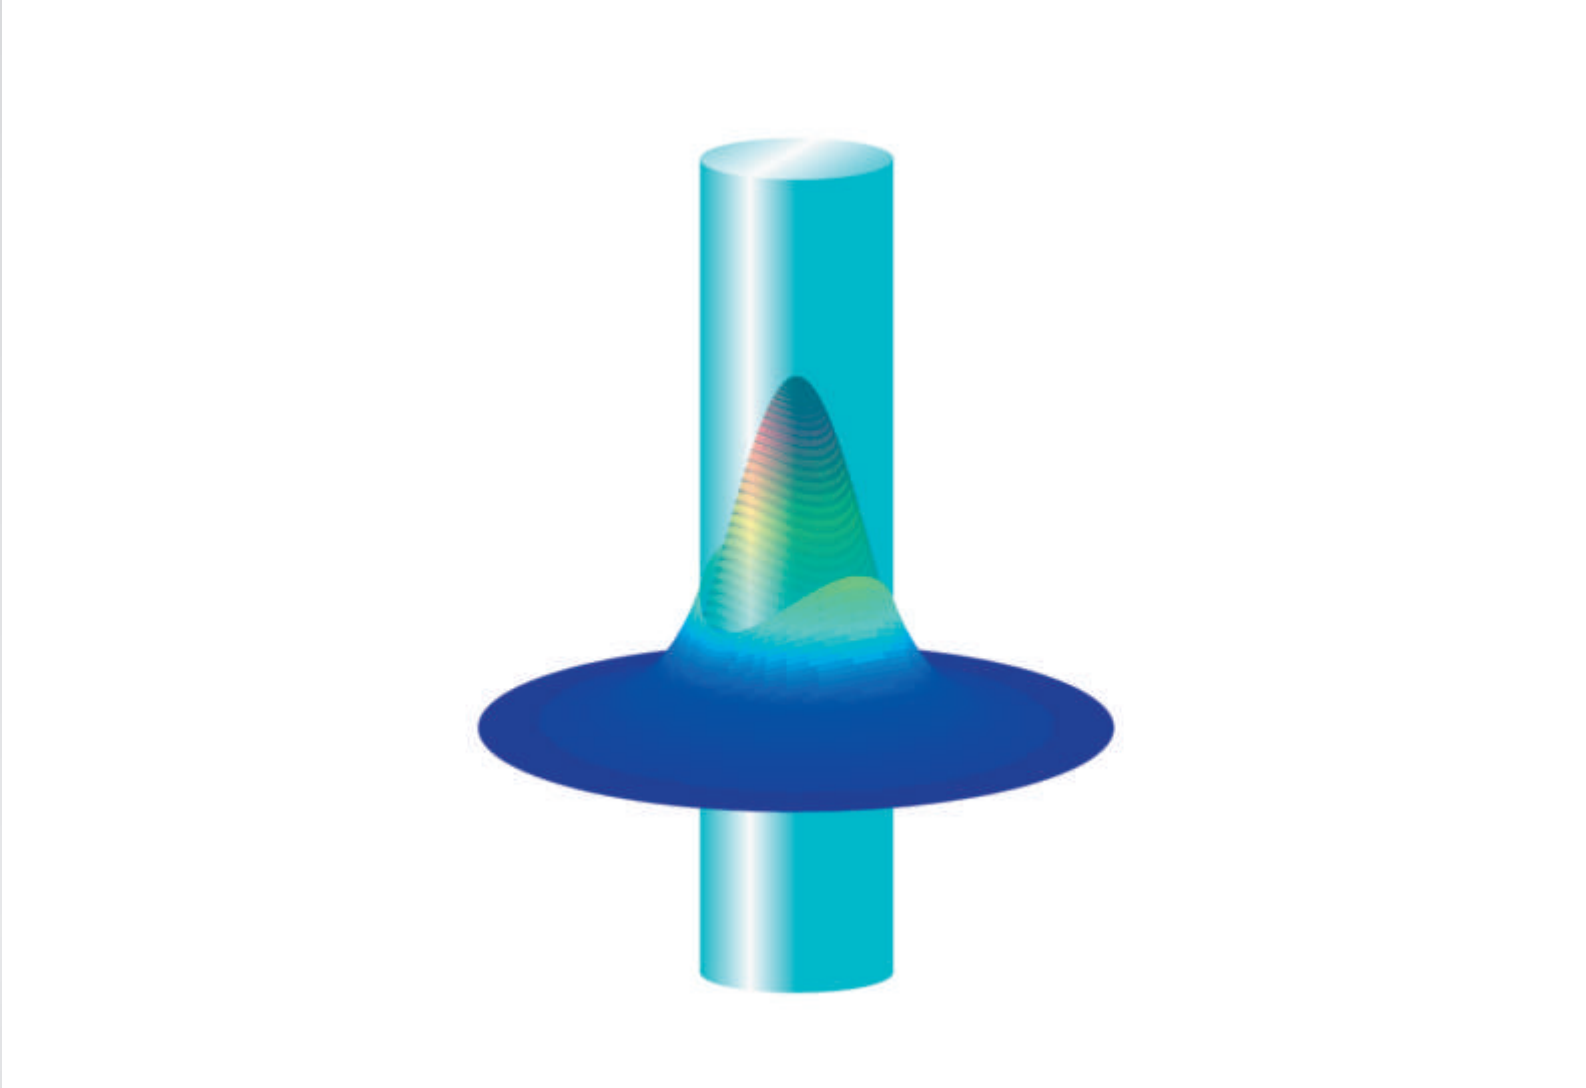

Optical properties

Poynting vector profile for 200-nm nanowire

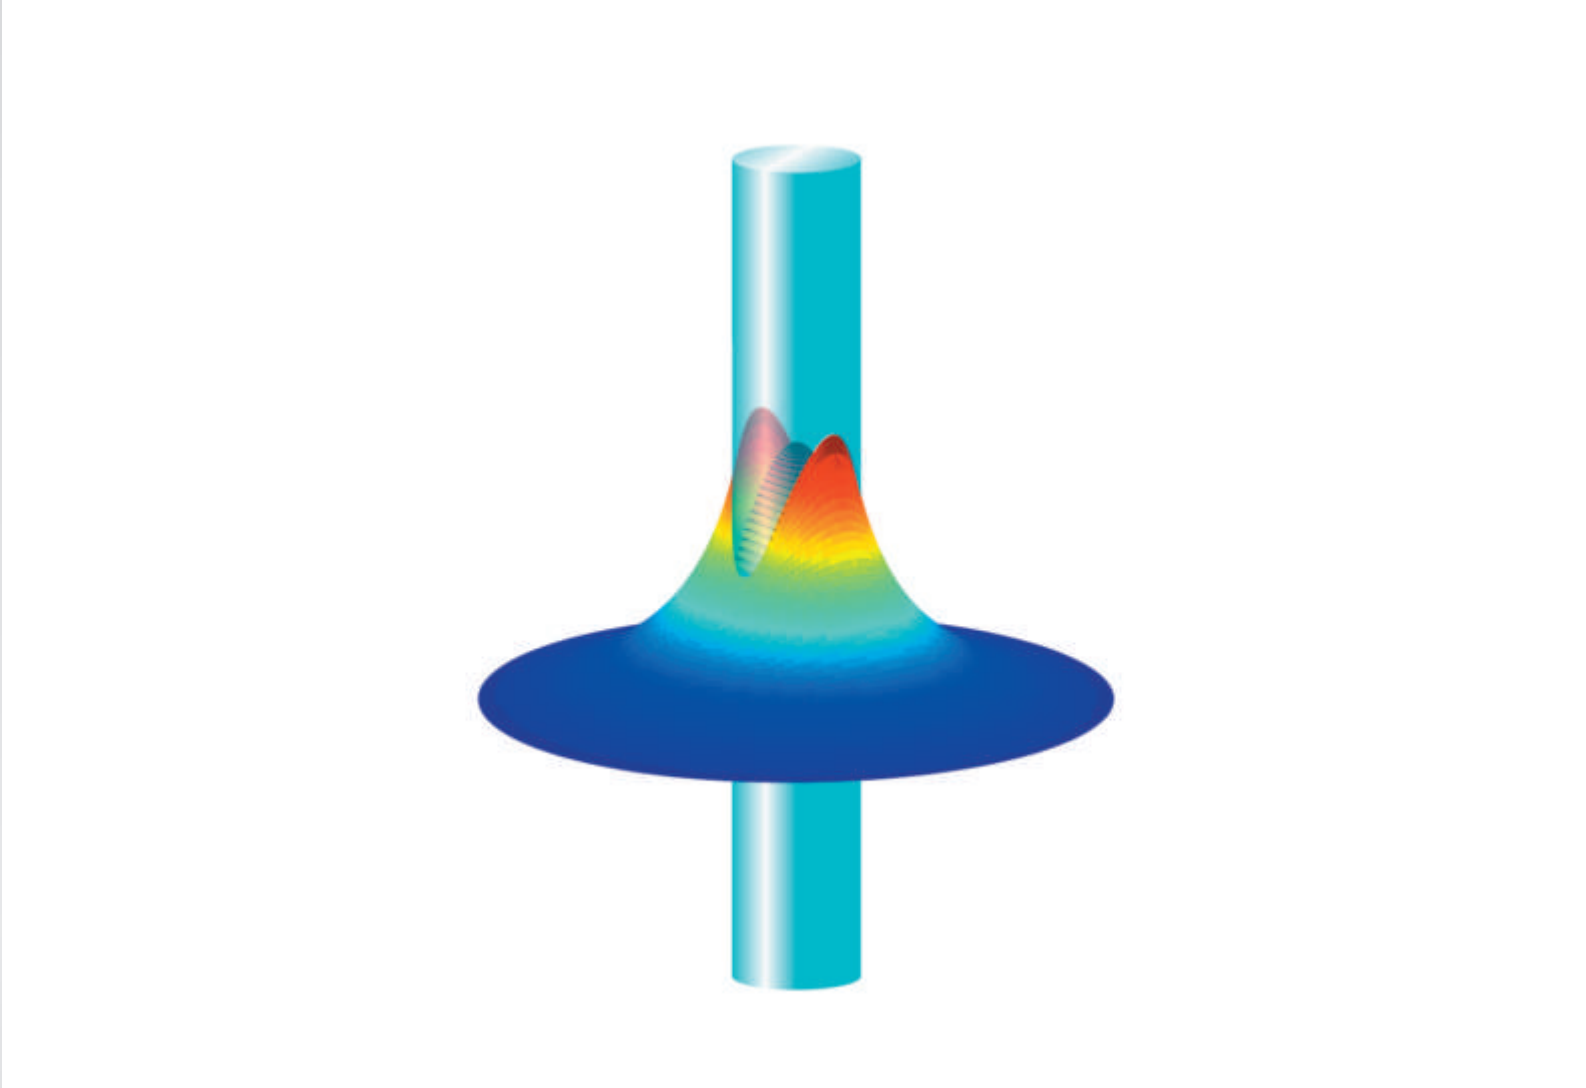

Waveguiding

fraction of power carried in core

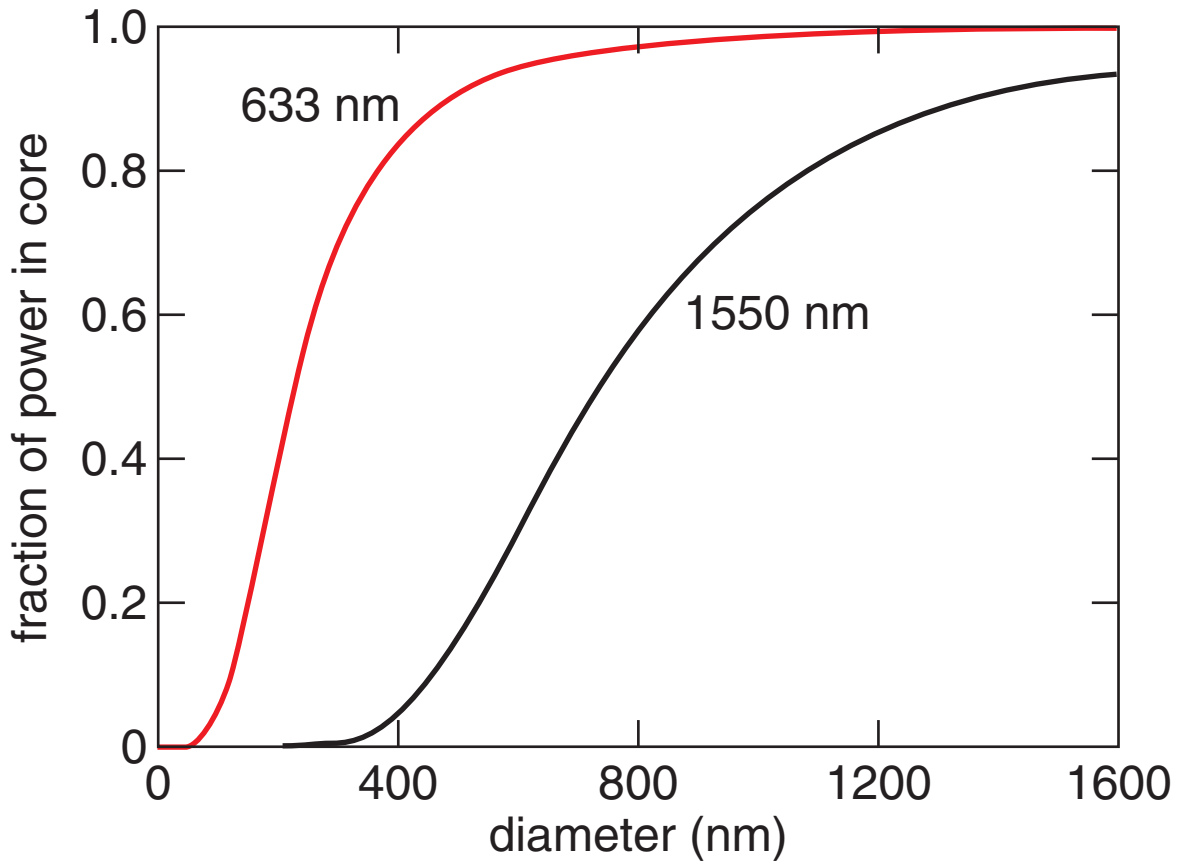

Optical properties

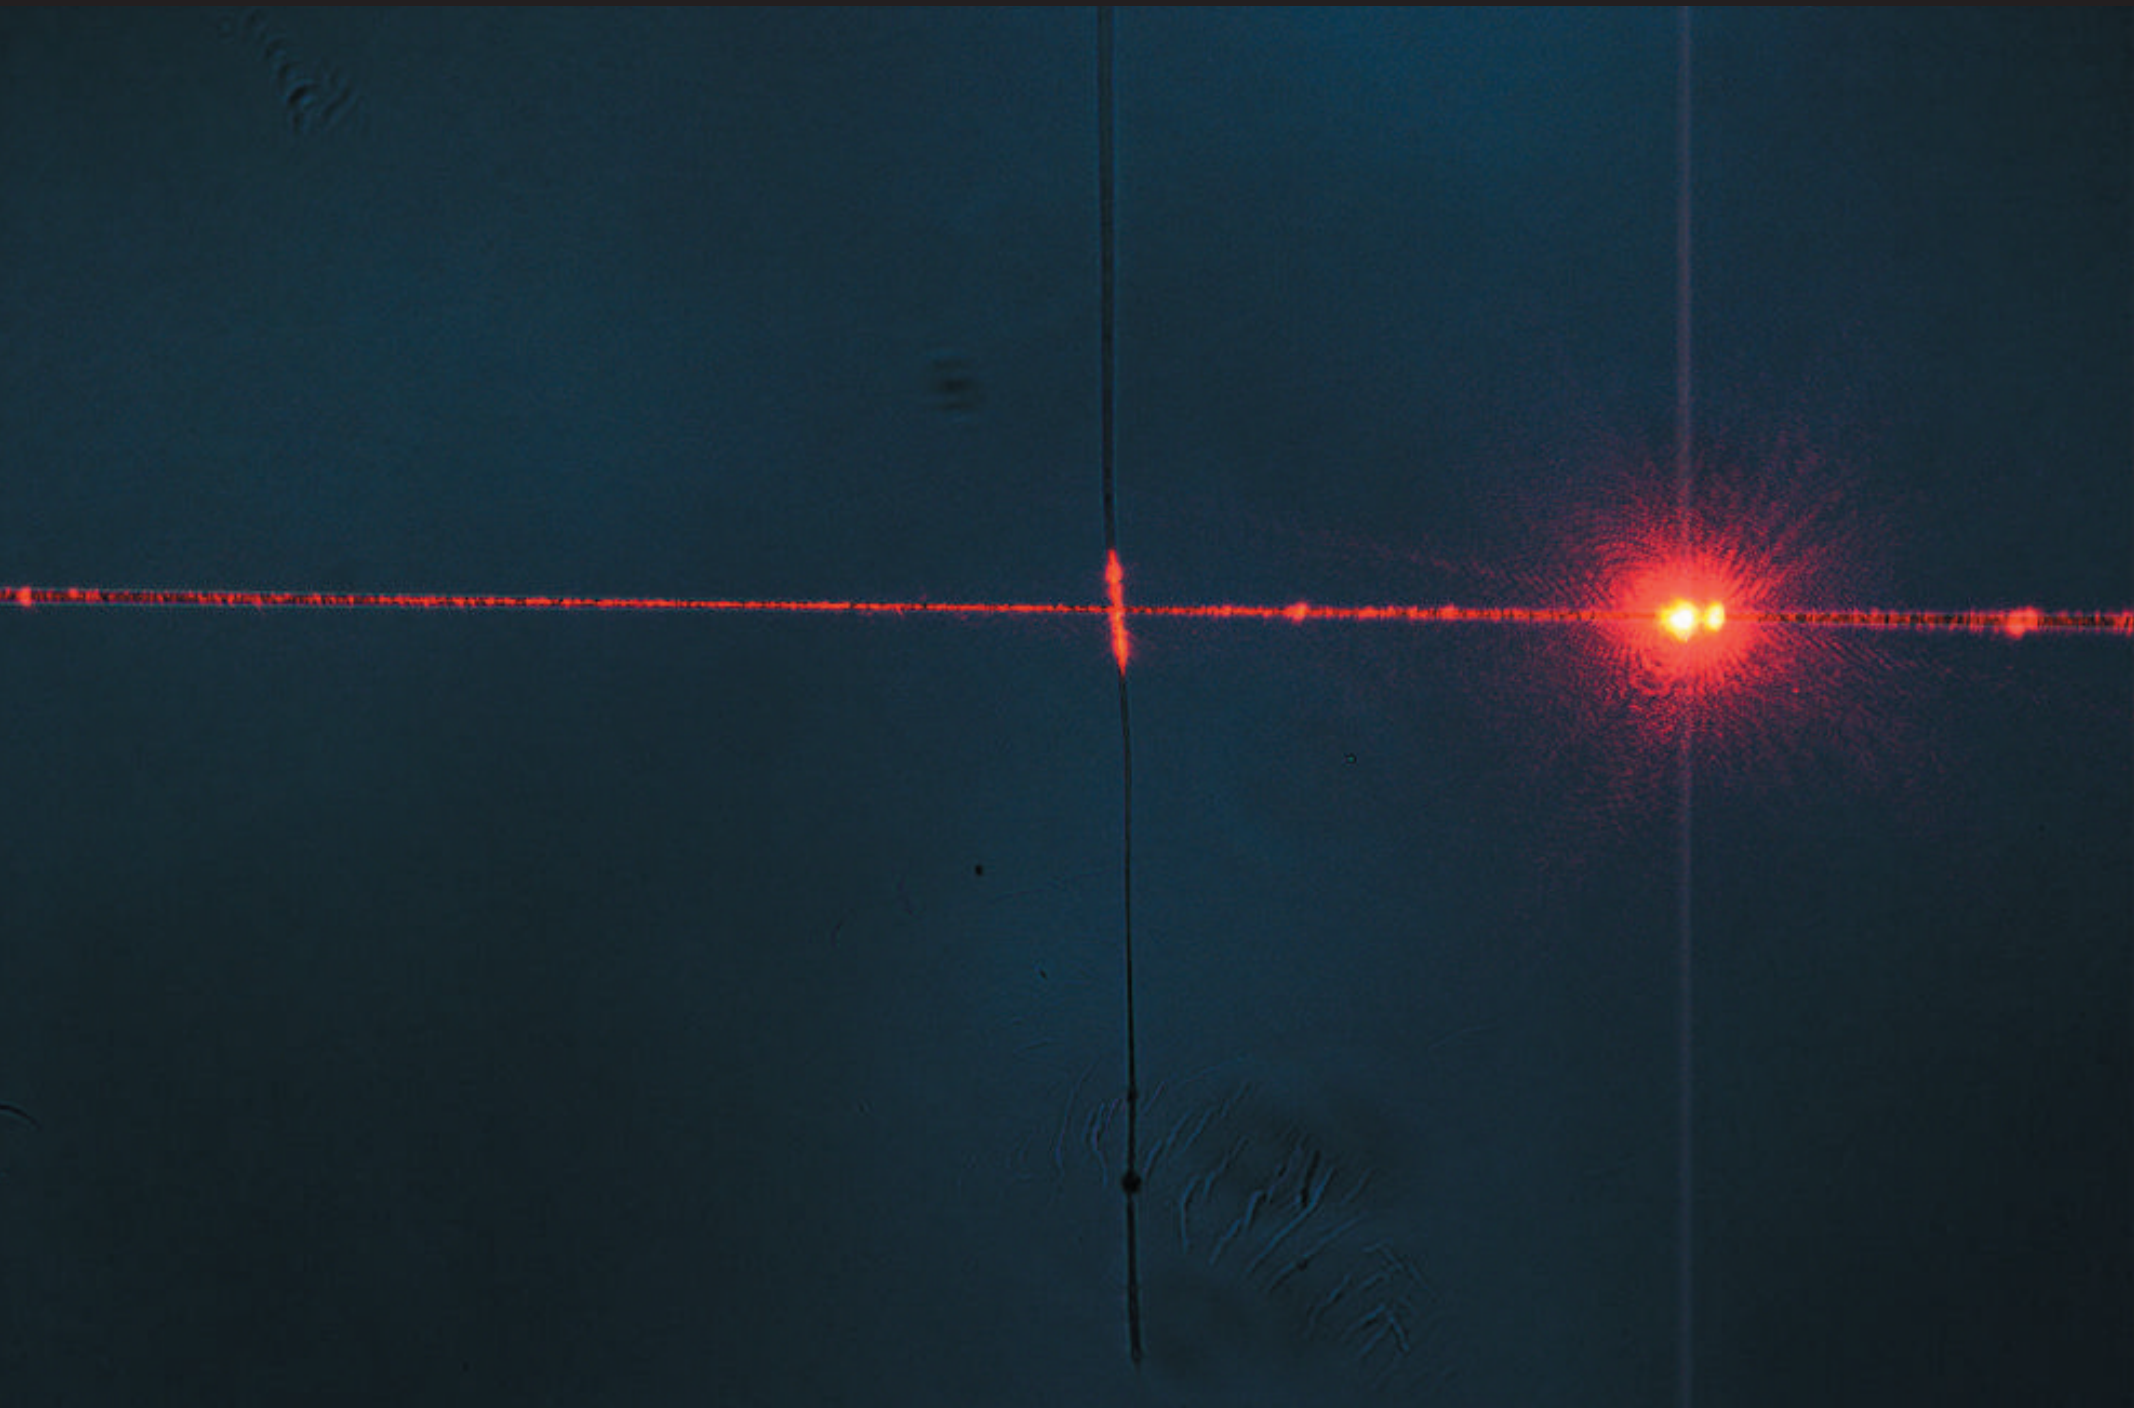

Optical properties

coupling light between nanowires

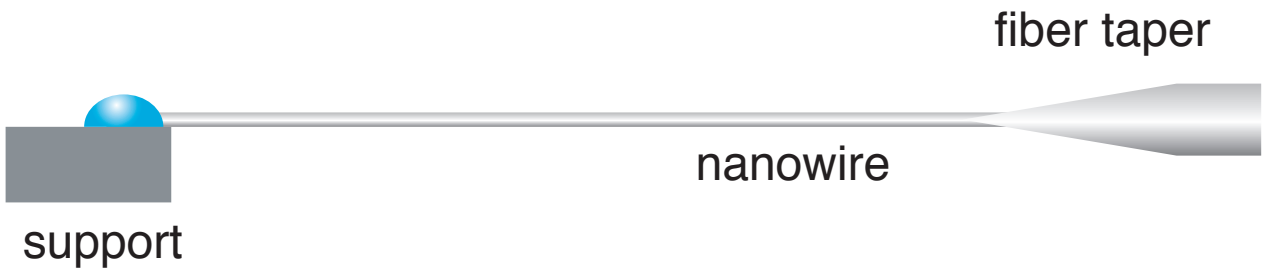

Optical properties

coupling light between nanowires

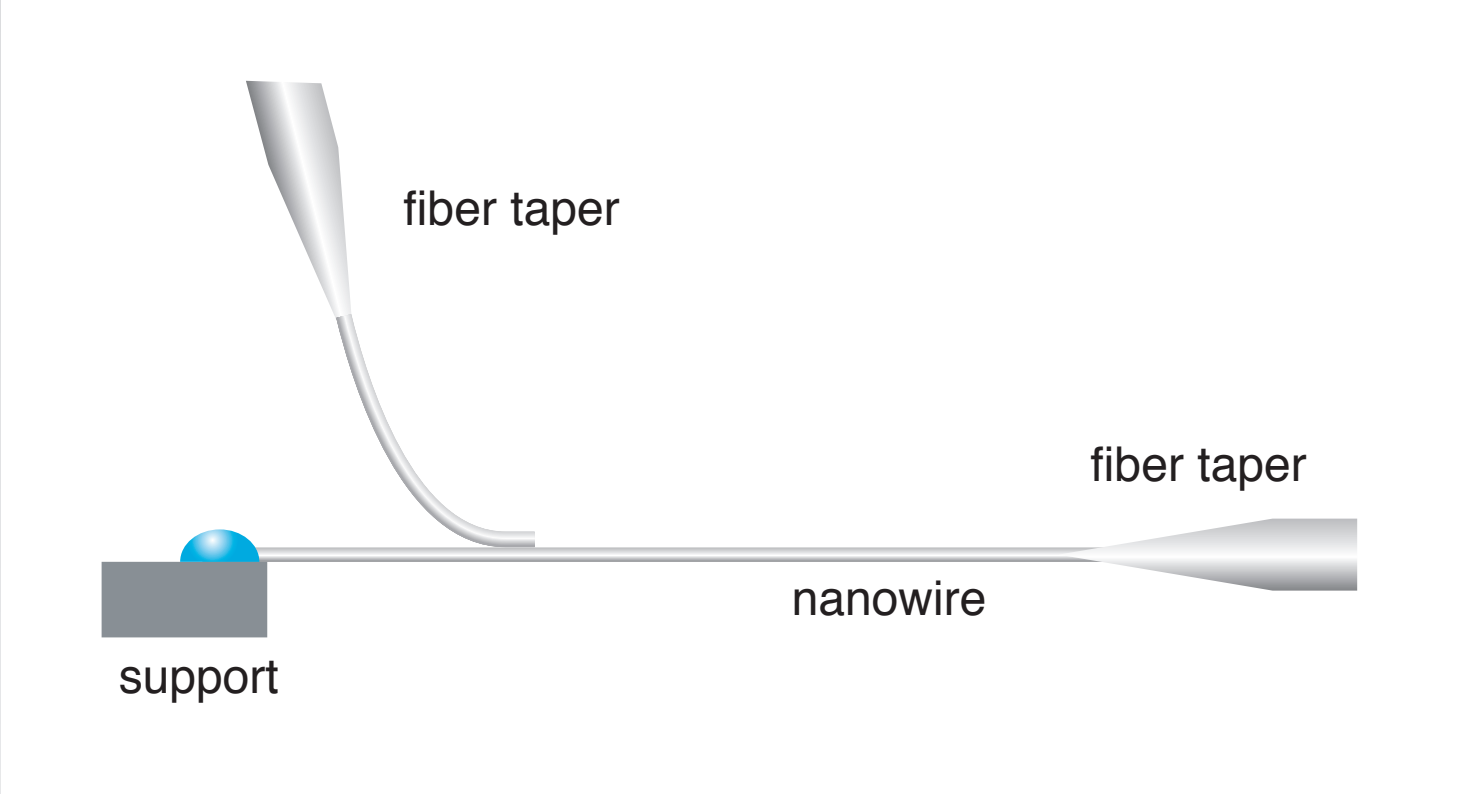

Optical properties

coupling light between nanowires

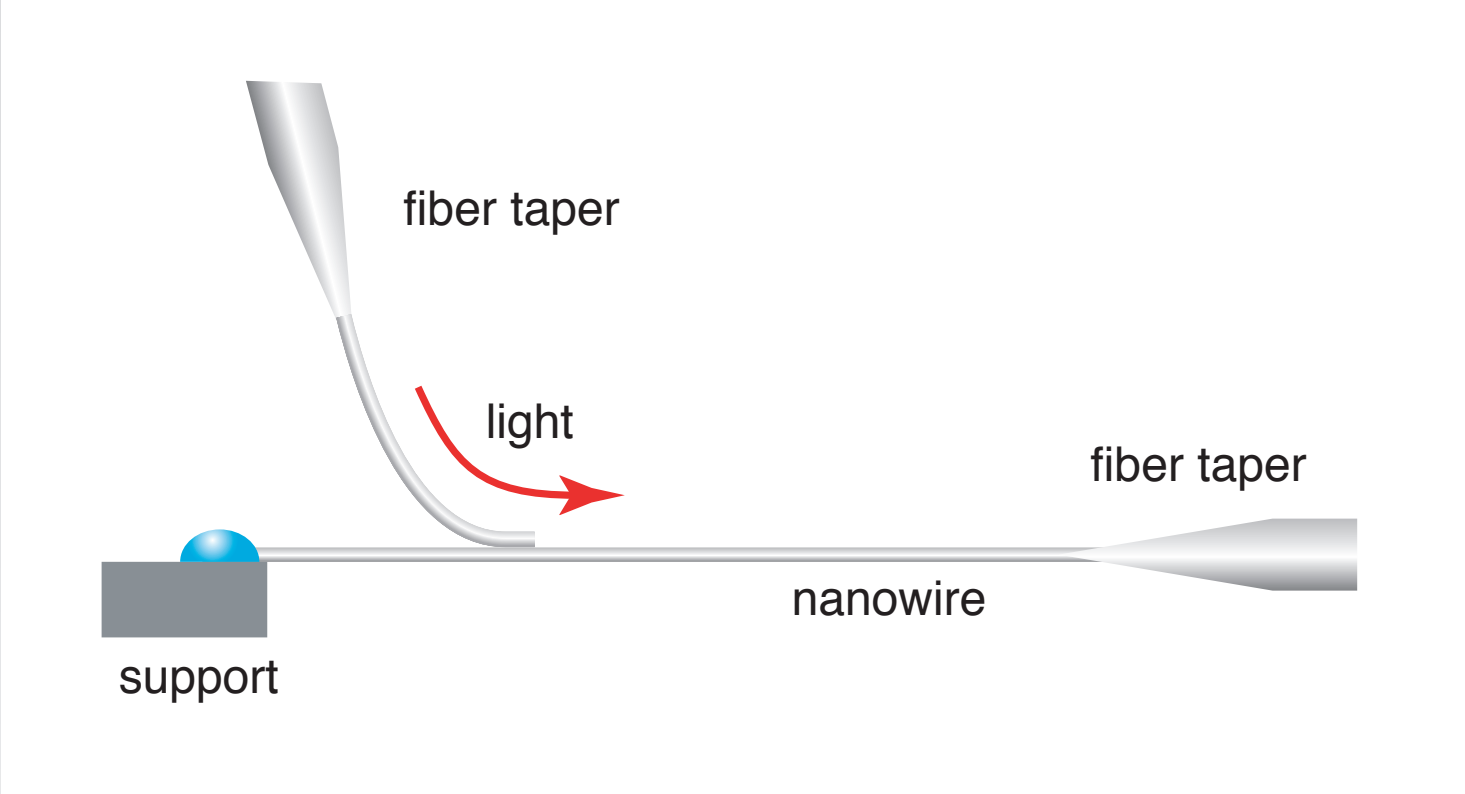

Optical properties

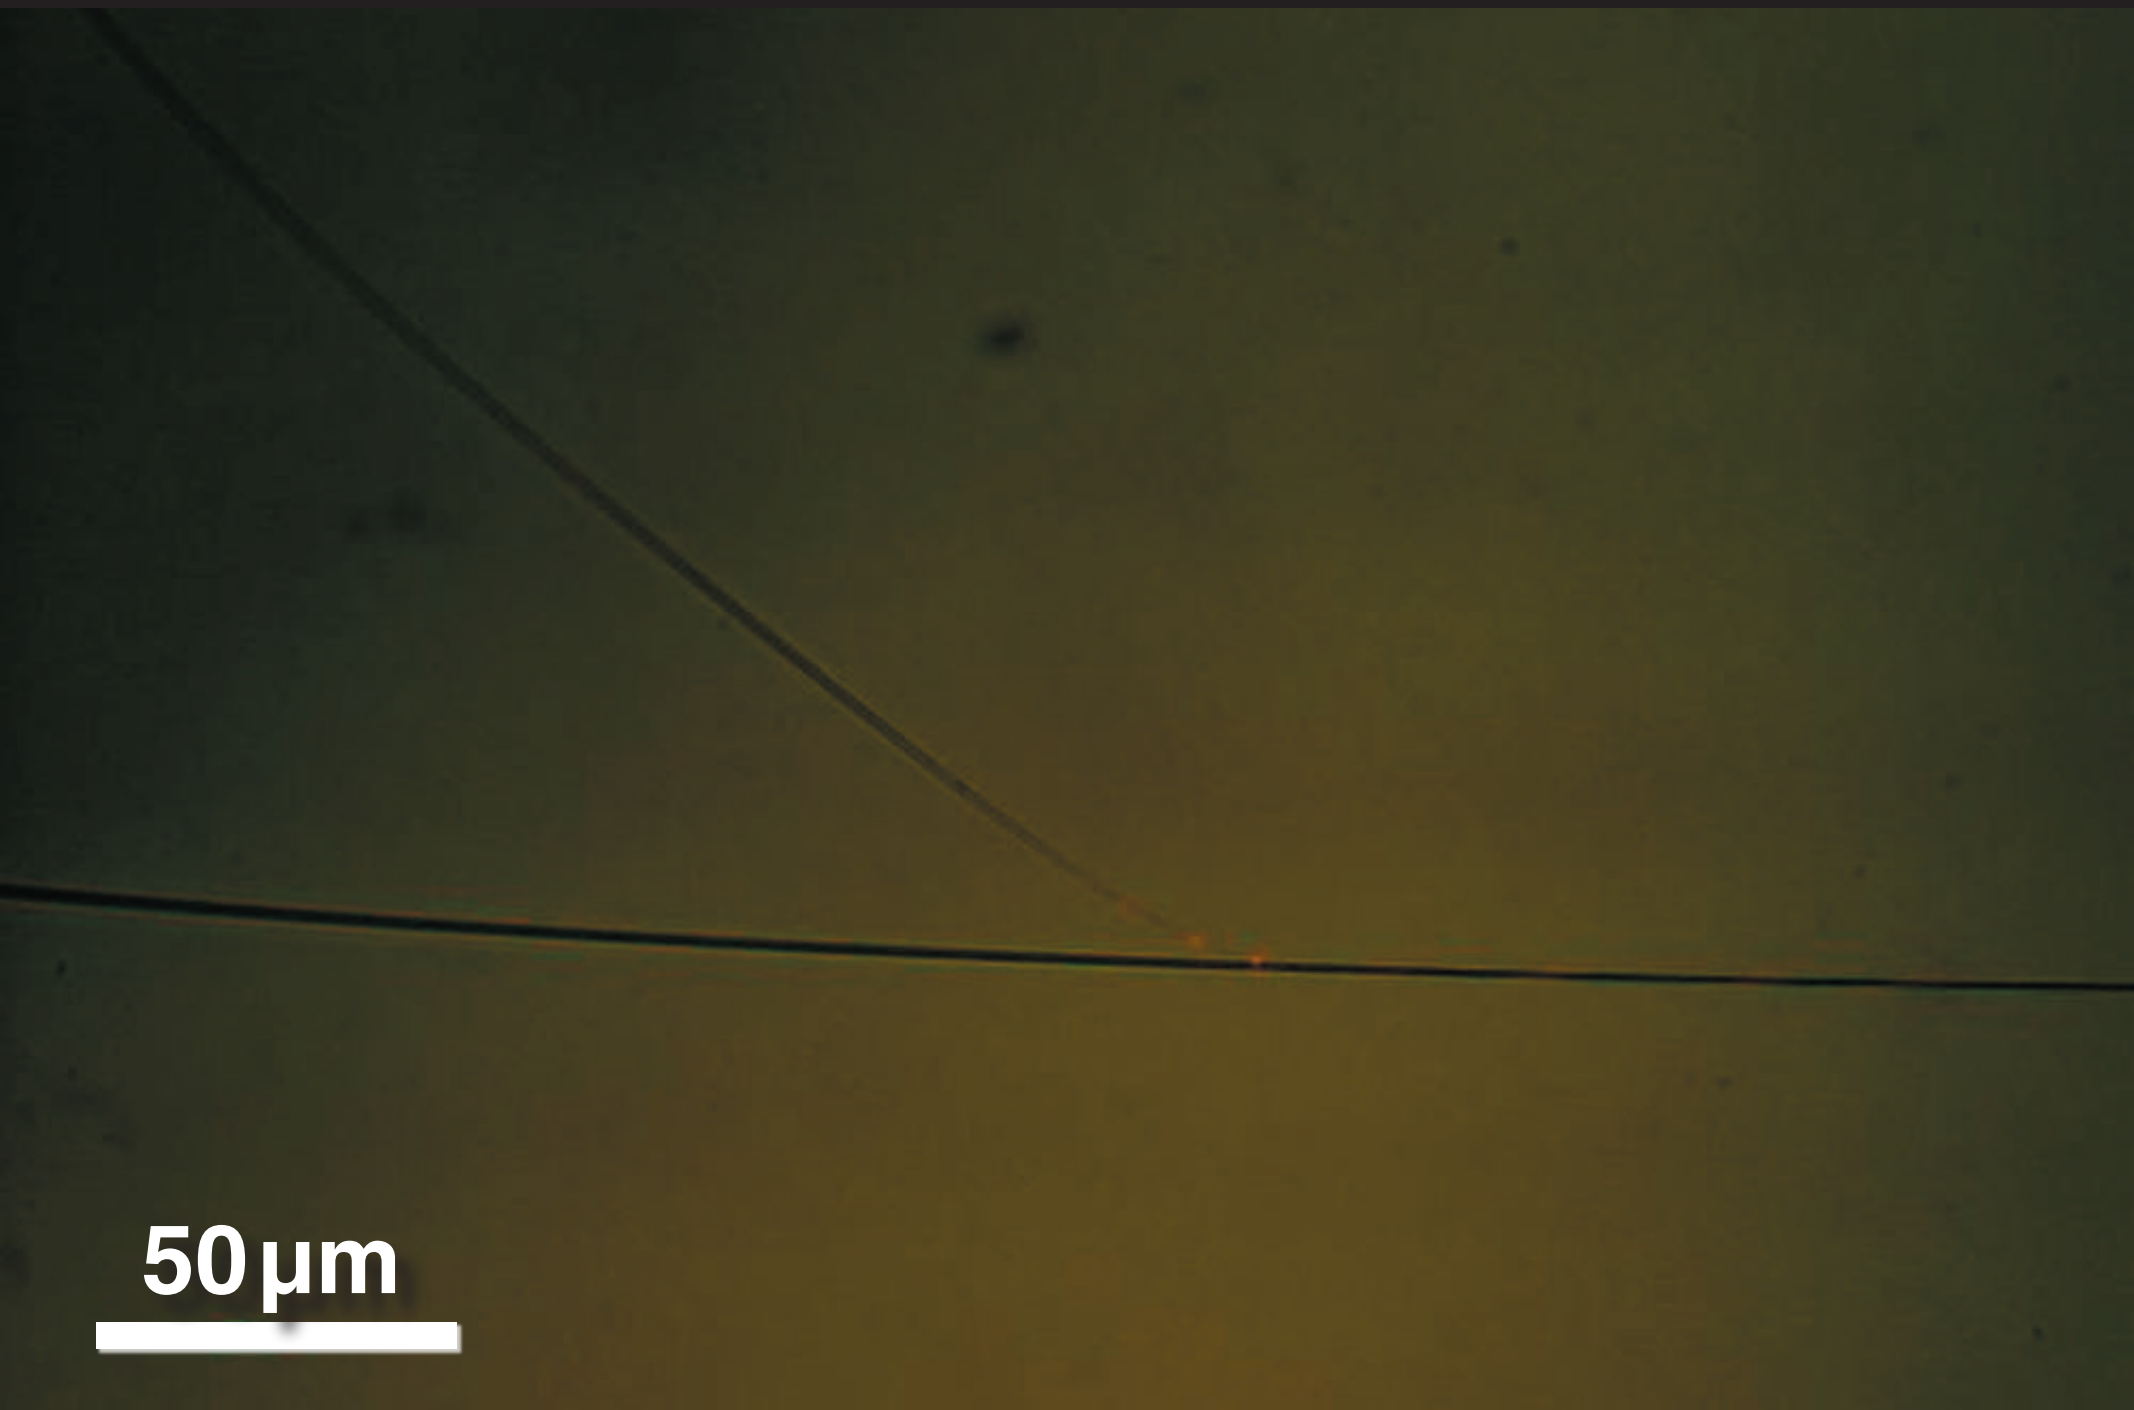

Optical properties

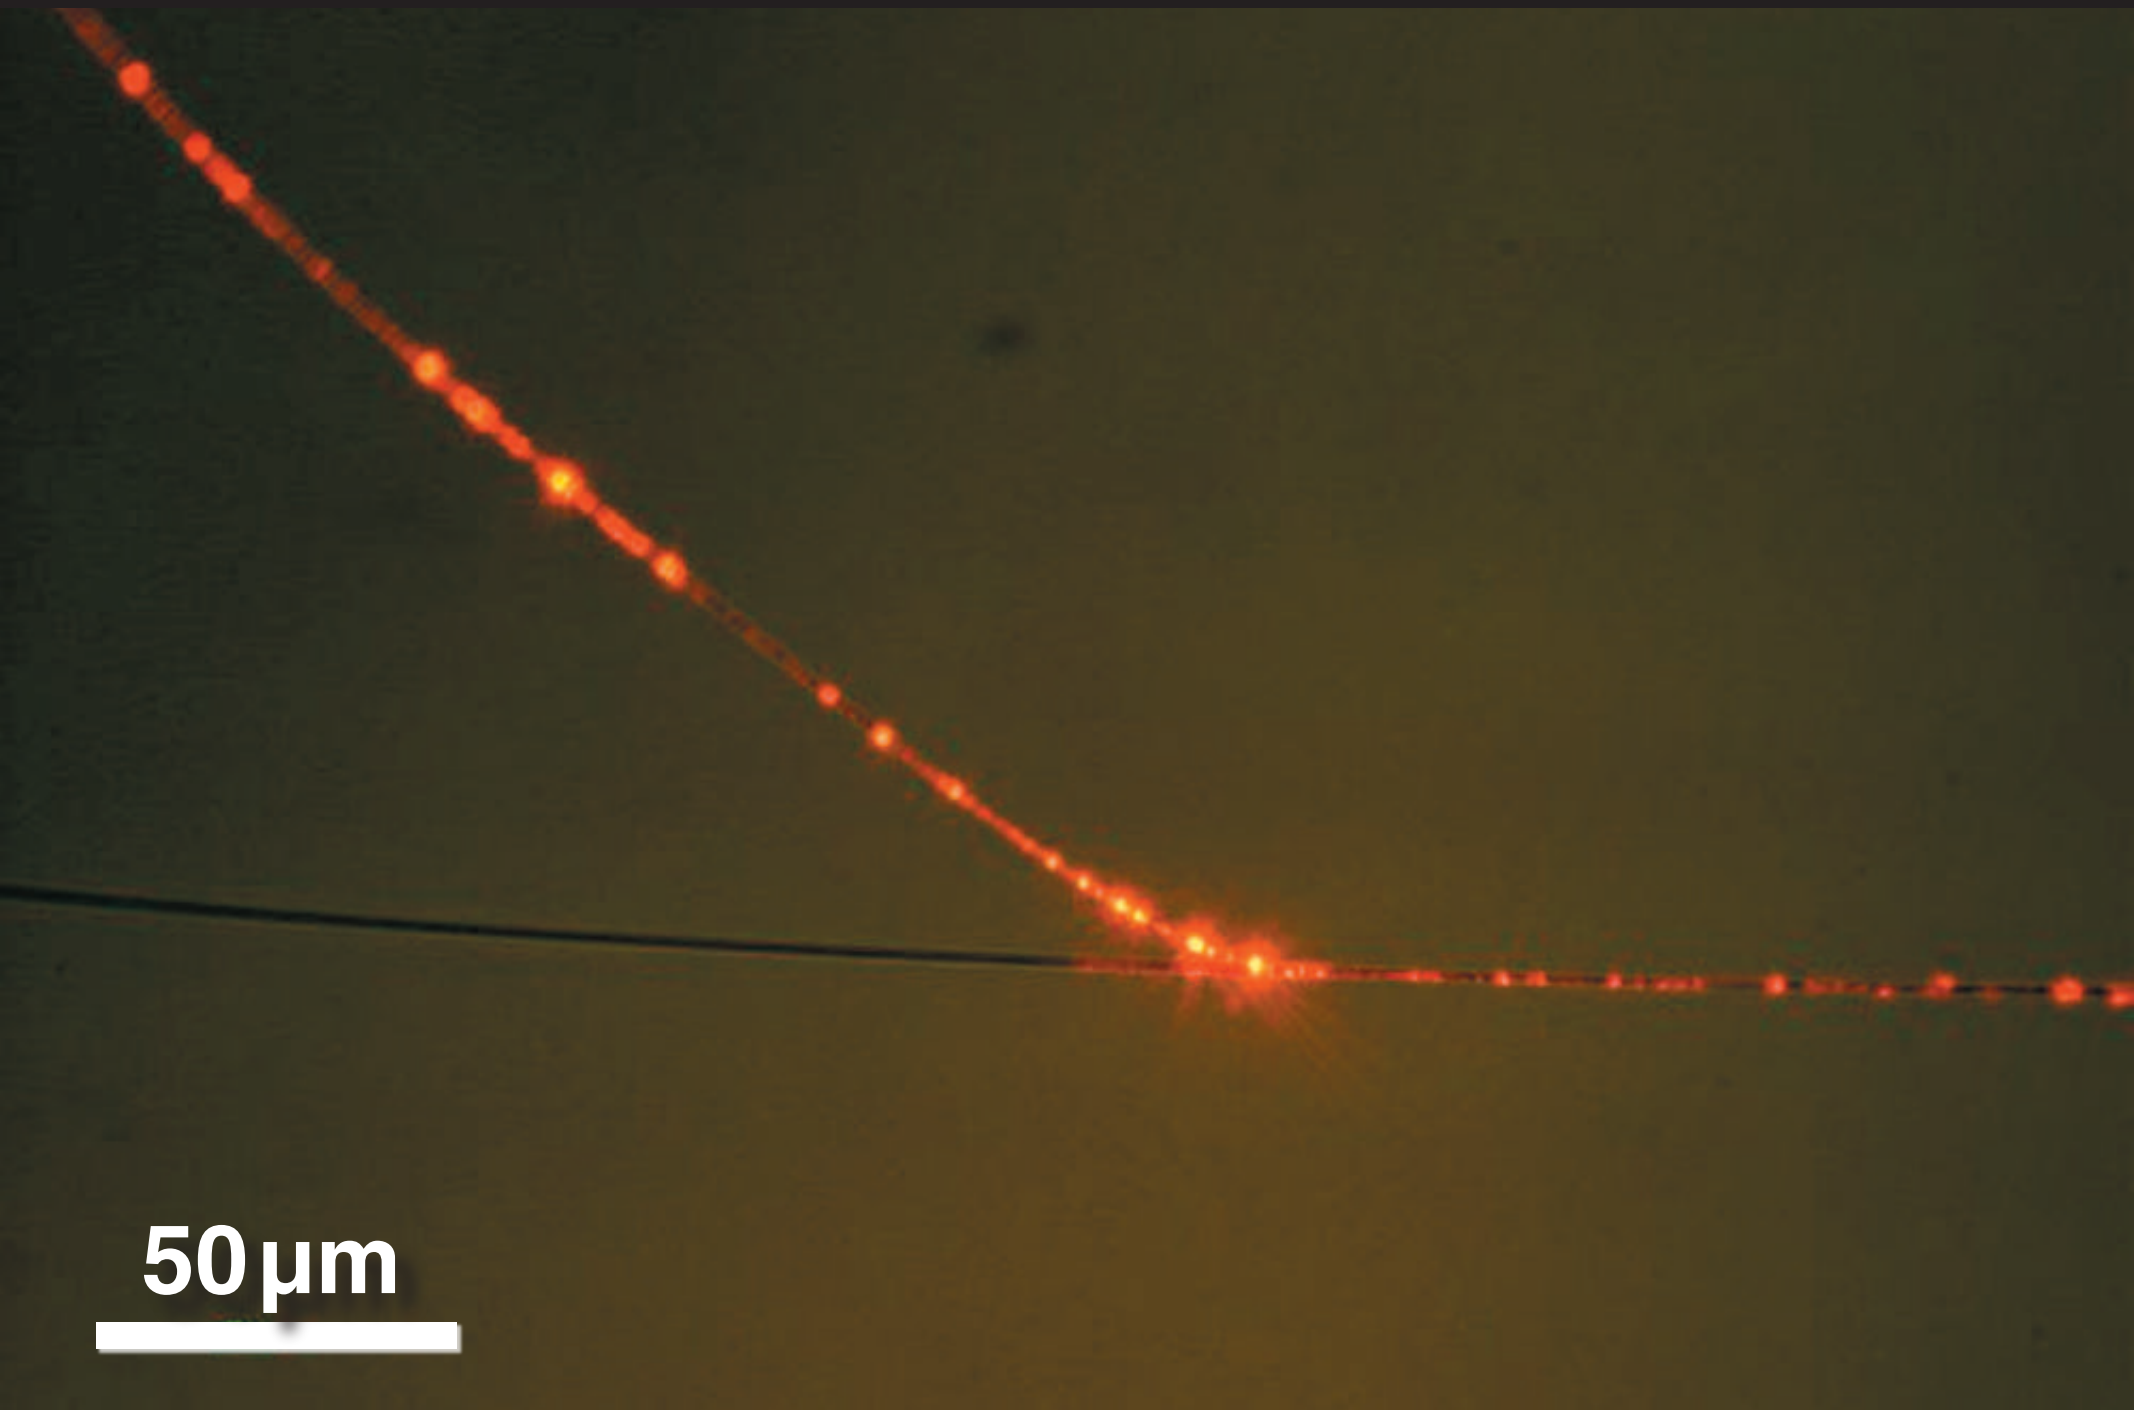

Optical properties

intensity distribution

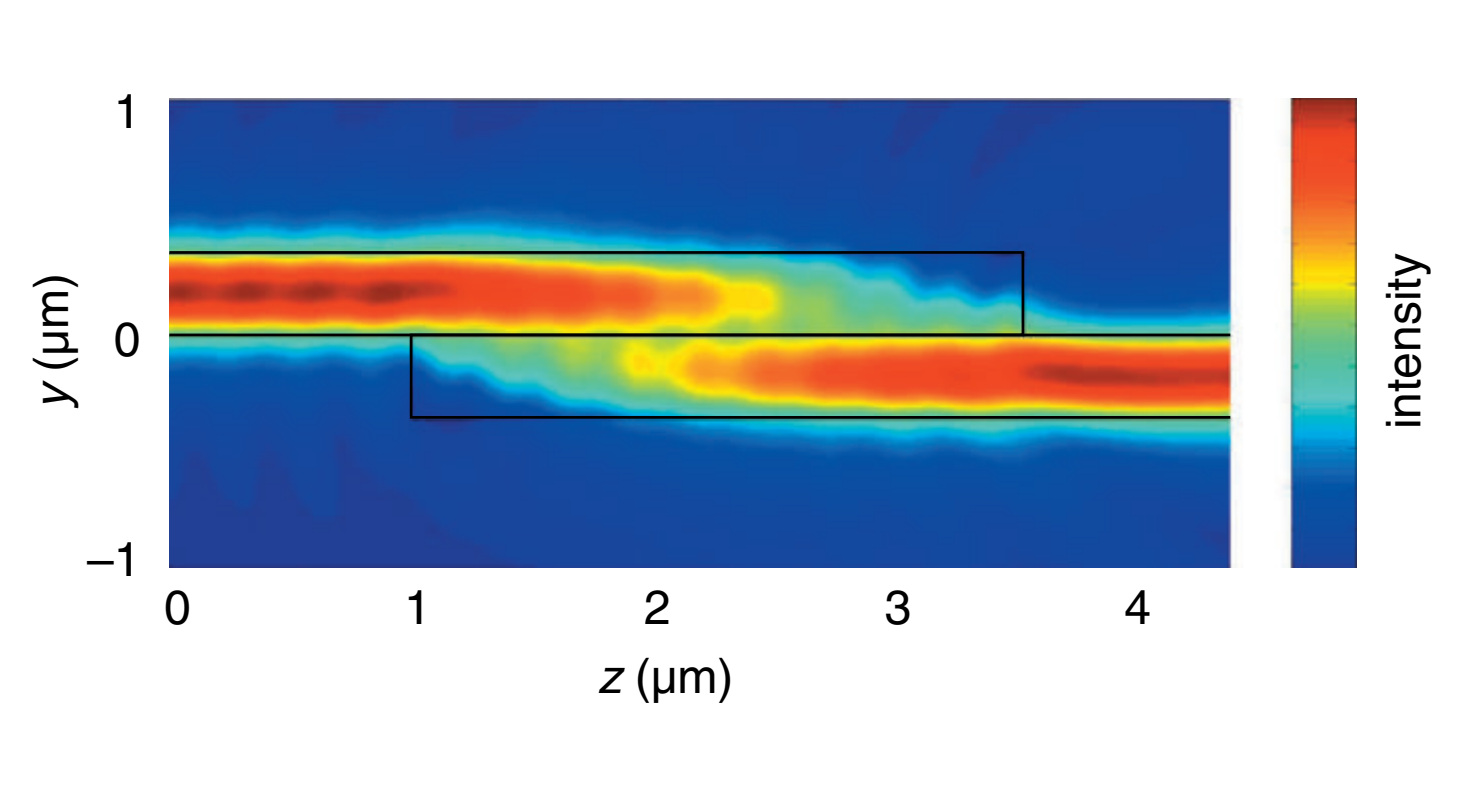

Optical properties

loss measurement

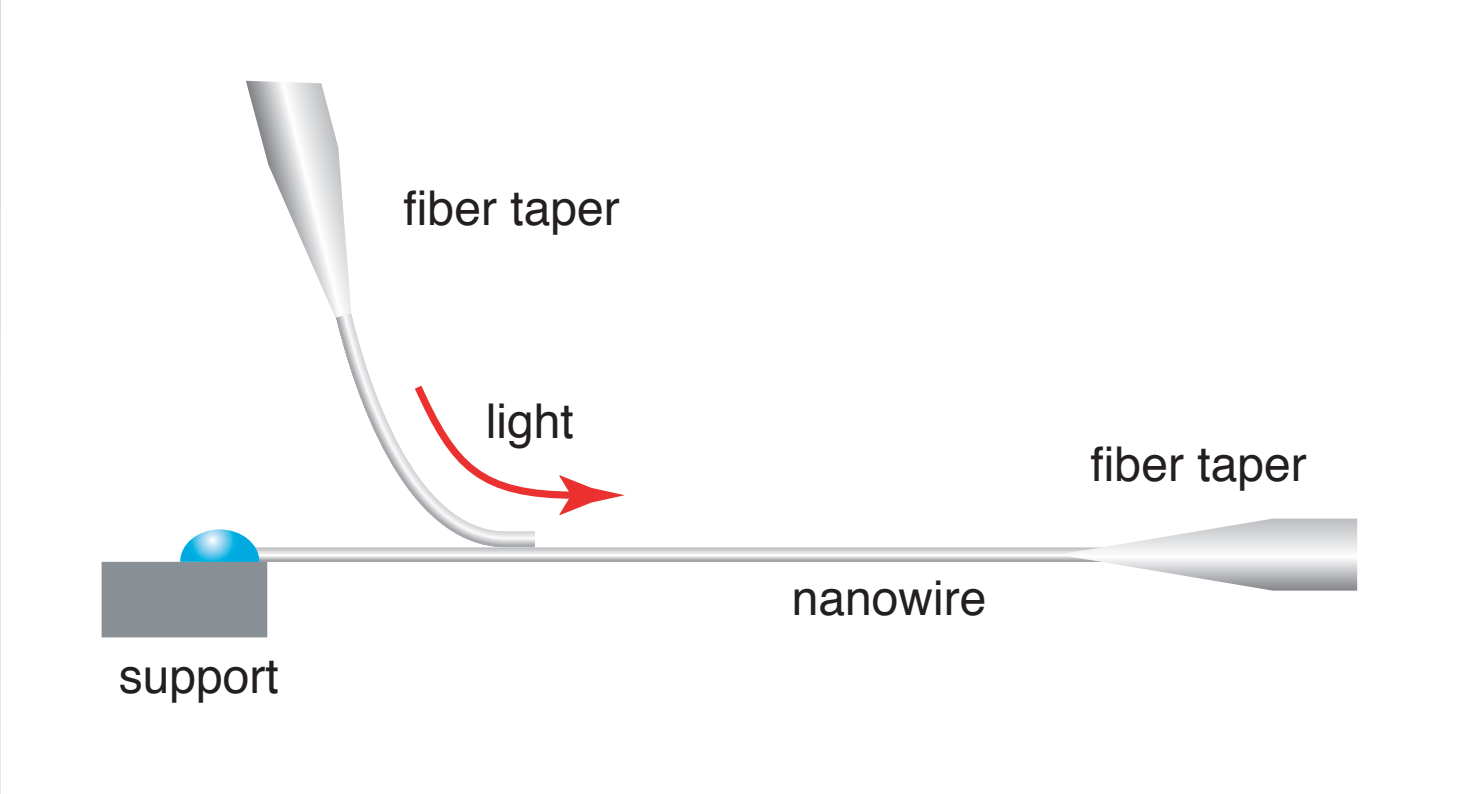

Nature, 426, 816 (2003)

Optical properties

loss measurement

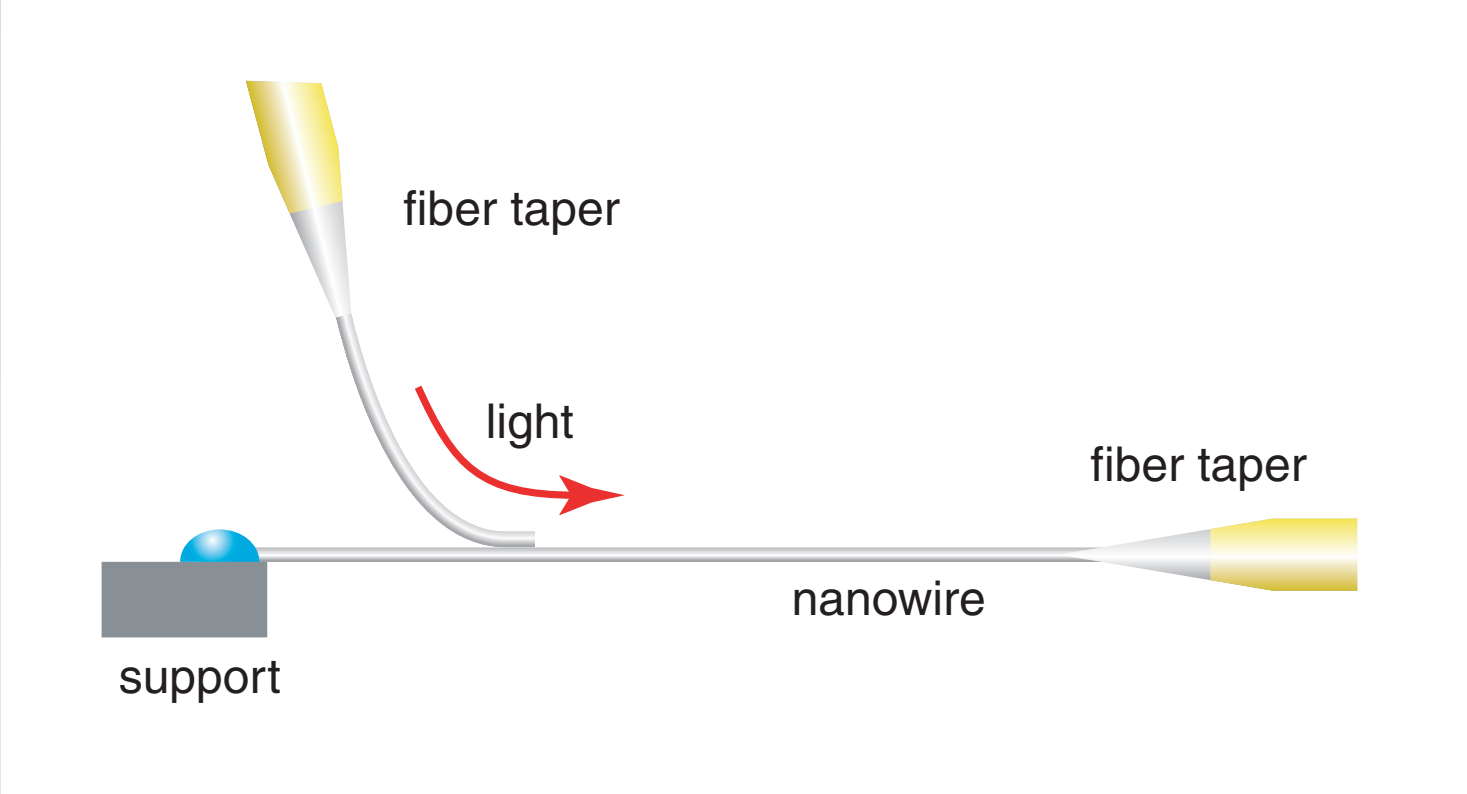

Nature, 426, 816 (2003)

Optical properties

loss measurement

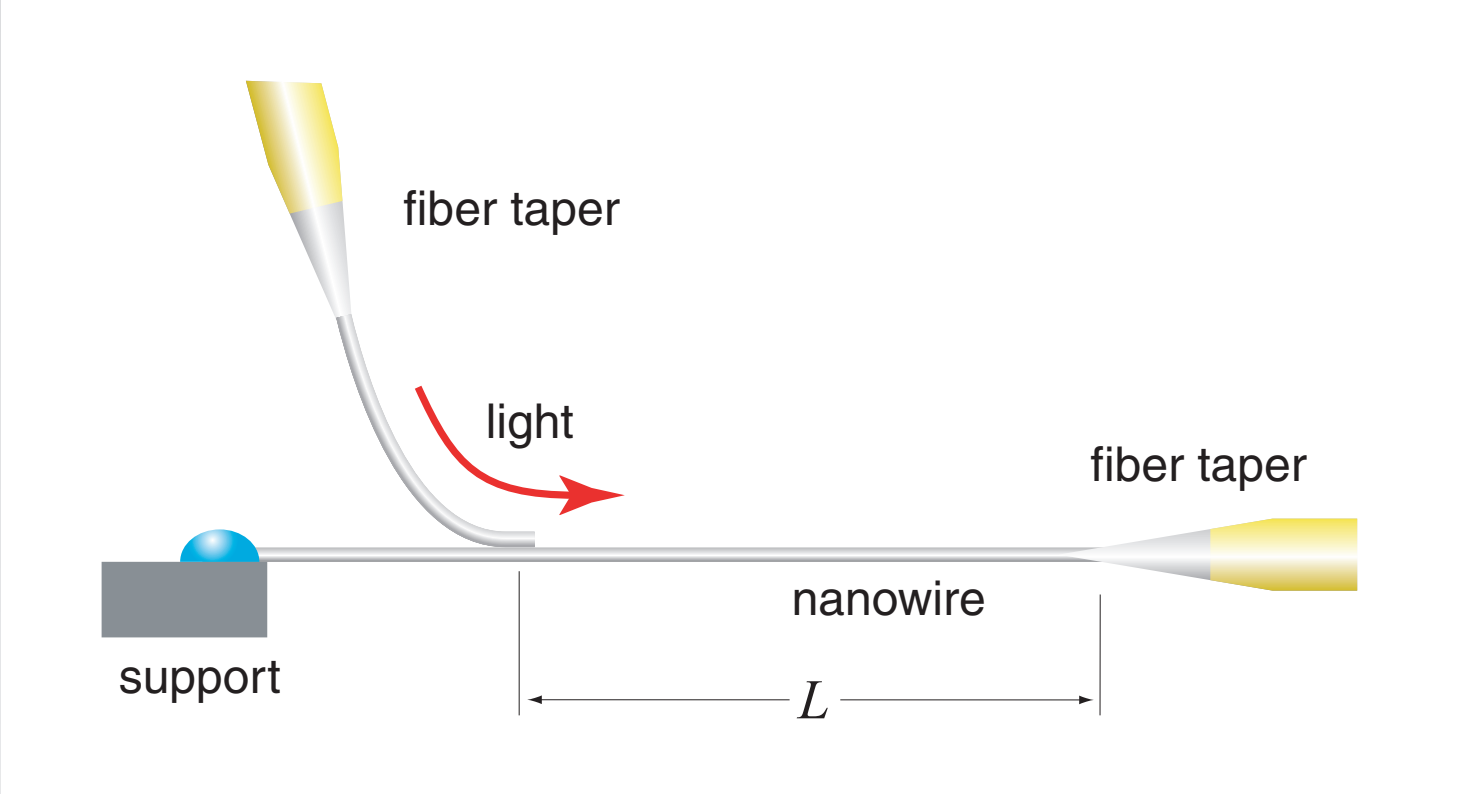

Nature, 426, 816 (2003)

Optical properties

loss measurement

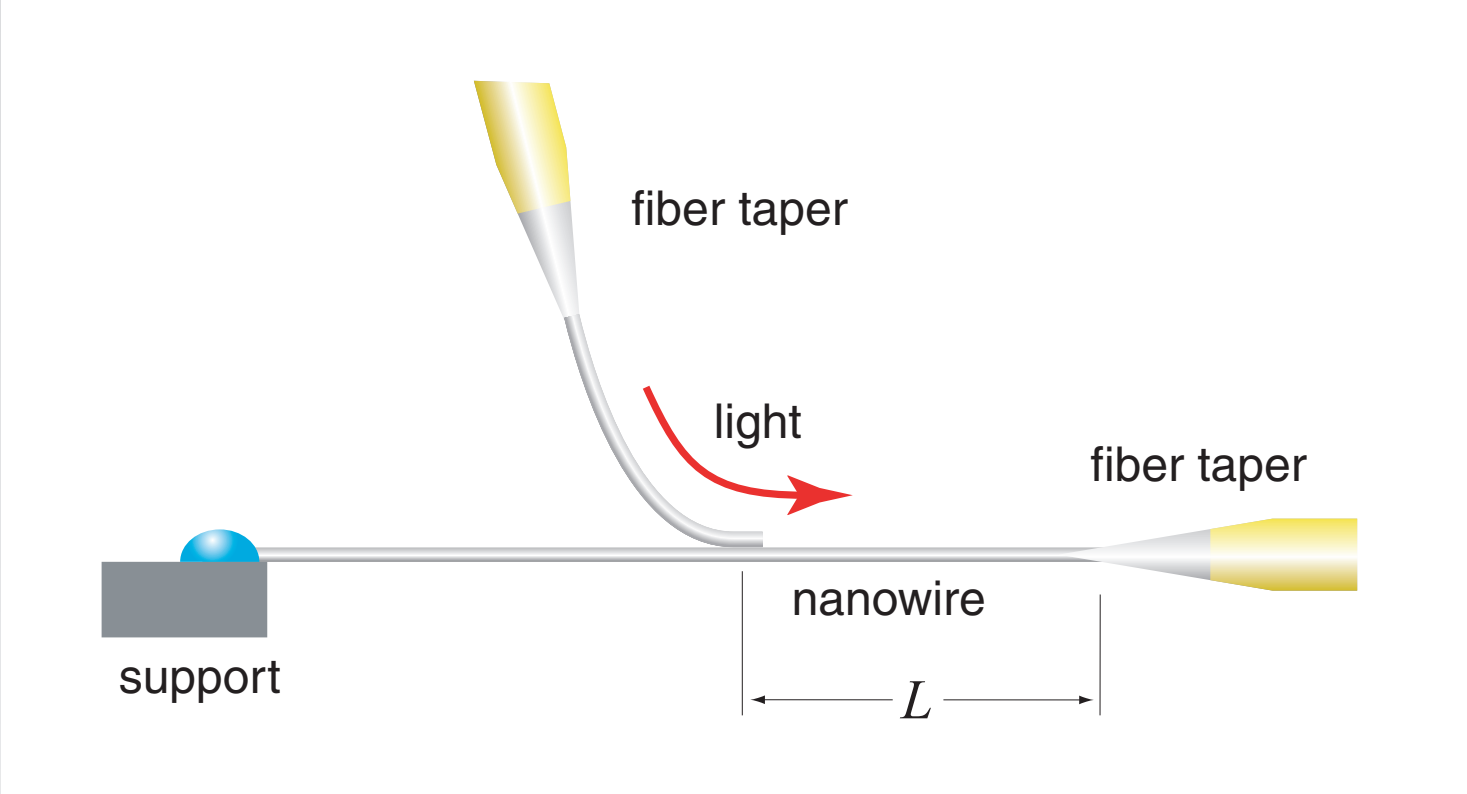

Nature, 426, 816 (2003)

Optical properties

loss measurement

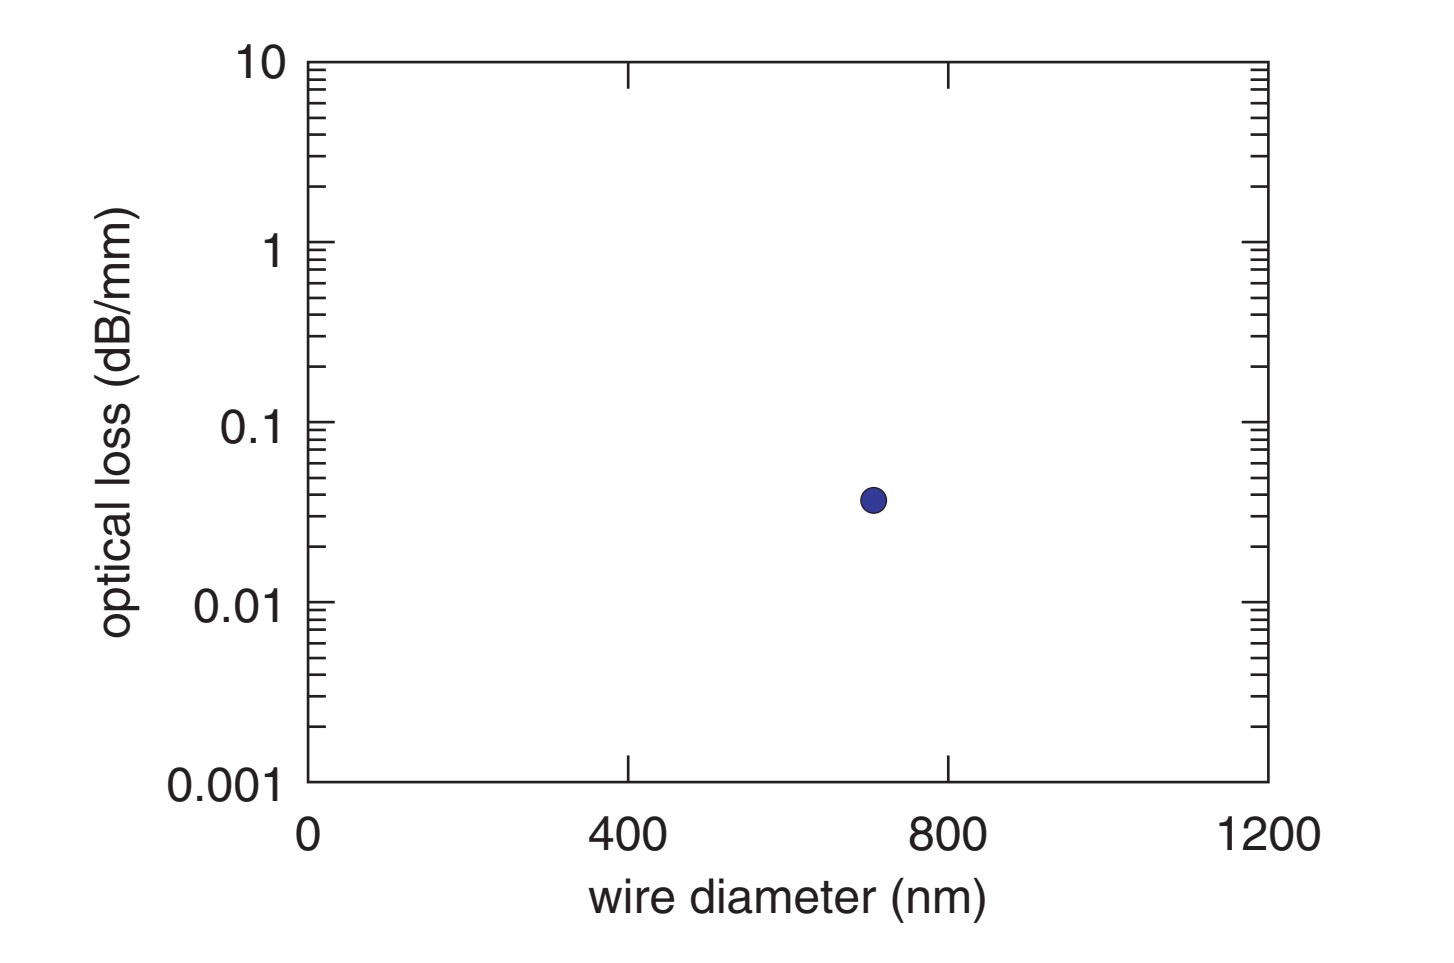

Nature, 426, 816 (2003)

Optical properties

loss measurement

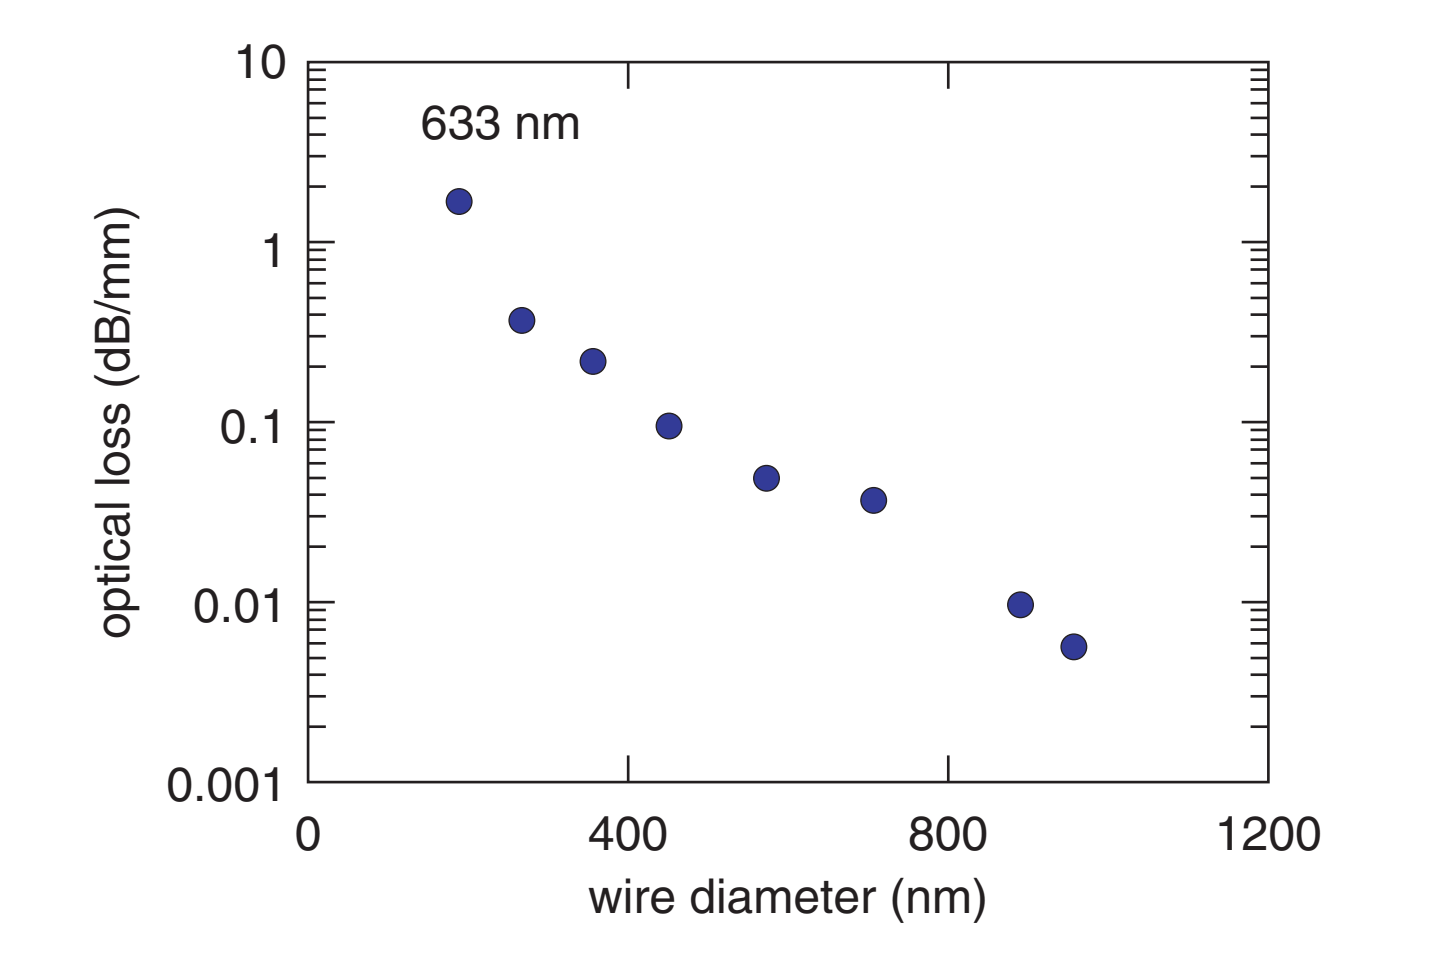

Nature, 426, 816 (2003)

Optical properties

loss measurement

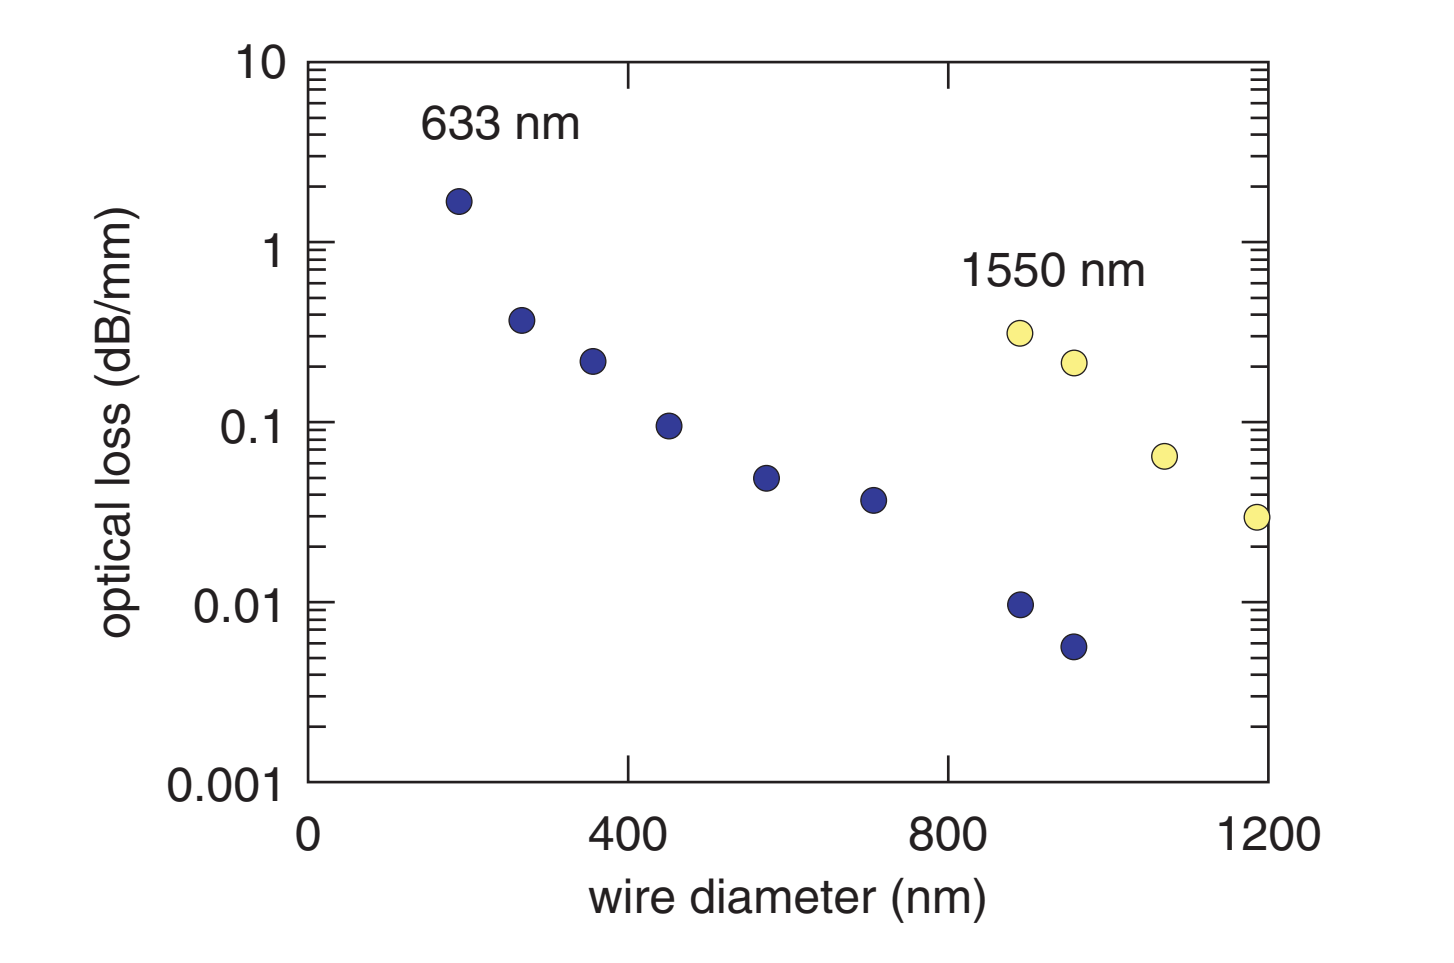

Nature, 426, 816 (2003)

Optical properties

loss at single-mode diameter < 0.1 dB/mm

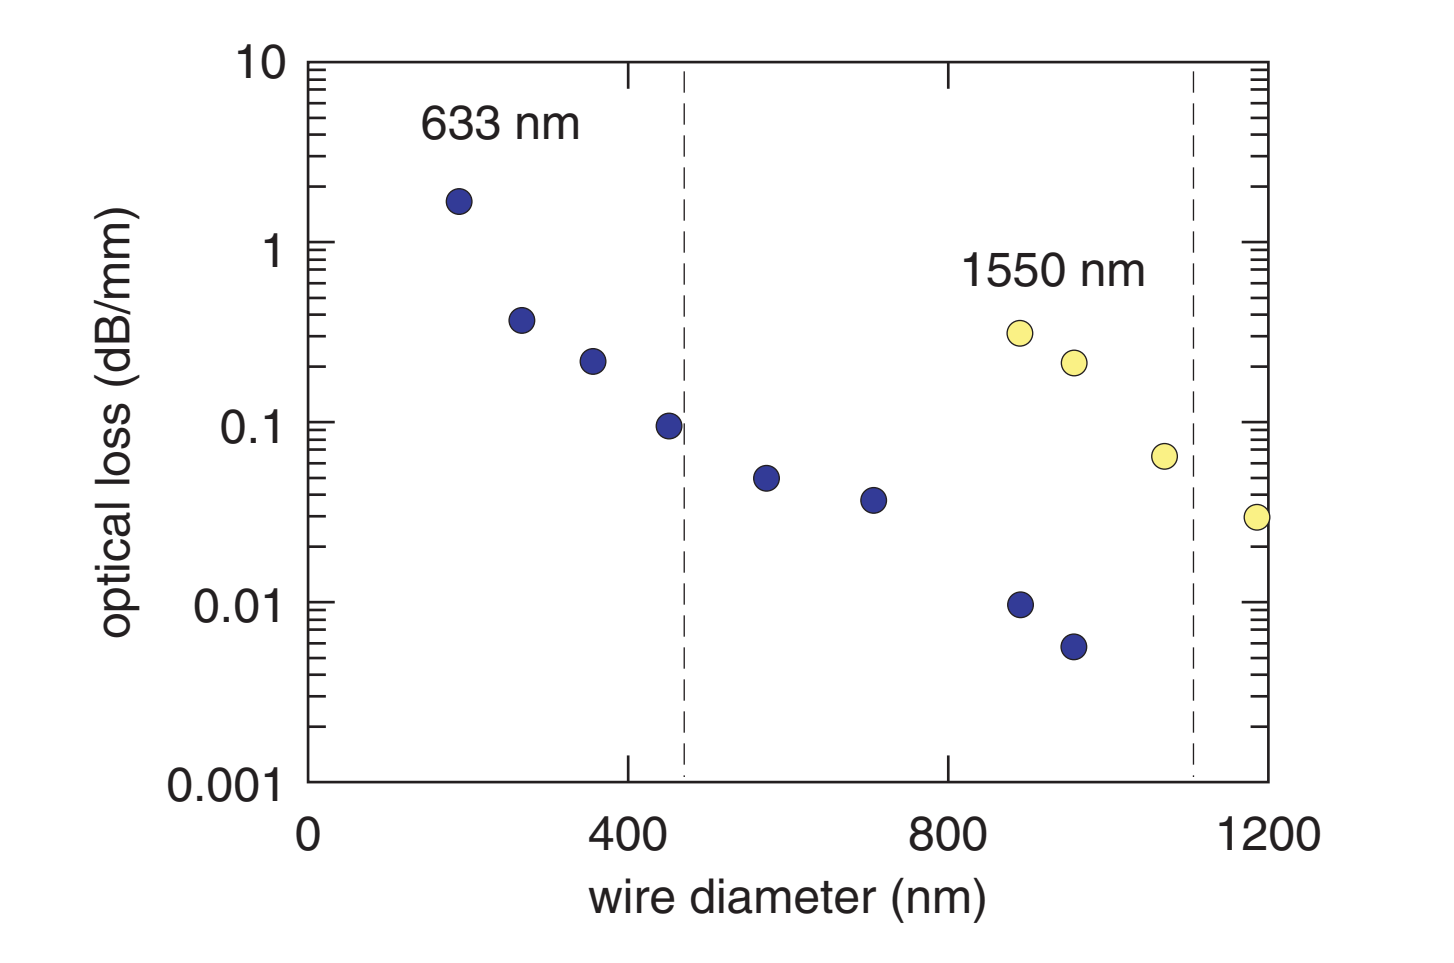

Nature, 426, 816 (2003)

Optical properties

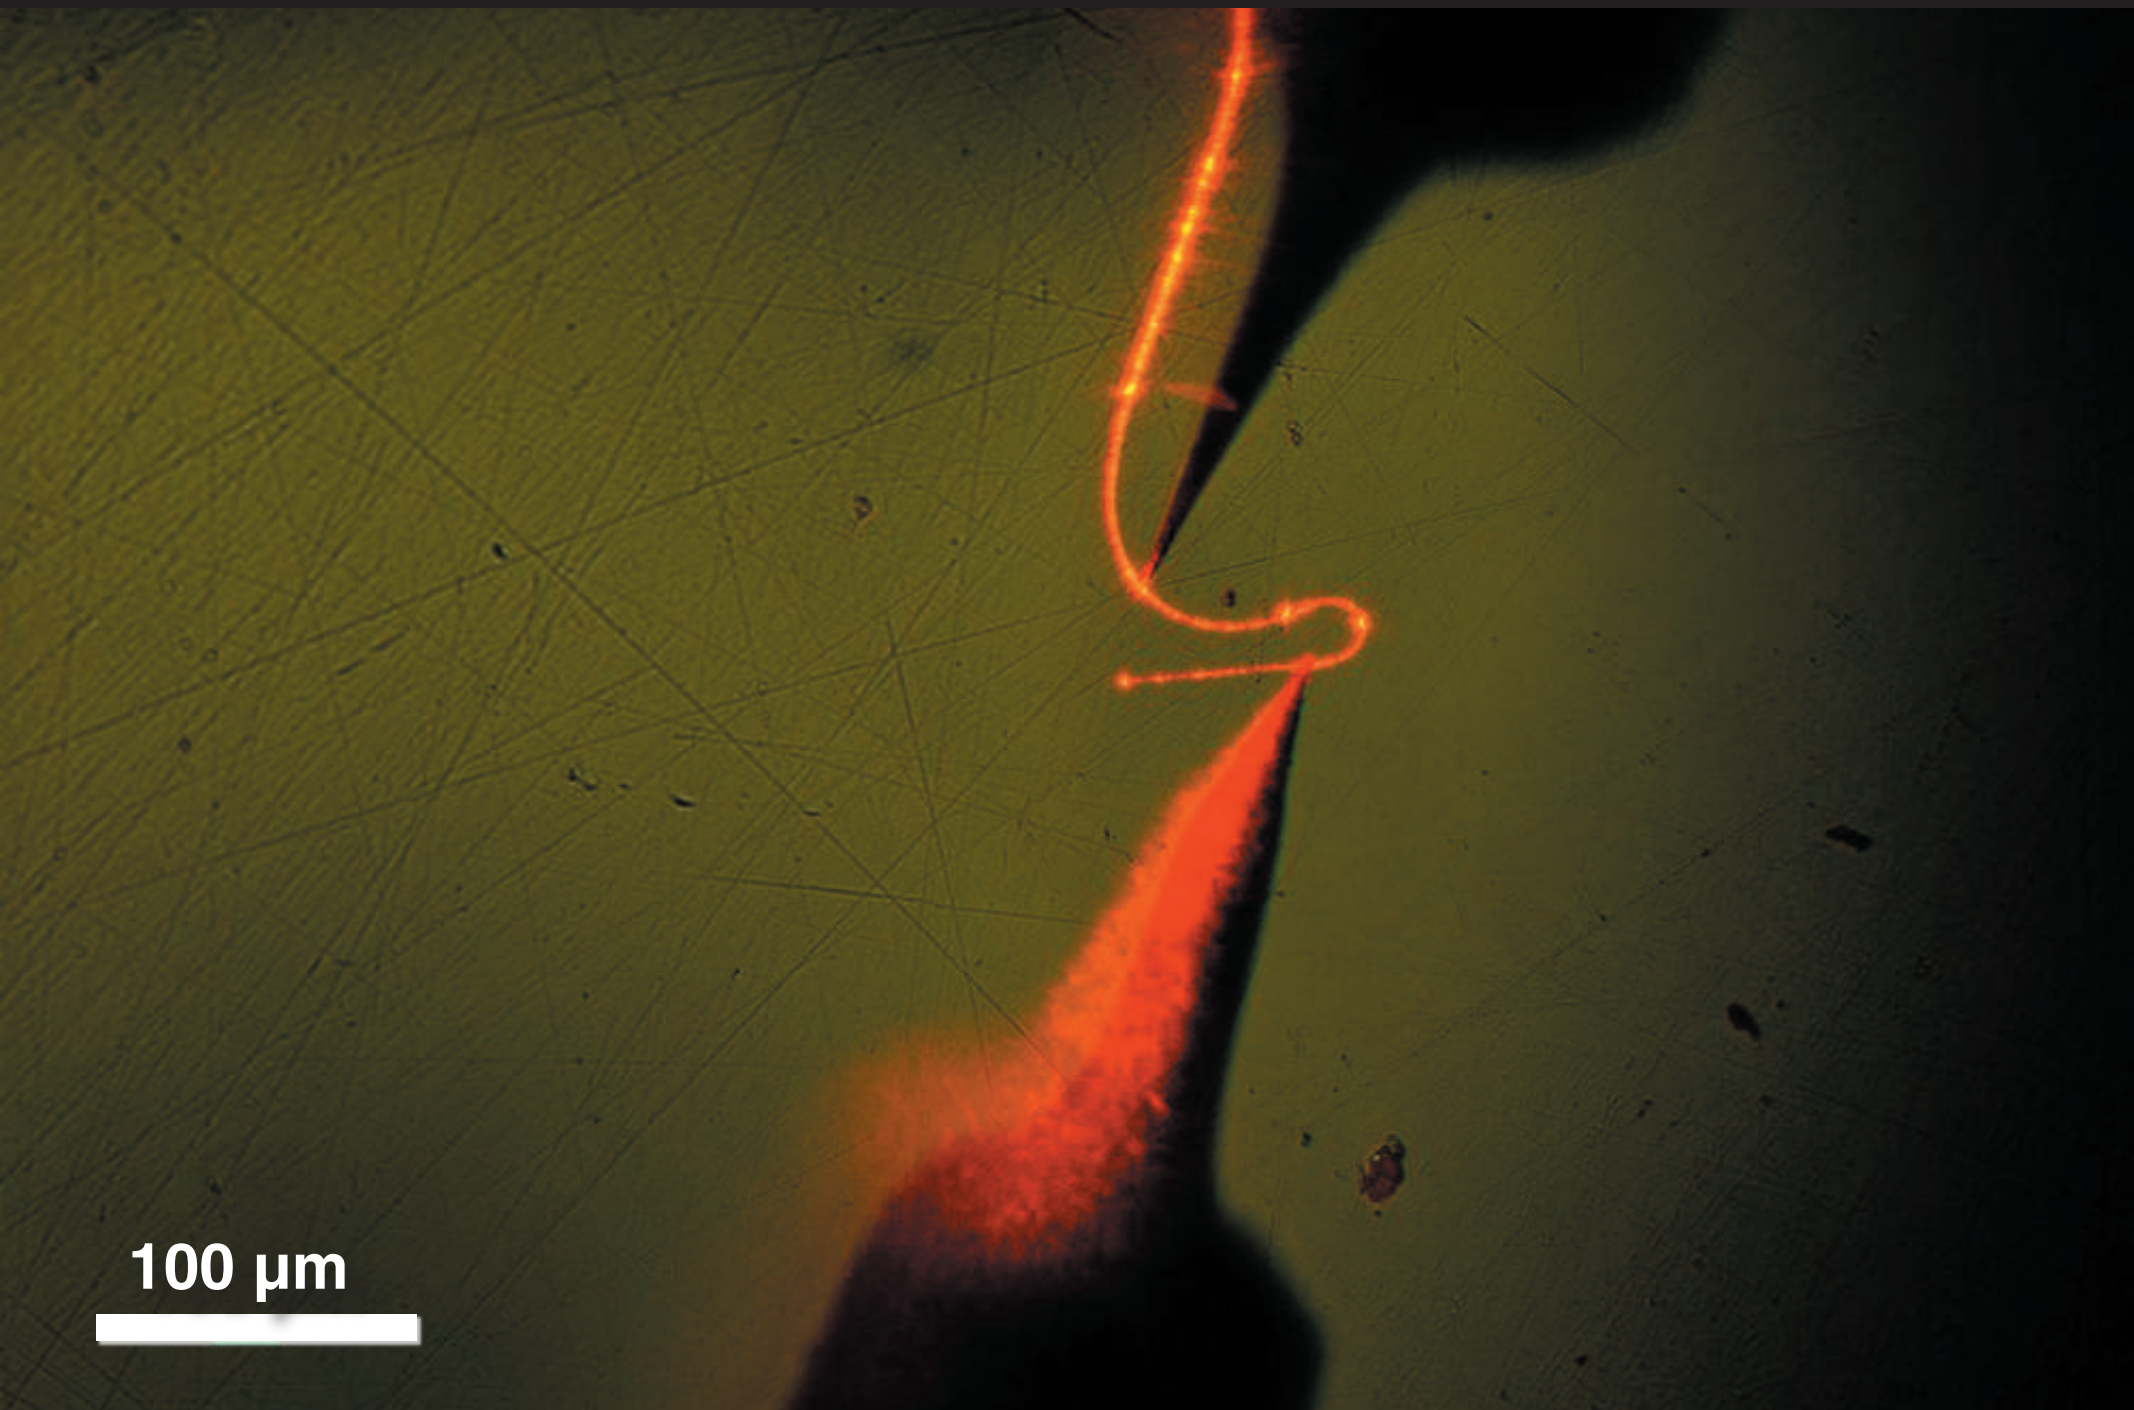

Optical properties

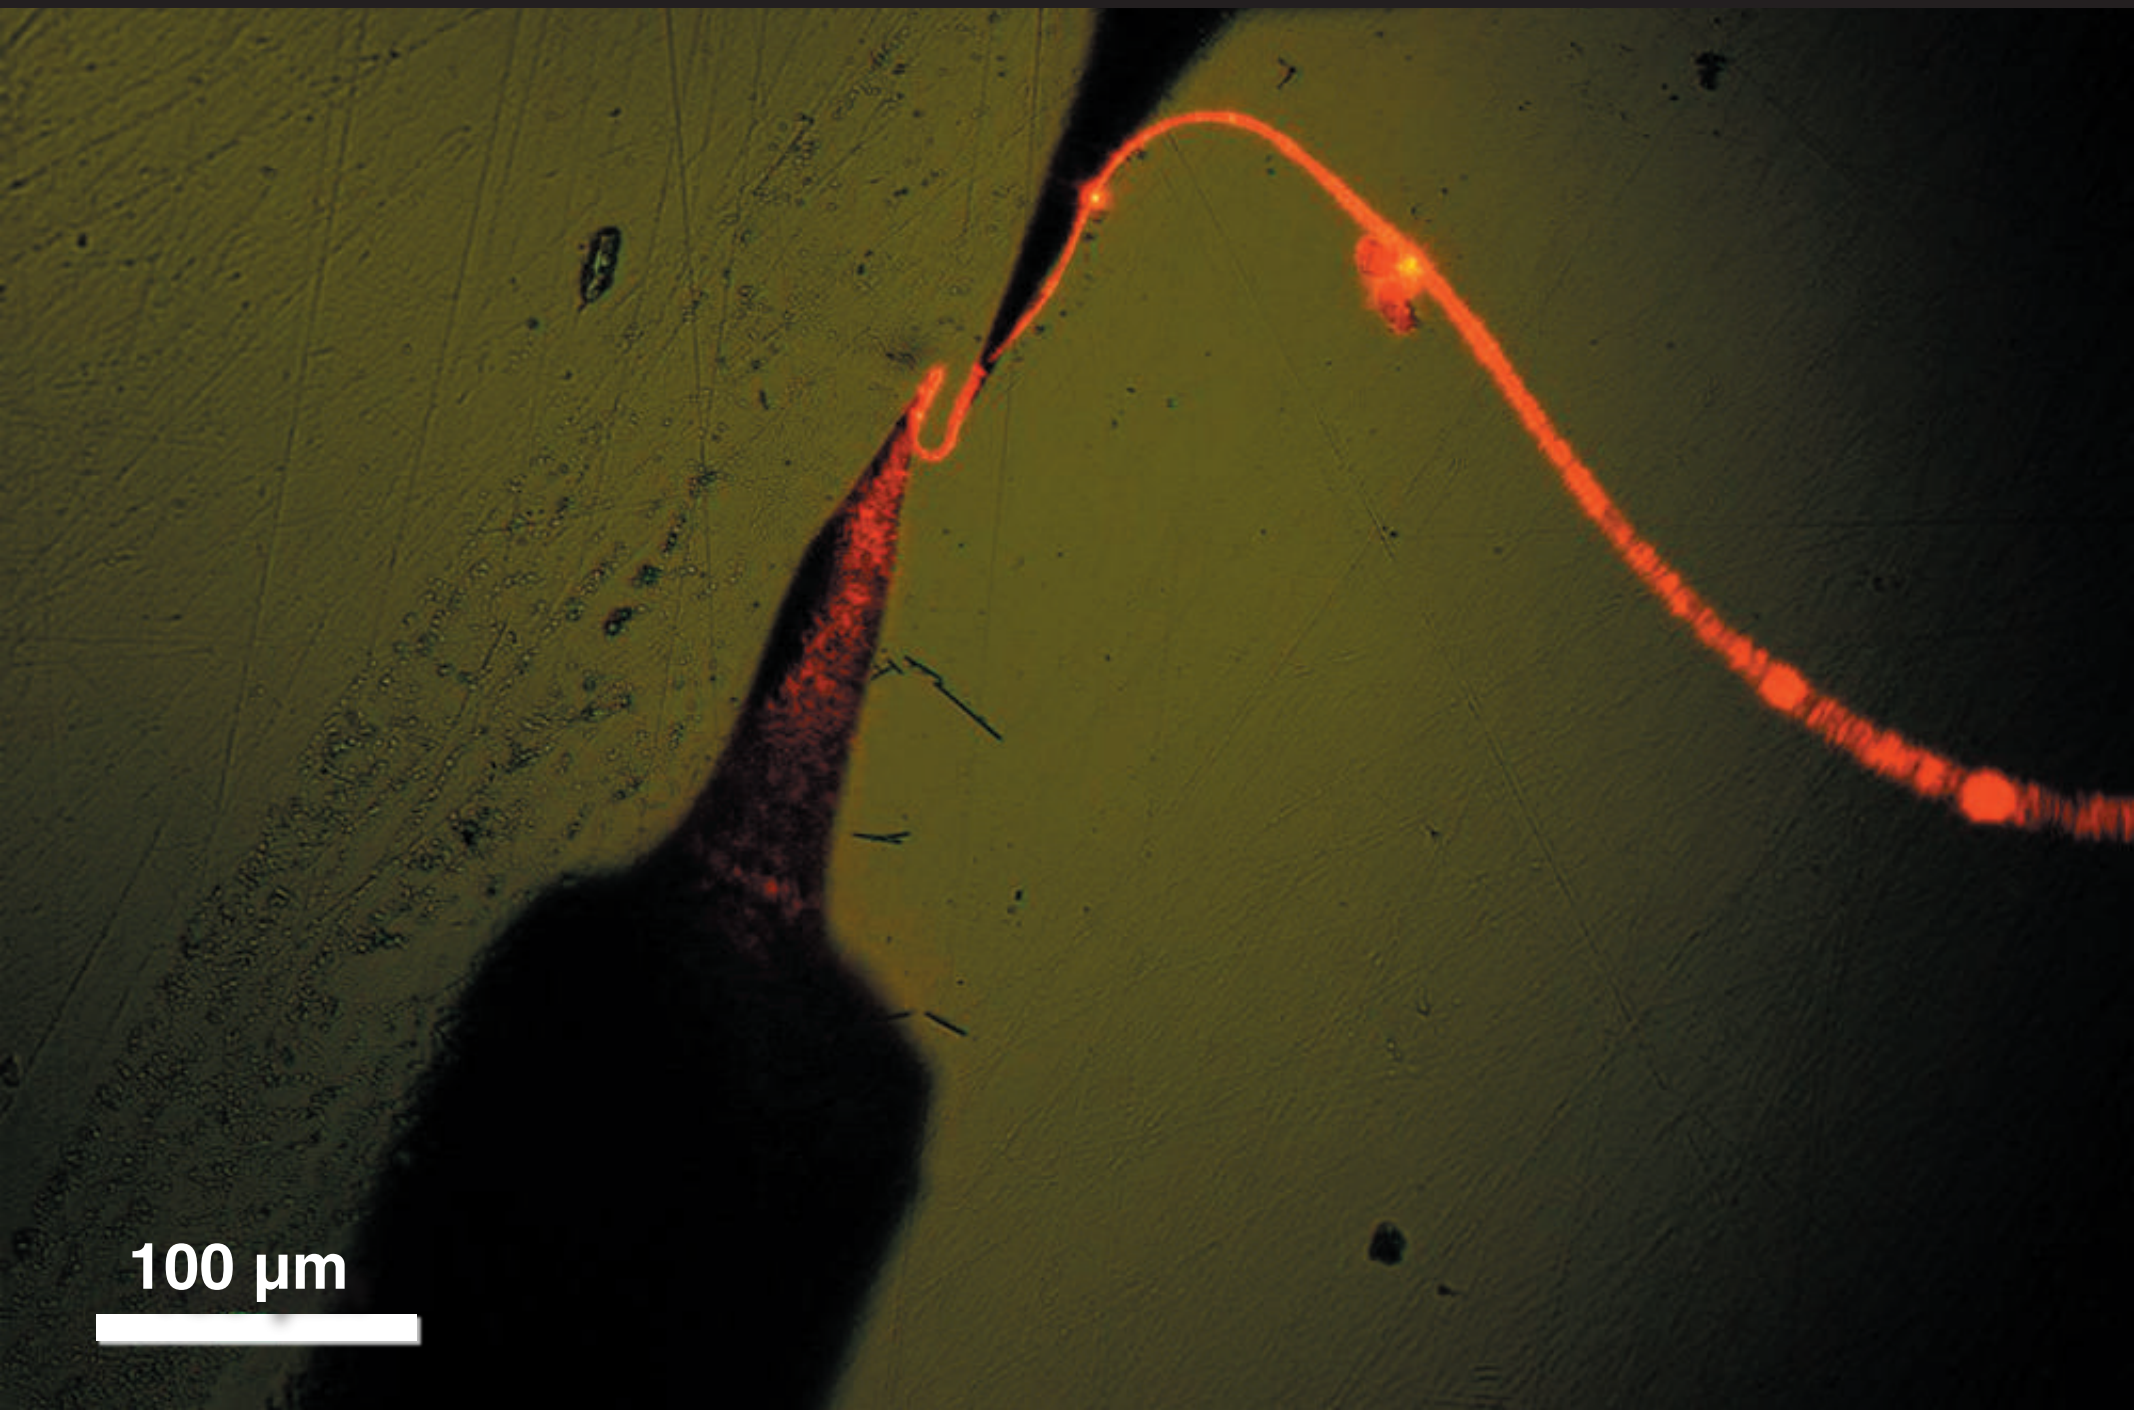

Optical properties

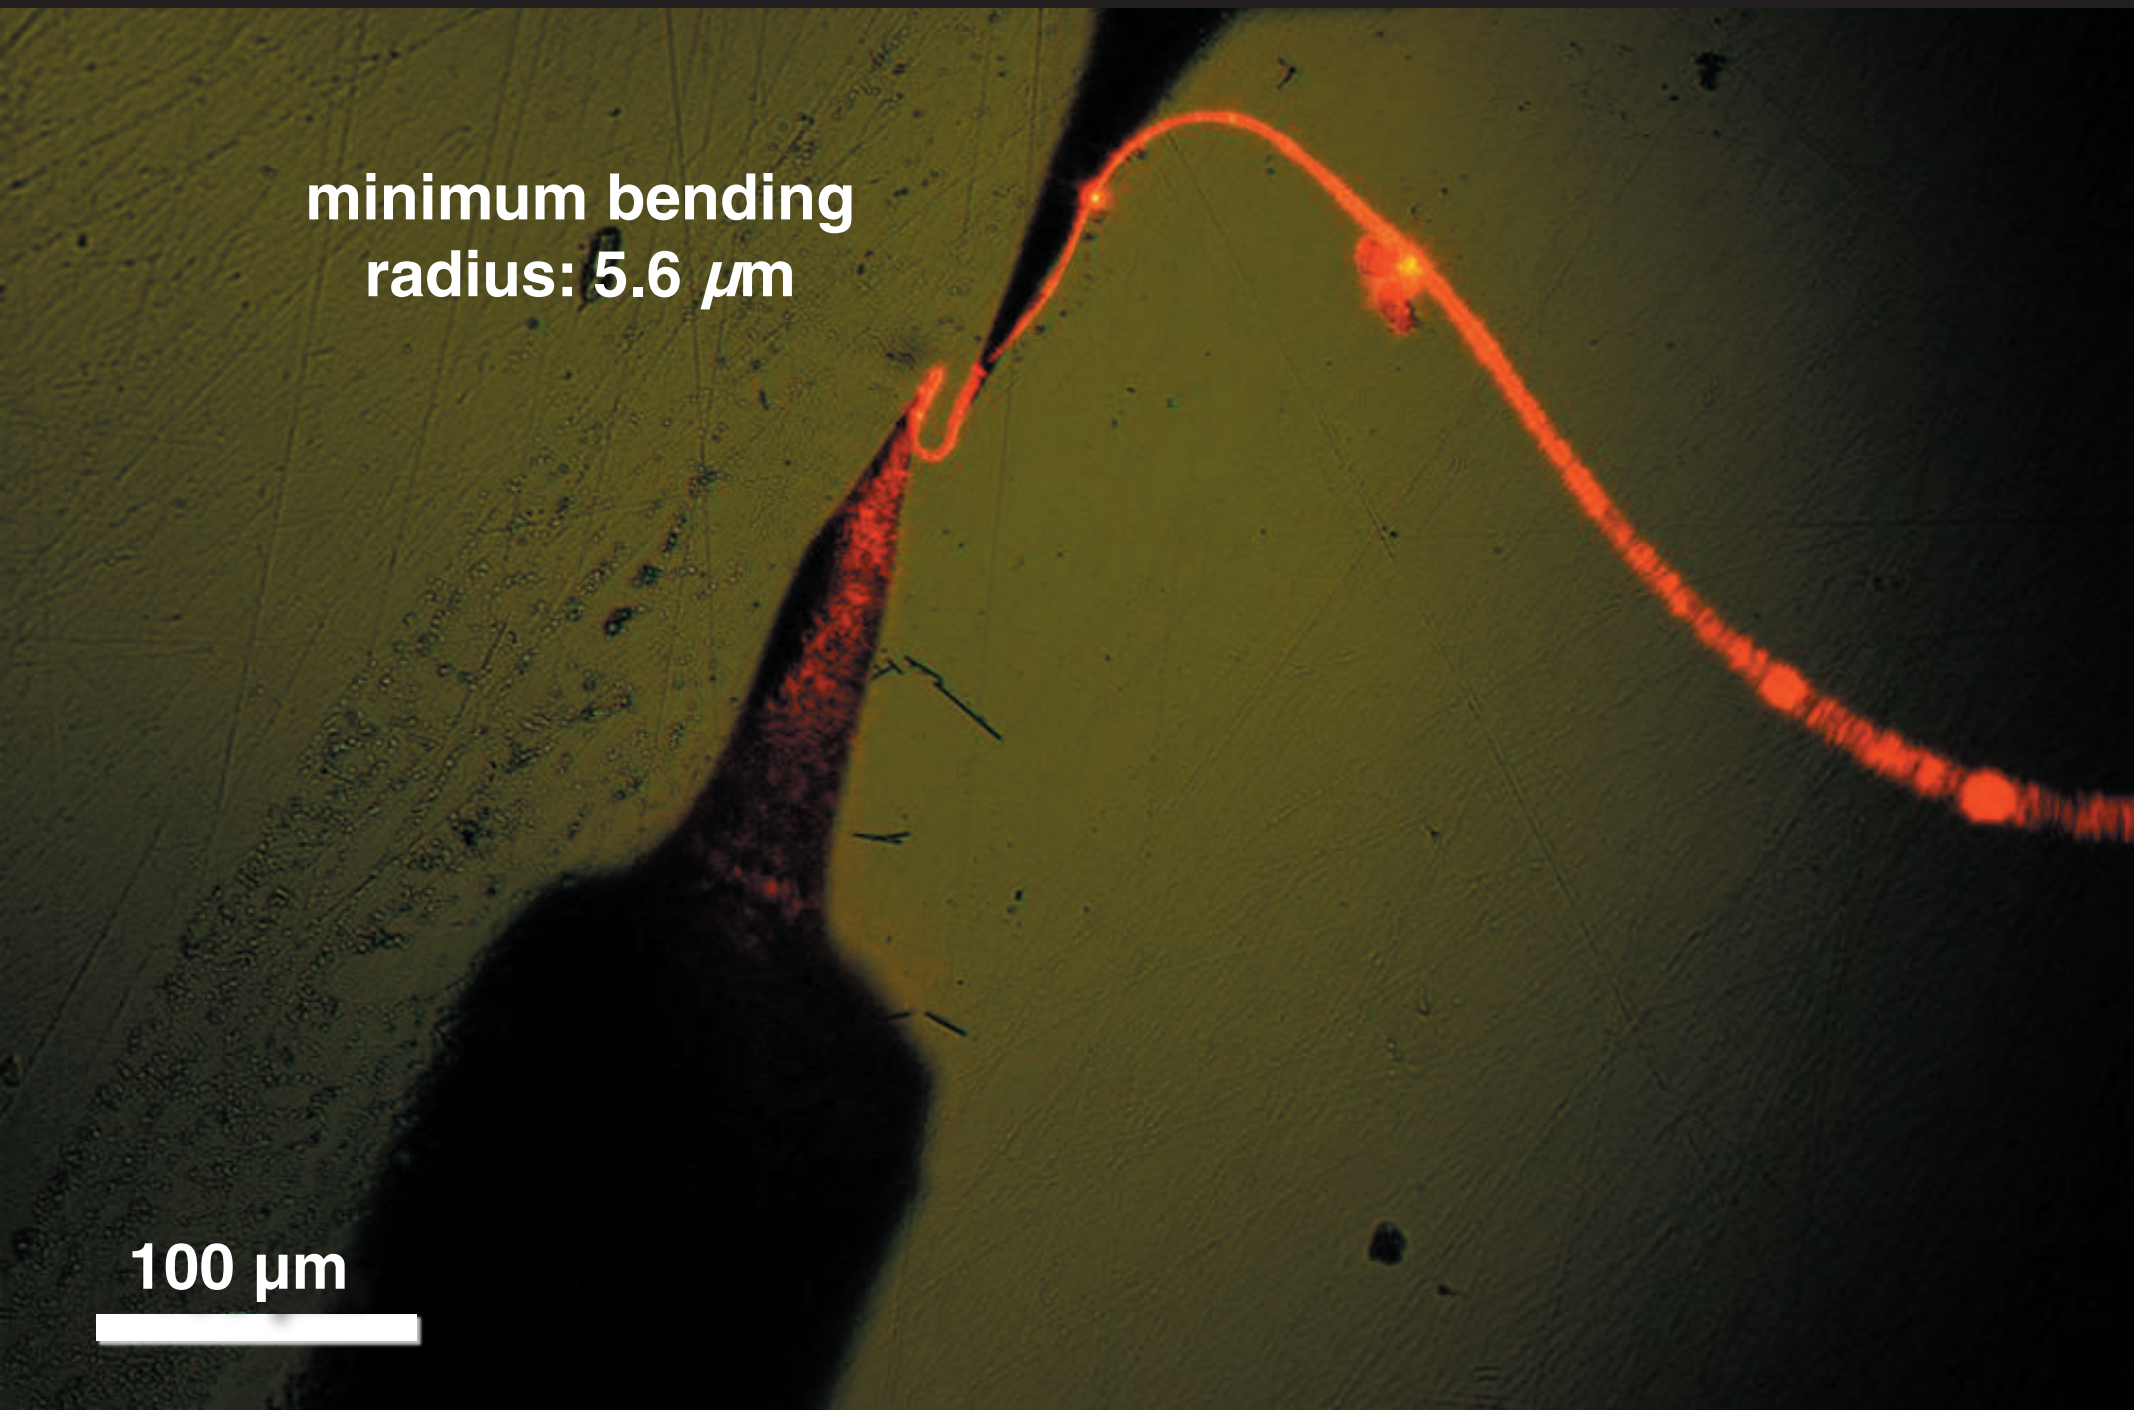

Optical properties

virtually no loss through 5 μm corner!

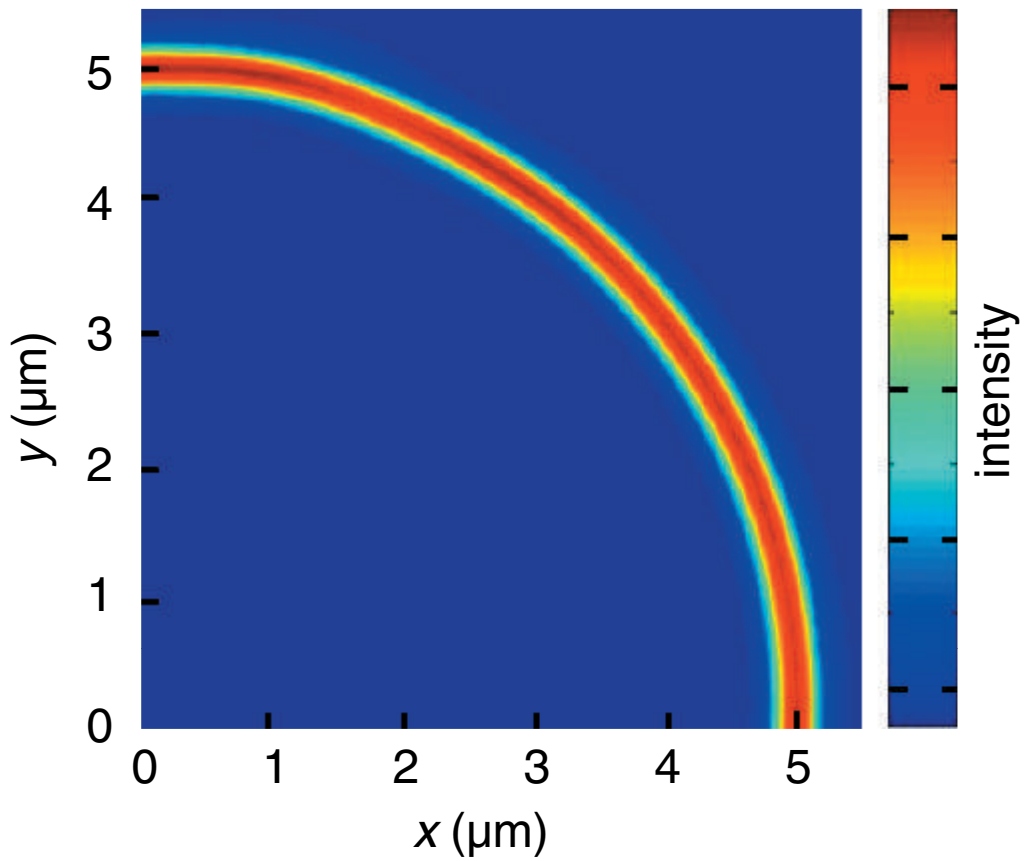

Summary

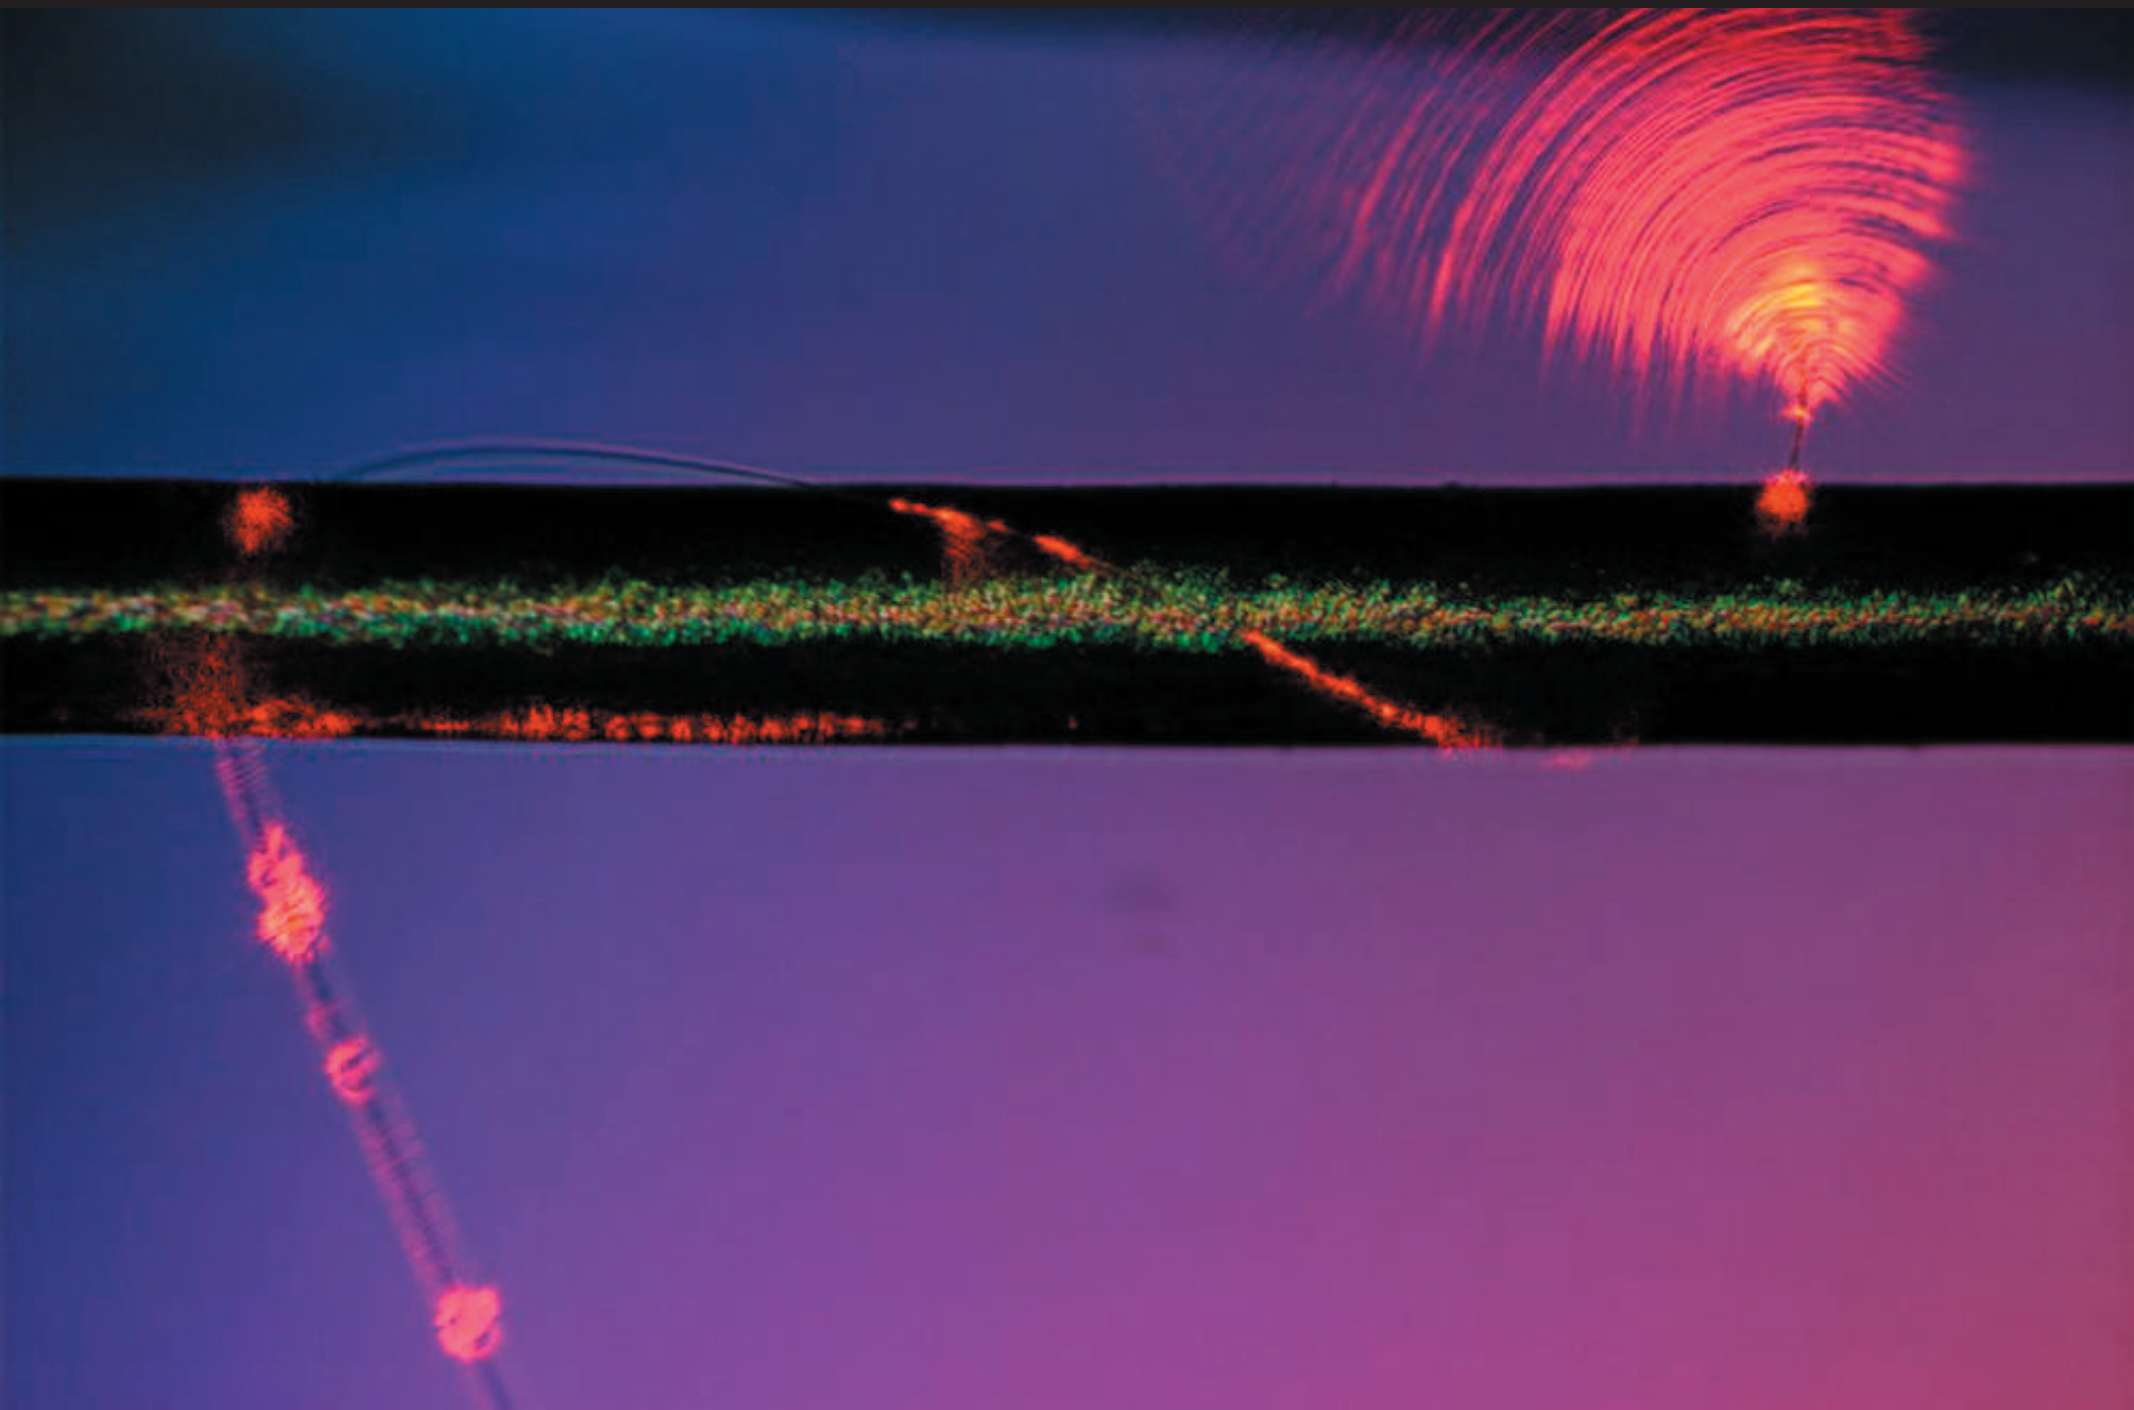

Summary

- strong confinement
- very tight bending
- large evanescent wave

Outlook

microphotonic components

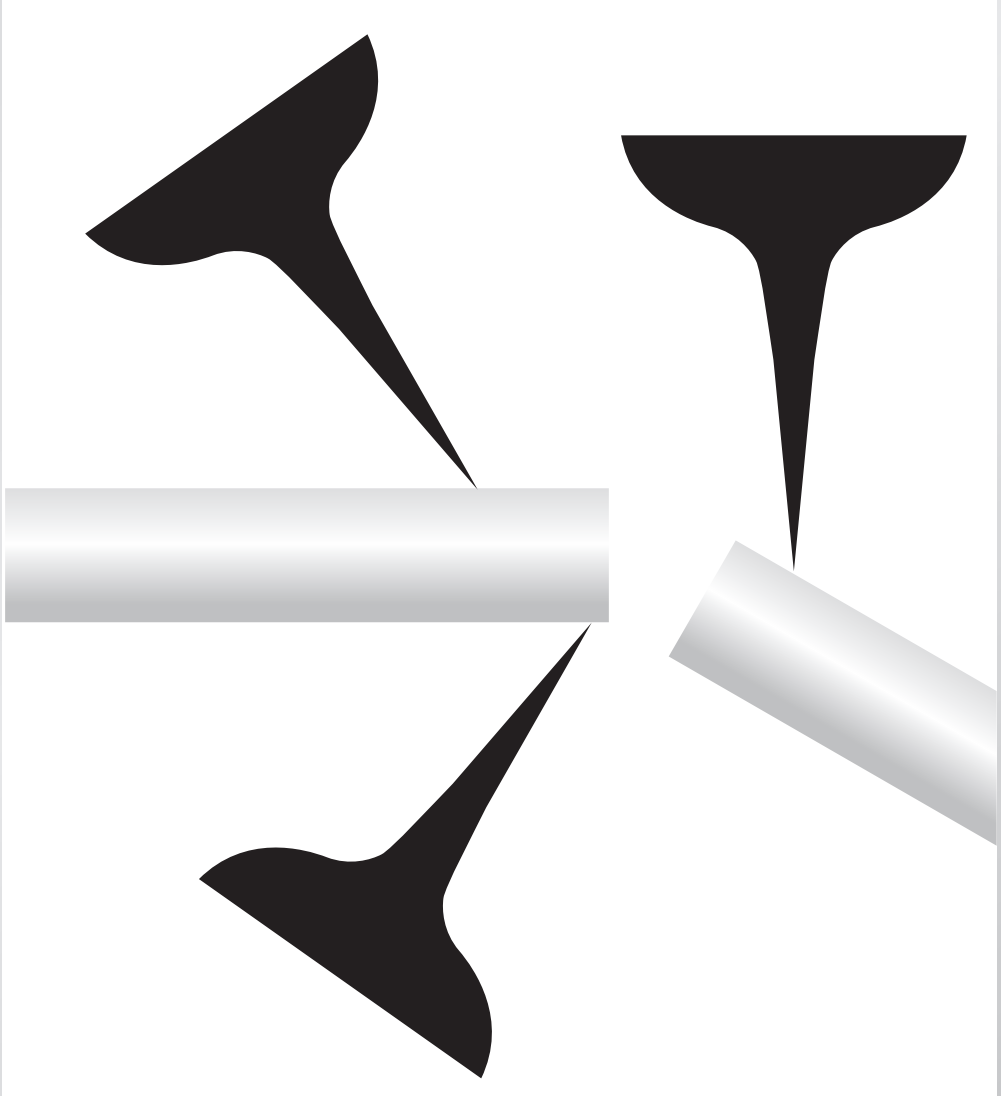

Outlook

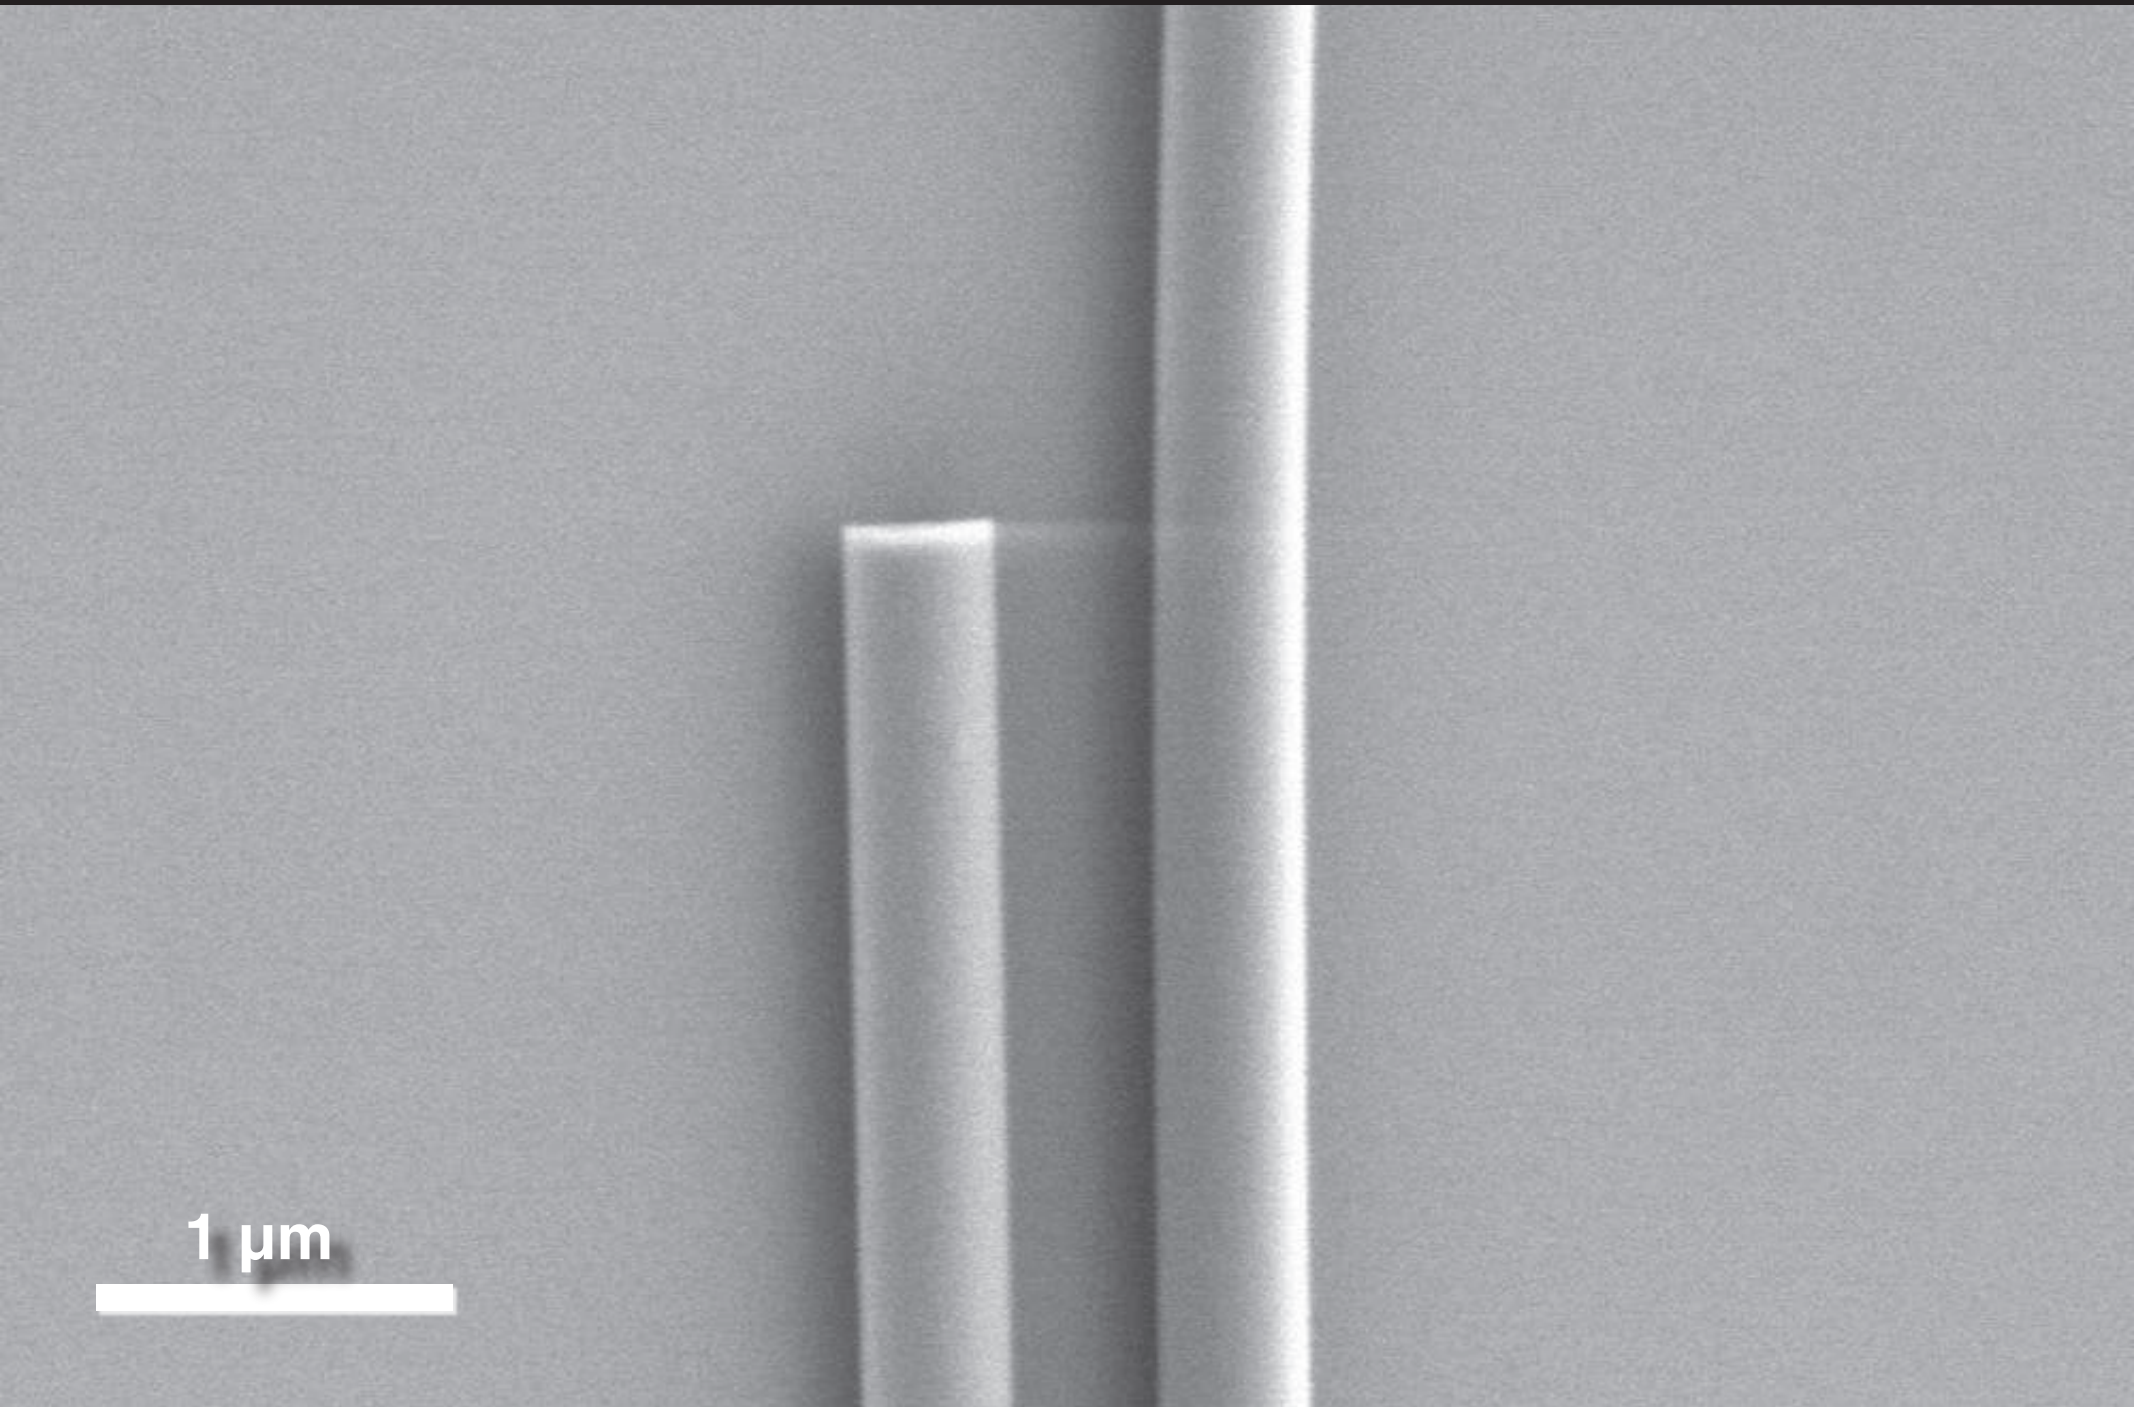

Outlook

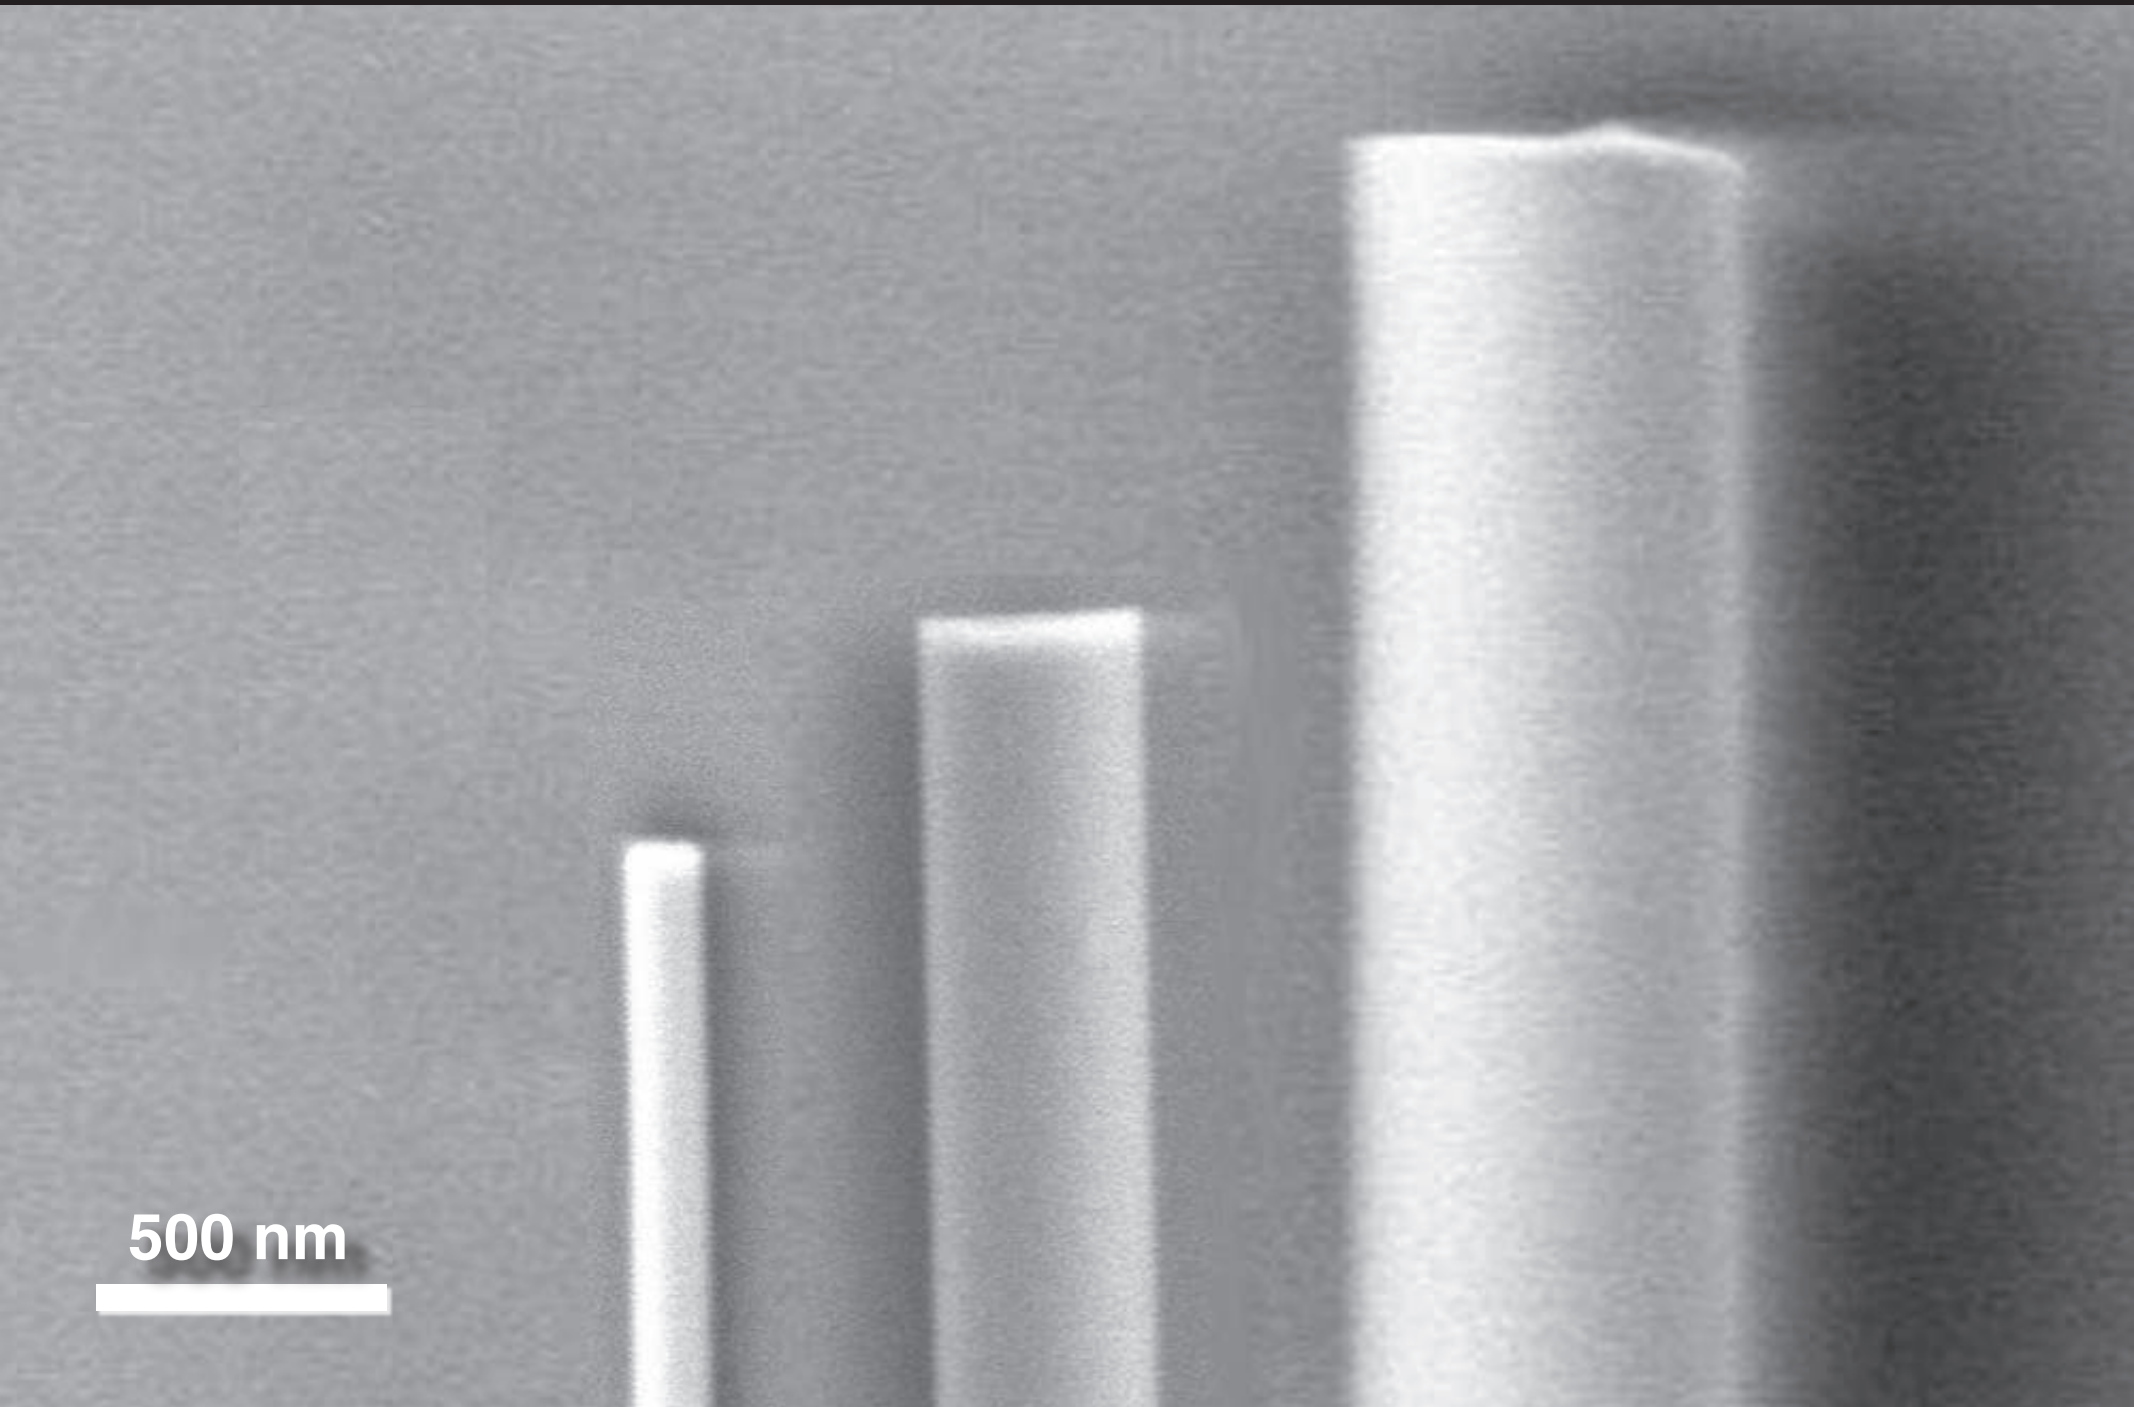

Outlook

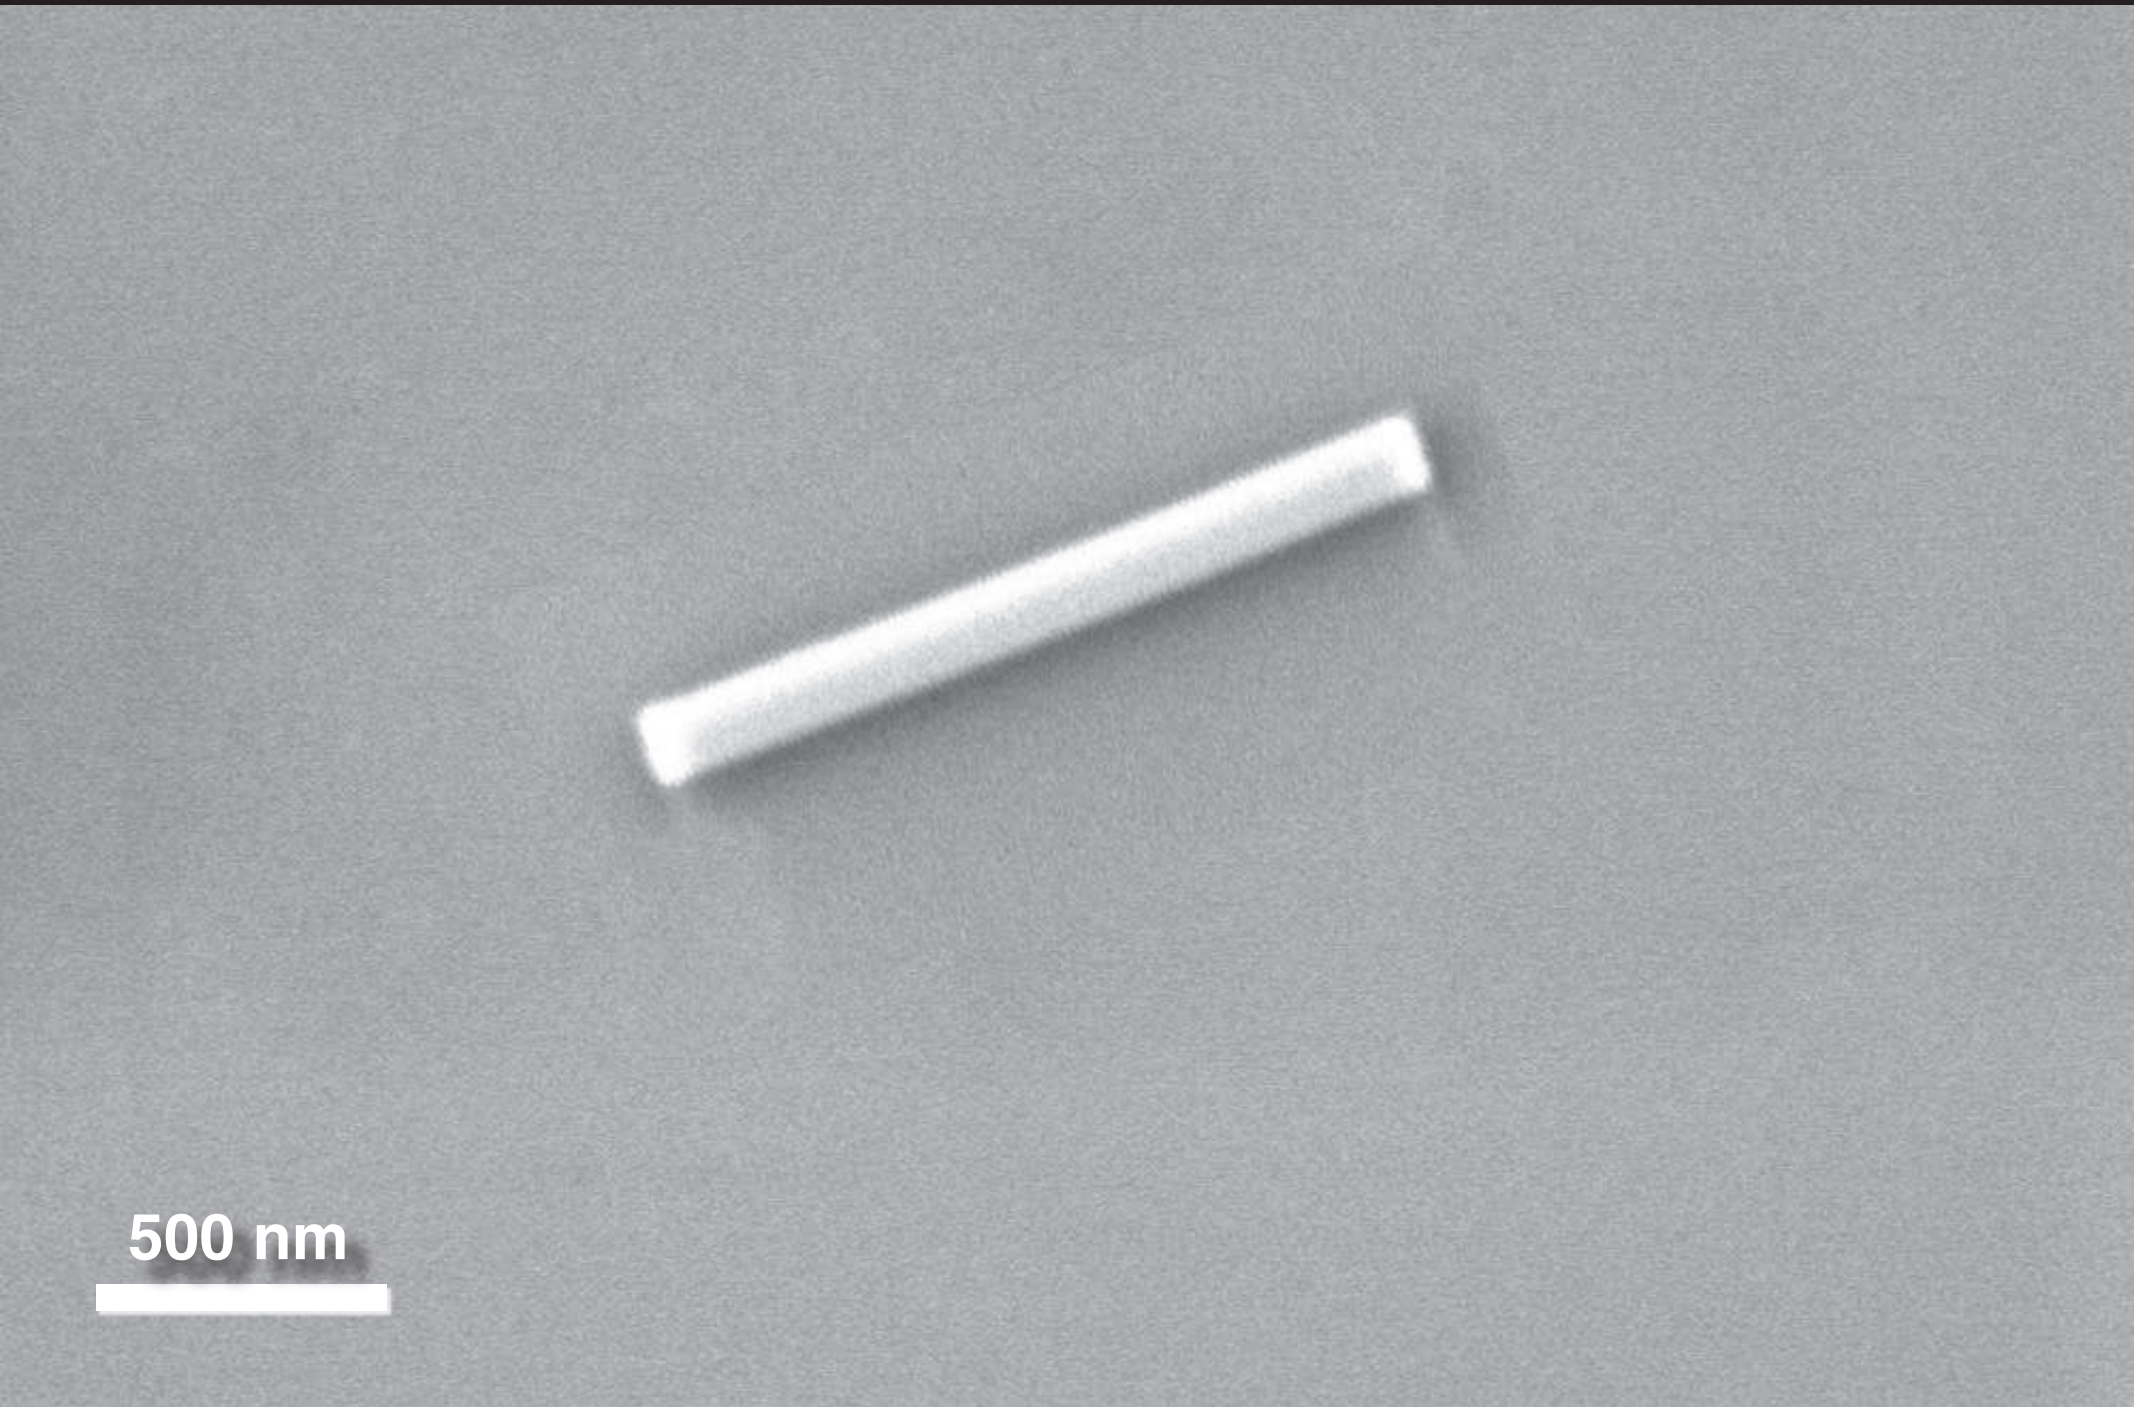

Outlook

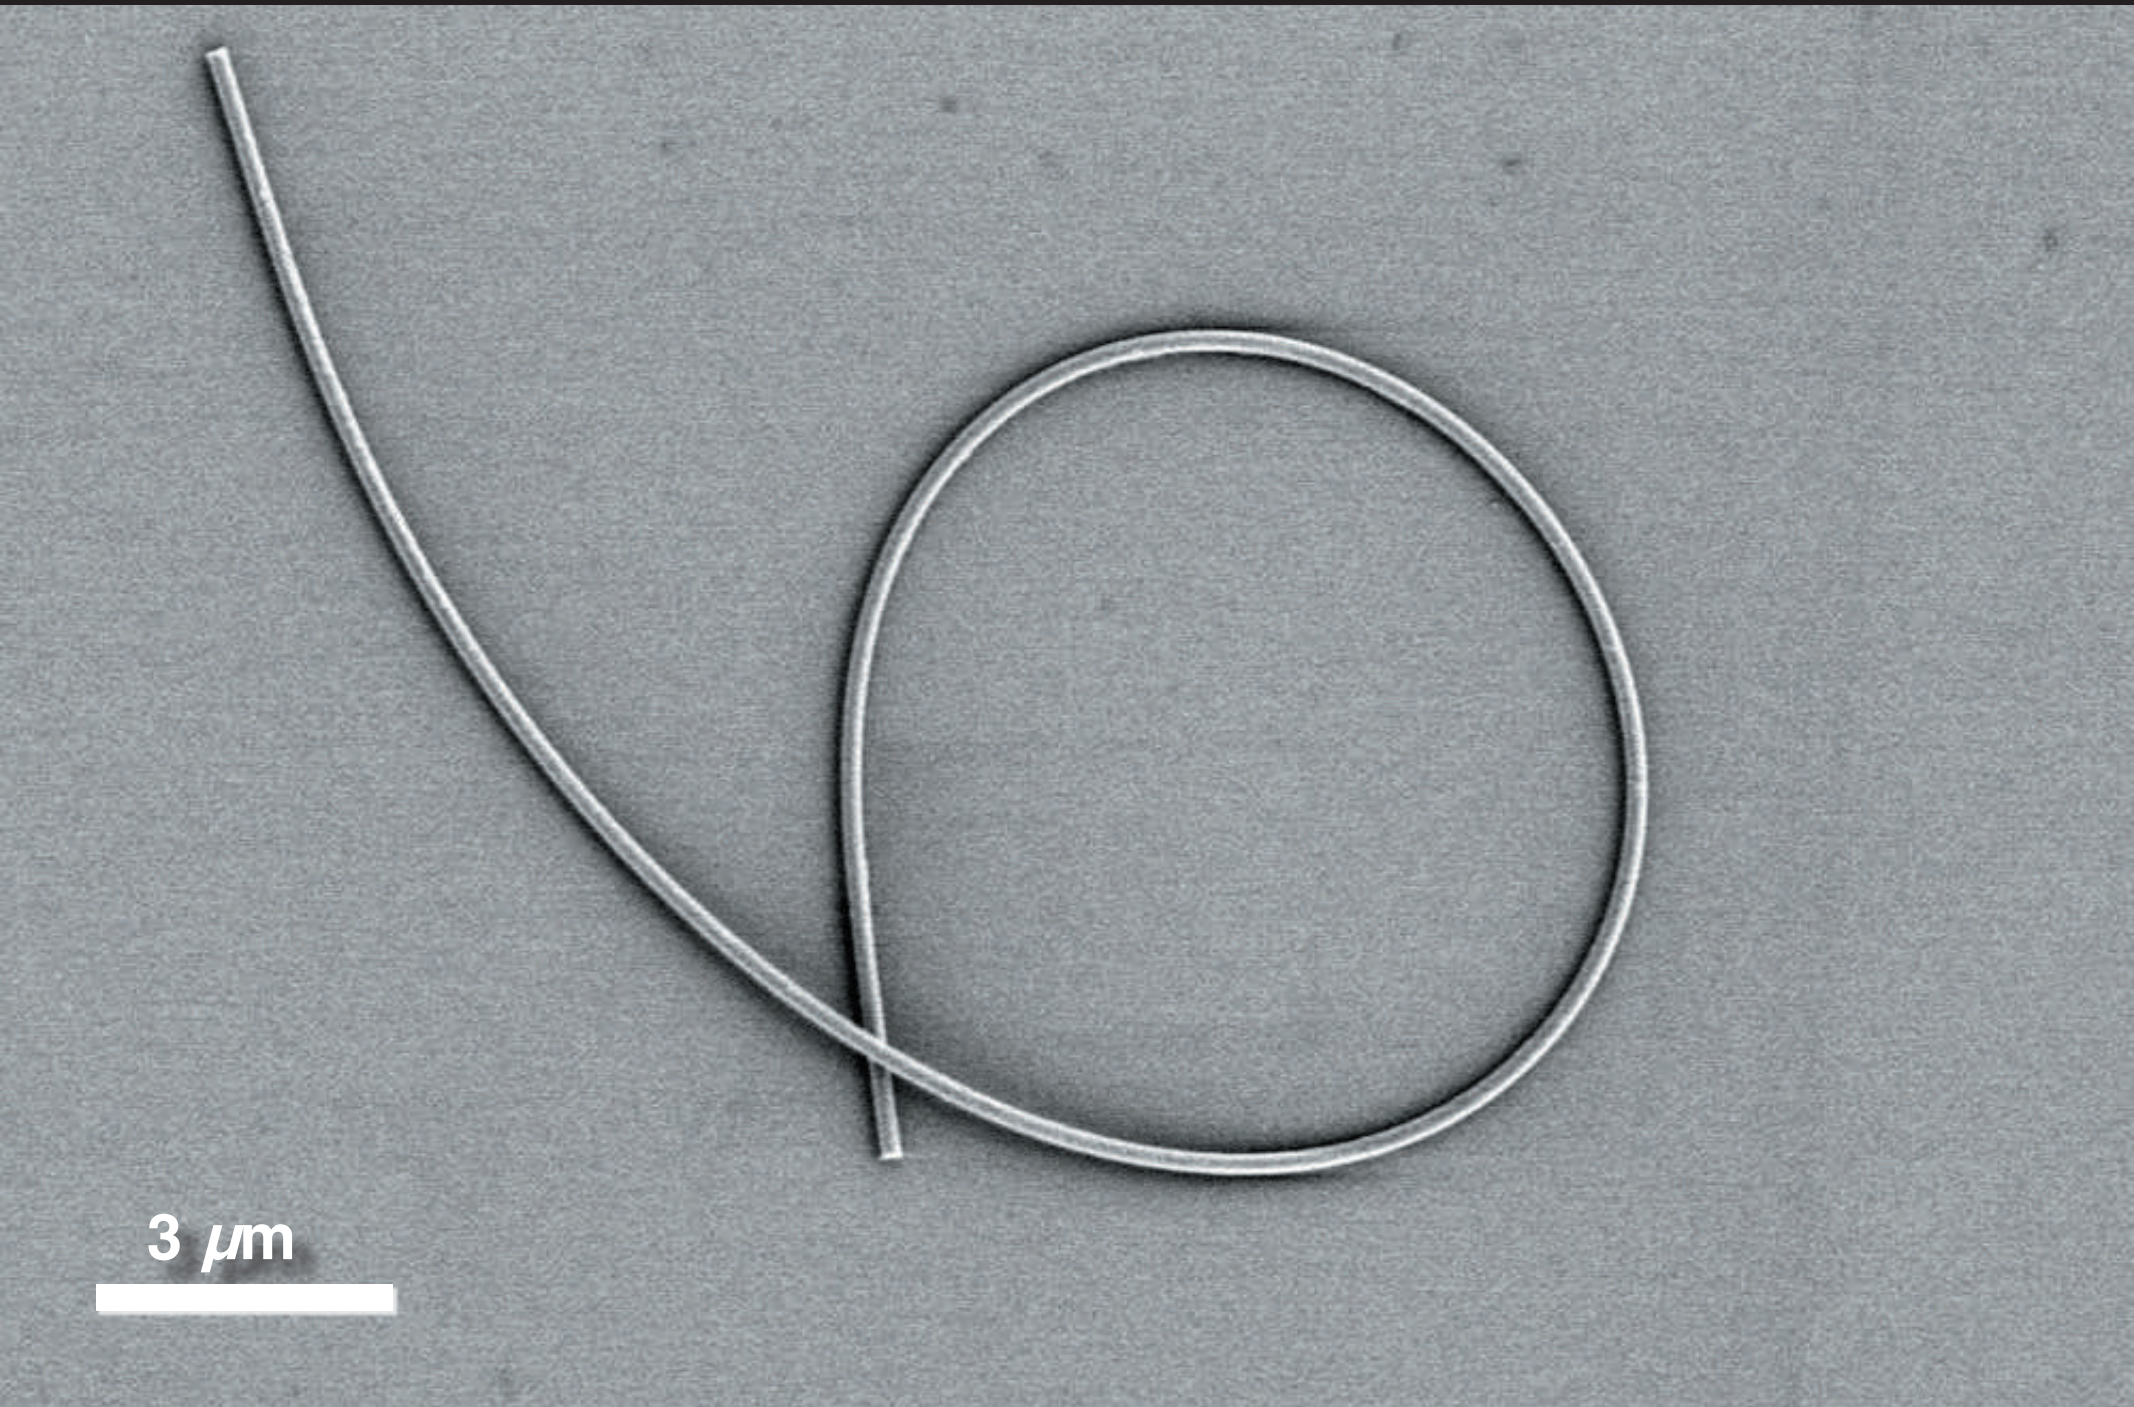

Outlook

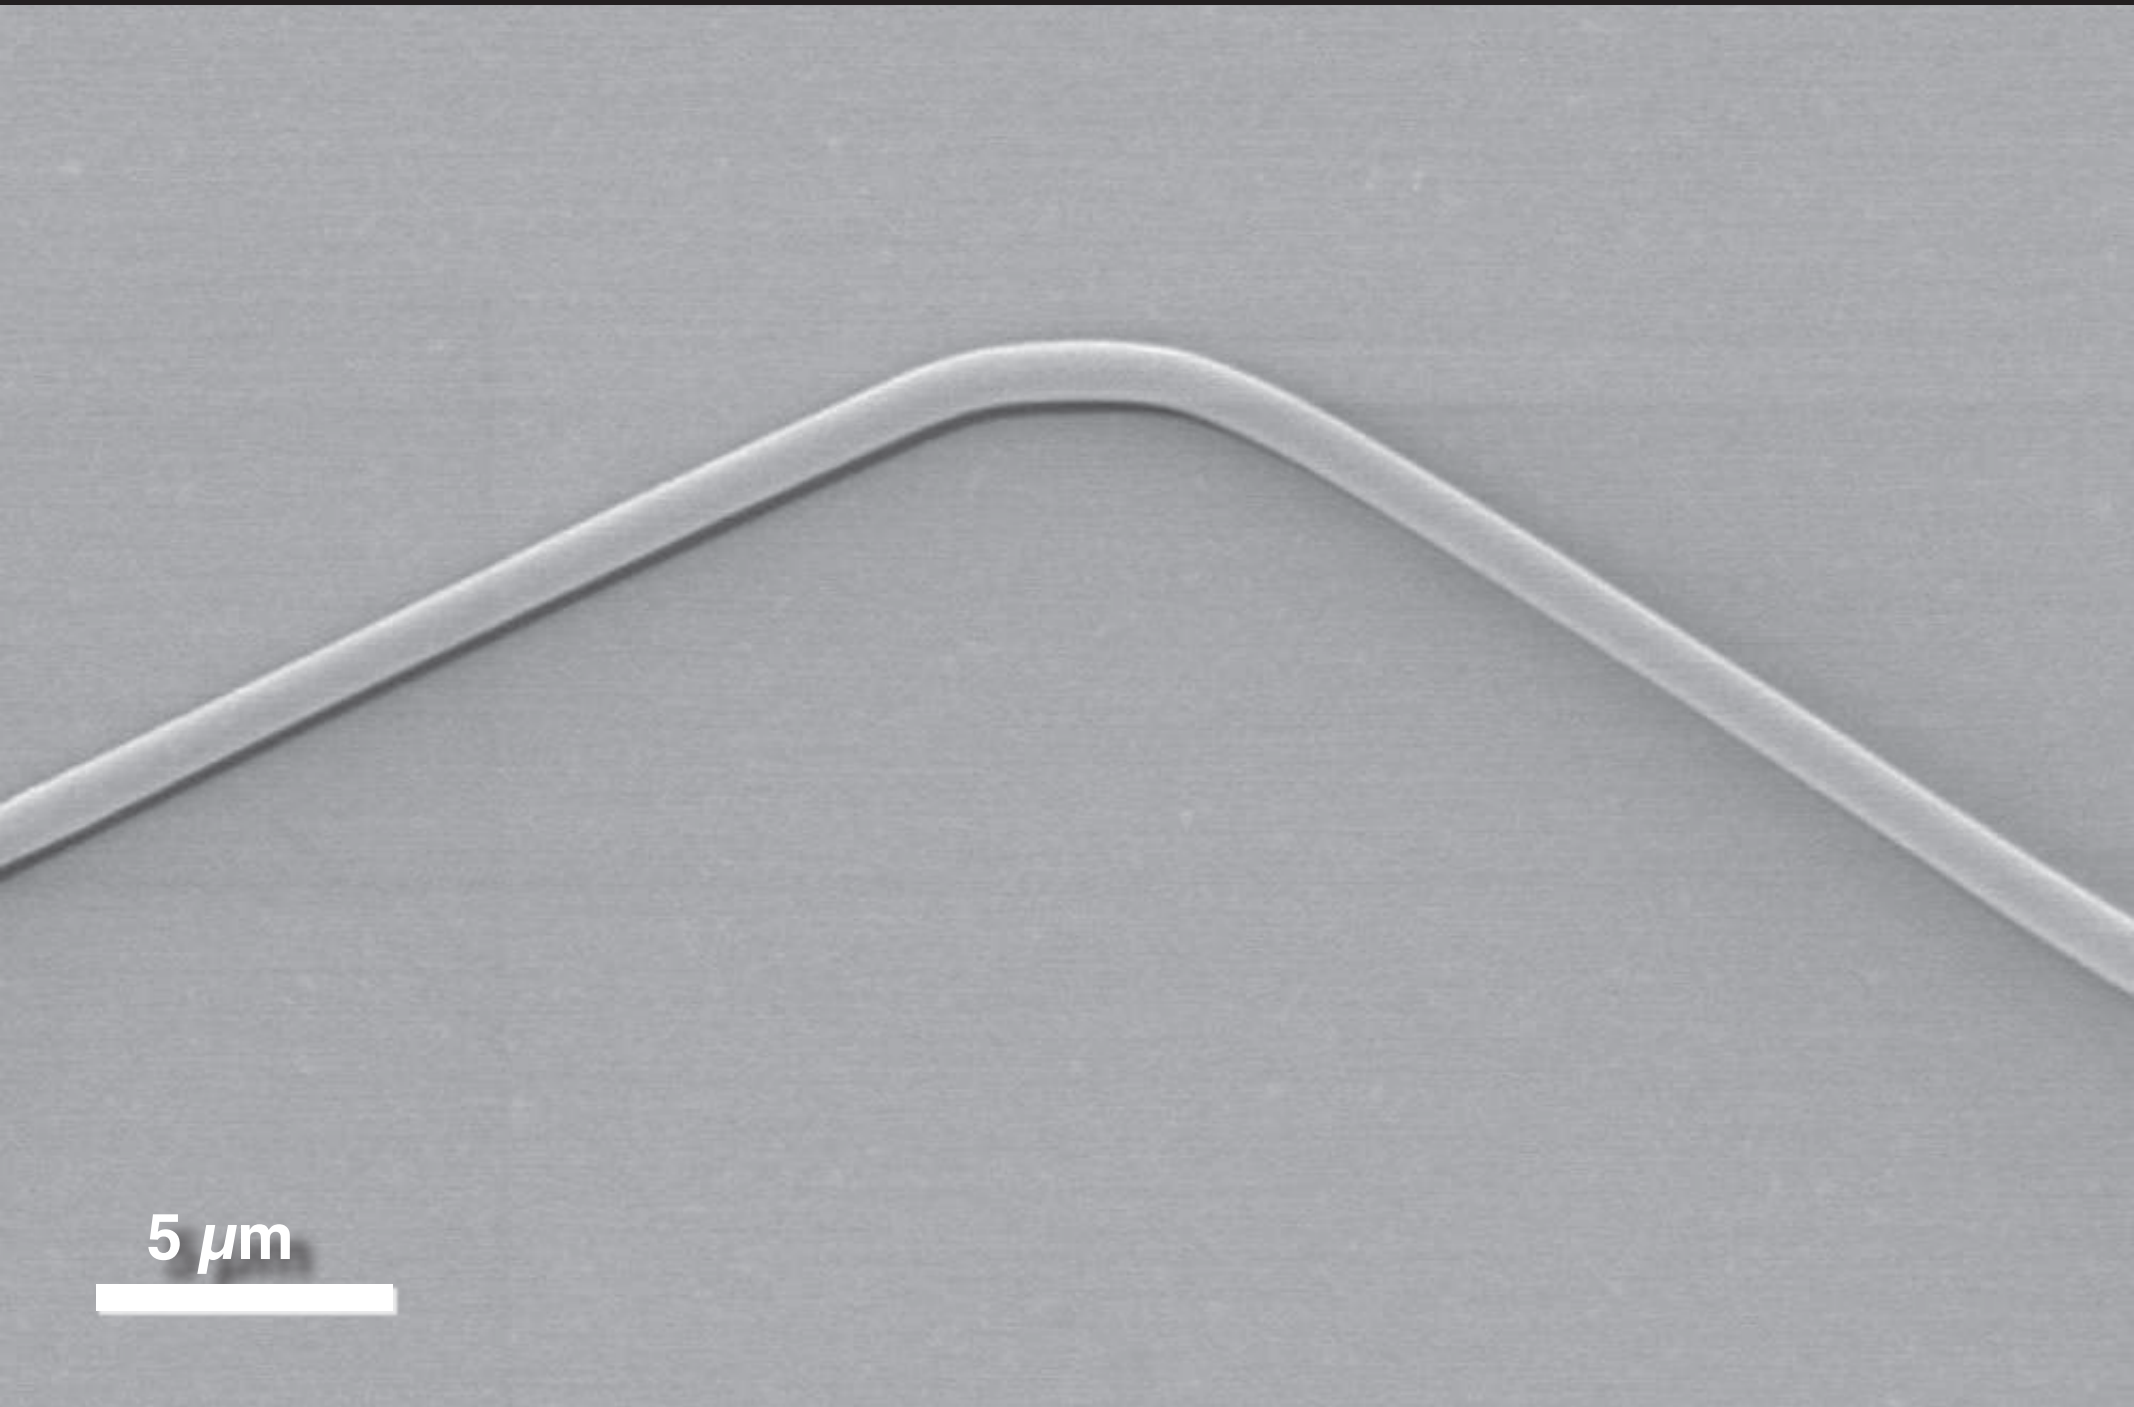

Outlook

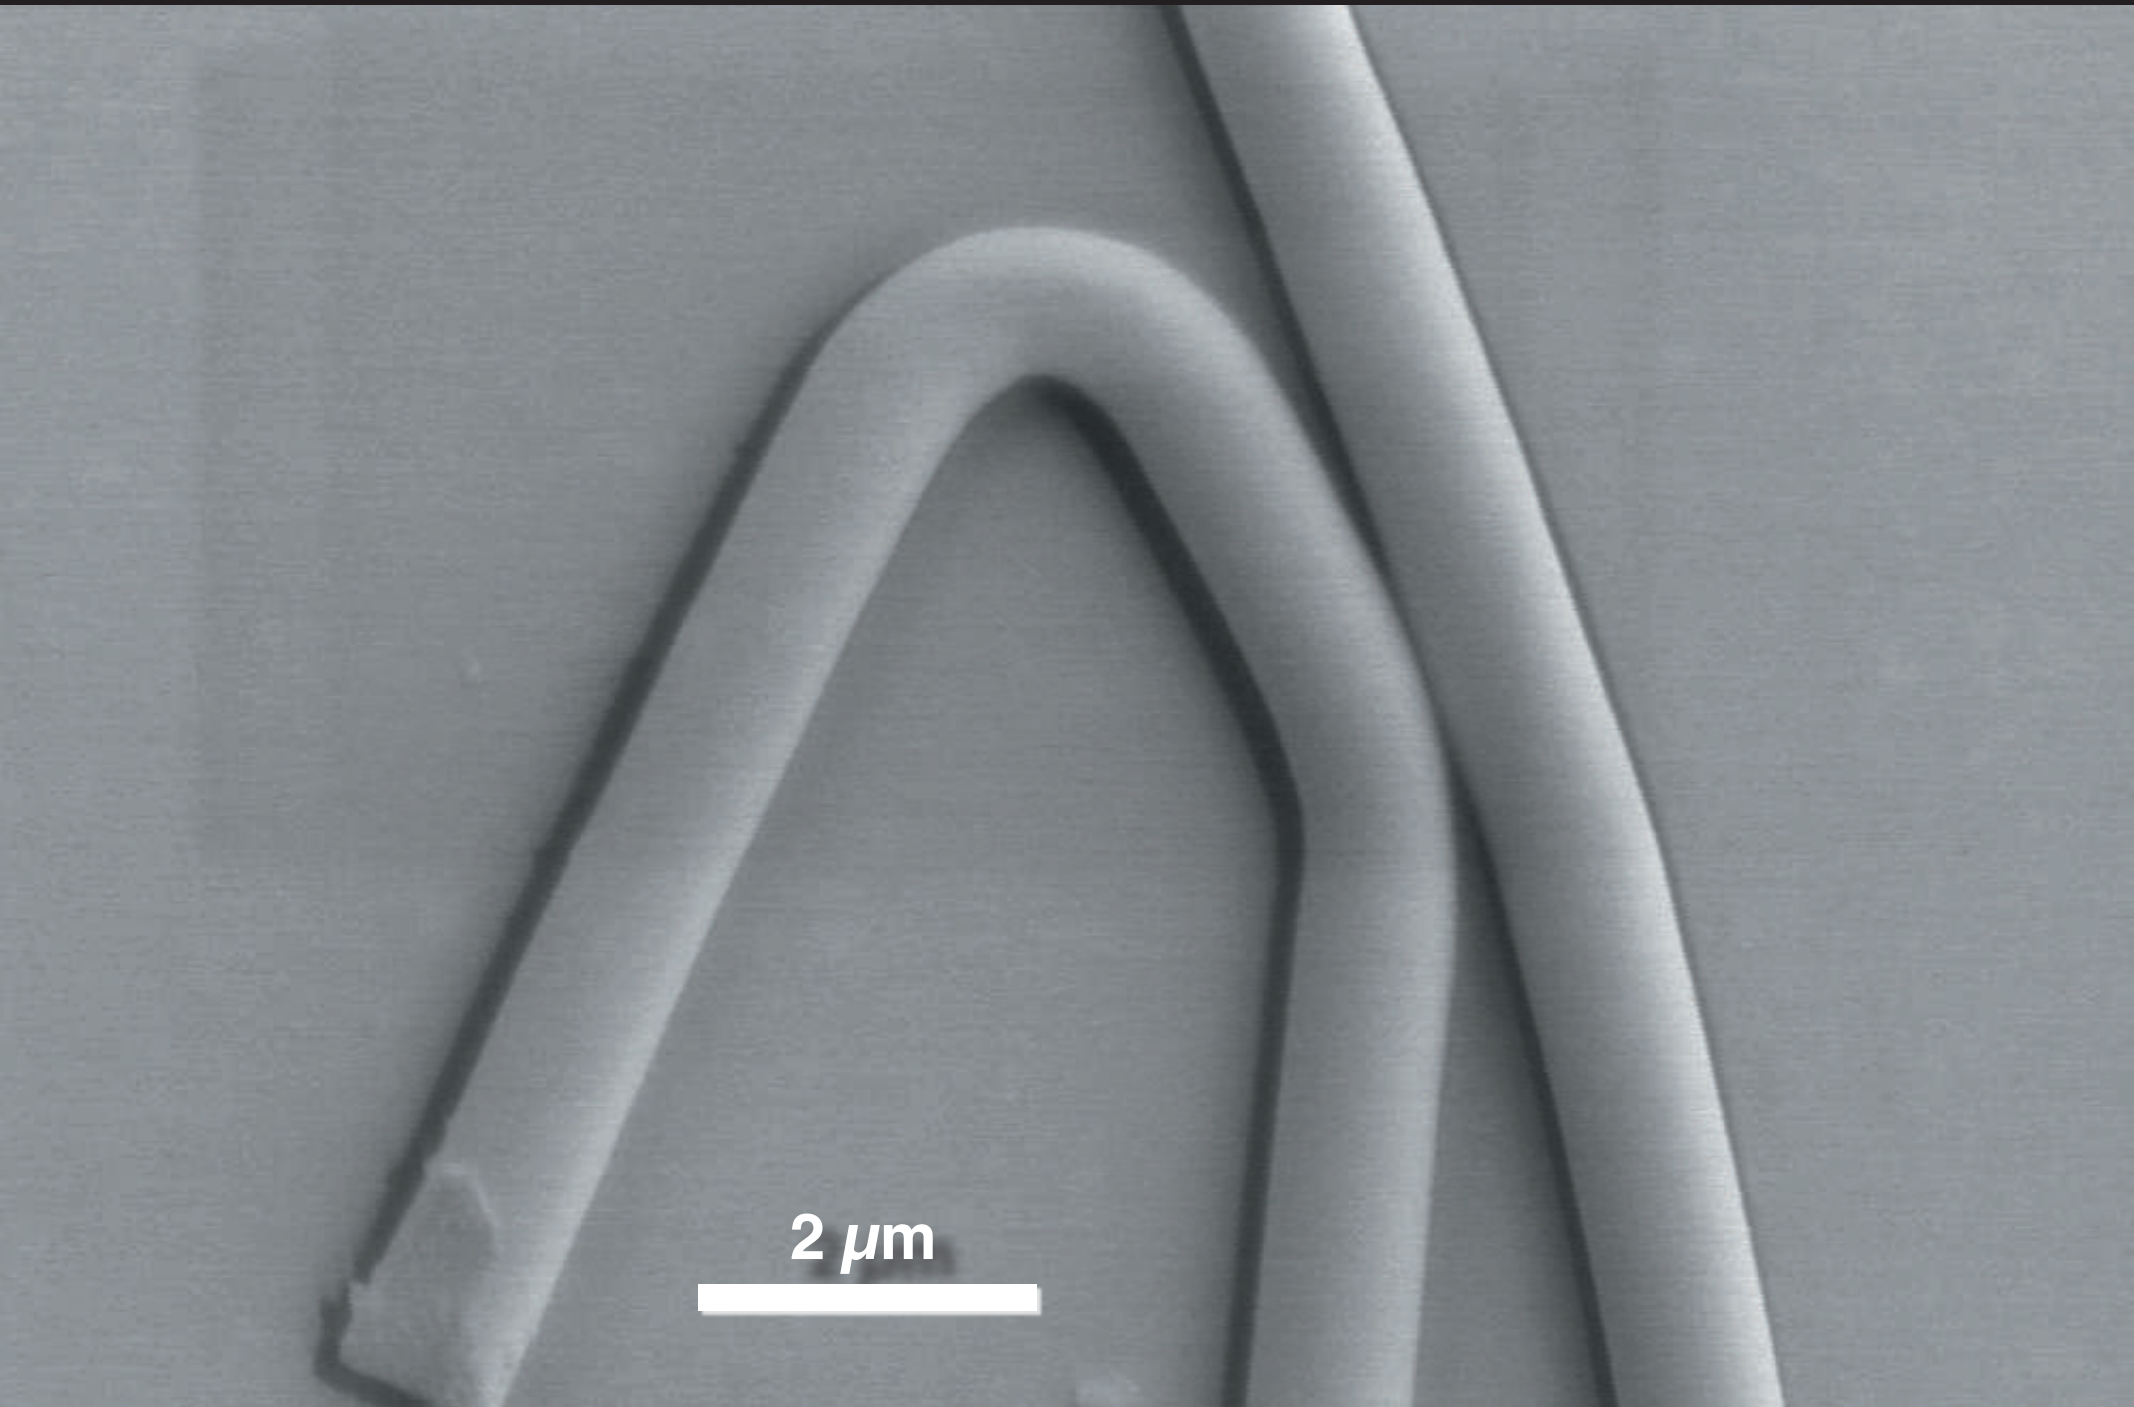

Outlook

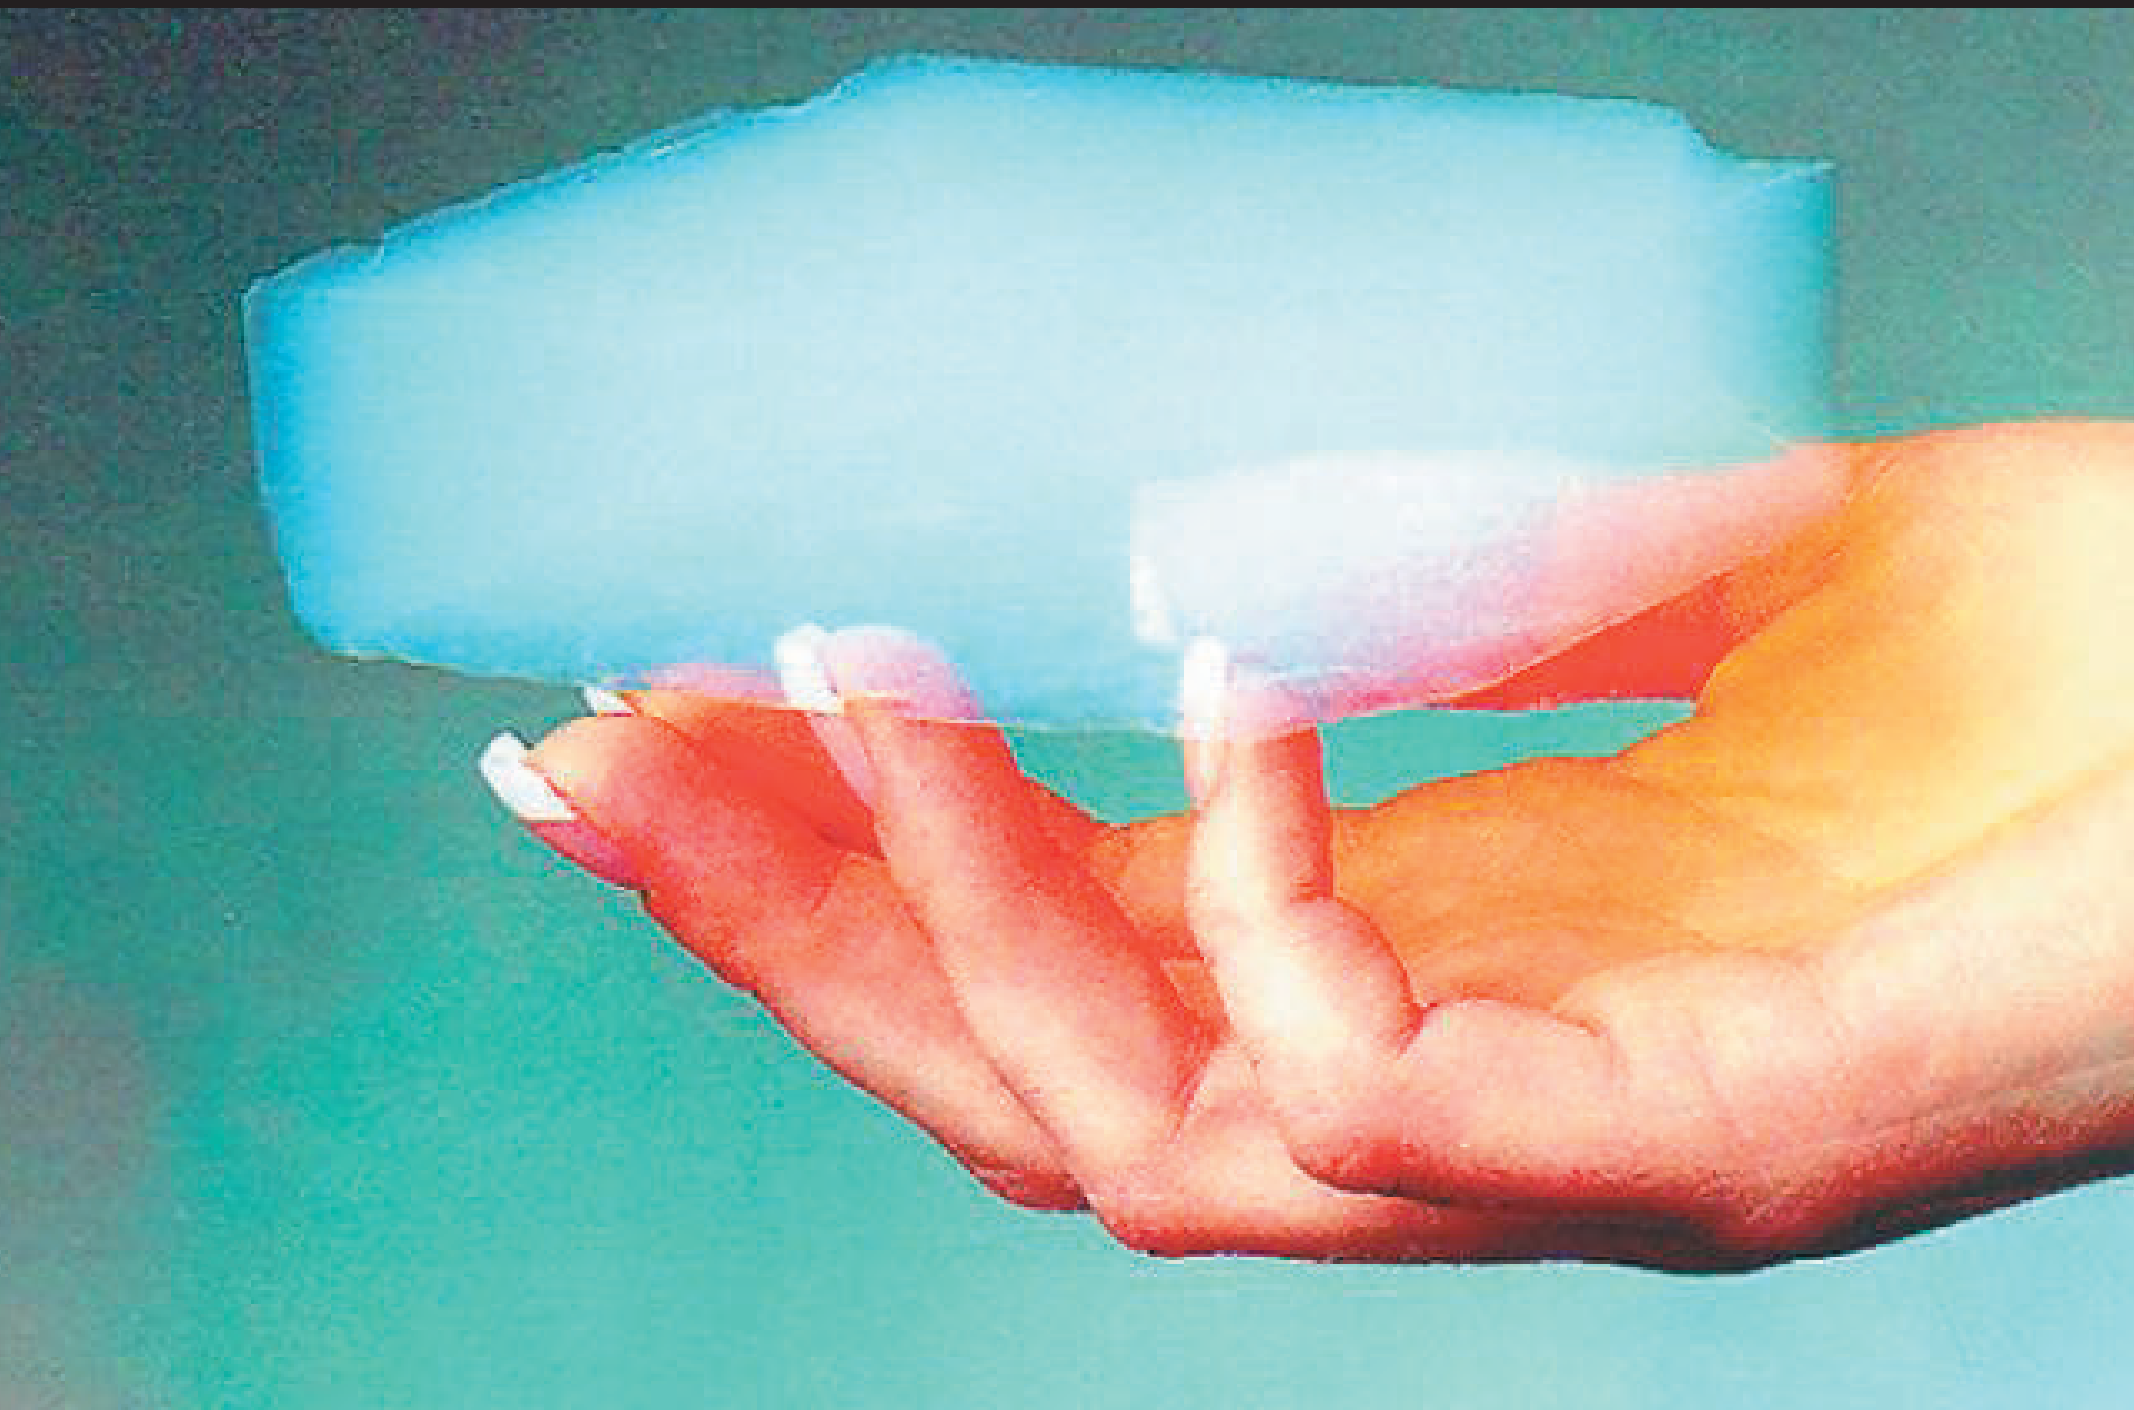

Outlook

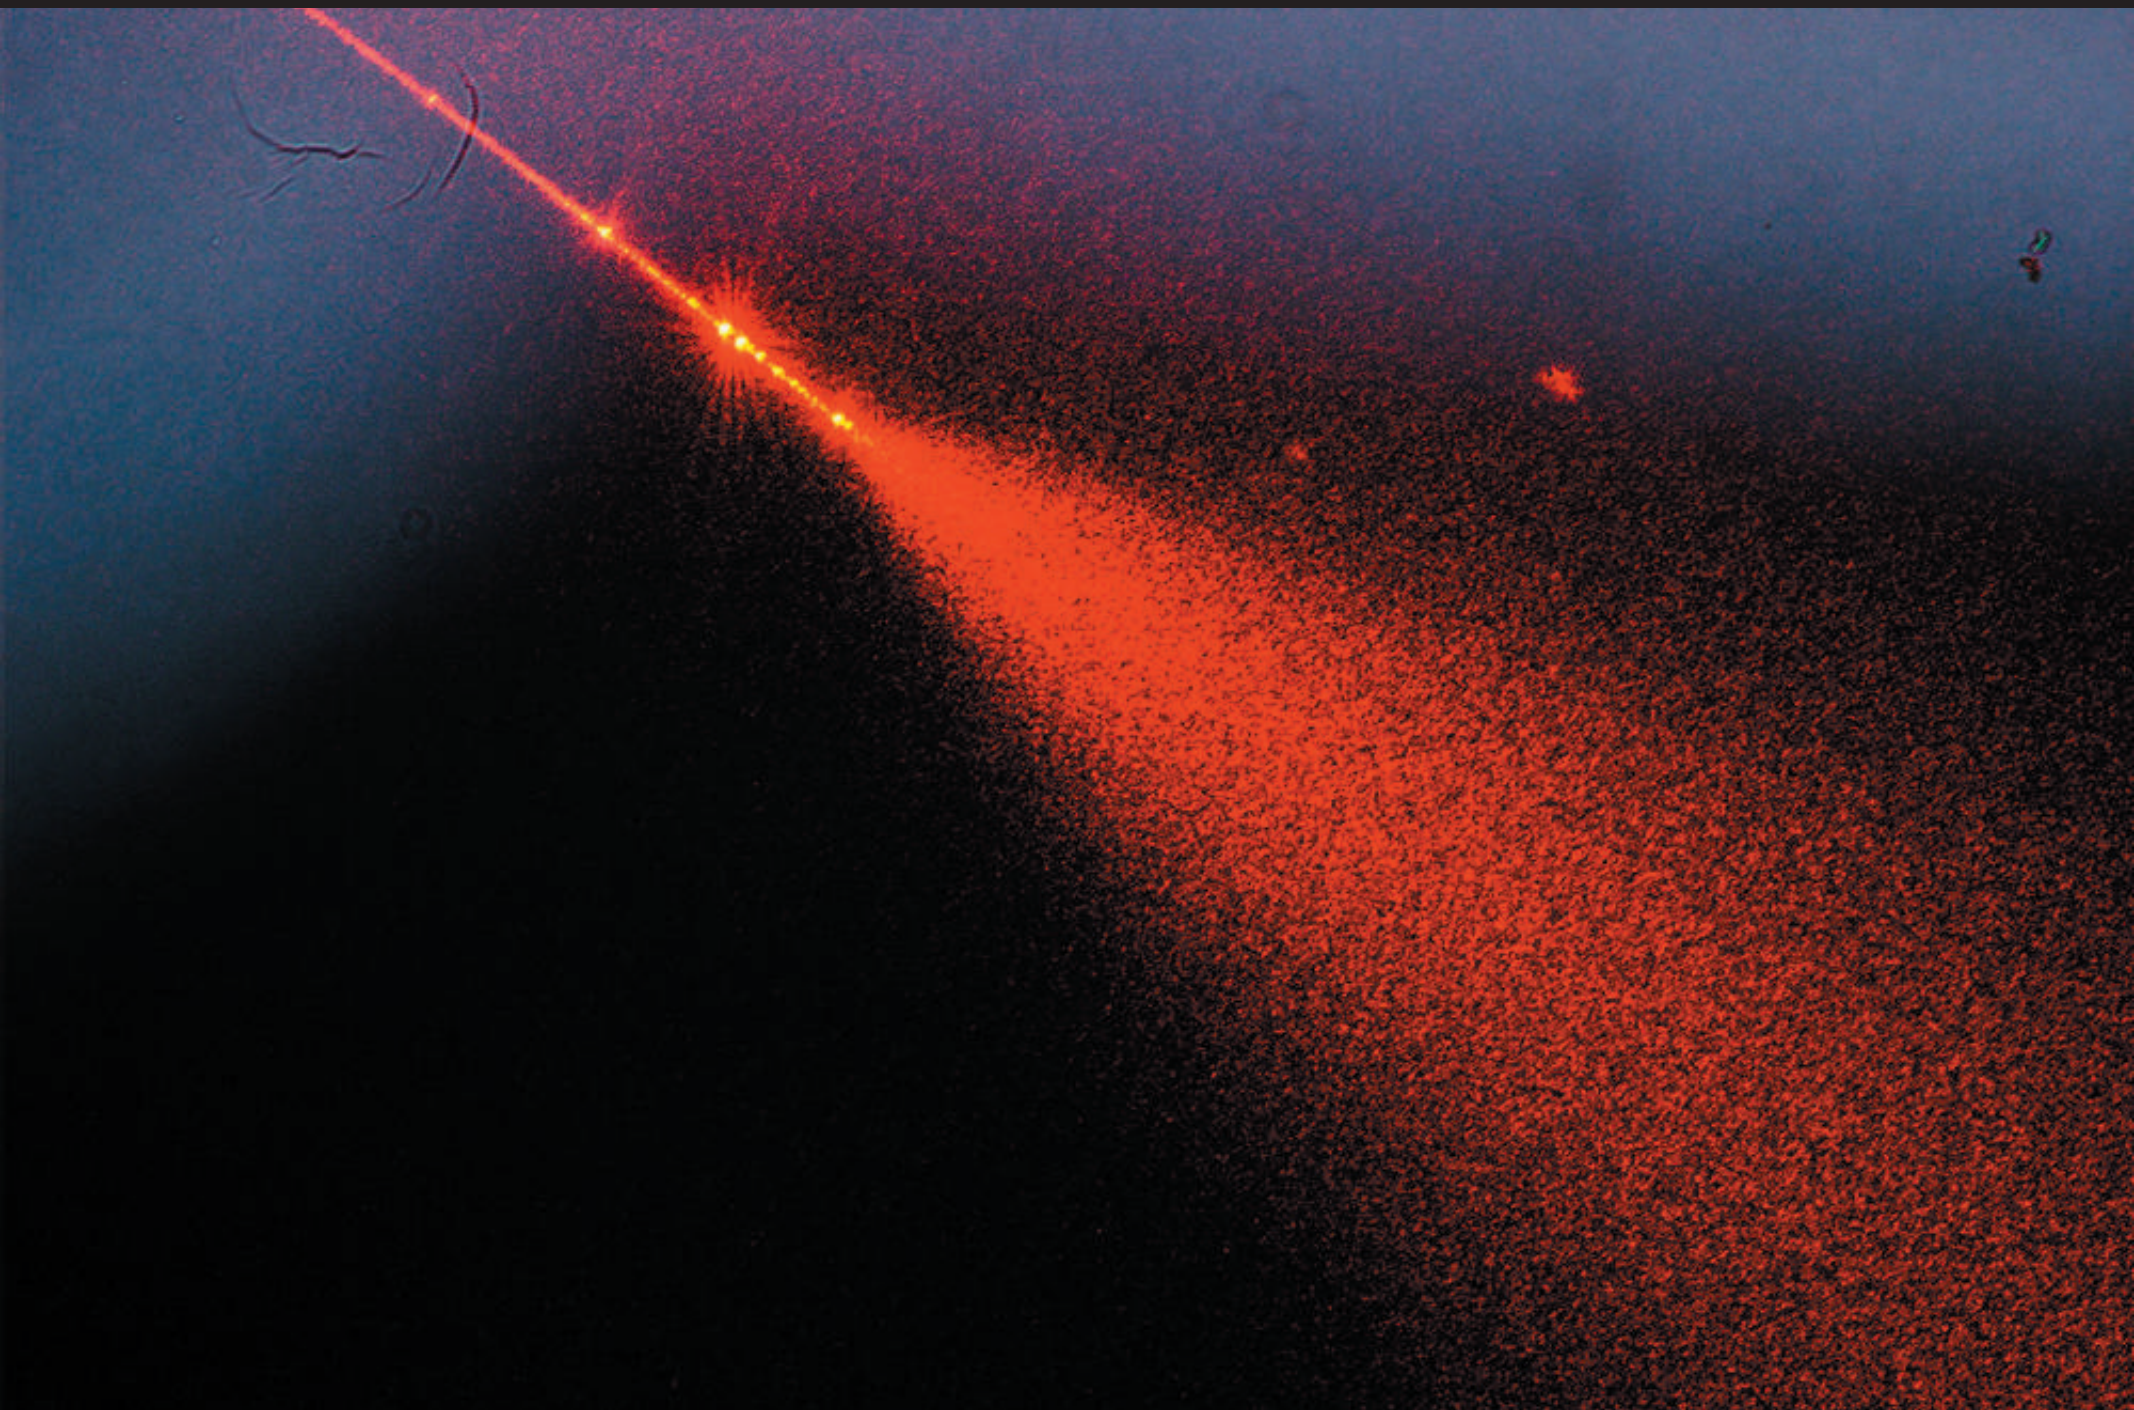

Outlook

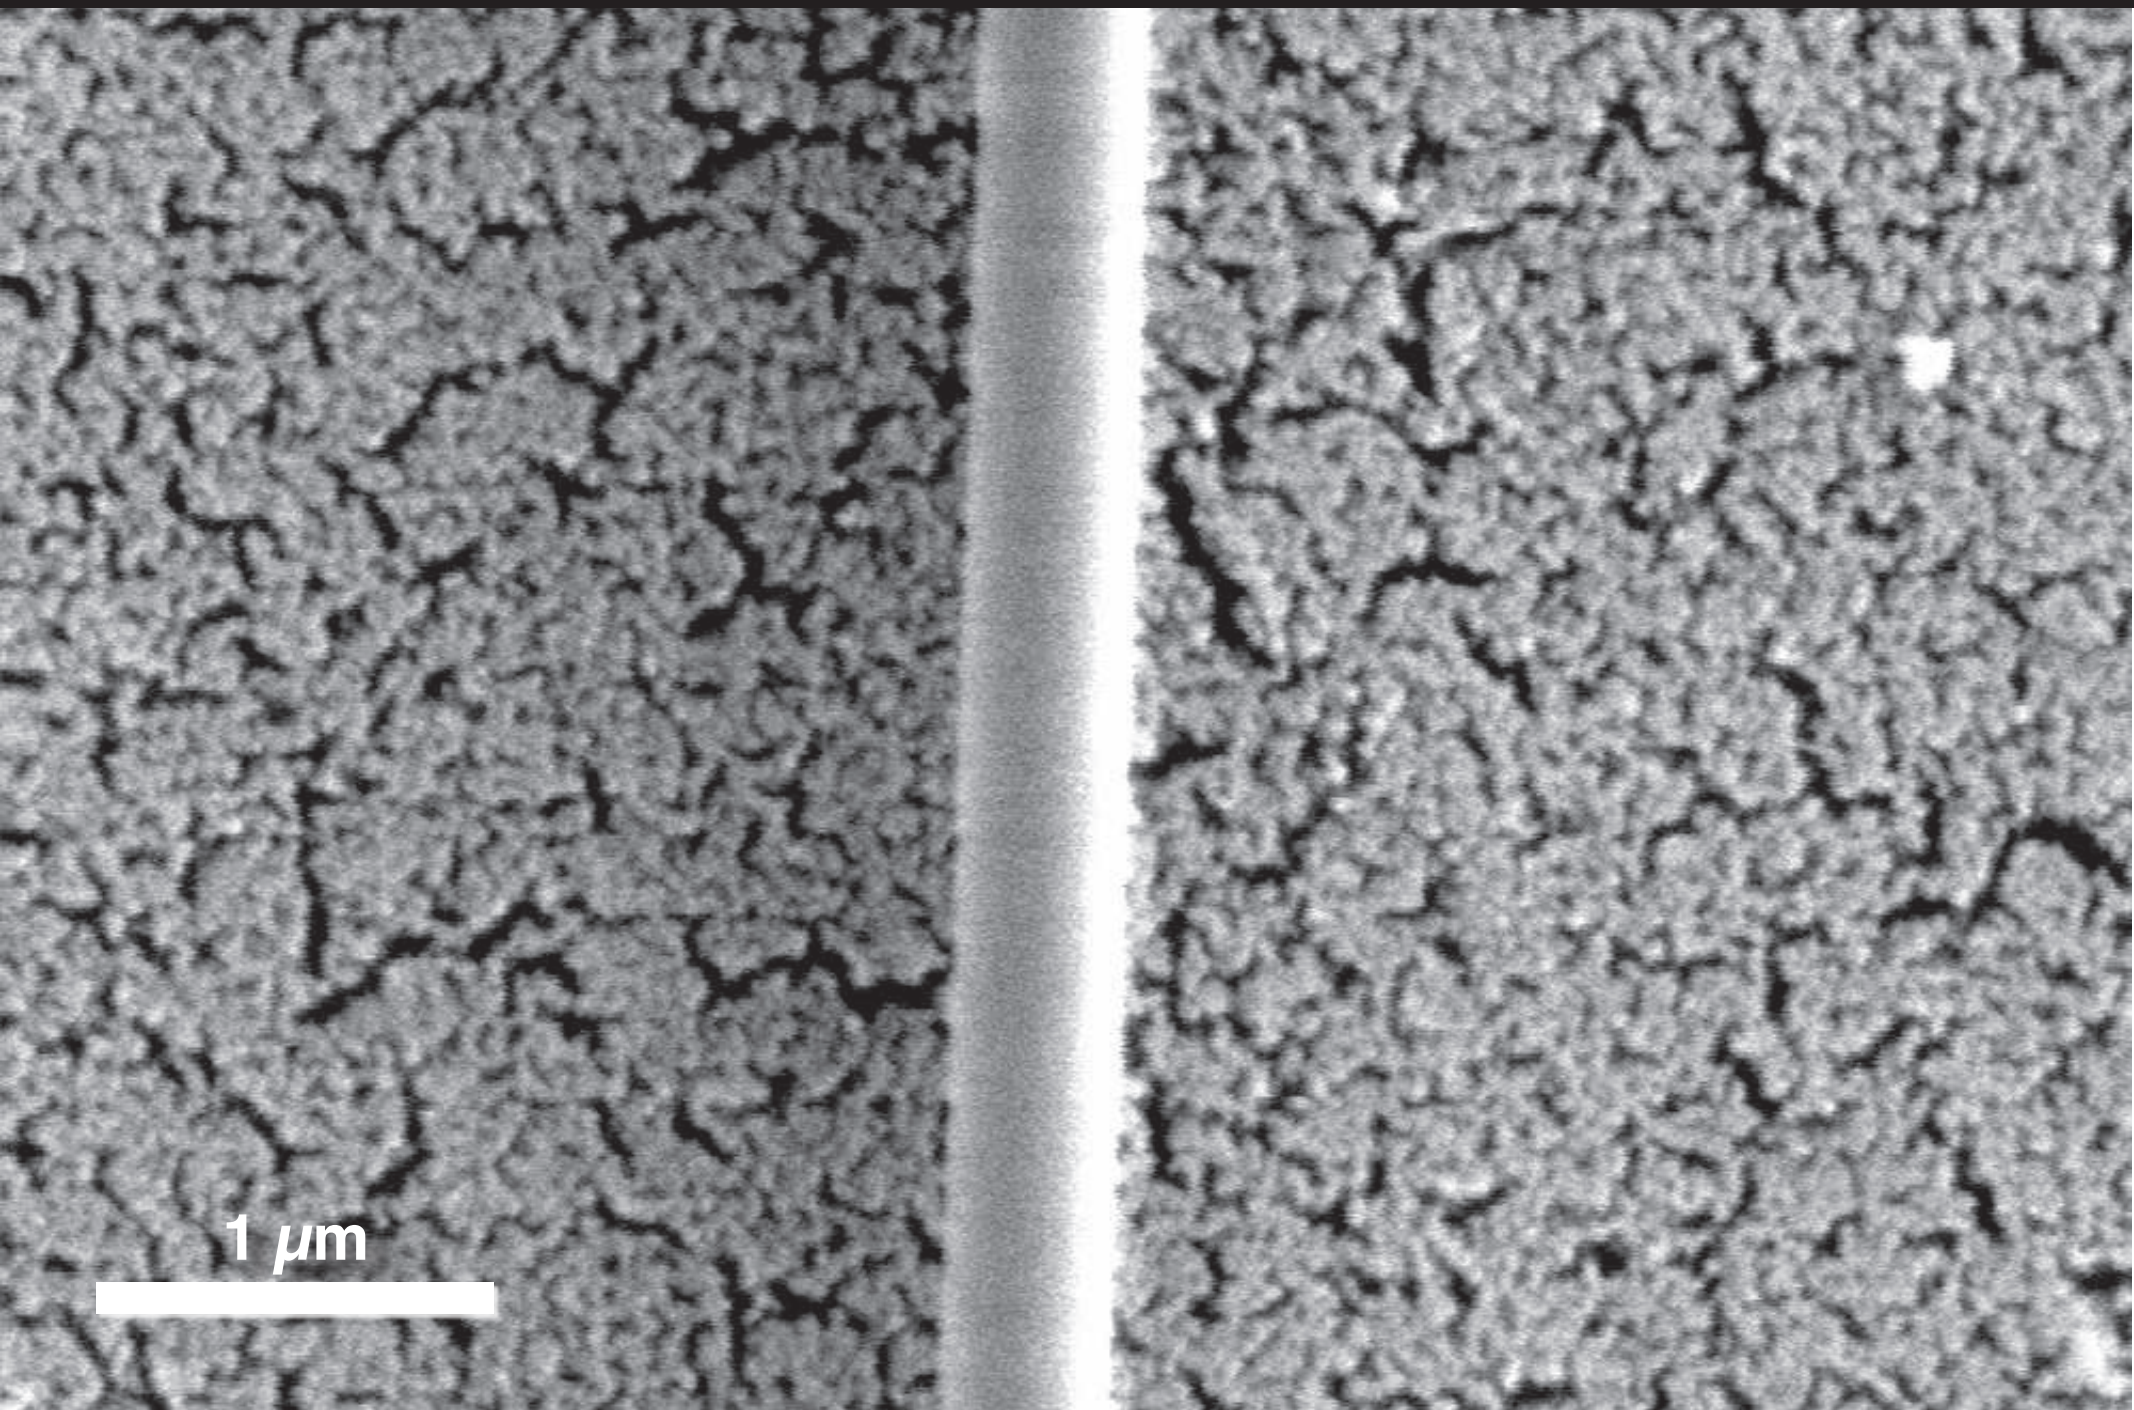

Outlook

loss measurement @ 633 nm

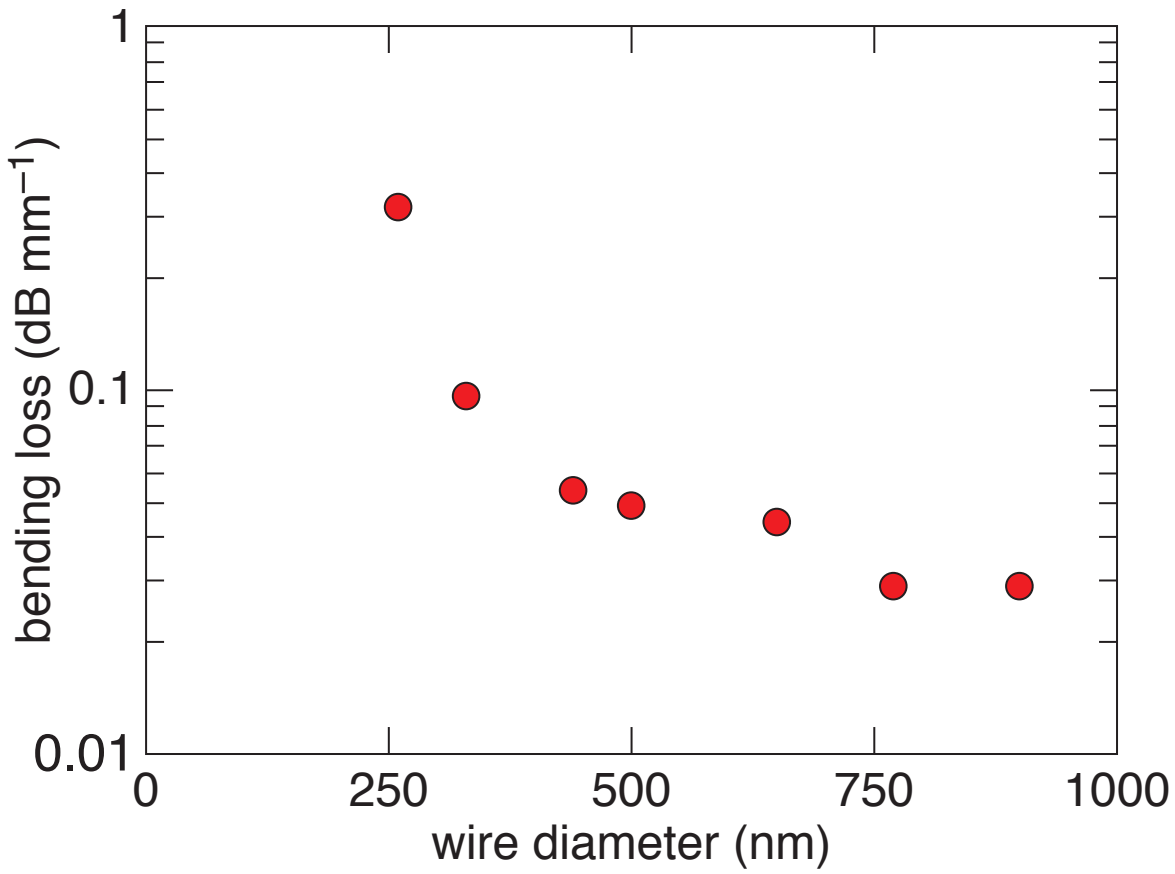

***Nanoletters*, in press (2005)**

Outlook

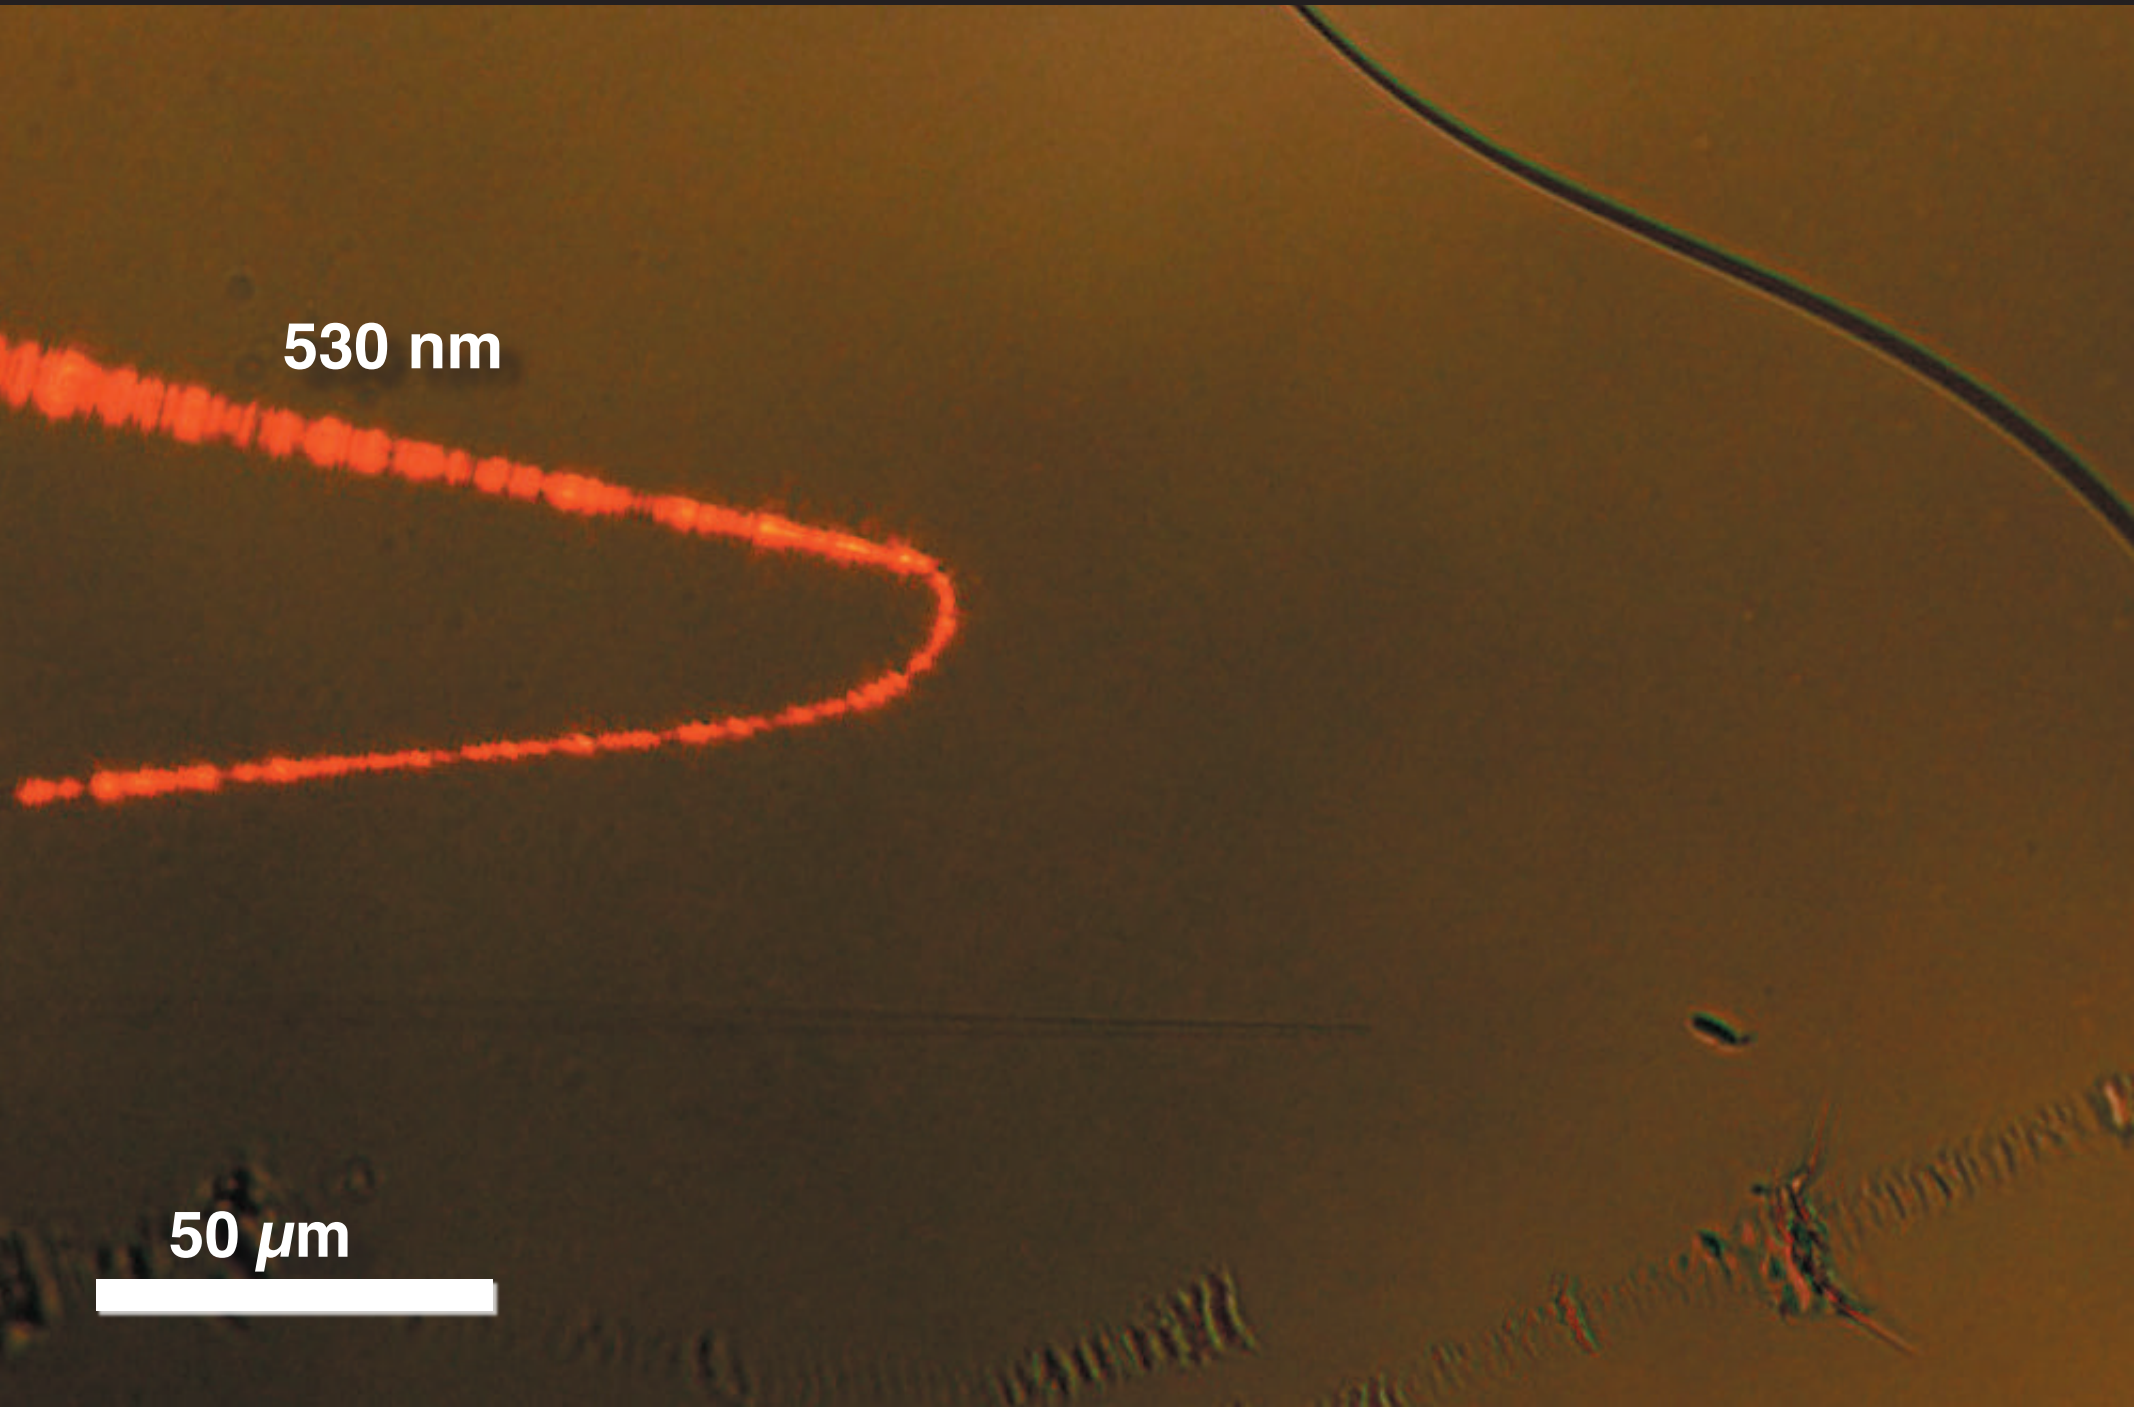

Outlook

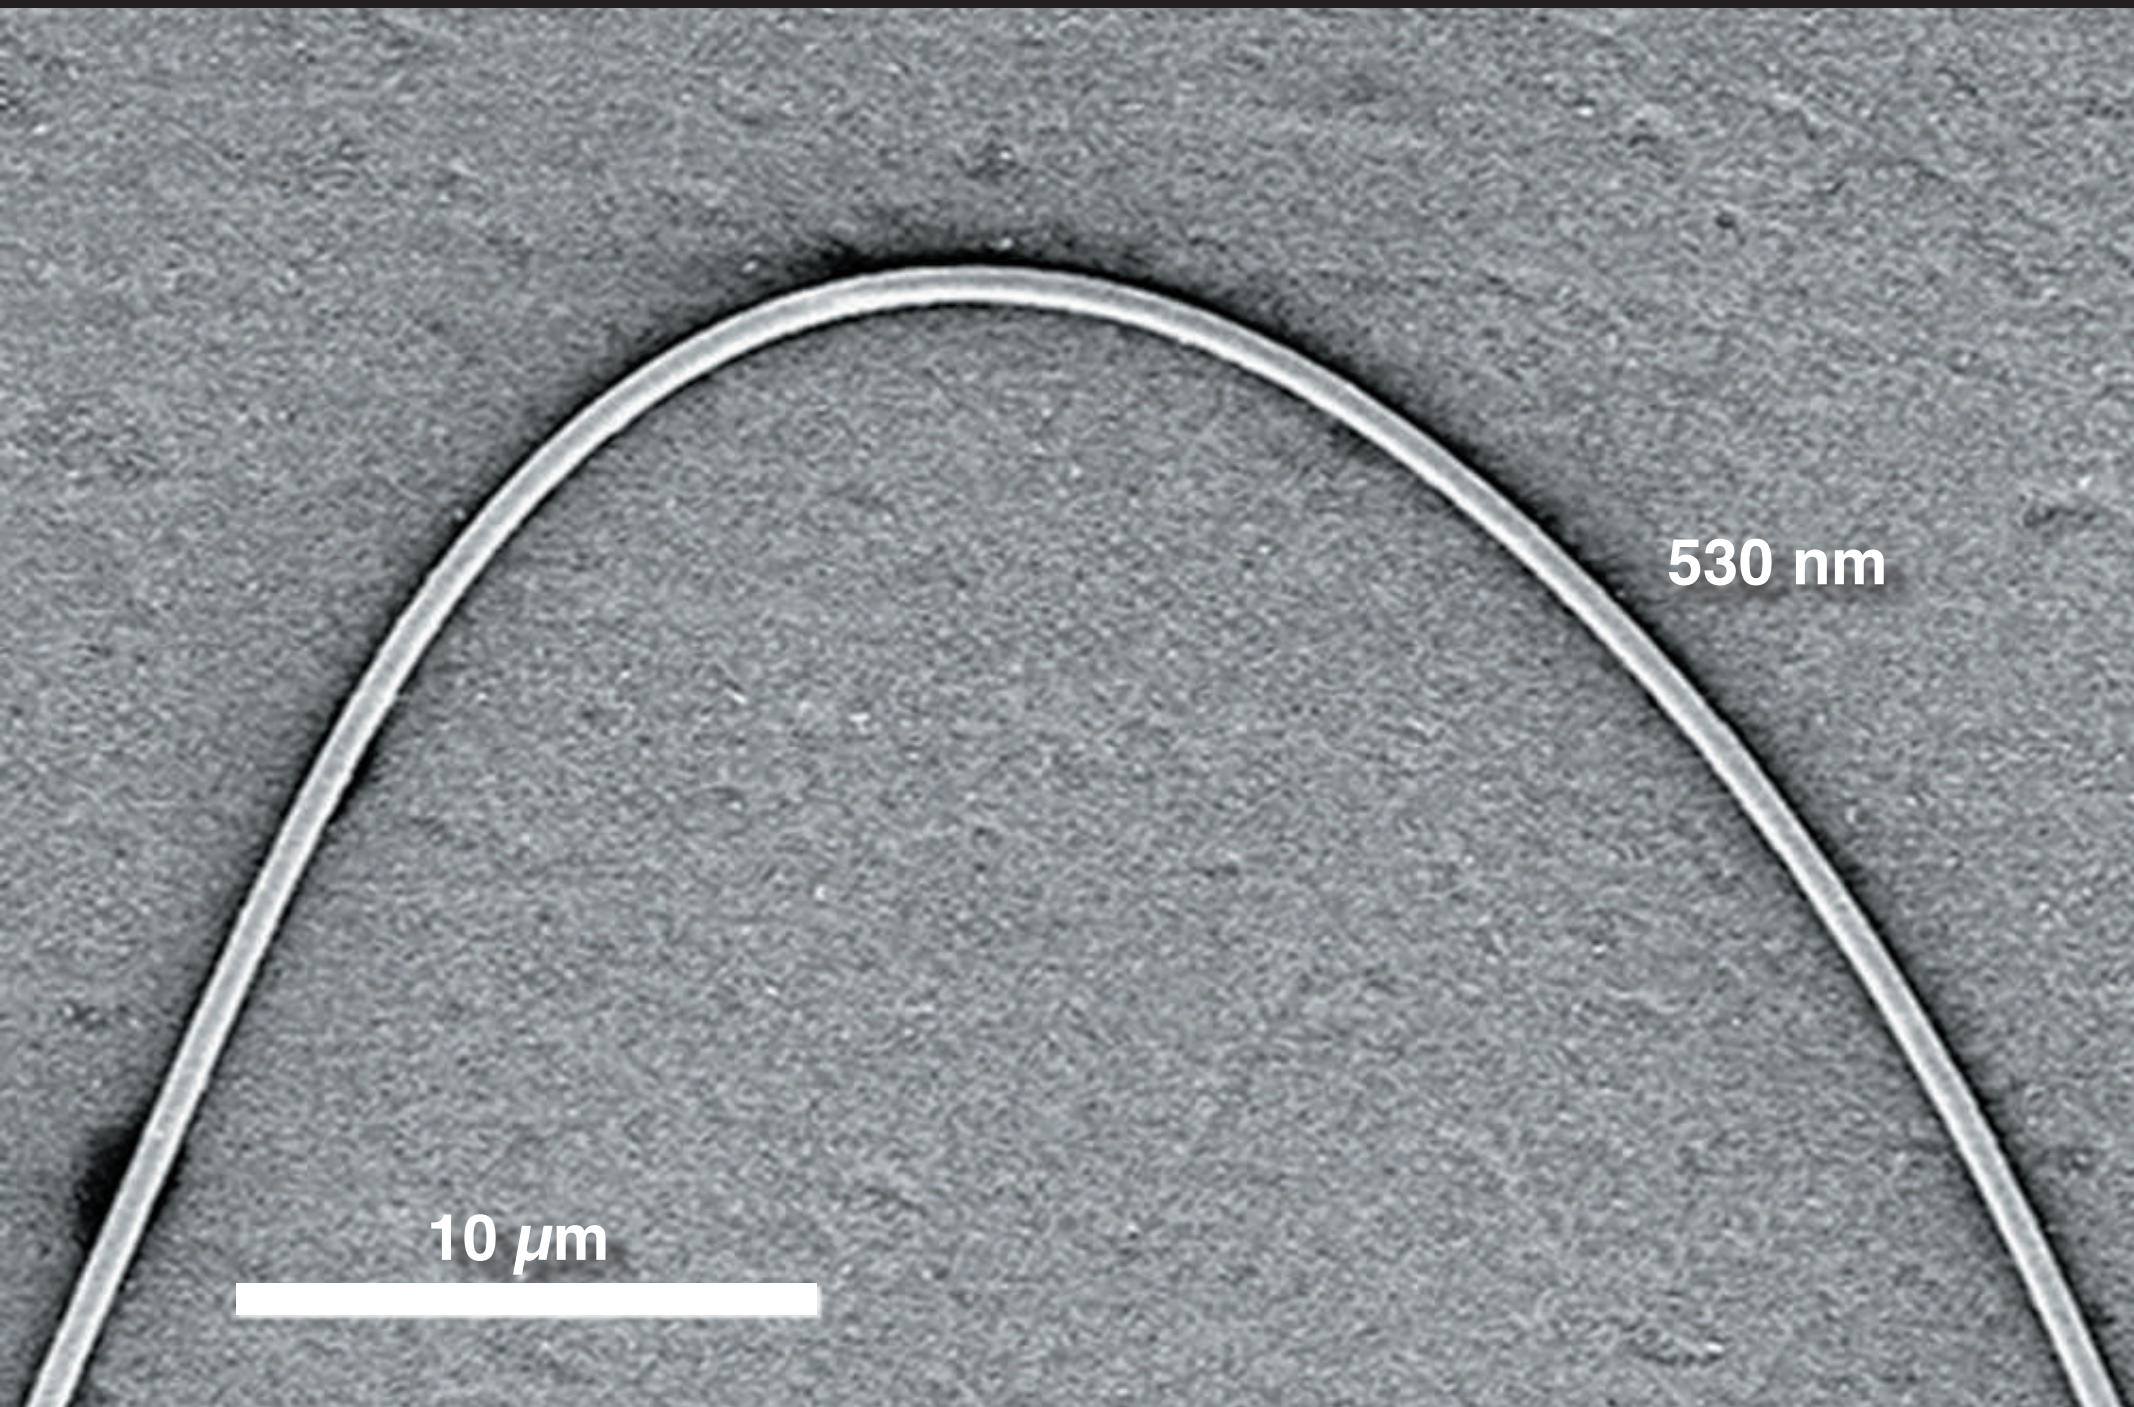

Outlook

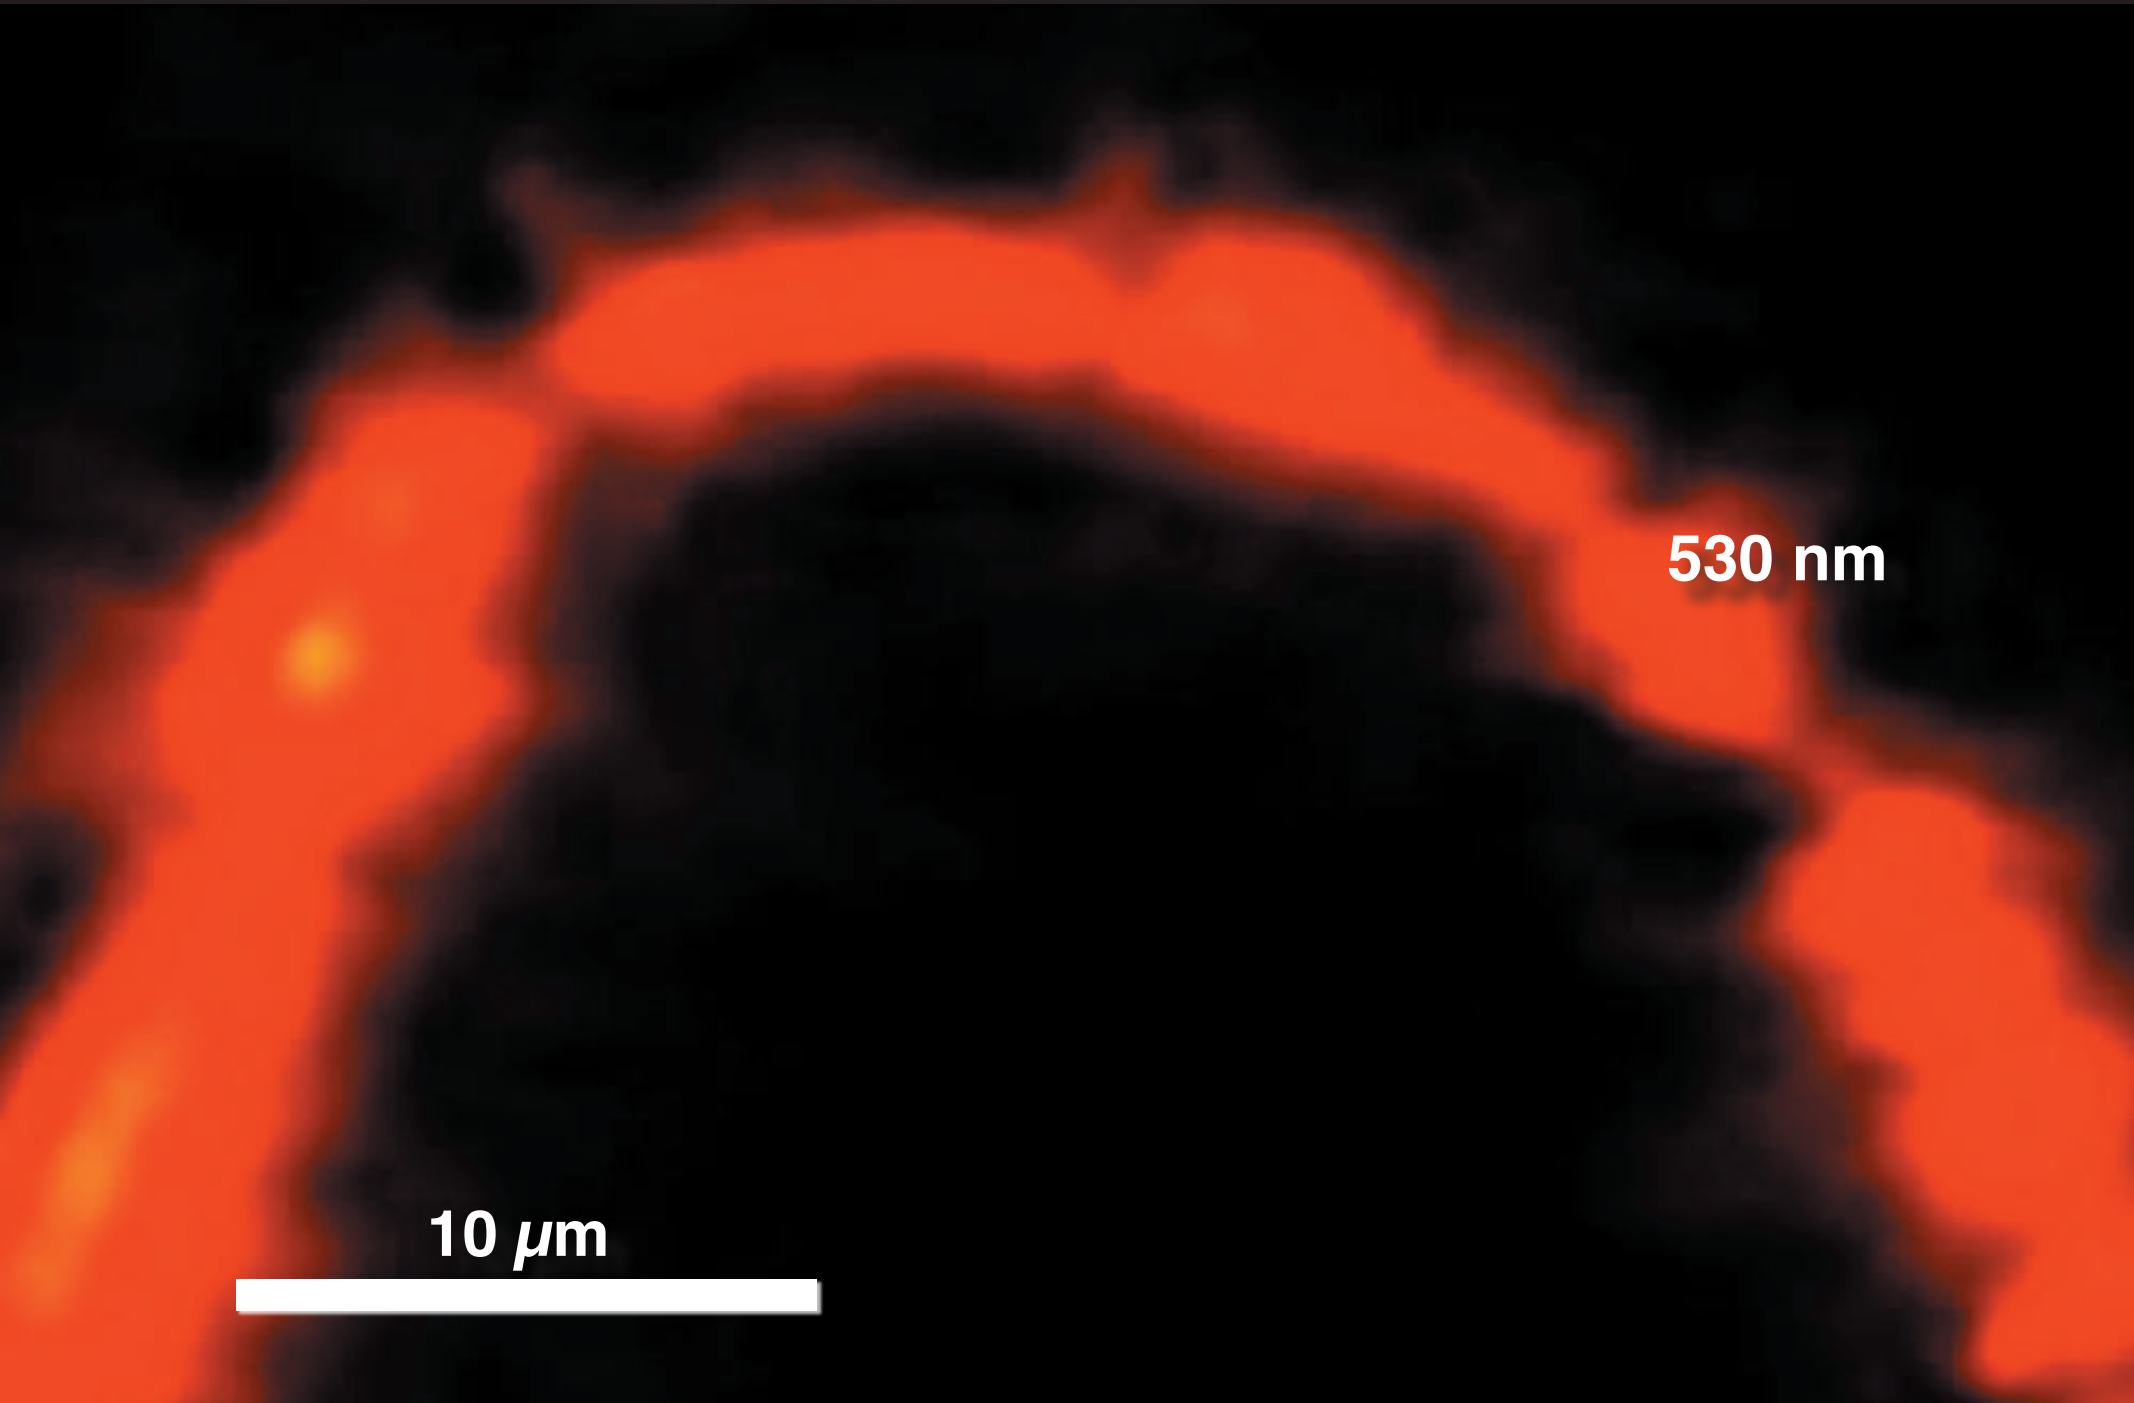

Outlook

bending loss @ 633 nm

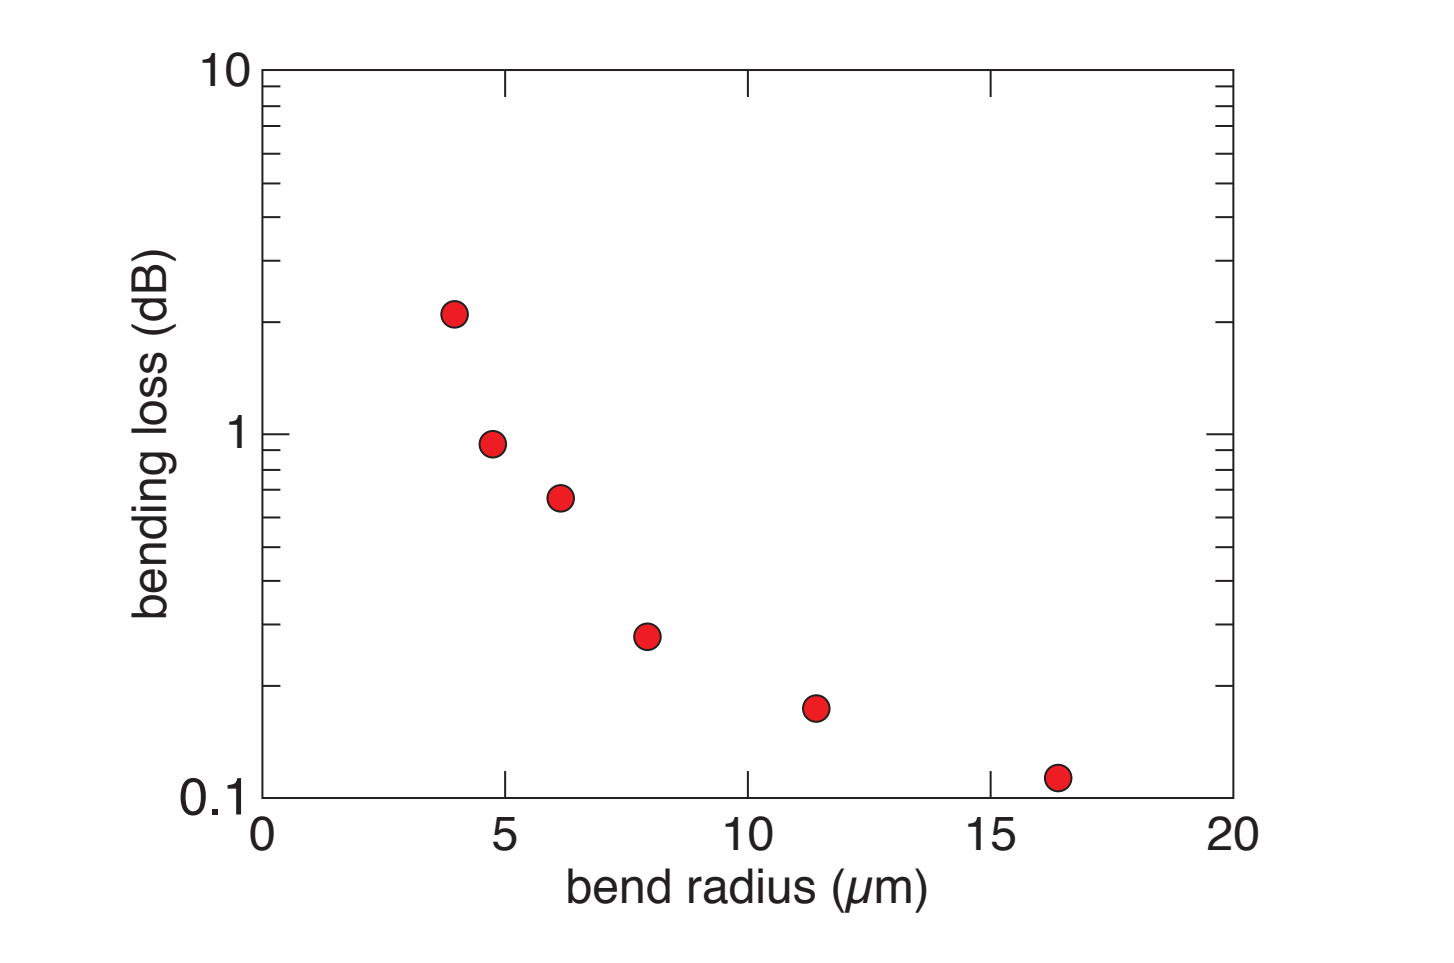

Nanoletters, in press (2005)

Outlook

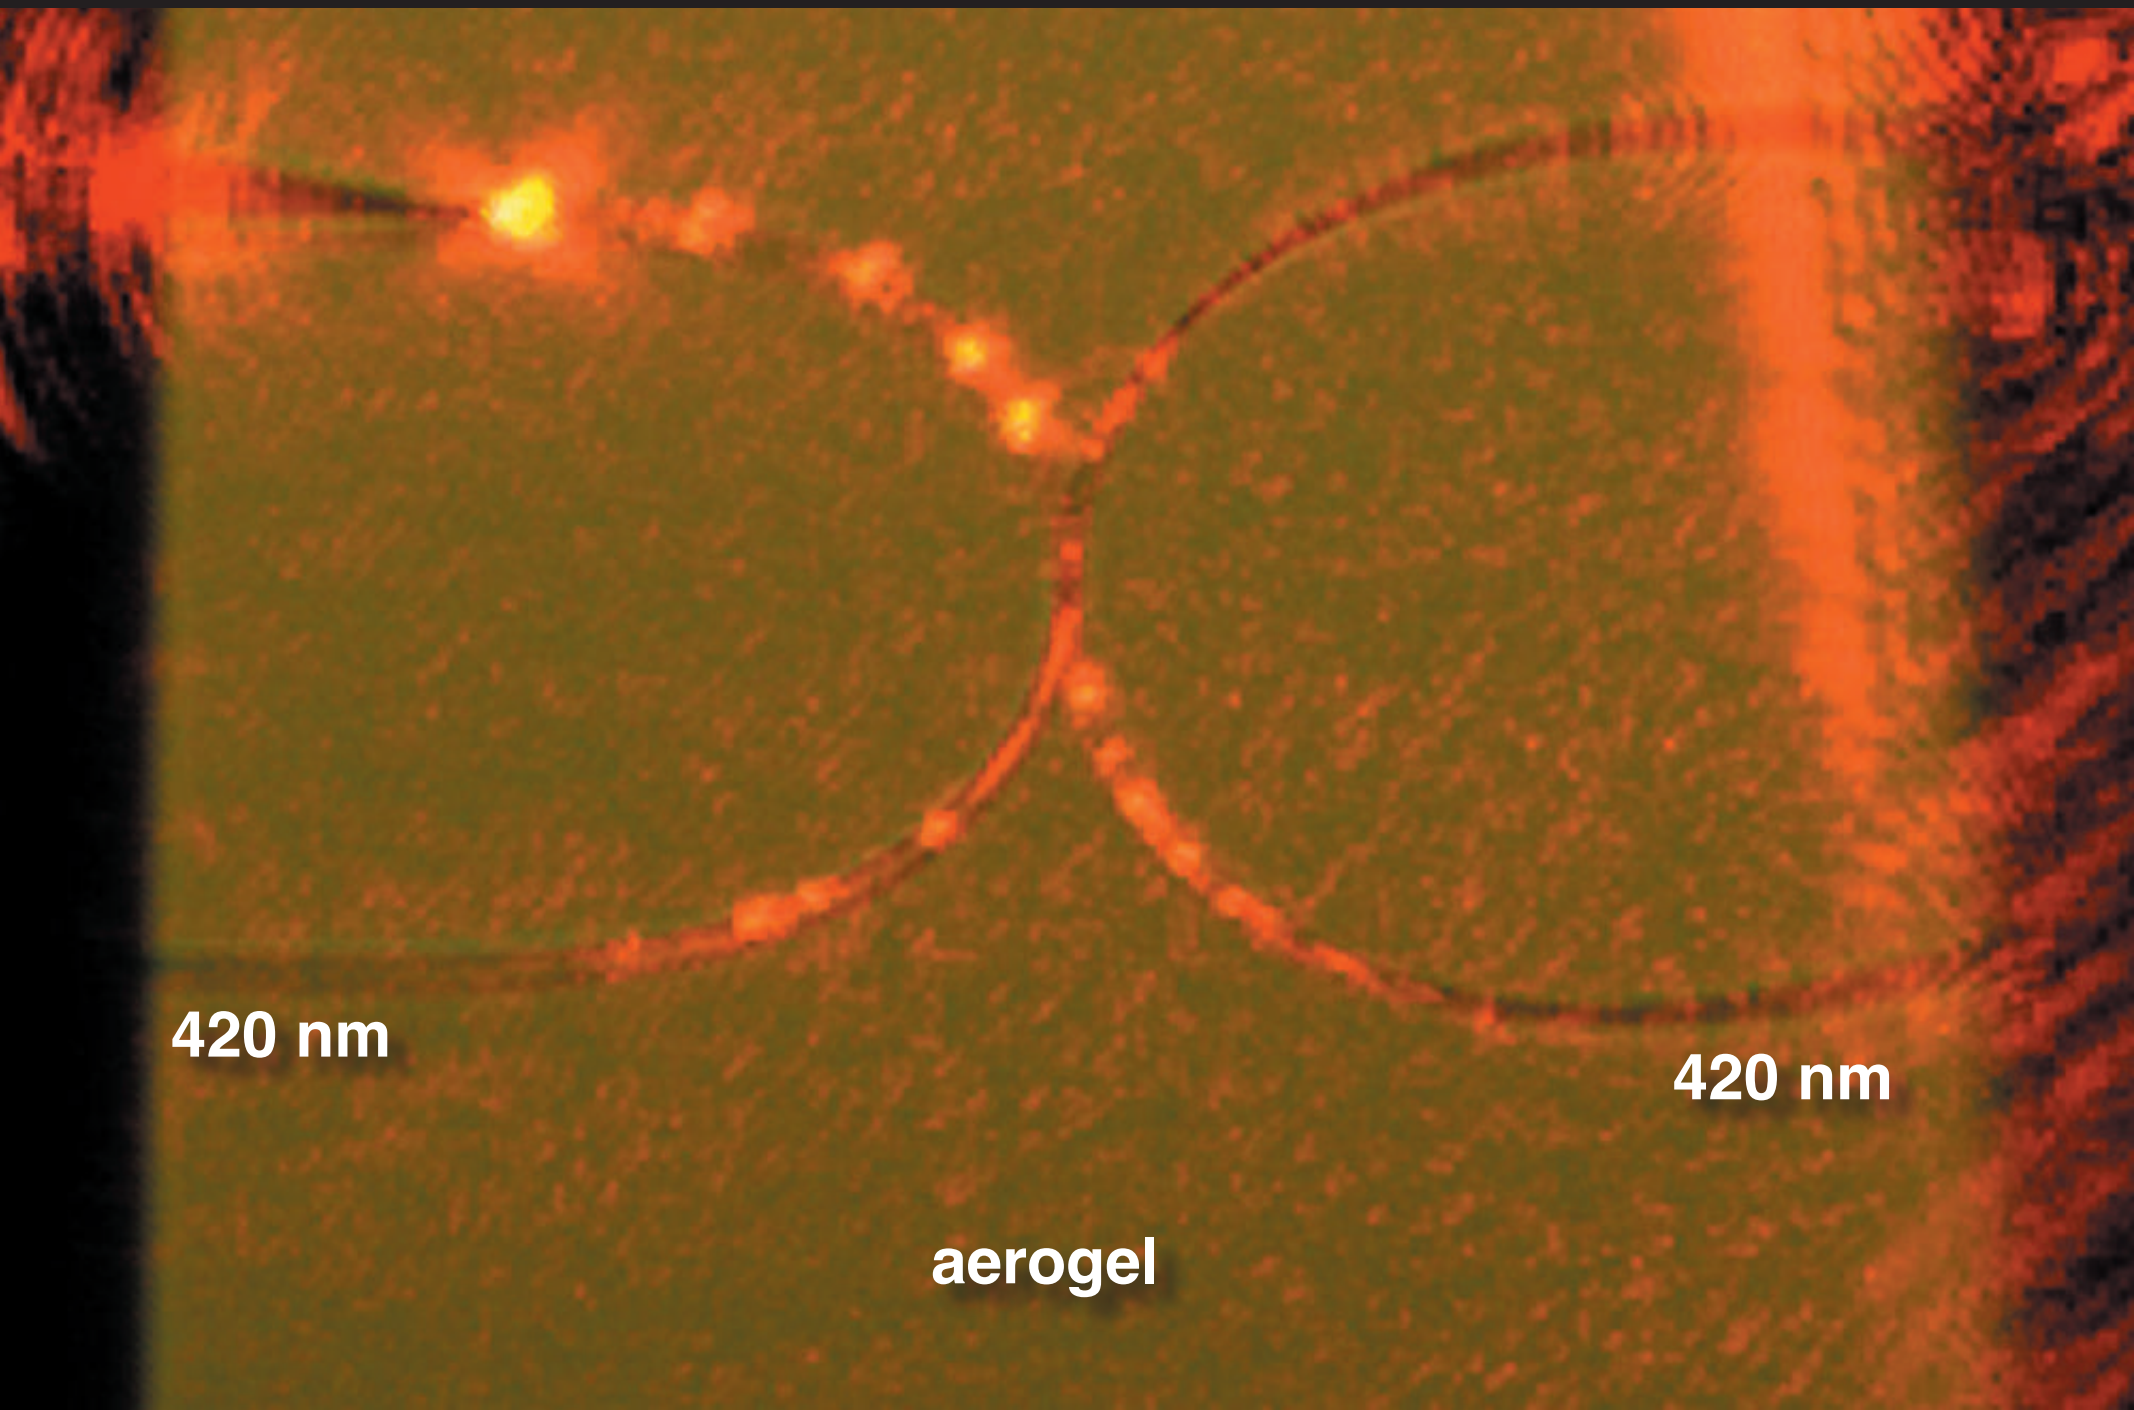

Outlook

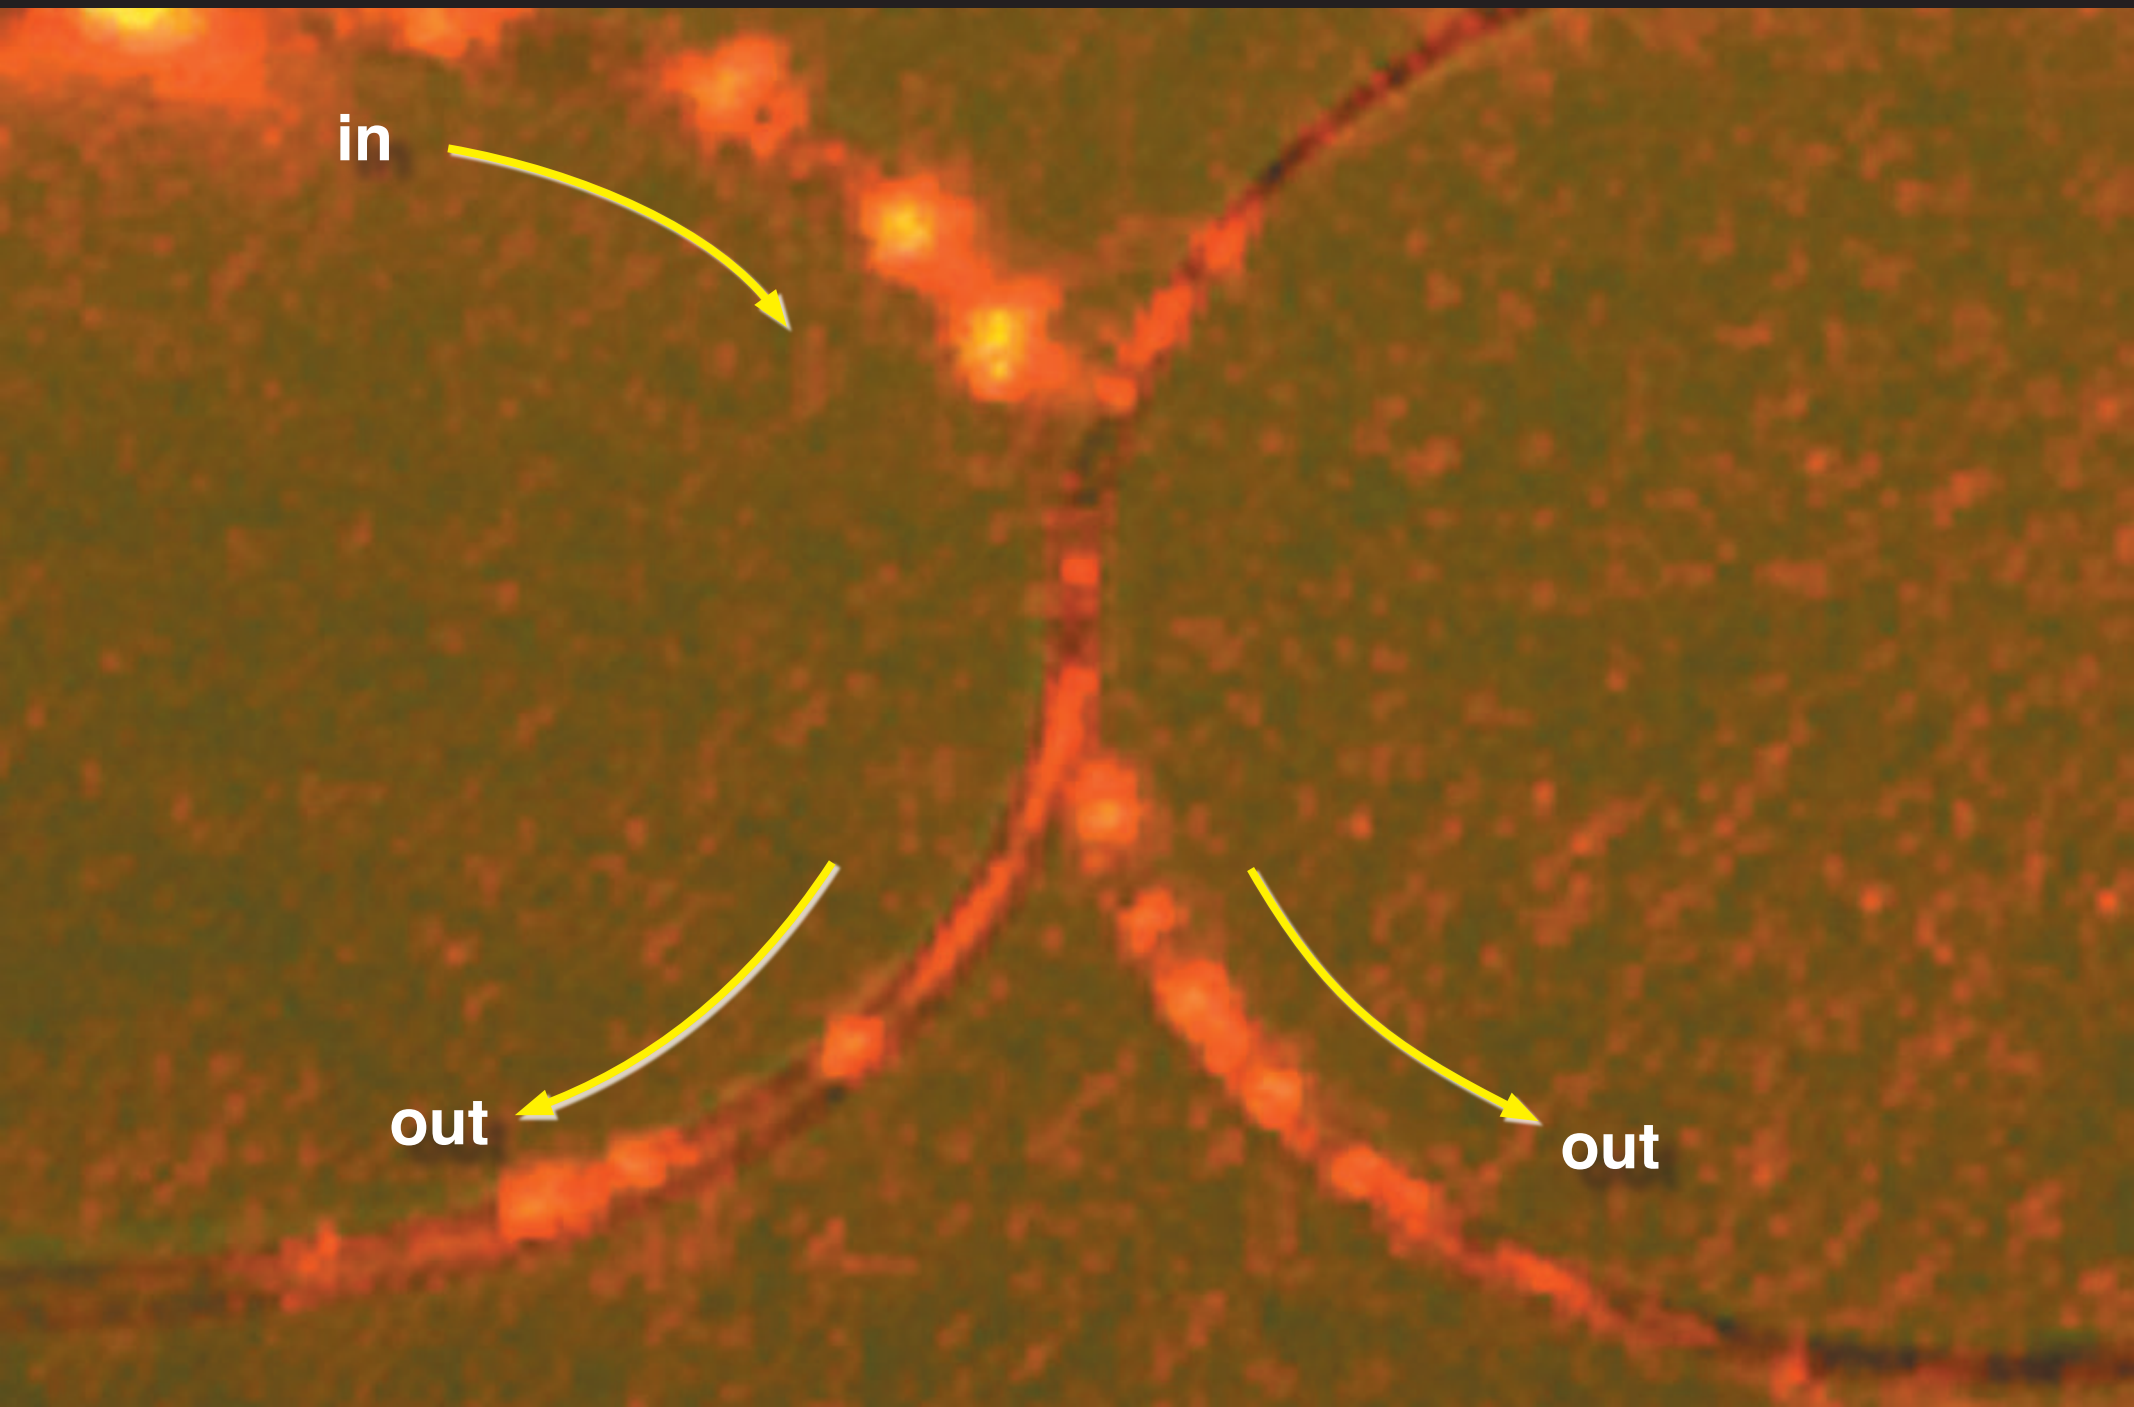

Outlook

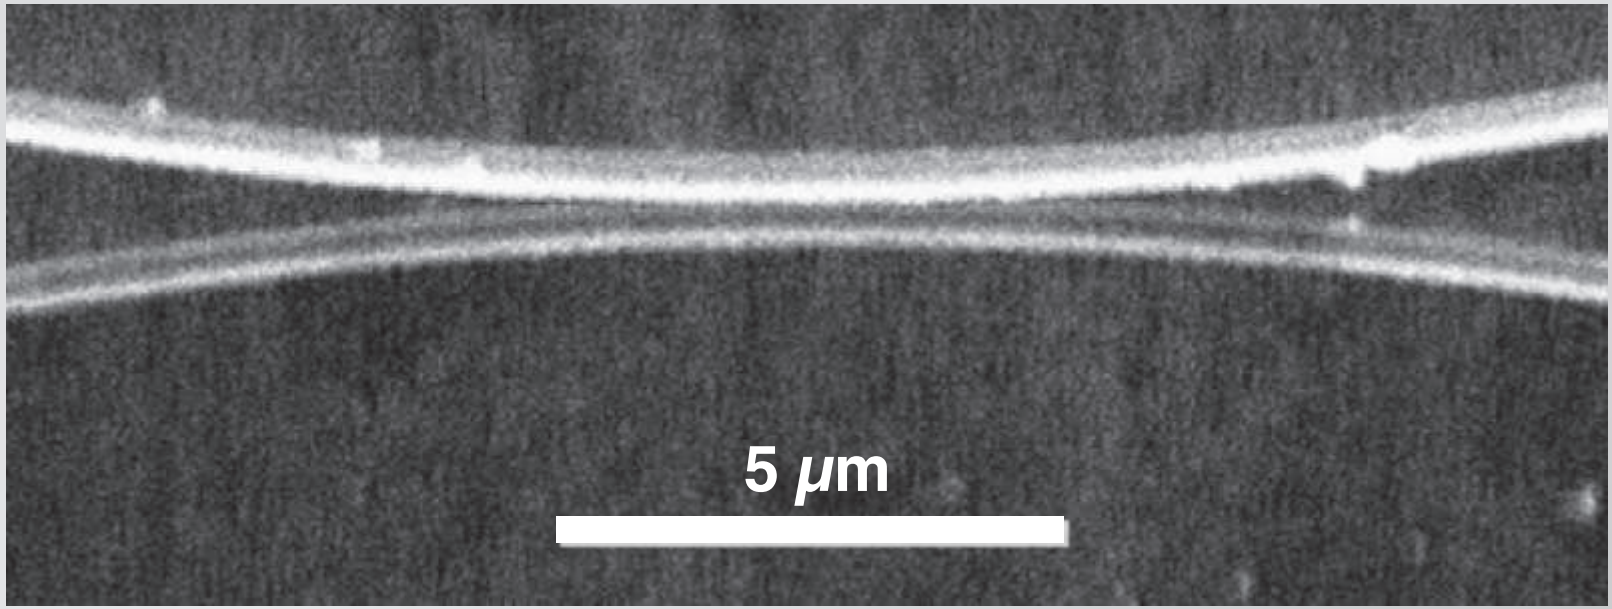

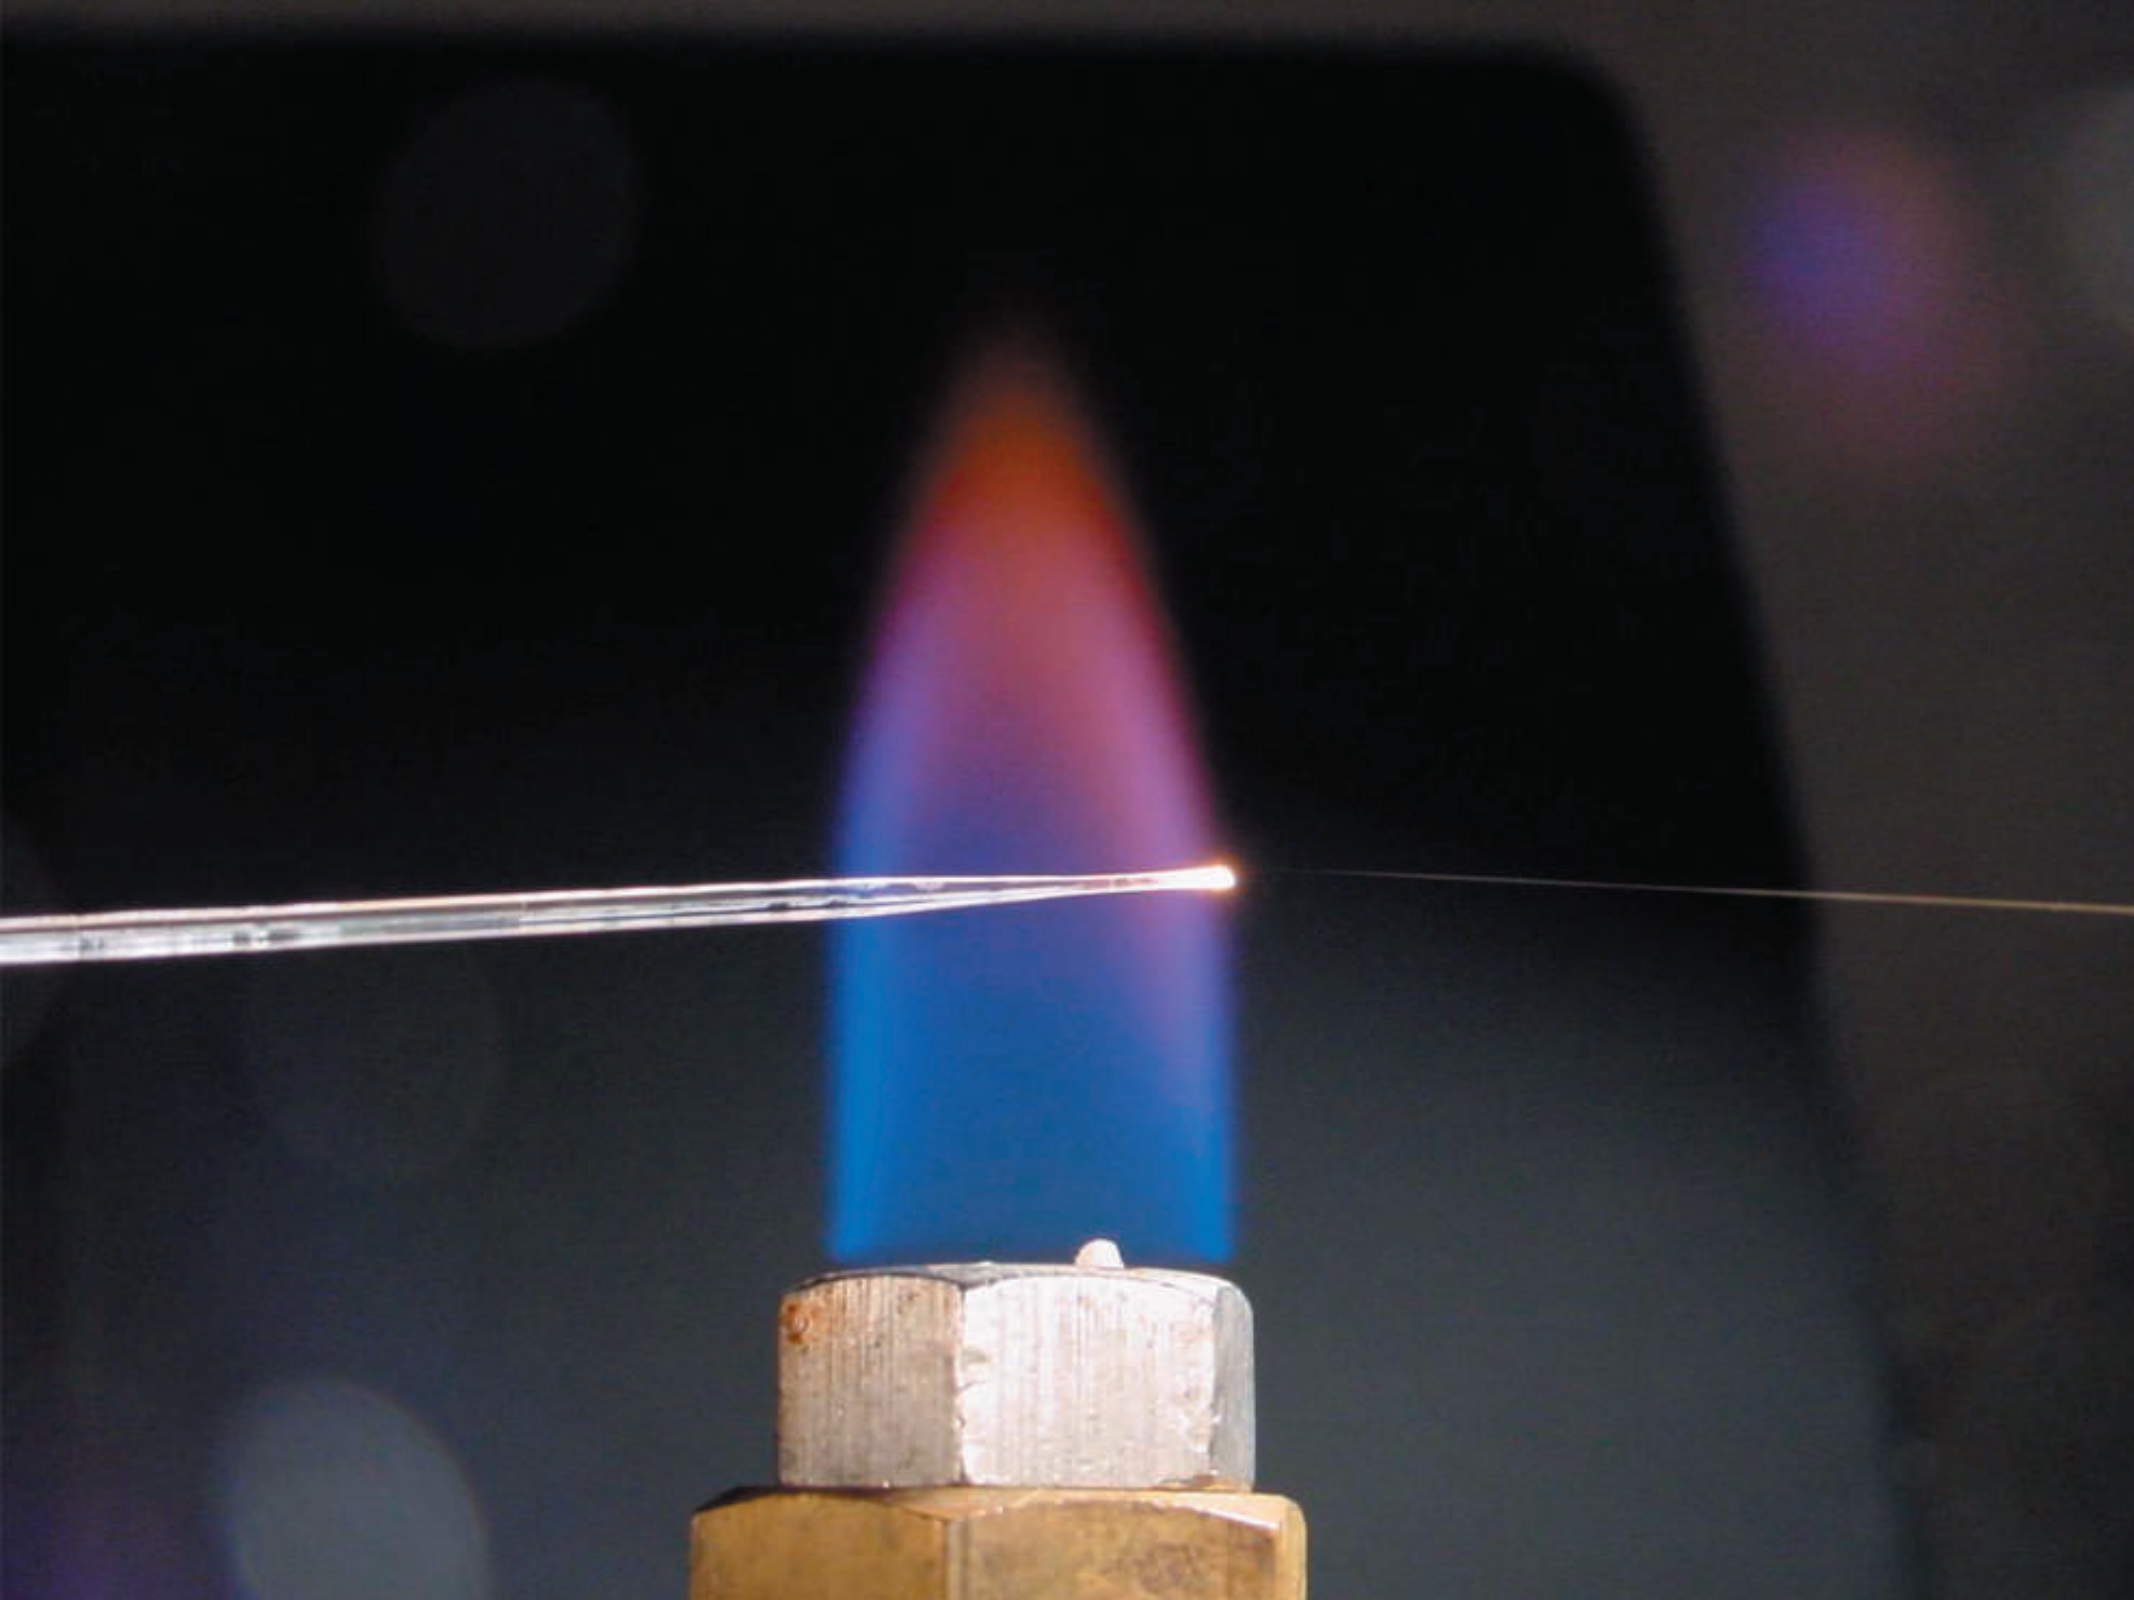

Funding:

Harvard Center for Imaging and Mesoscopic Structures
National Science Foundation
National Natural Science Foundation of China

for a copy of this presentation:

http://mazur-www.harvard.edu