Wrapping light around a hair: manipulating light at the nanoscale

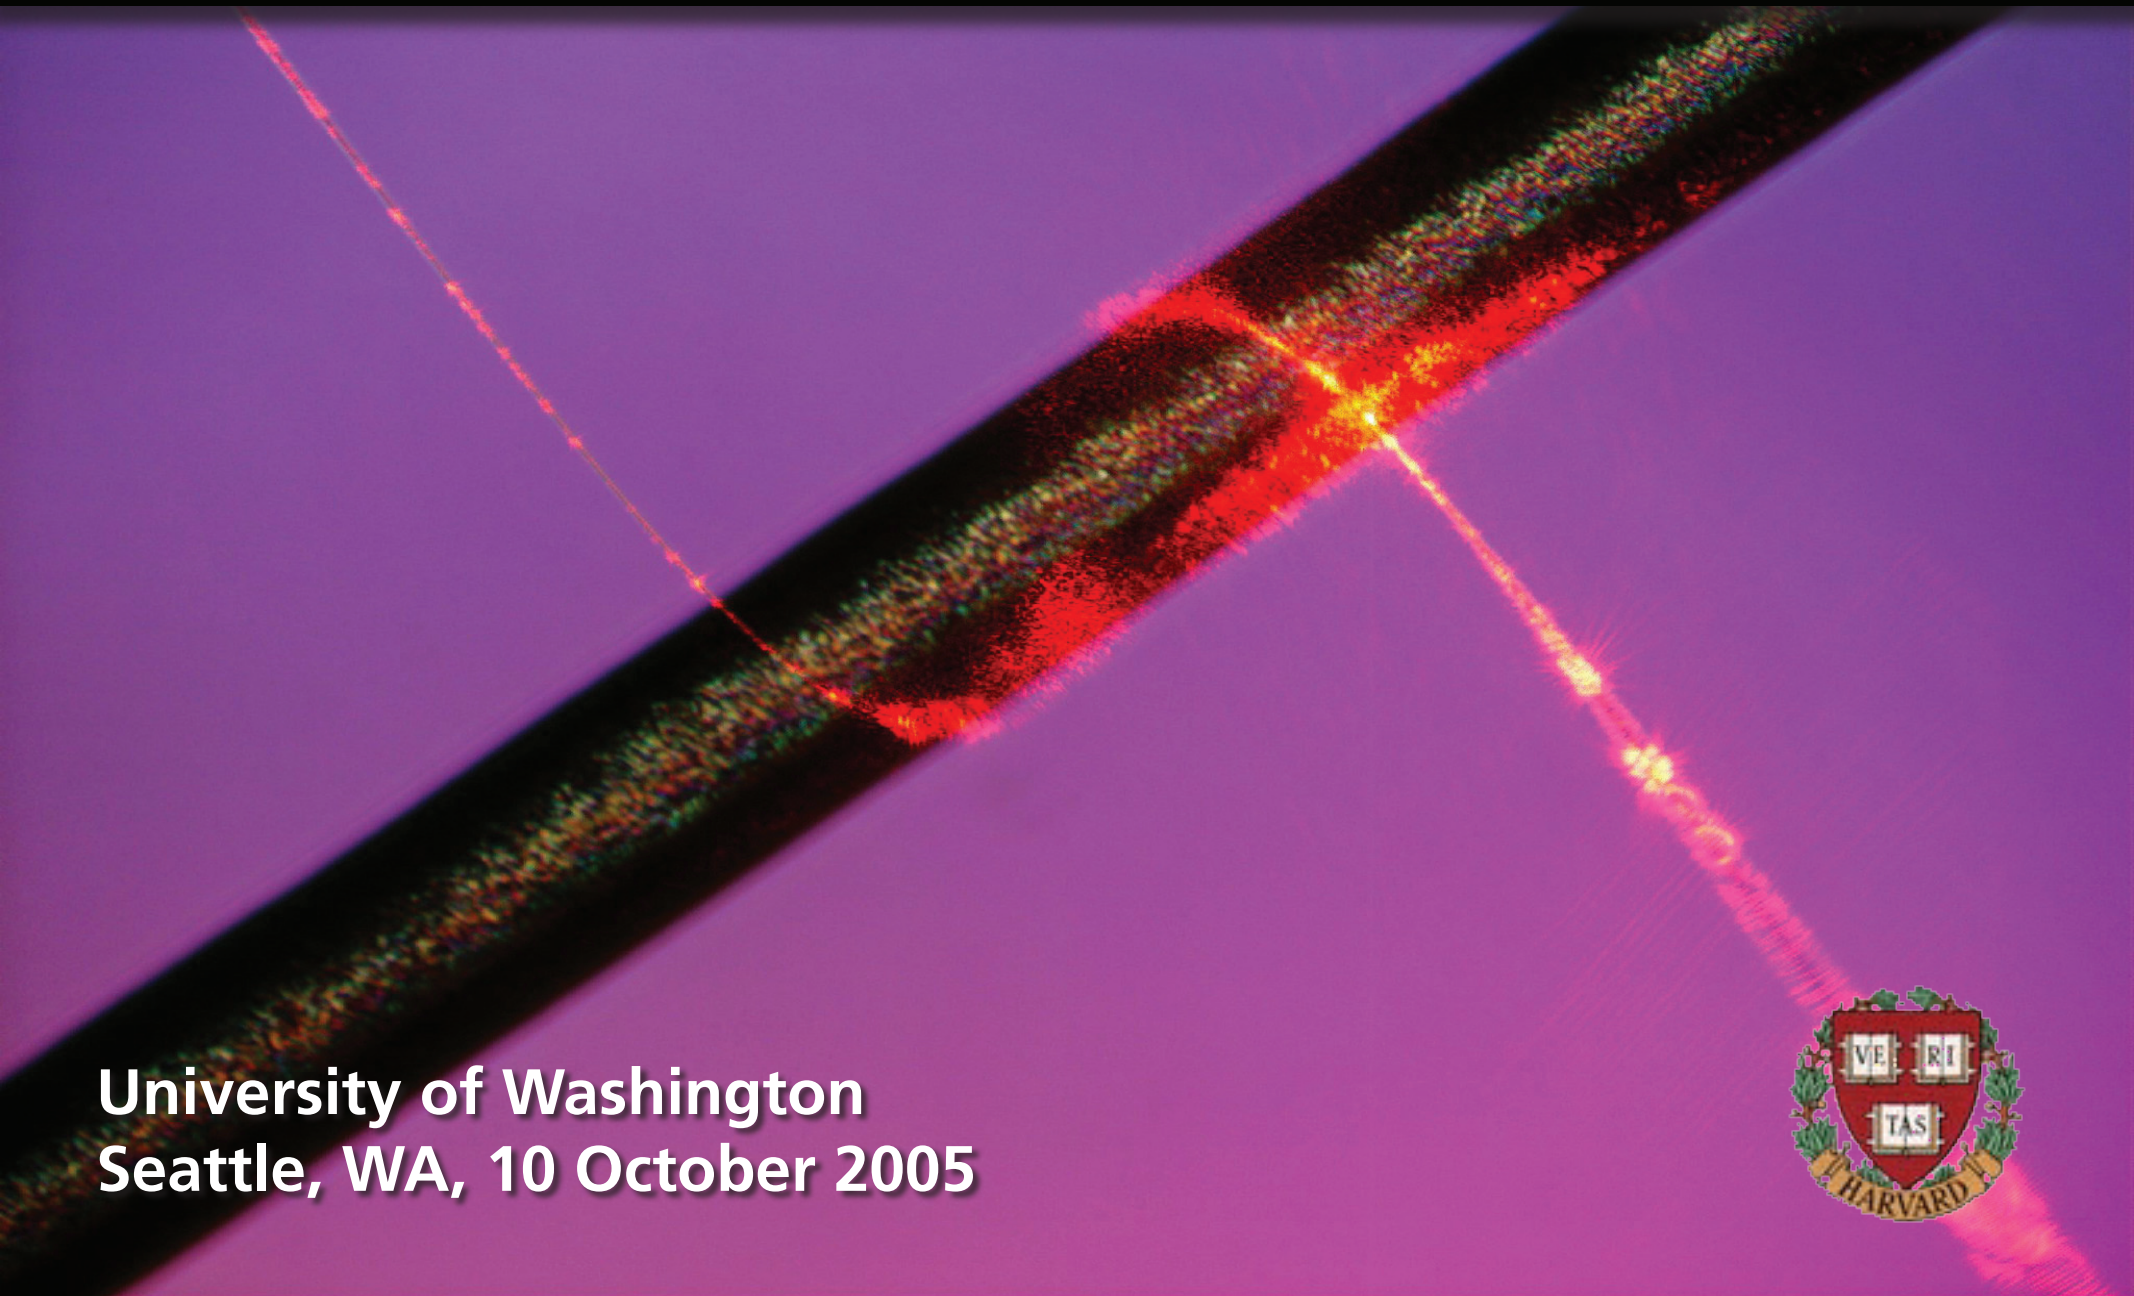

University of Washington
Seattle, WA, 10 October 2005

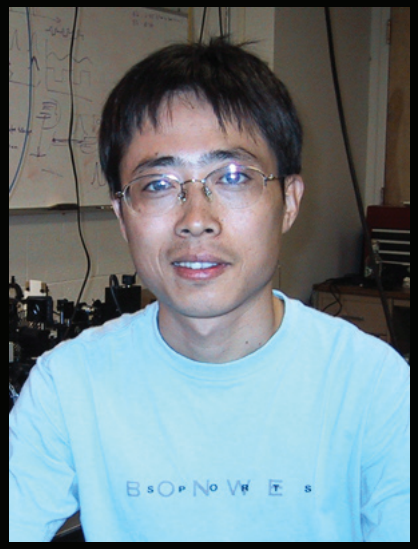

Limin Tong

Rafael Gattass

Geoff Svacha

Tommaso Baldacchini

and also....

at Harvard:

Jonathan Aschom
Mengyan Shen
Iva Maxwell
James Carey
Brian Tull
Dr. Yuan Lu
Dr. Richard Schalek
Prof. Federico Capasso
Prof. Cynthia Friend

and elsewhere:

Xuewen Chen (Zhejiang University)
Zhanghua Han (Zhejiang University)
Dr. Sailing He (Zhejiang University)
Prof. Igor Khruschev (Aston University)
Dr. Jingyi Lou (Zhejiang University)
Dr. Ray Mariella (LLNL)
Liu Liu (Zhejiang University)

“I managed to illuminate the interior of a stream in a dark space. I have discovered that this strange arrangement offers one of the most beautiful, and most curious experiments that one can perform in a course on Optics.”

Daniel Colladon, *Comptes Rendus*, 15, 800–802 (1842)

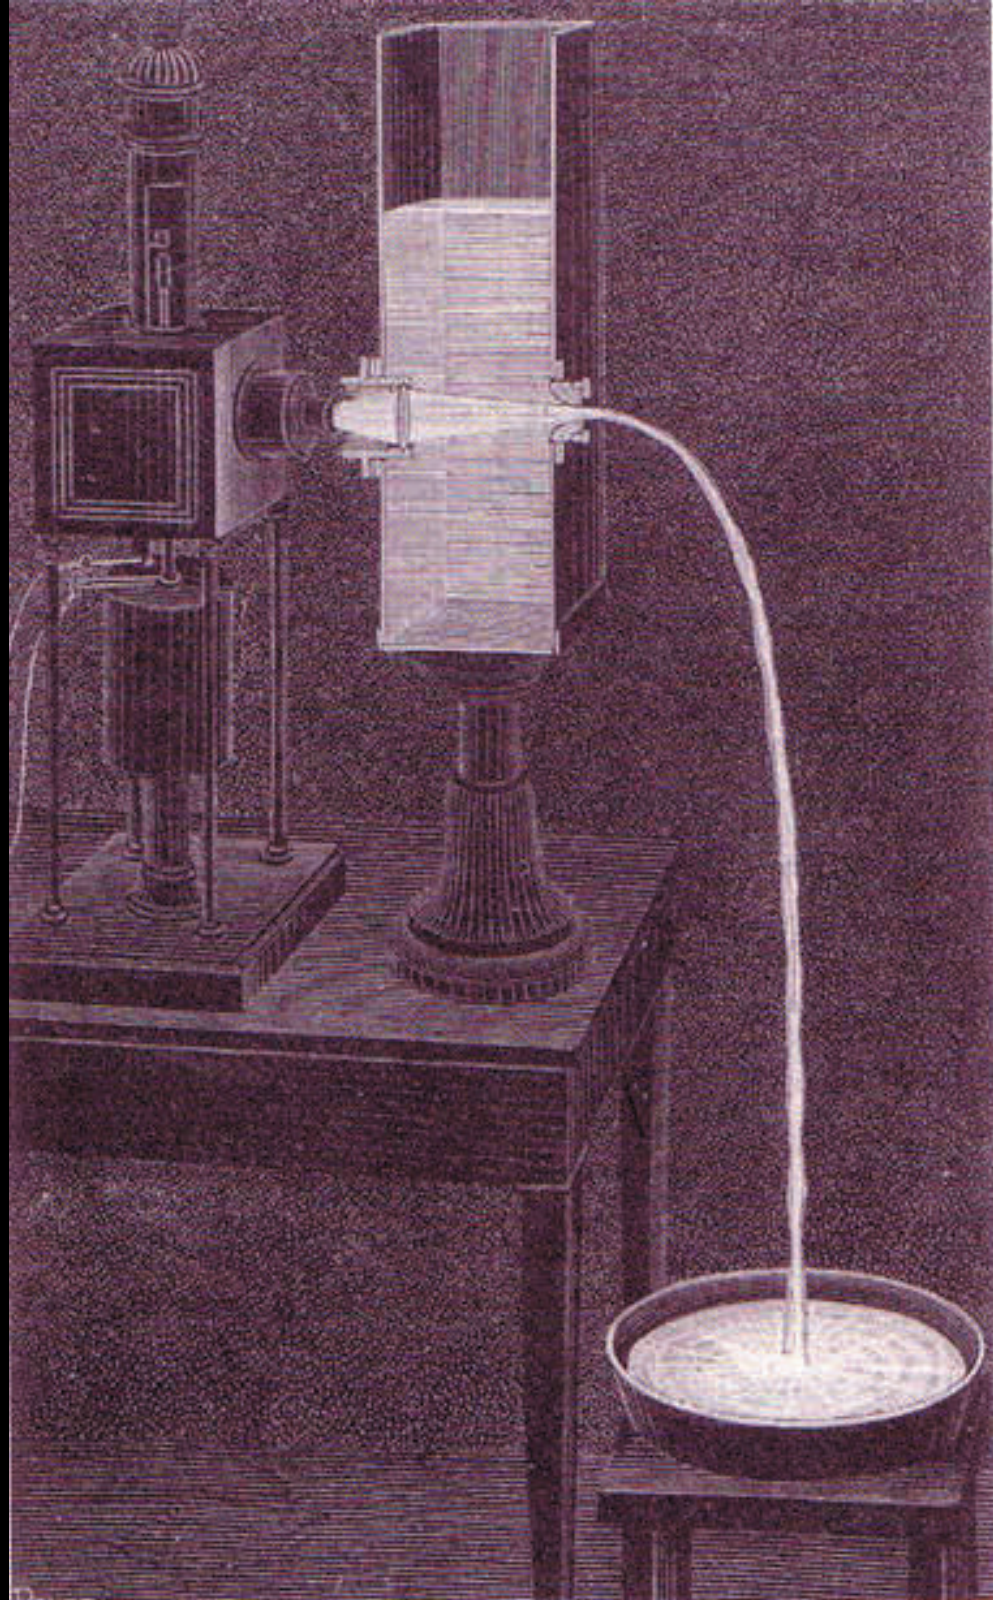

D. Colladon, *La Nature*, 325 (1884)

(No model.) 4 Sheets—Sheet

W. WHEELER.

APPARATUS FOR LIGHTING DWELLINGS OR OTHER STRUCTURES.

No. 247,229. Patented Sept. 20, 1881.

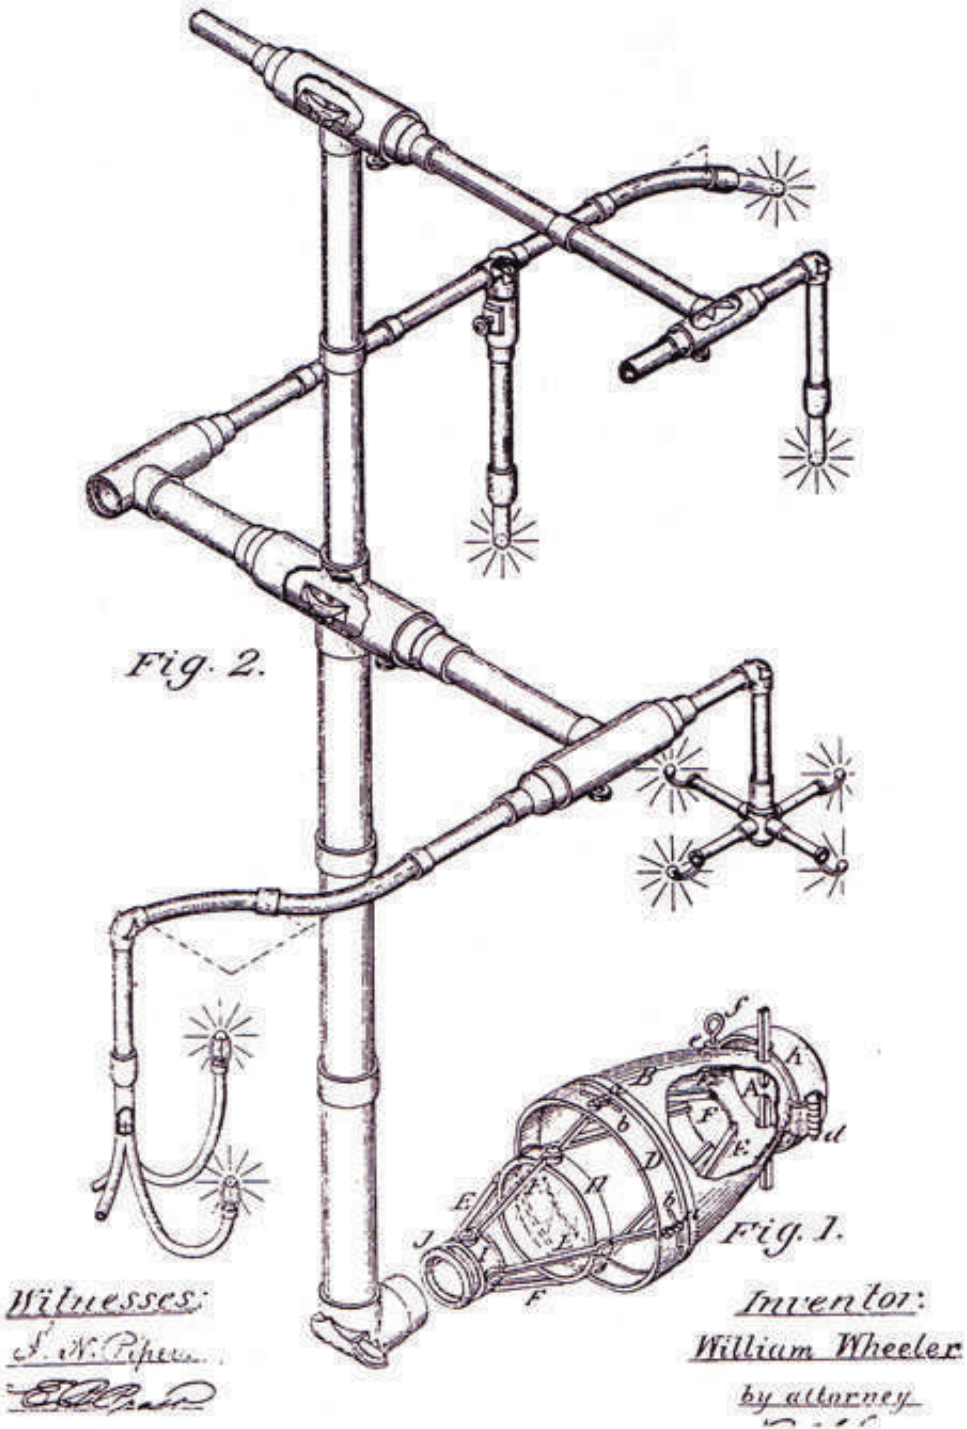

US Patent 247, 229 (1881)

Outline

- waveguiding
- nanowire fabrication
- optical properties

Waveguiding

two crossed planar waves…

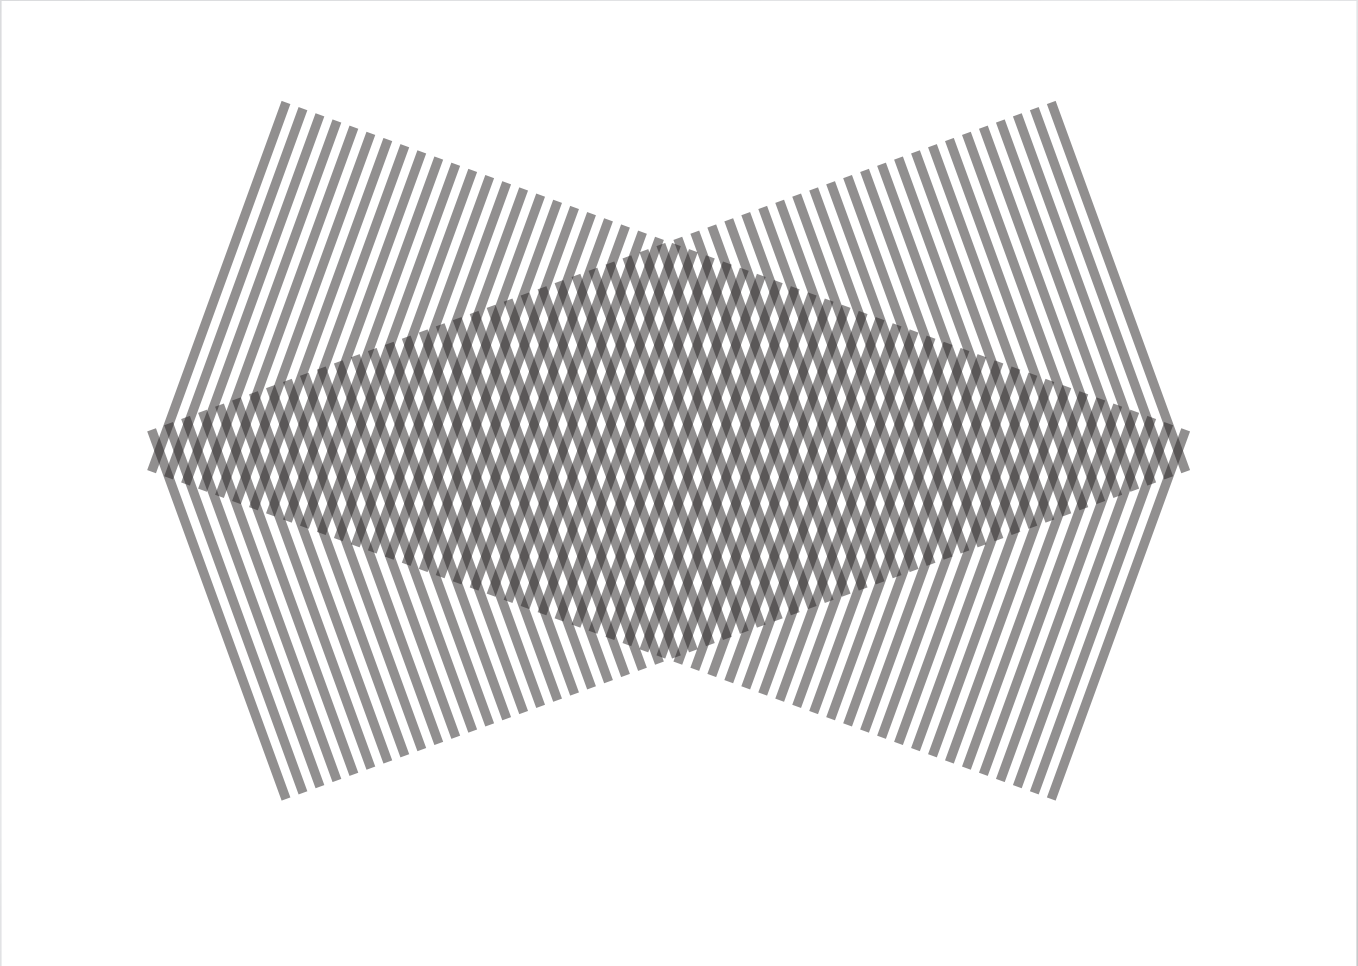

Waveguiding

…cause an interference pattern

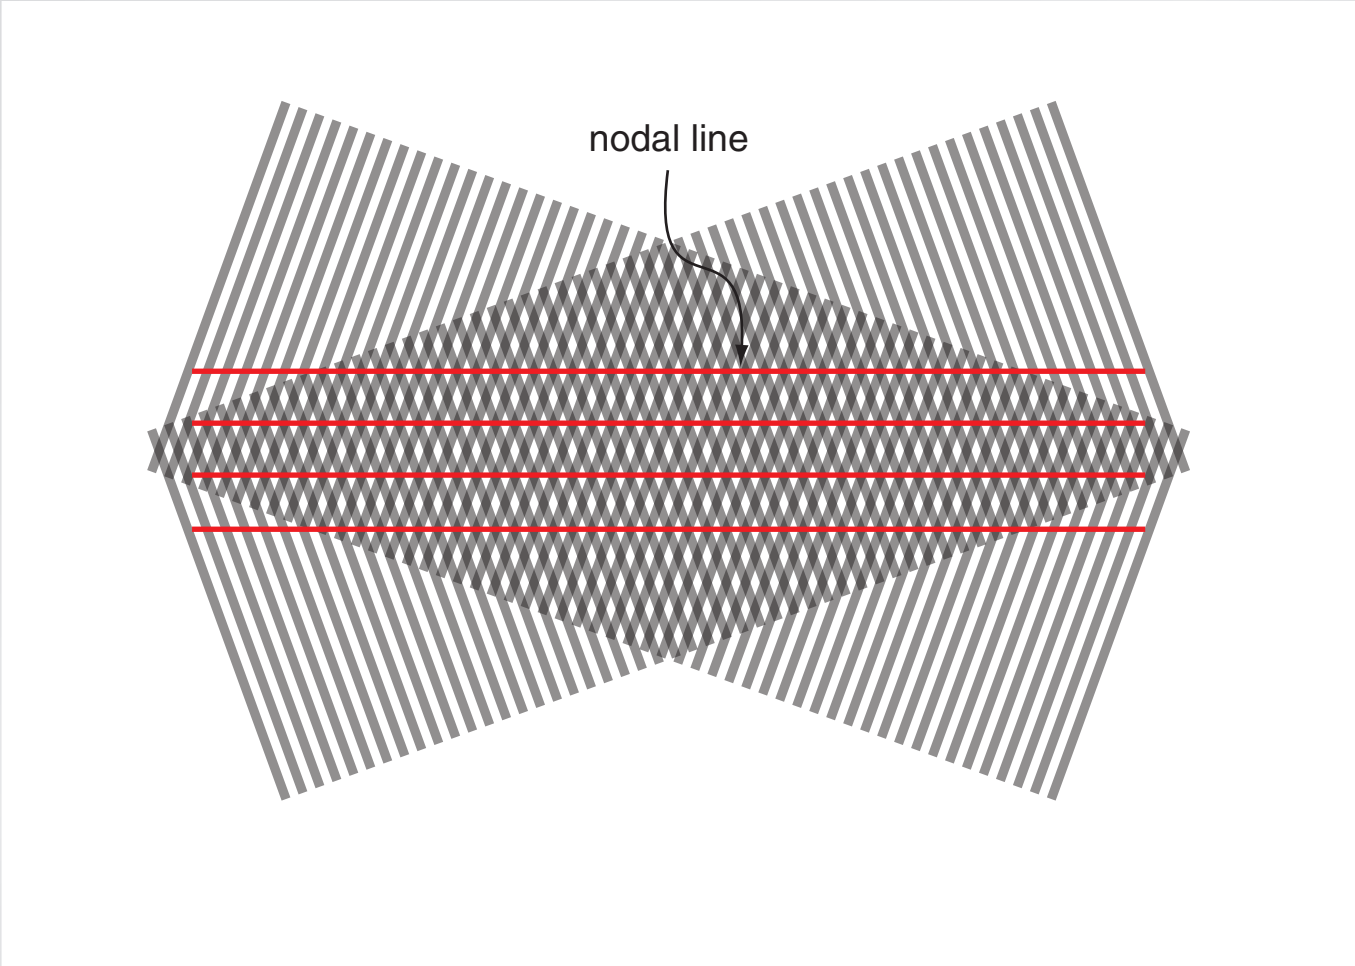

Waveguiding

$E = 0$ **on the nodal lines**

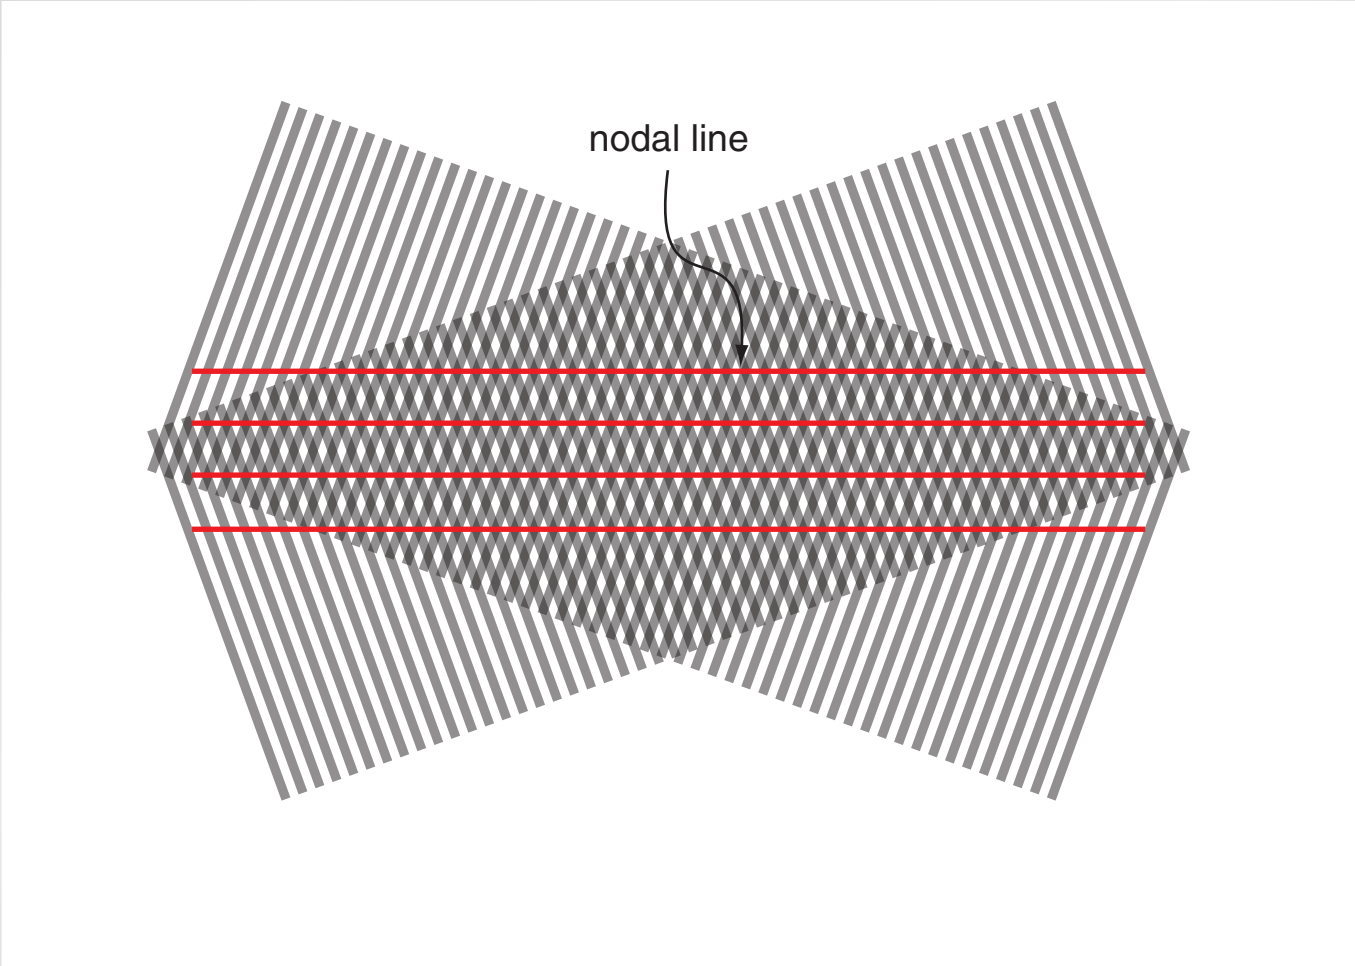

Waveguiding

…satisfying boundary conditions for planar-mirror waveguide

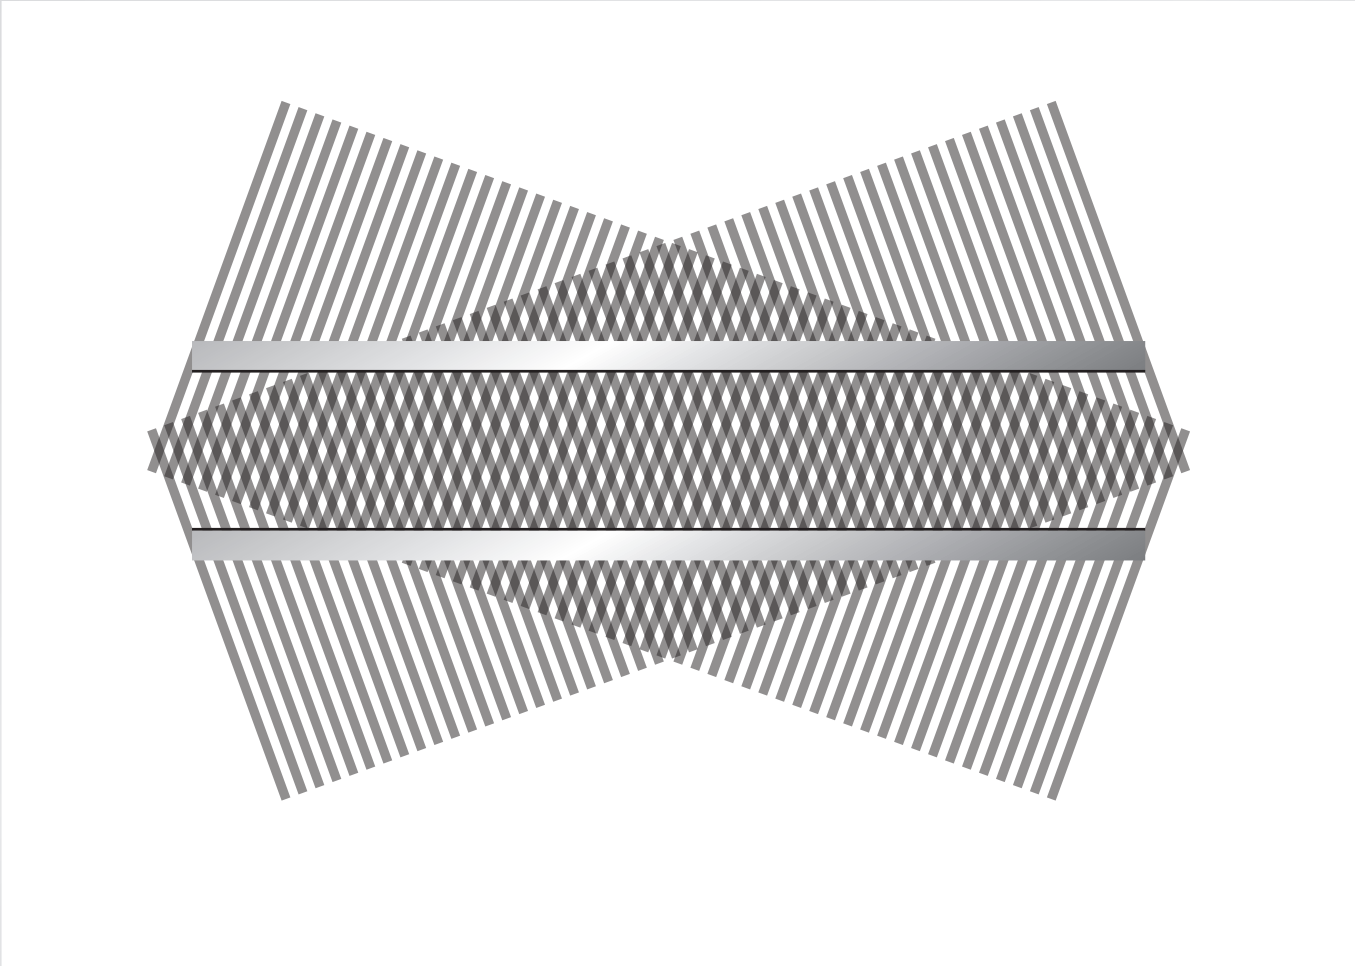

Waveguiding

transverse standing wave, traveling along axis

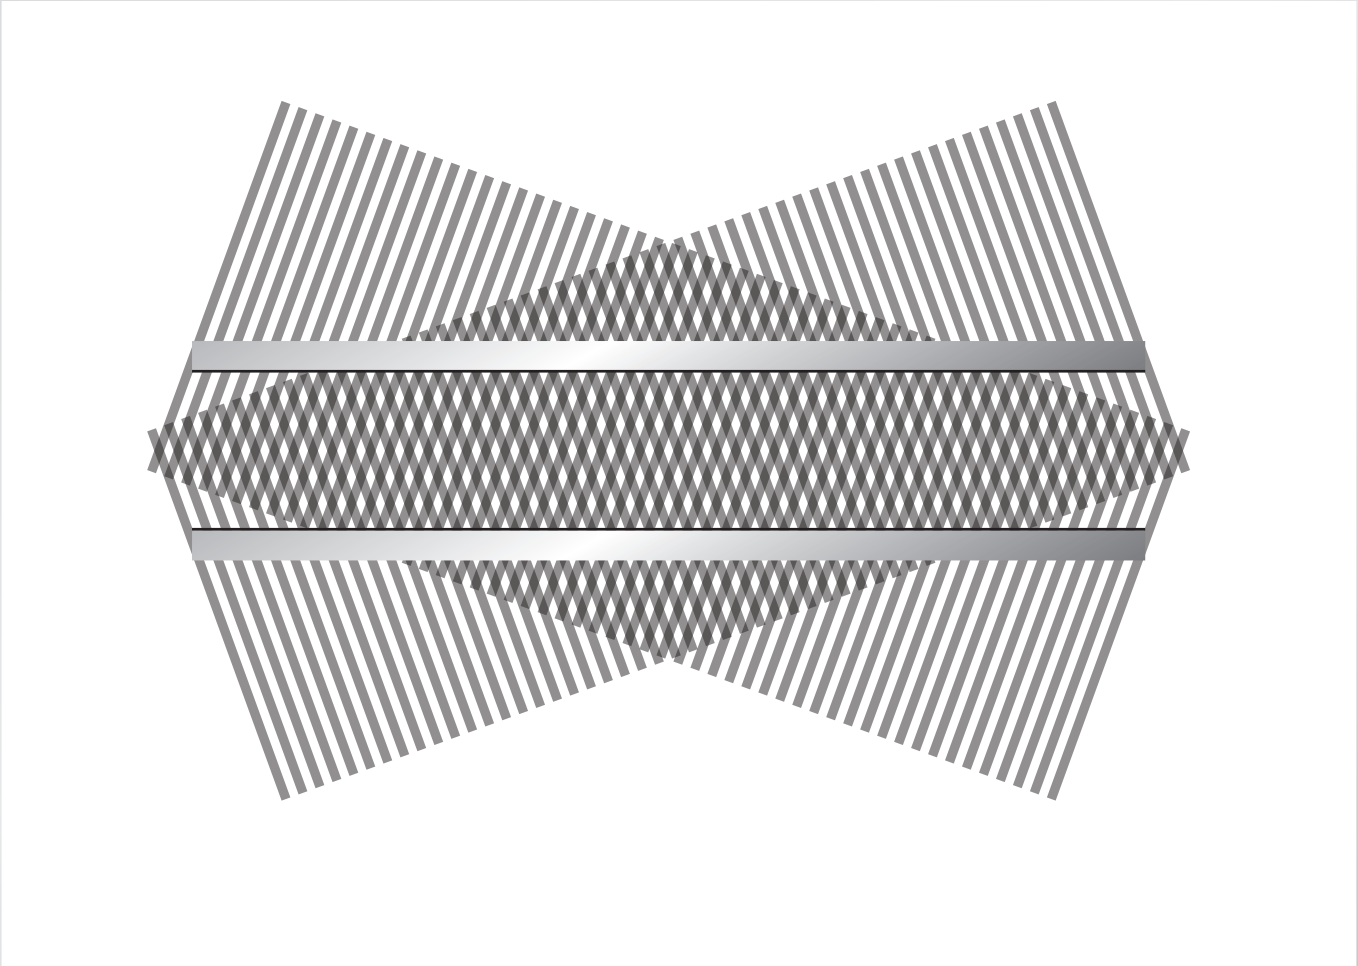

Waveguiding

transverse standing wave, traveling along axis

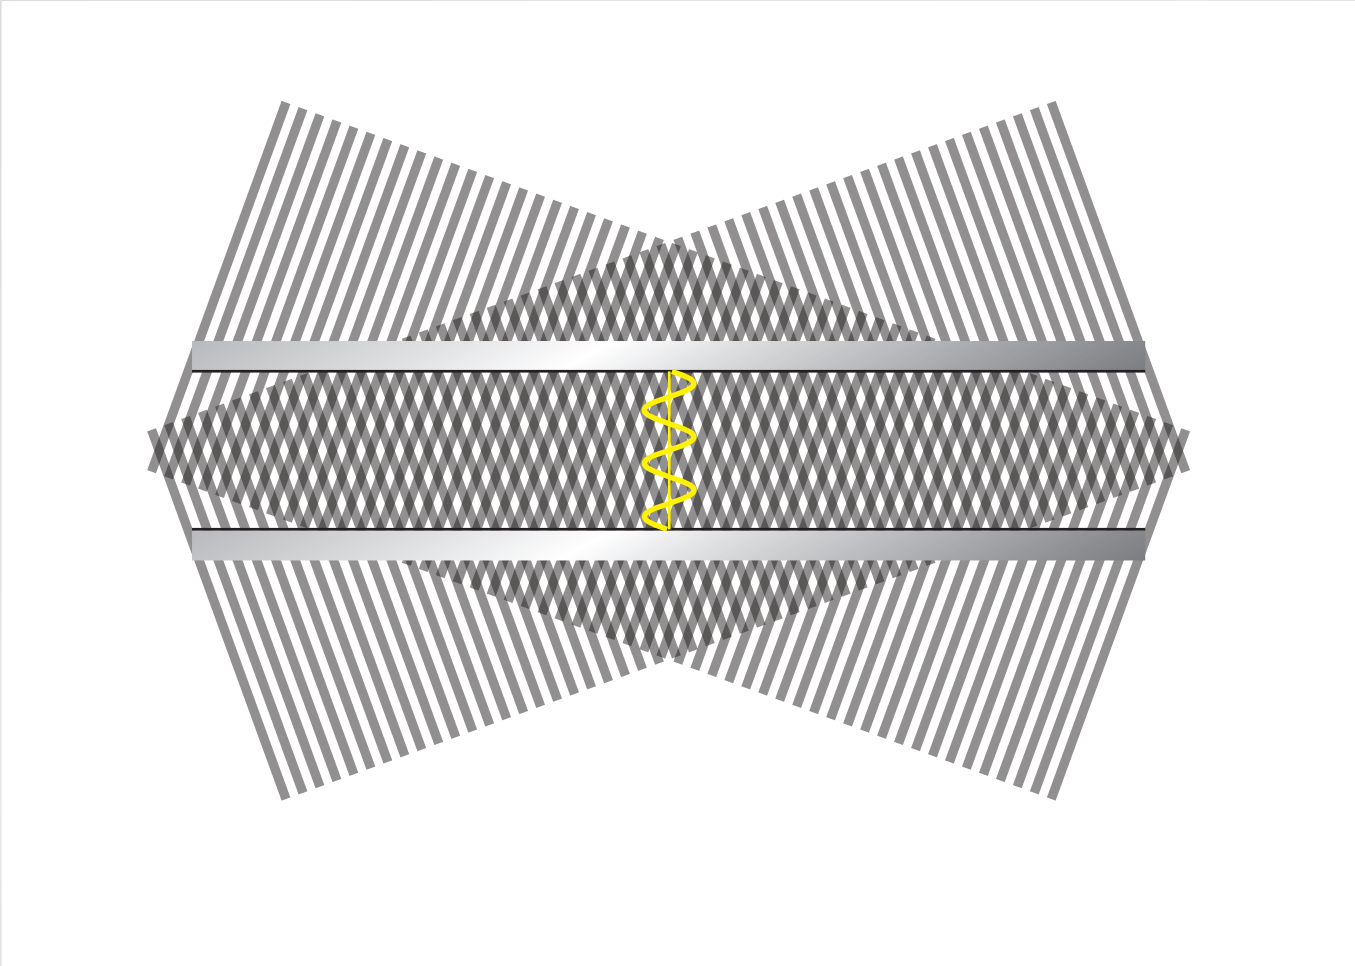

Waveguiding

change angle of incident waves…

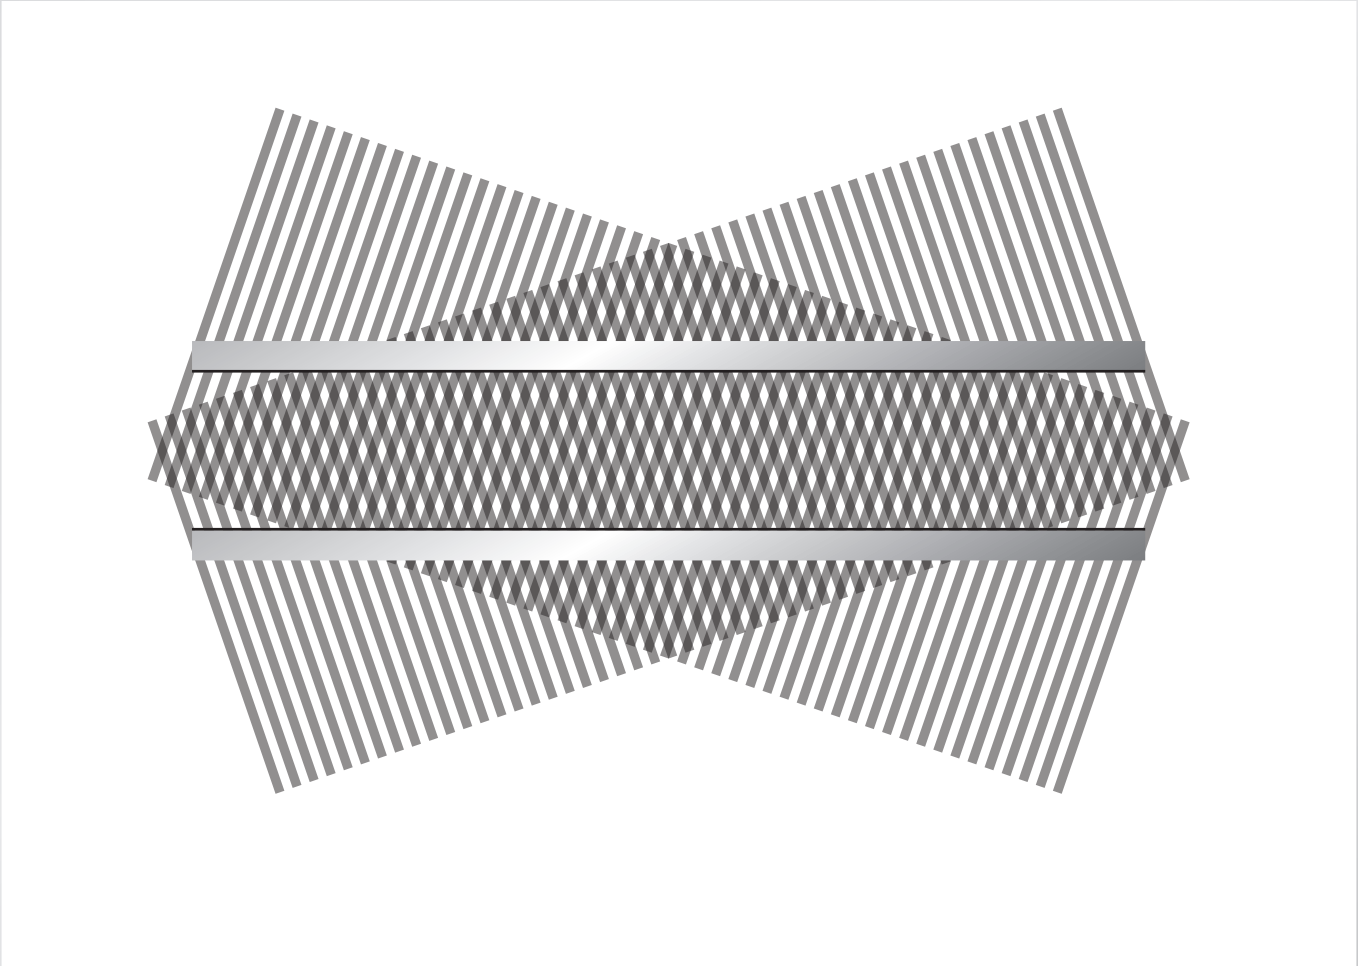

Waveguiding

change angle of incident waves…

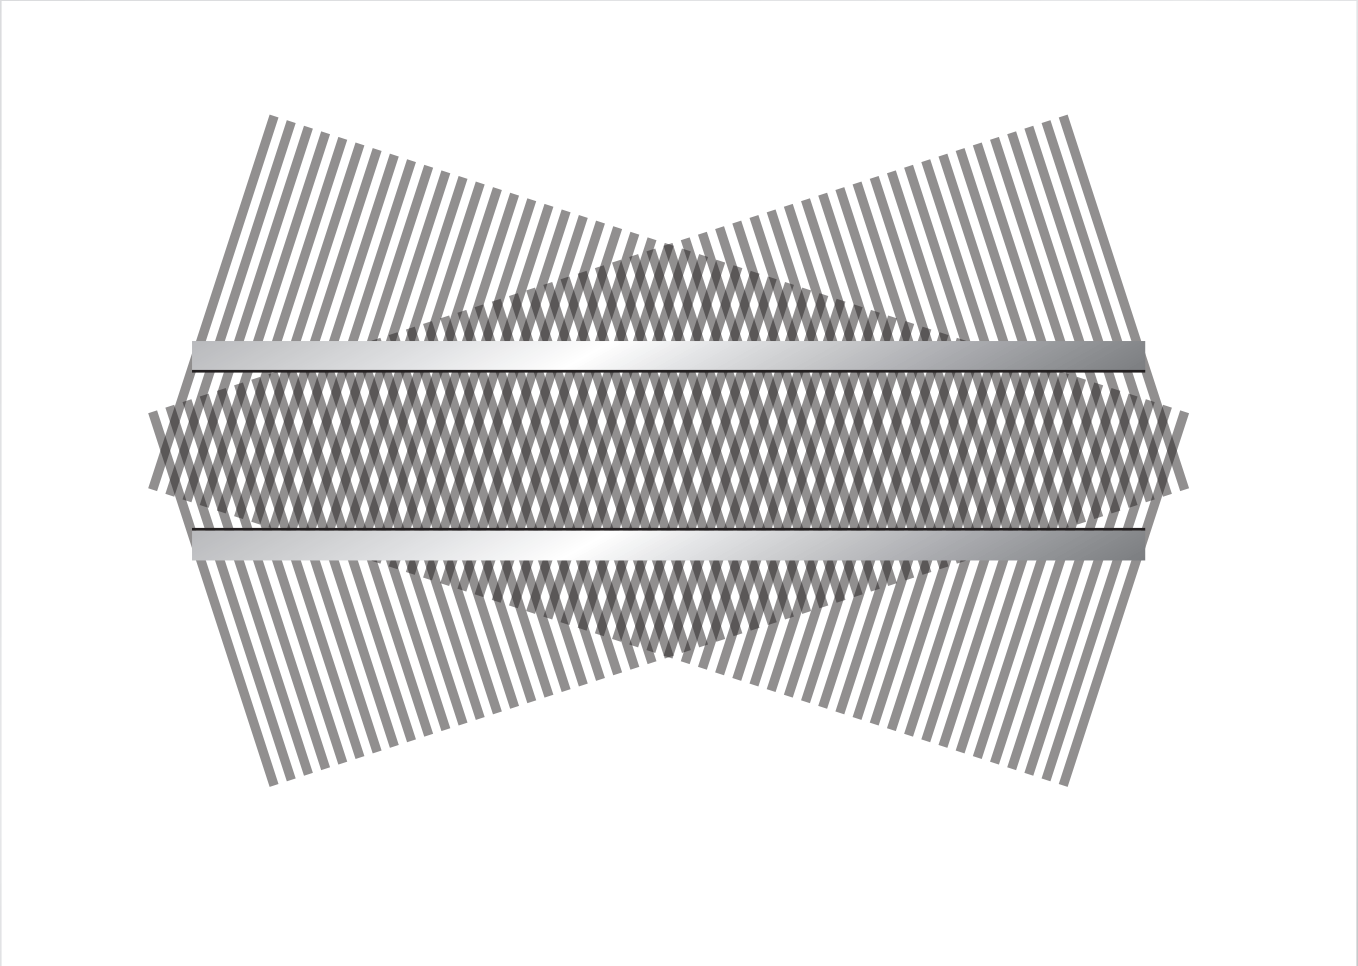

Waveguiding

change angle of incident waves…

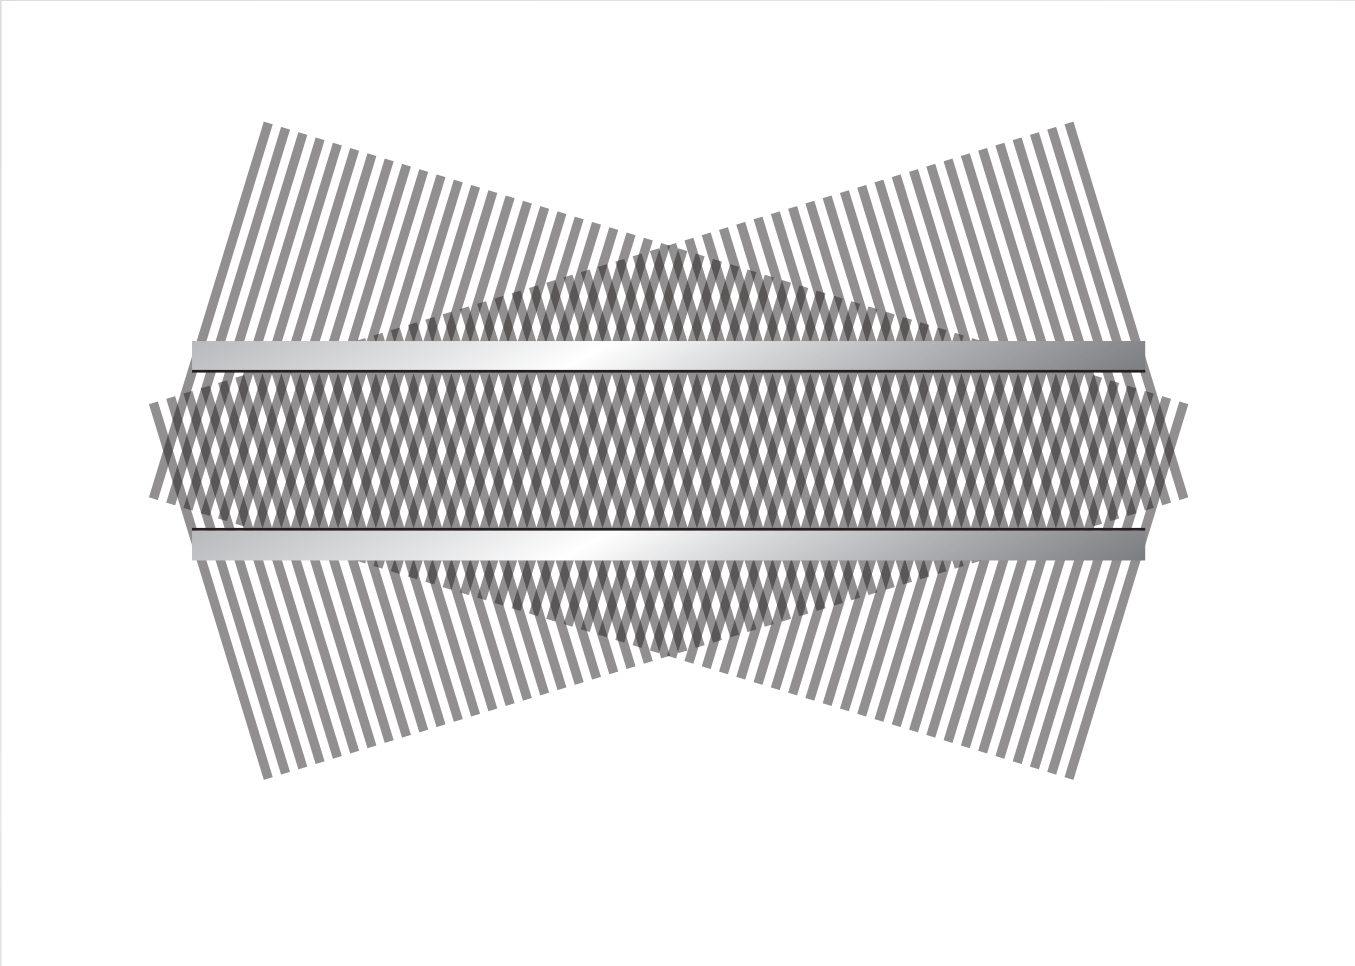

Waveguiding

change angle of incident waves…

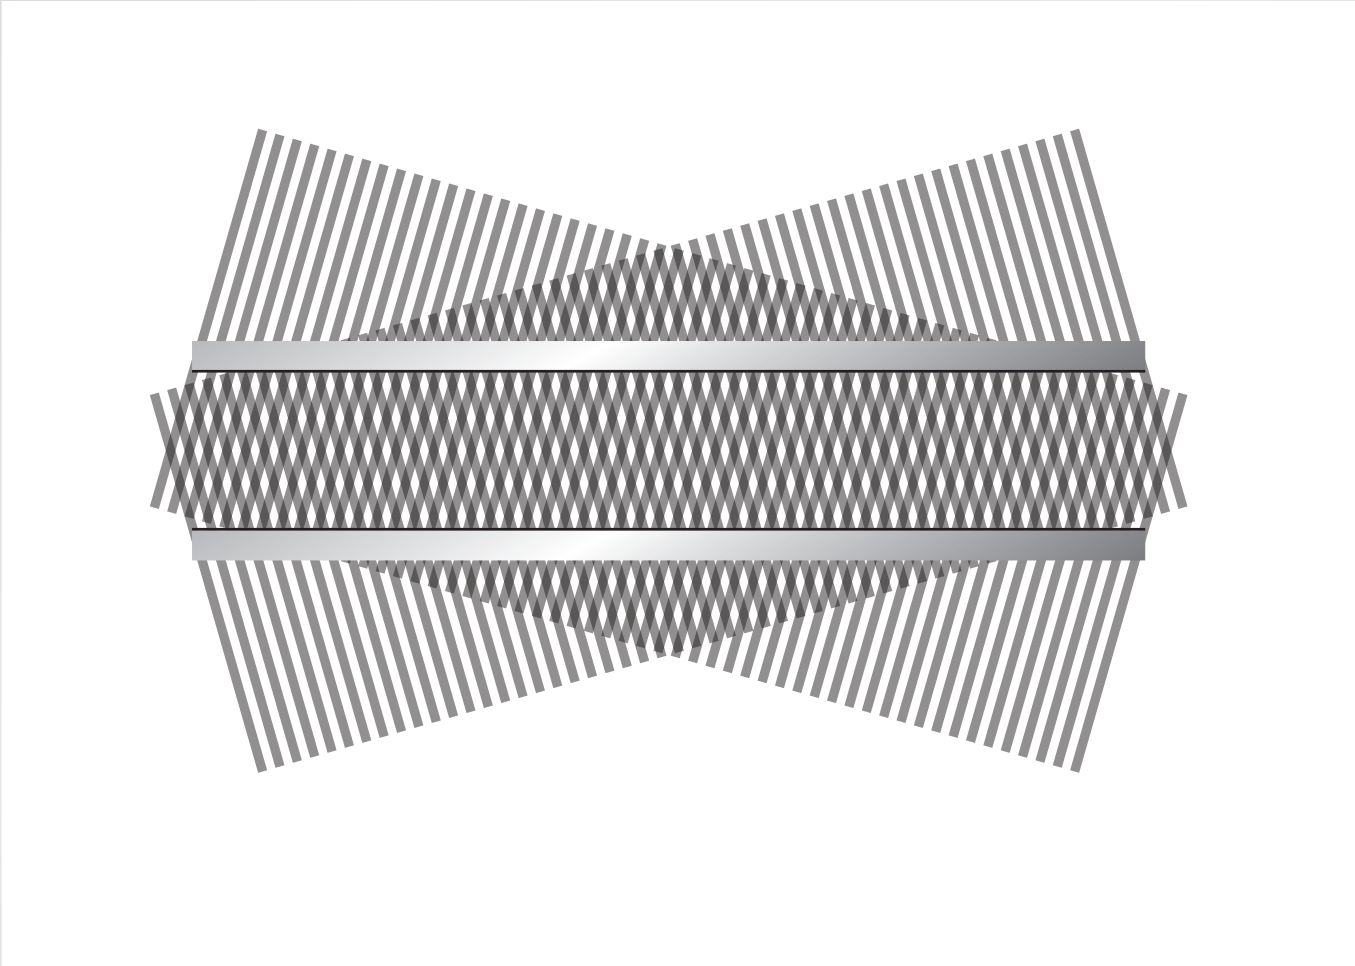

Waveguiding

change angle of incident waves…

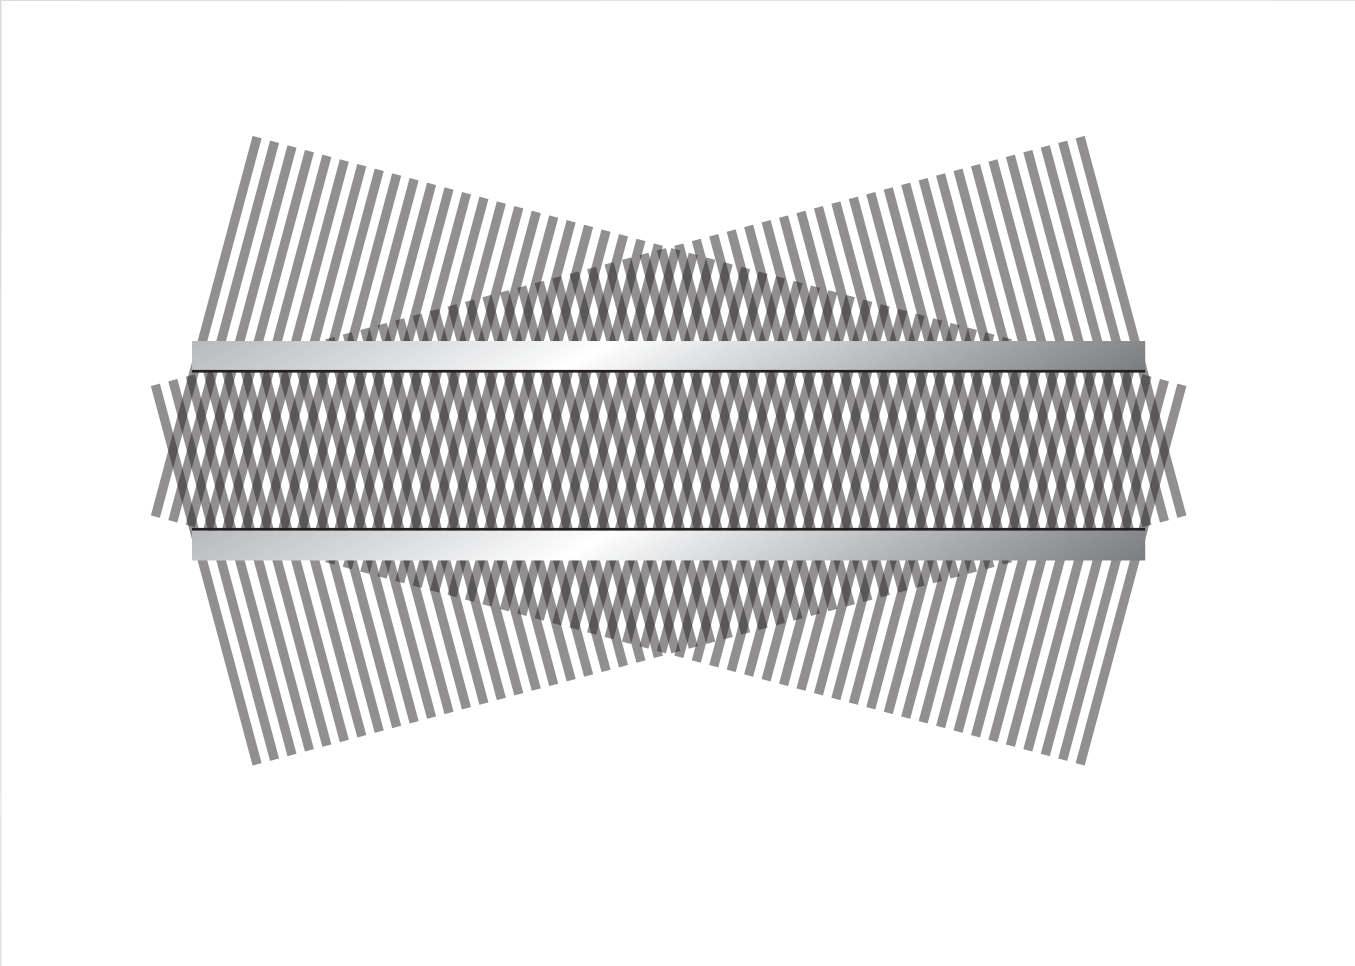

Waveguiding

change angle of incident waves…

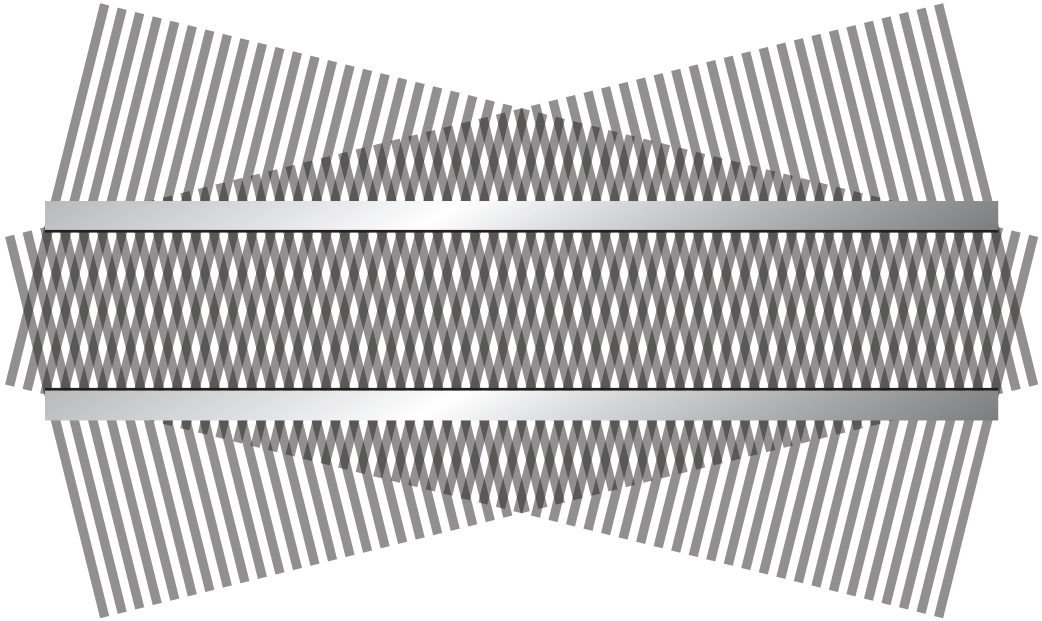

Waveguiding

change angle of incident waves…

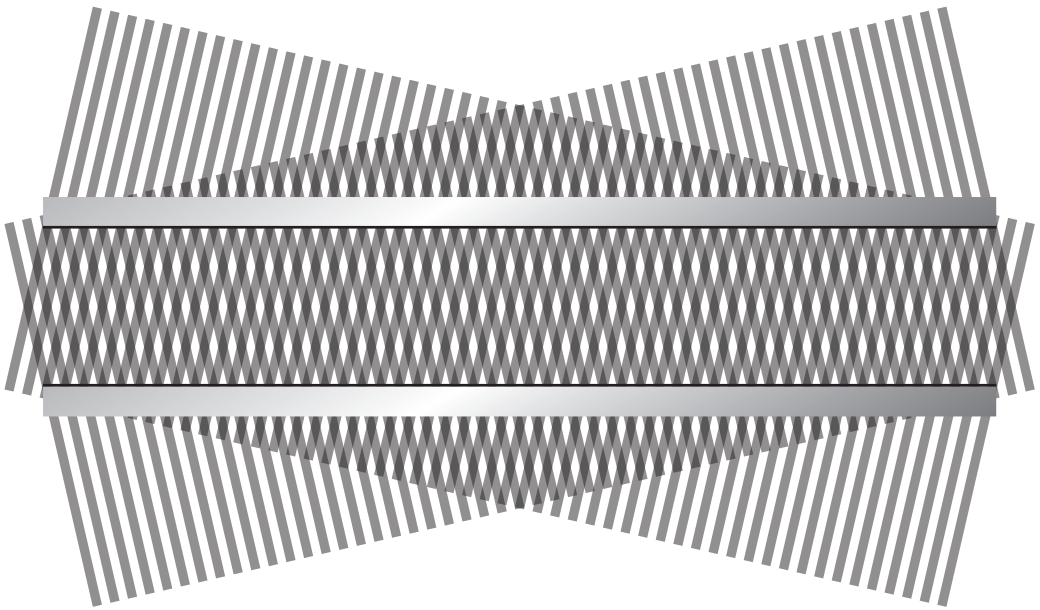

Waveguiding

change angle of incident waves…

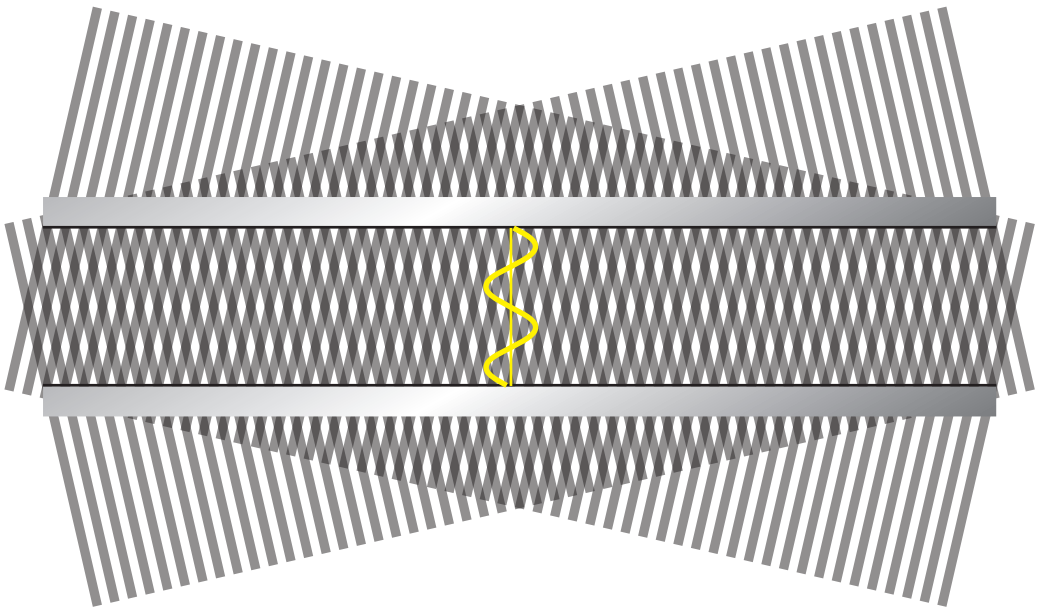

Waveguiding

change angle of incident waves…

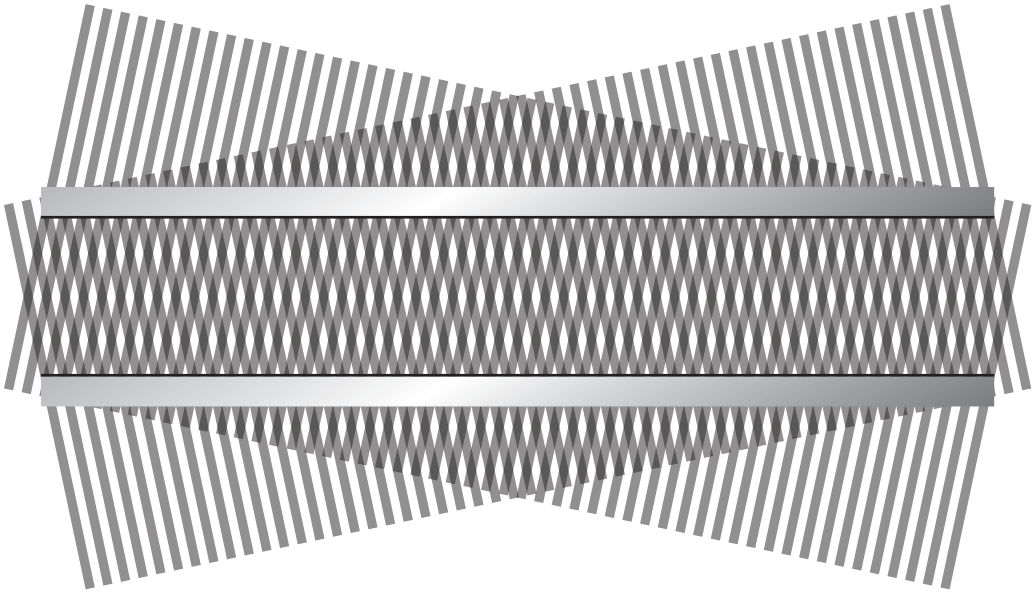

Waveguiding

change angle of incident waves…

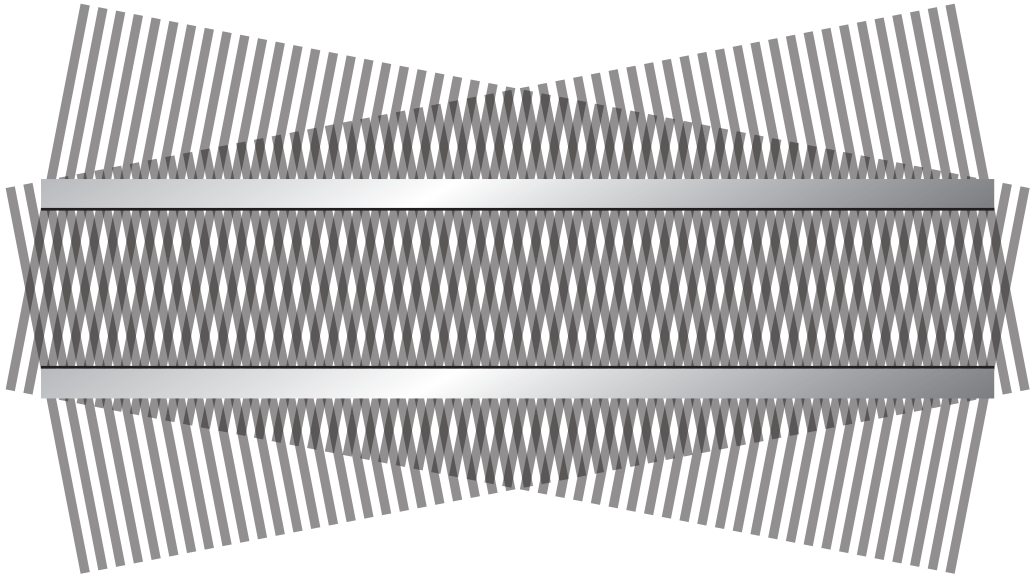

Waveguiding

change angle of incident waves…

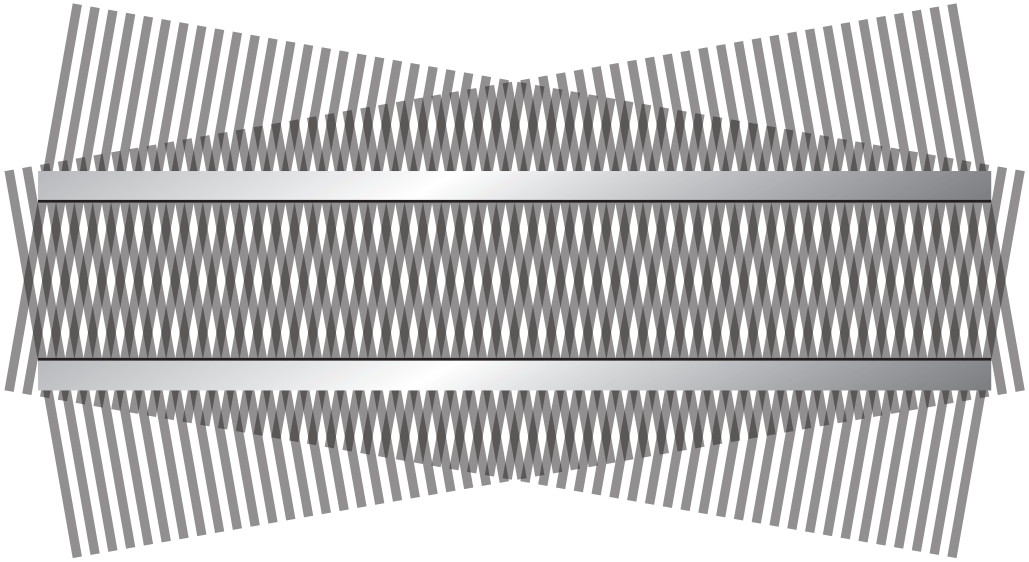

Waveguiding

change angle of incident waves…

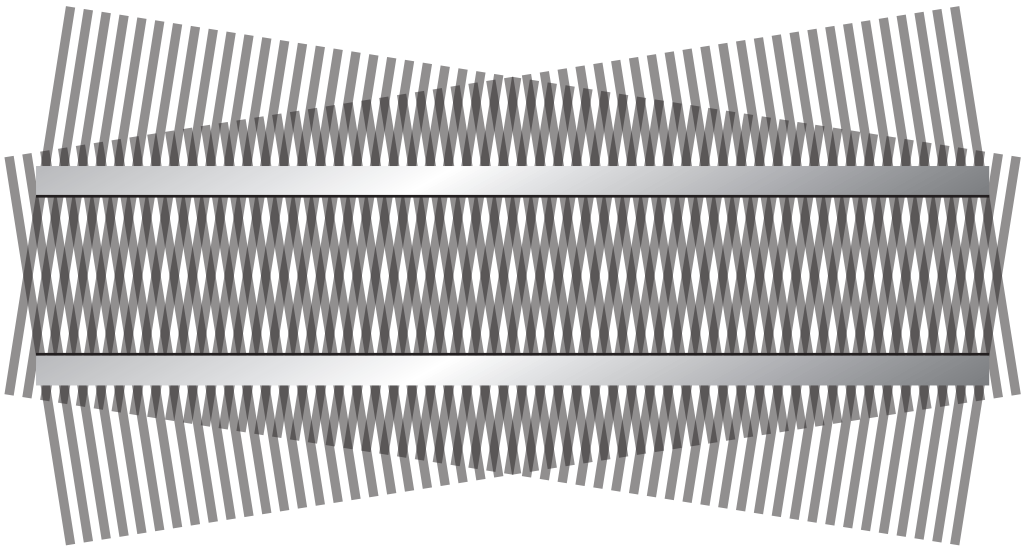

Waveguiding

change angle of incident waves…

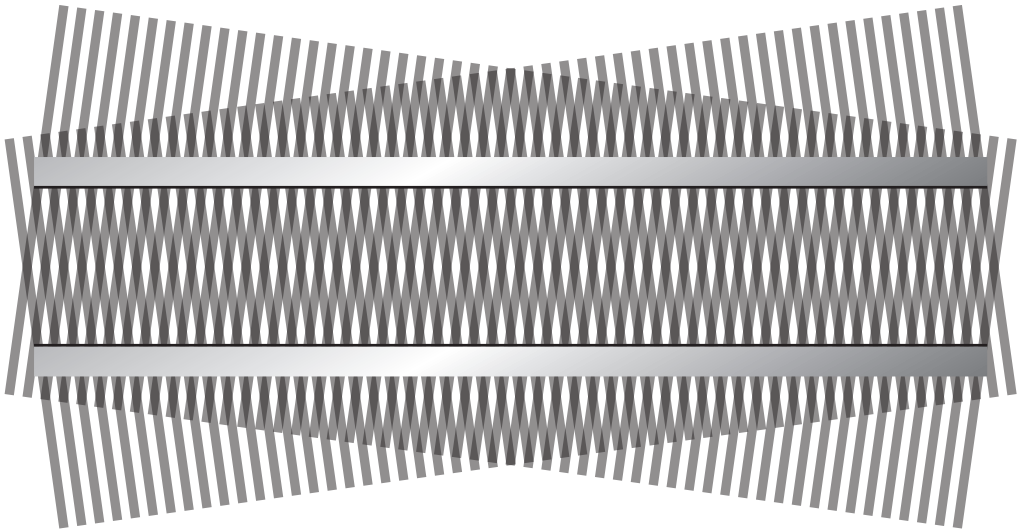

Waveguiding

change angle of incident waves…

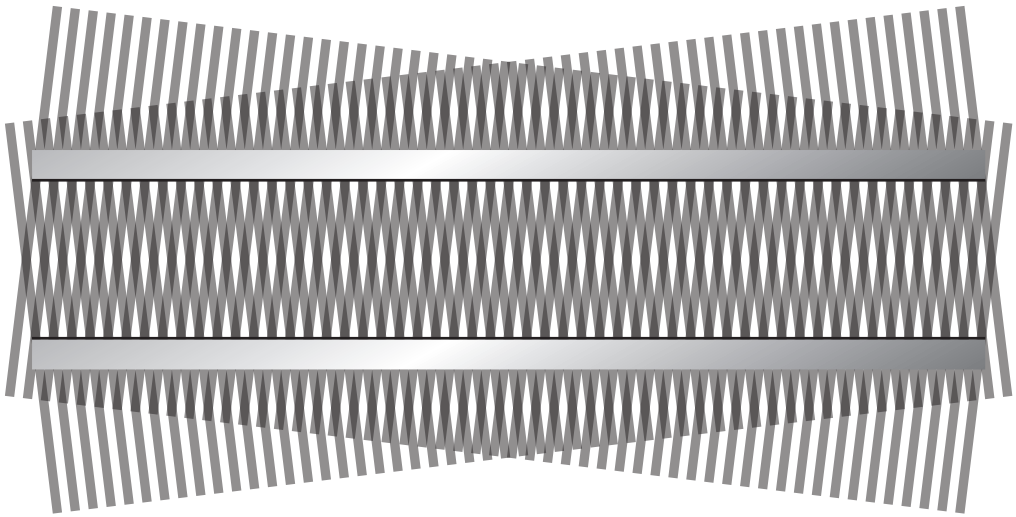

Waveguiding

change angle of incident waves…

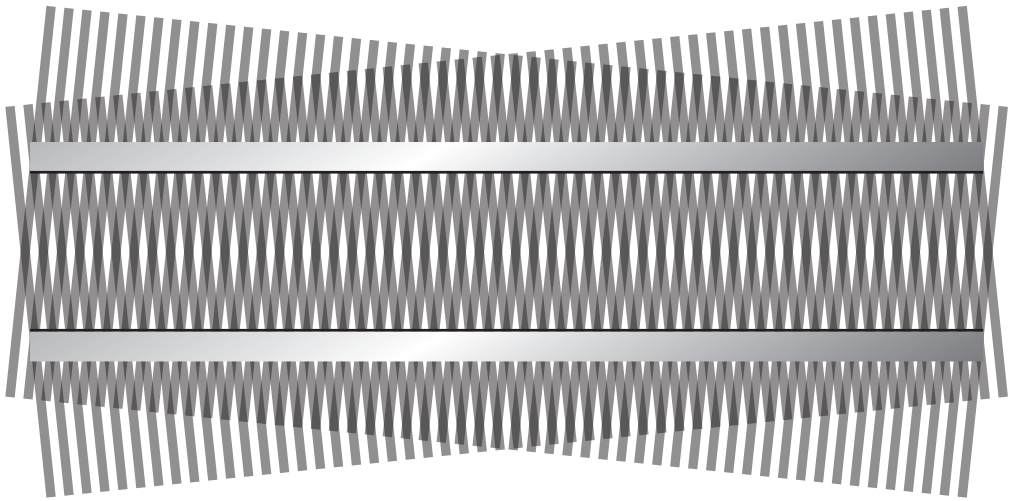

Waveguiding

change angle of incident waves…

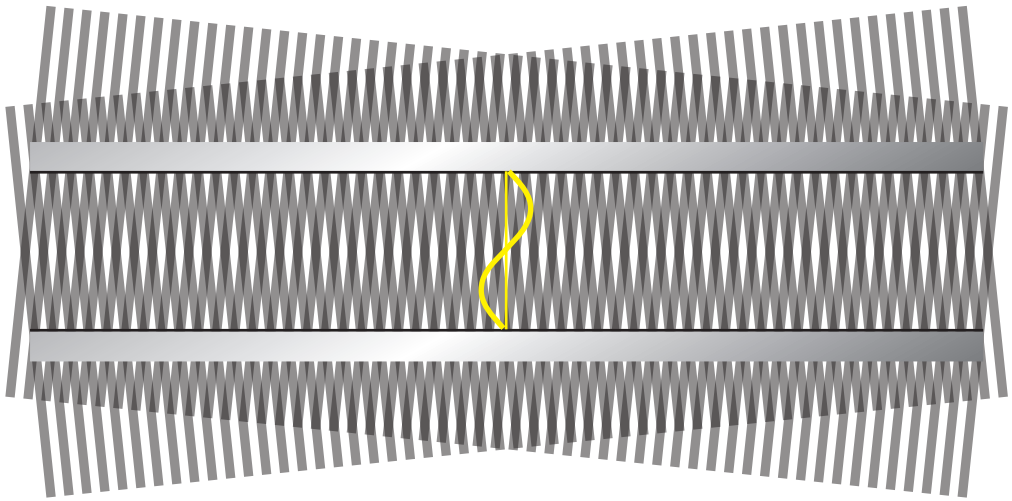

Waveguiding

change angle of incident waves…

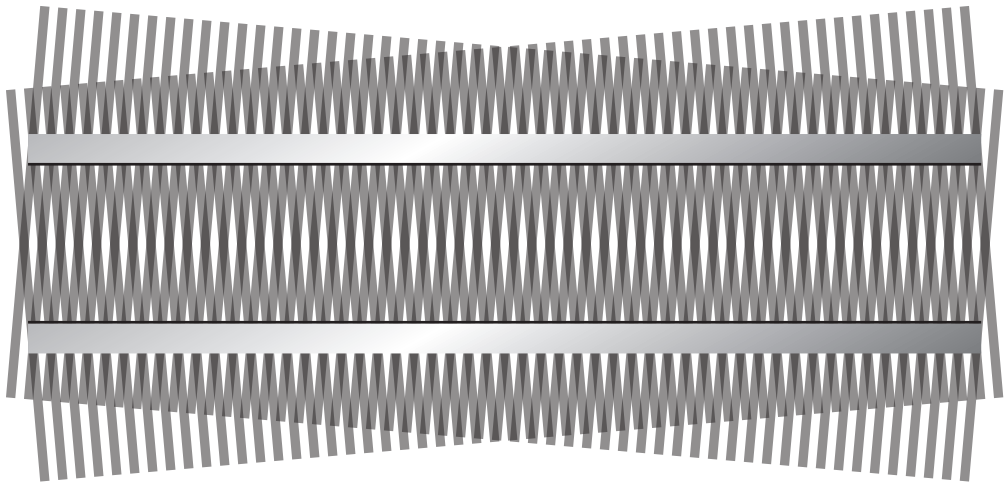

Waveguiding

change angle of incident waves…

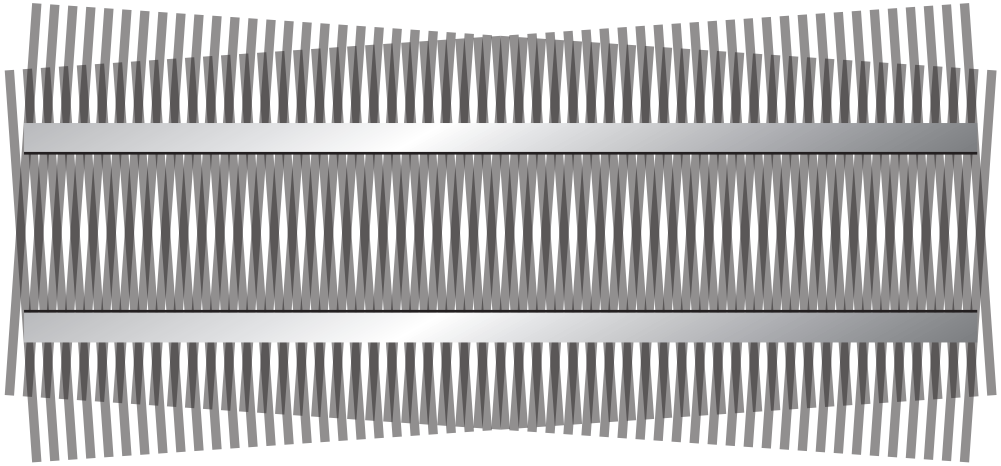

Waveguiding

boundary conditions only satisfied for certain θ

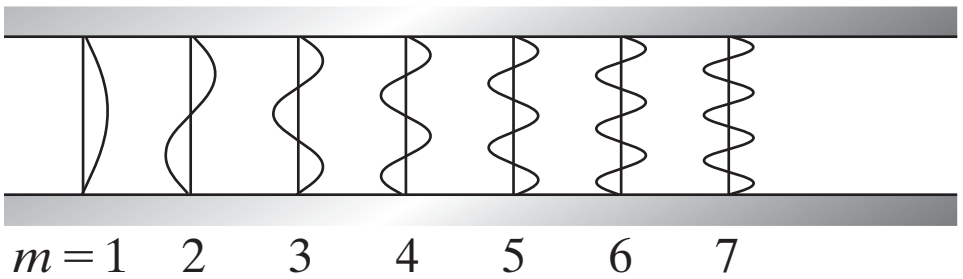

standing wave in *y*-direction, traveling in *z*-direction

Waveguiding

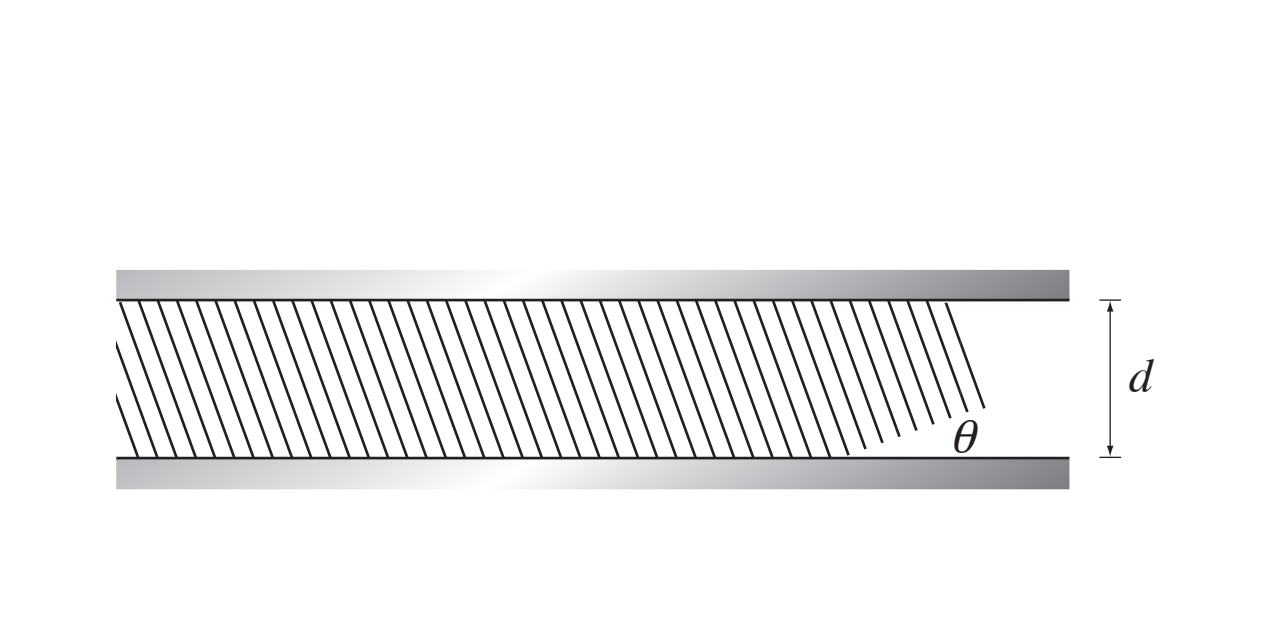

consider wave incident at angle θ

Waveguiding

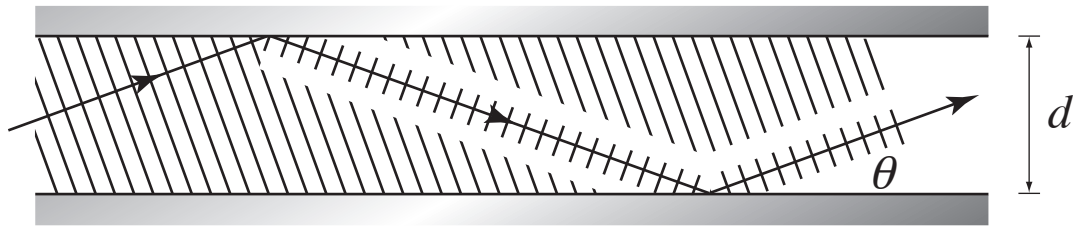

twice-reflected wave

Waveguiding

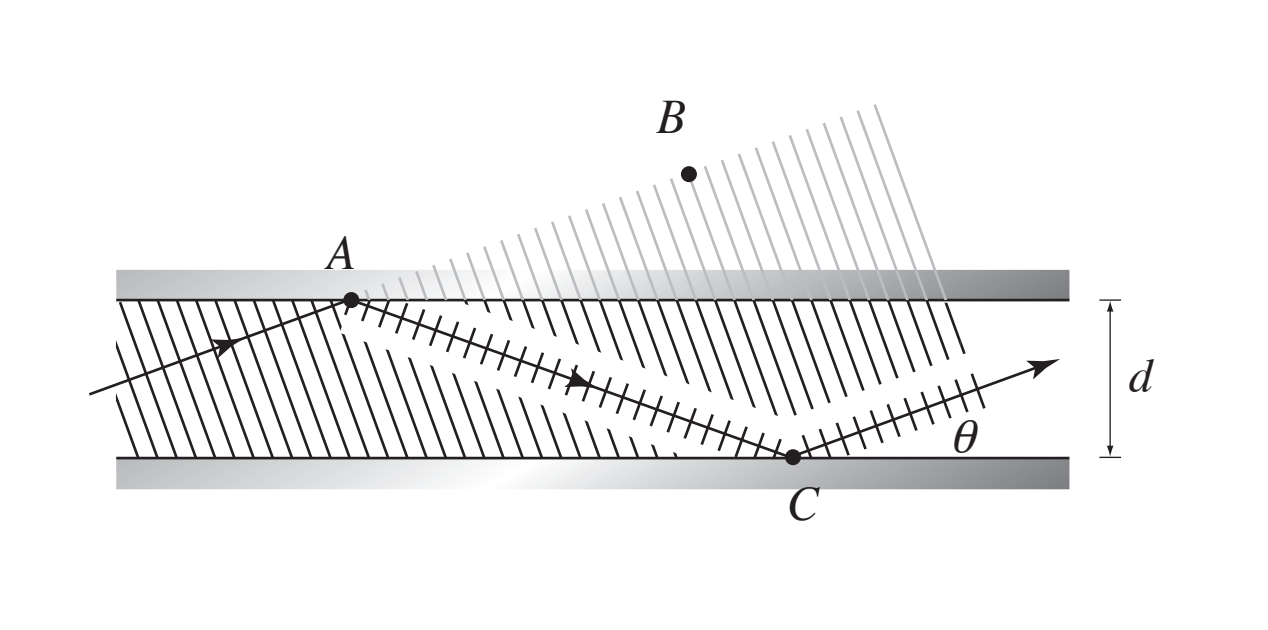

self consistency:

$$AC - AB = 2d\sin\theta = m\lambda \quad (m = 1, 2, ...)$$

Waveguiding

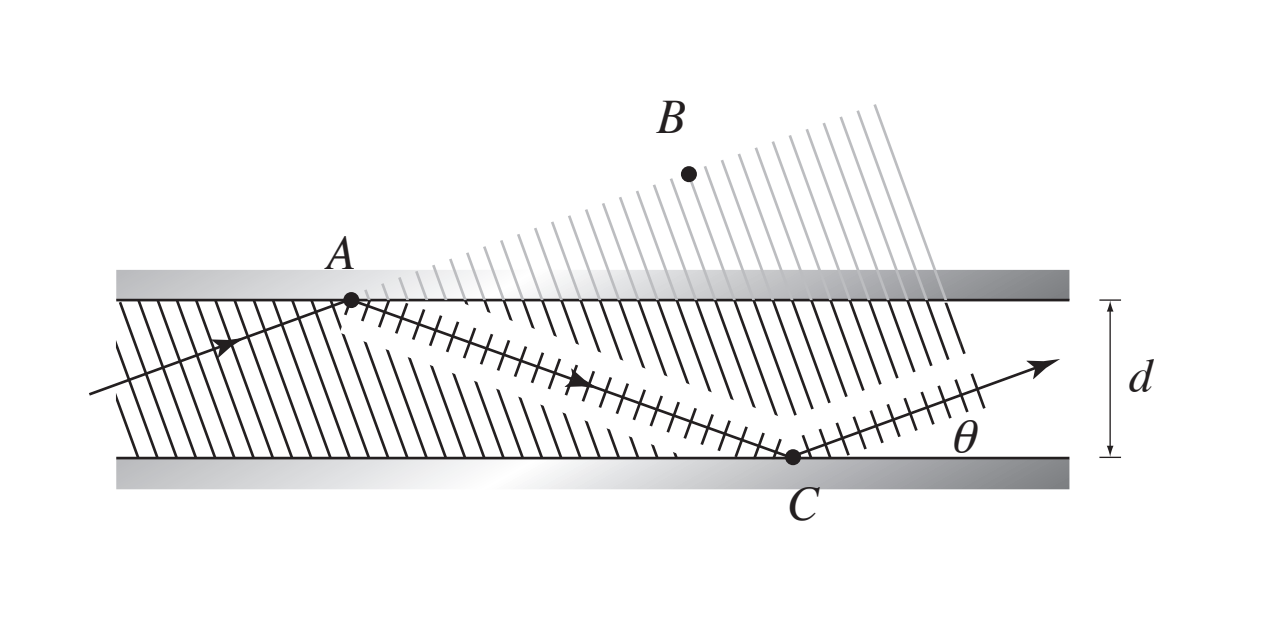

self consistency:

$$AC - AB = 2d\sin\theta = m\lambda \quad (m = 1, 2, ...)$$

so:

$$\sin\theta_m = m\frac{\lambda}{2d}$$

Waveguiding

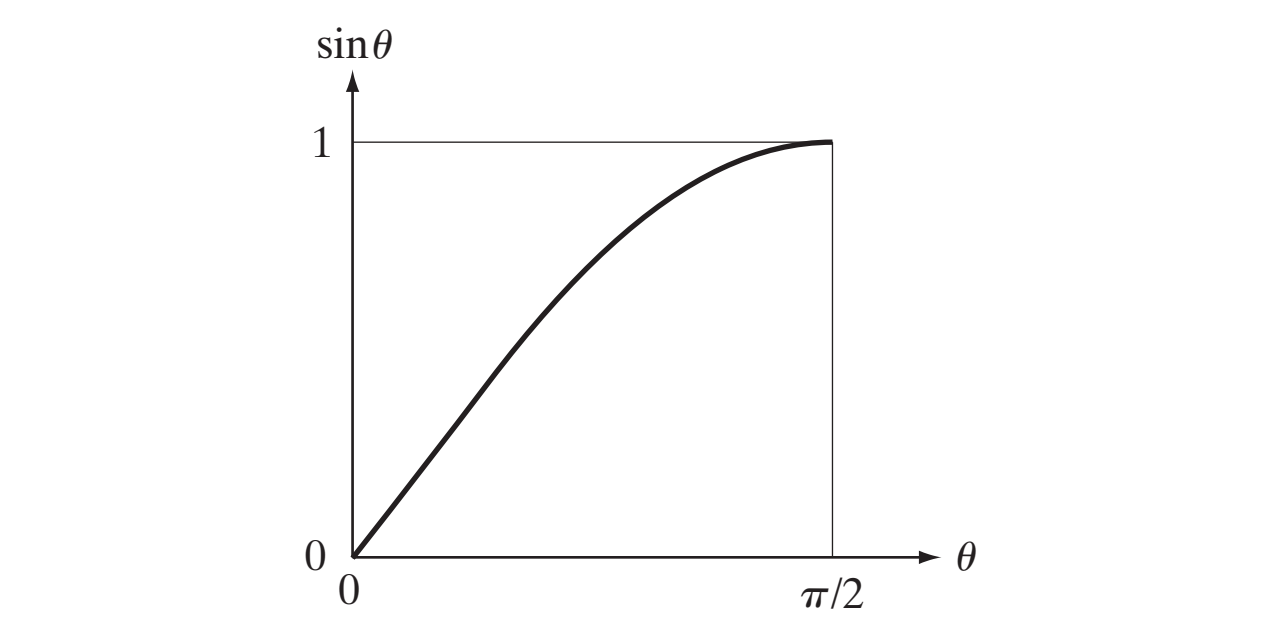

self consistency:

$$AC - AB = 2d\sin\theta = m\lambda \quad (m = 1, 2, ...)$$

so:

$$\sin\theta_m = m\frac{\lambda}{2d}$$

Waveguiding

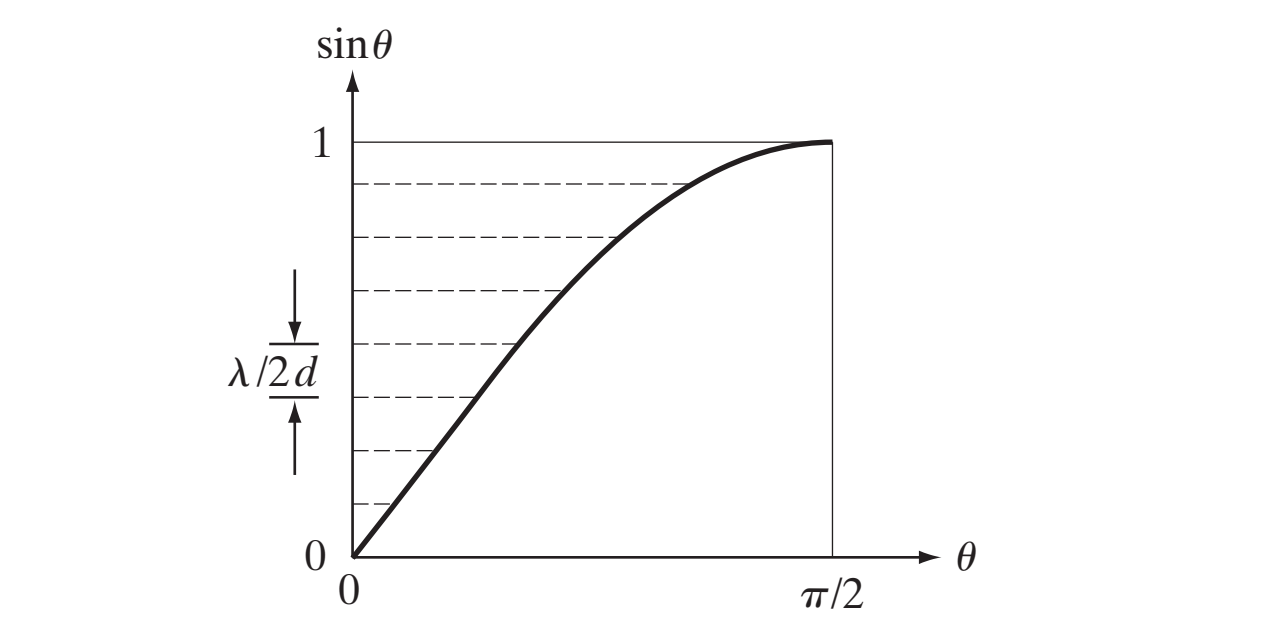

self consistency:

$$AC - AB = 2d\sin\theta = m\lambda \quad (m = 1, 2, ...)$$

so:

$$\sin\theta_m = m\frac{\lambda}{2d}$$

Waveguiding

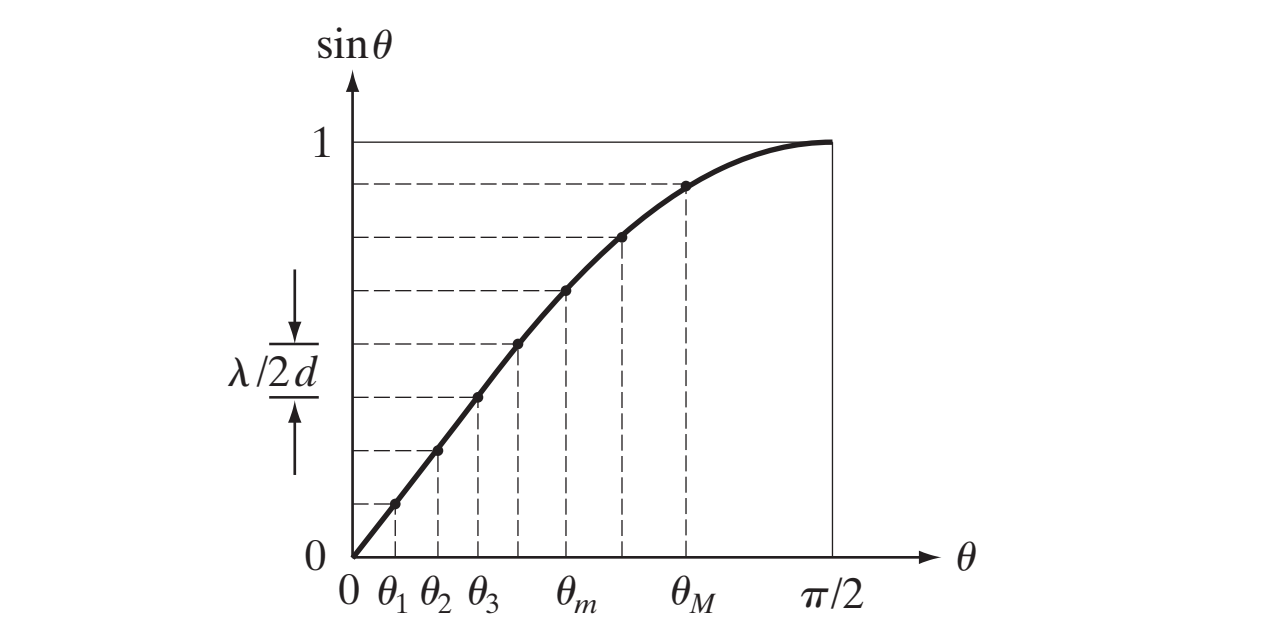

self consistency:

$$AC - AB = 2d\sin\theta = m\lambda \quad (m = 1, 2, ...)$$

so:

$$\sin\theta_m = m\frac{\lambda}{2d}$$

Waveguiding

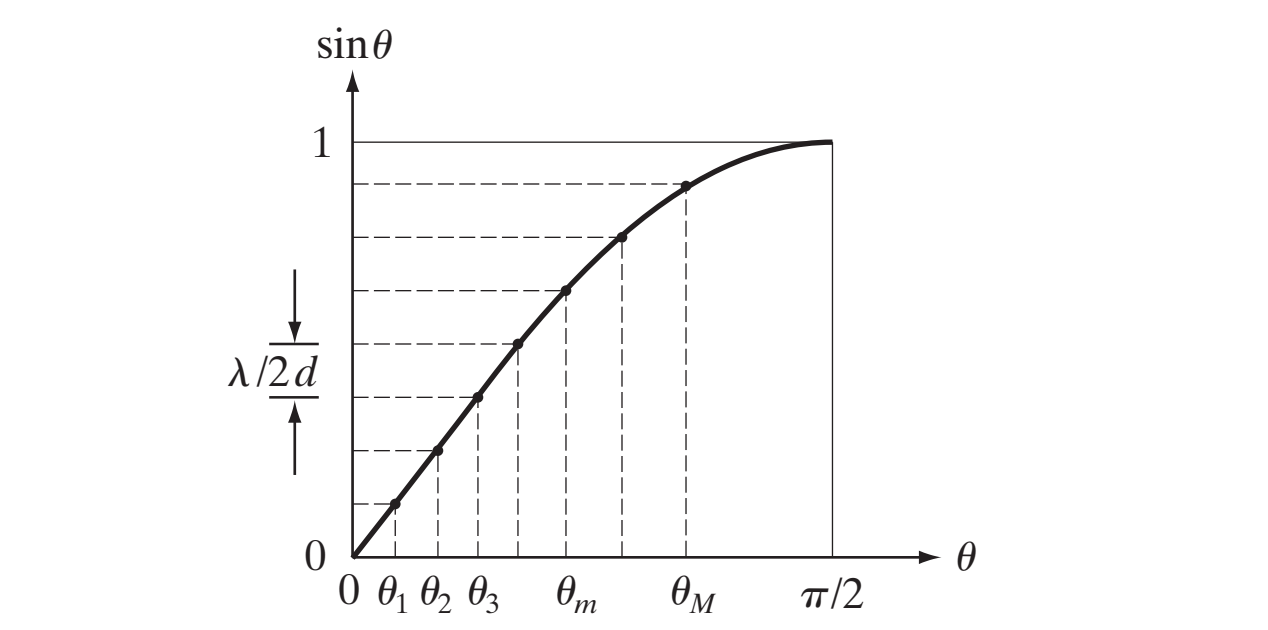

number of modes:

$$M \doteq \frac{2d}{\lambda}$$

Waveguiding

now consider a planar dielectric waveguide

Waveguiding

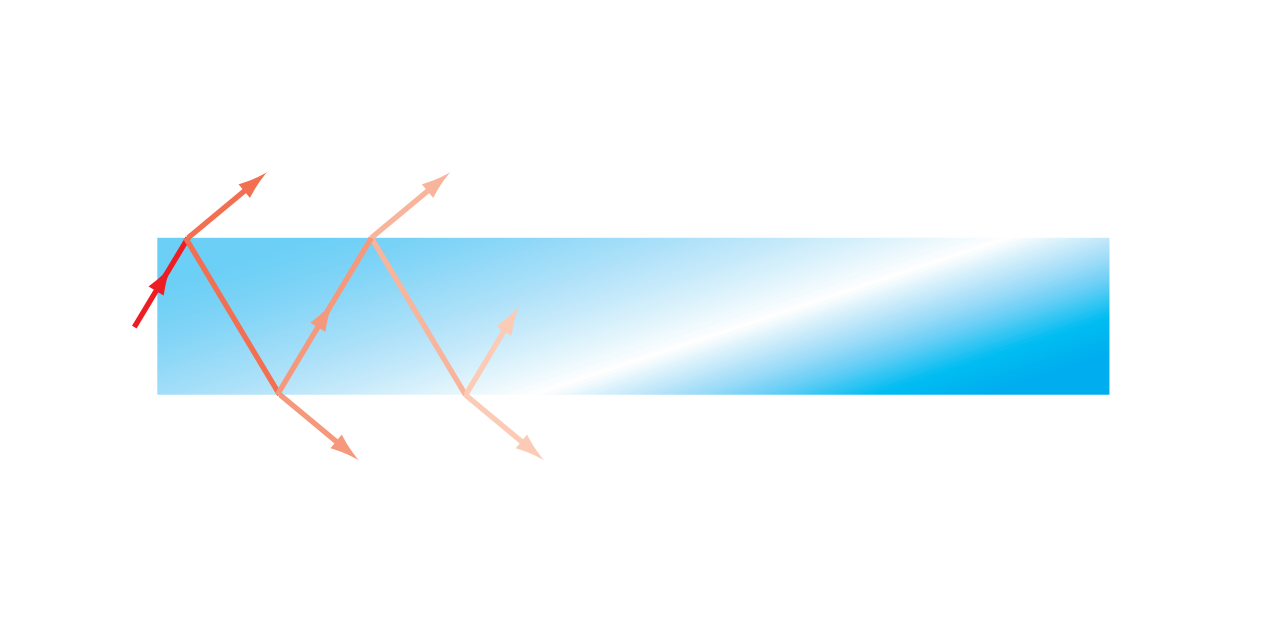

rays incident at angle $\theta > \pi/2 - \theta_c$ are unguided

Waveguiding

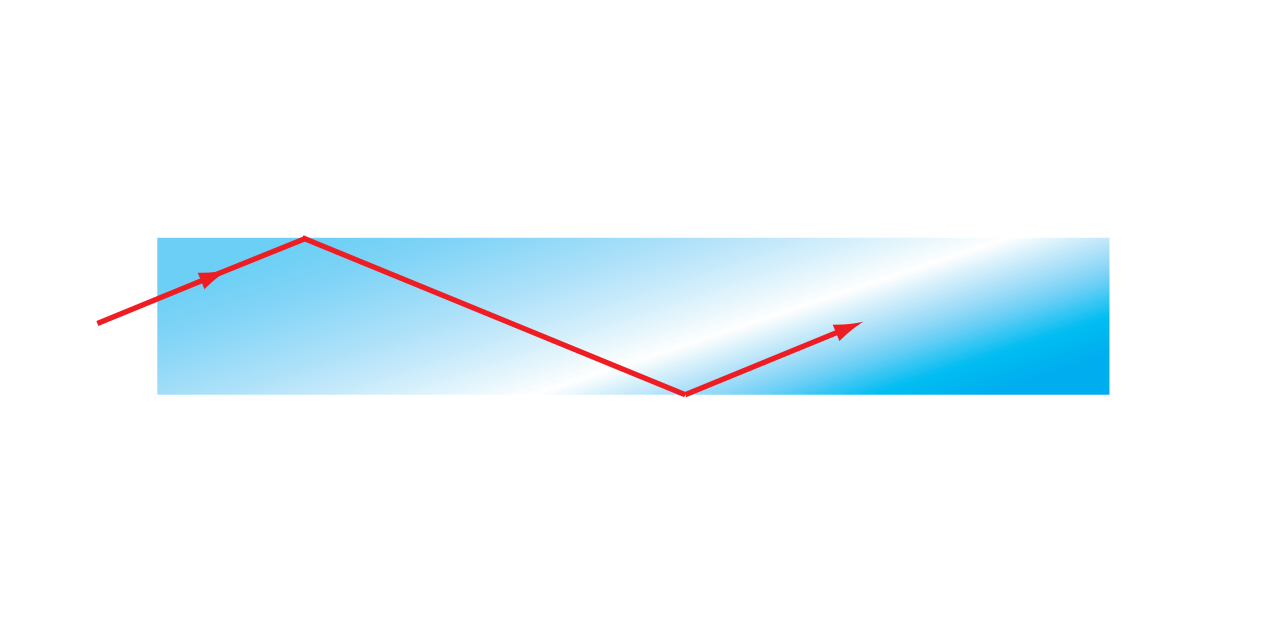

rays incident at angle $\theta < \pi/2 - \theta_c$ are guided

Waveguiding

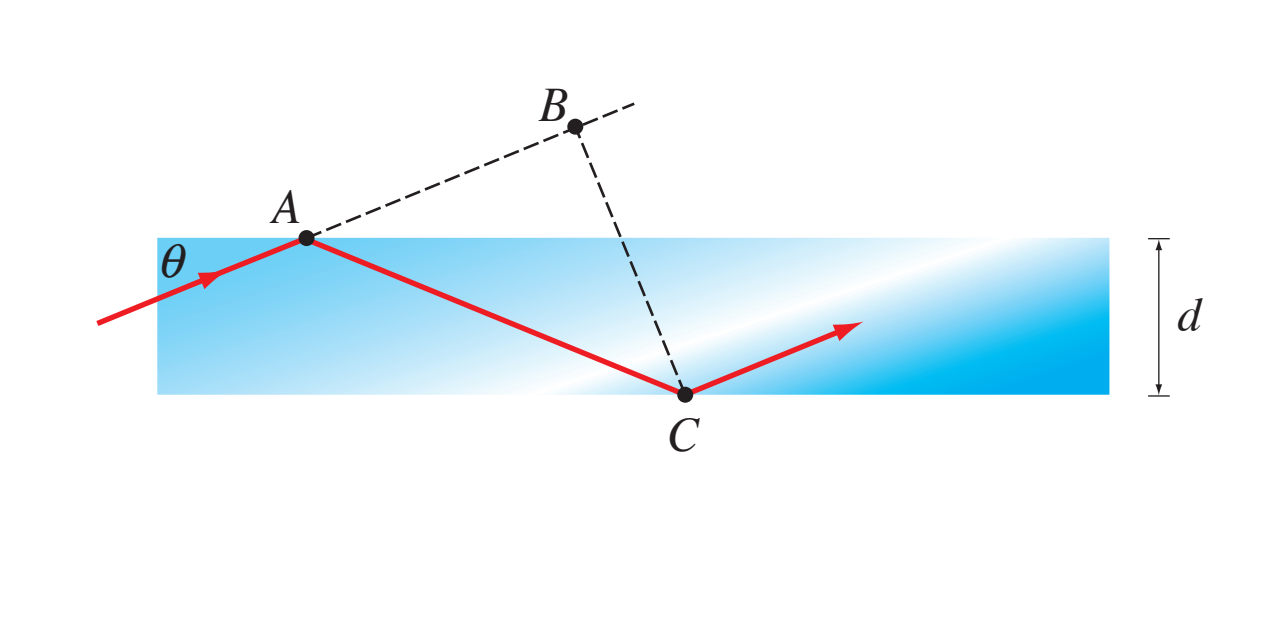

rays incident at angle $\theta < \pi/2 - \theta_c$ are guided

Waveguiding

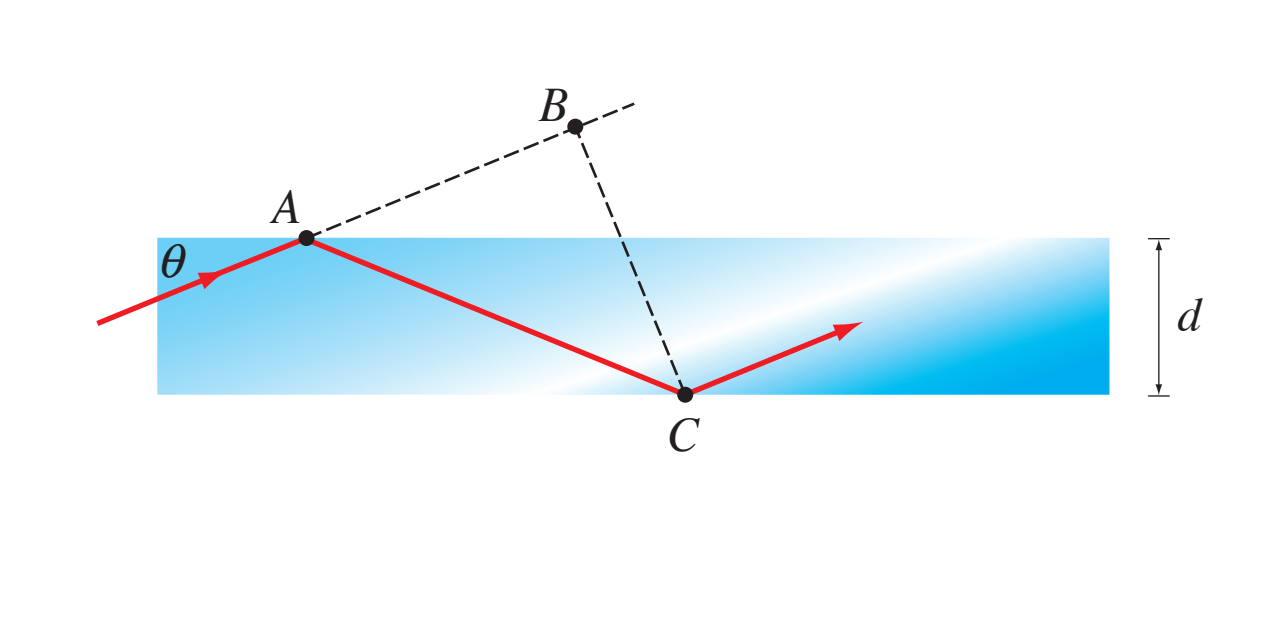

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

Waveguiding

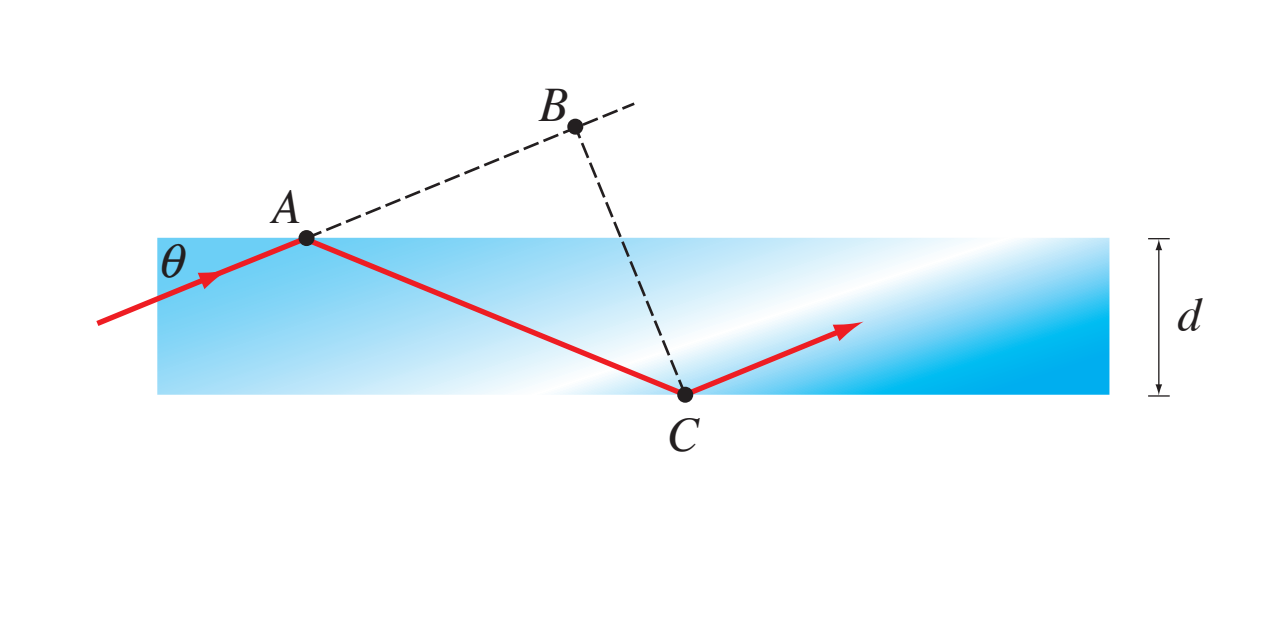

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2 - \theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

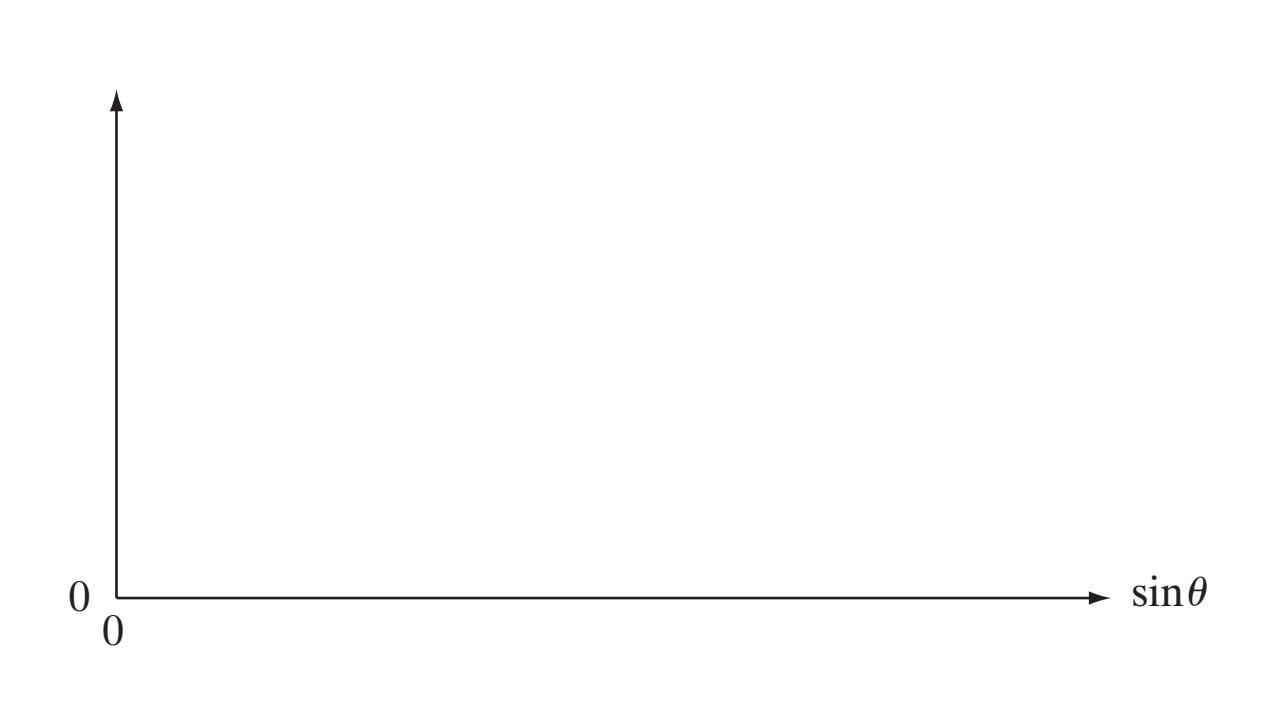

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2 - \theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

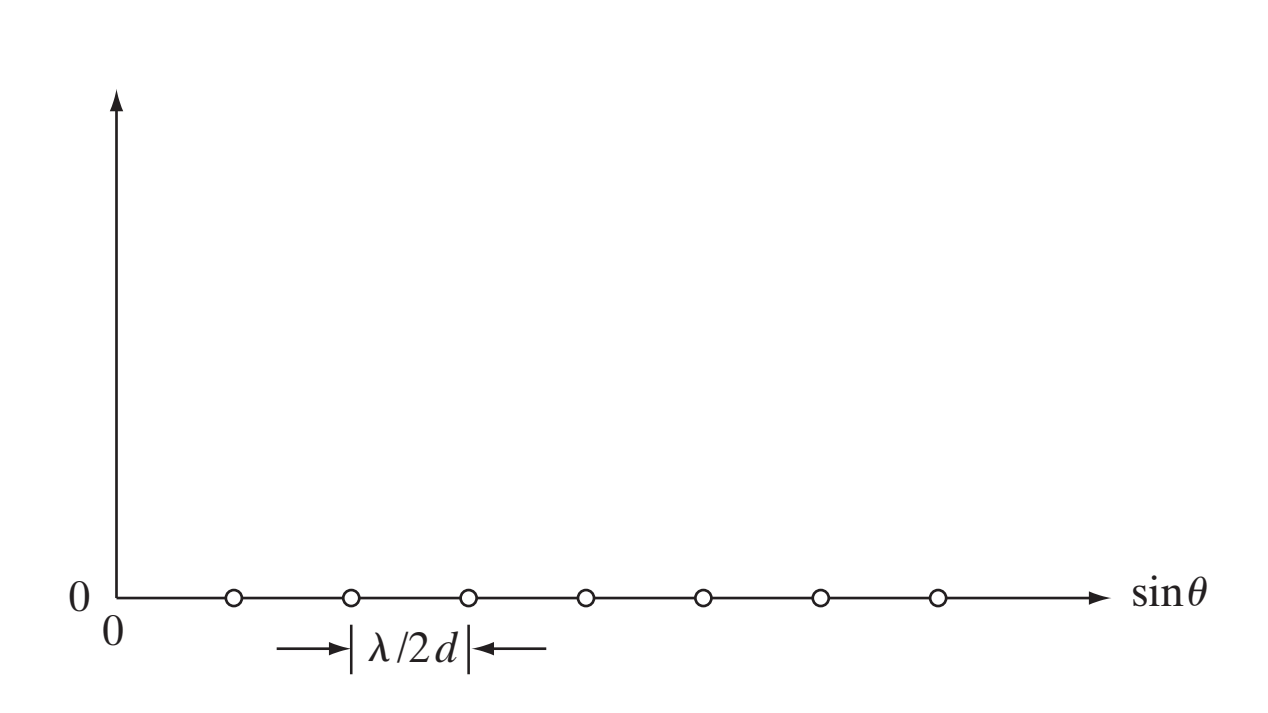

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2 - \theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

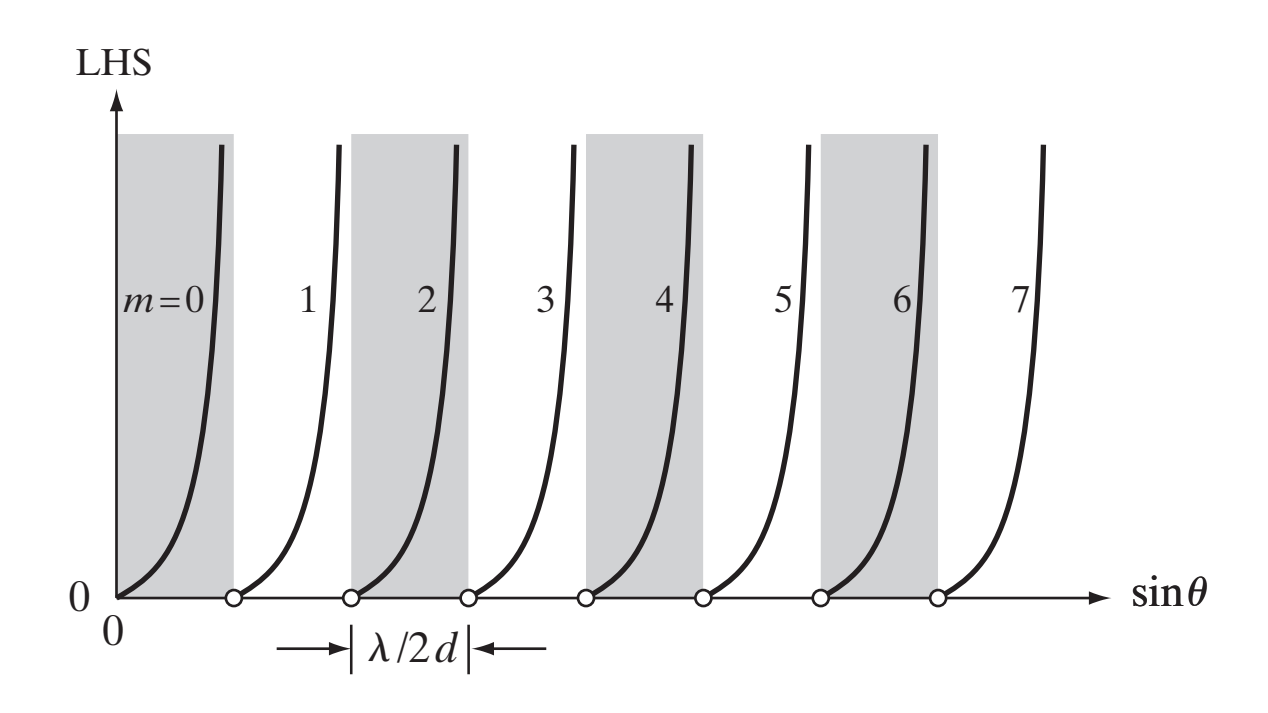

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2 - \theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

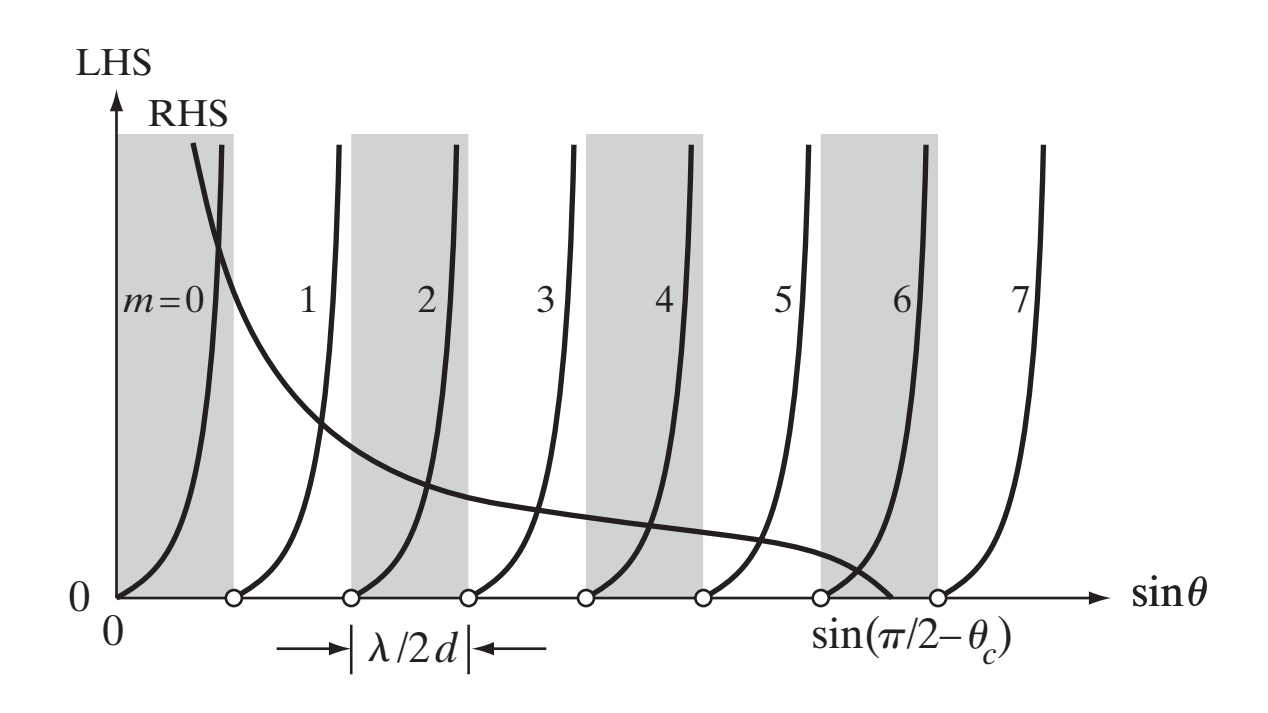

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2-\theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

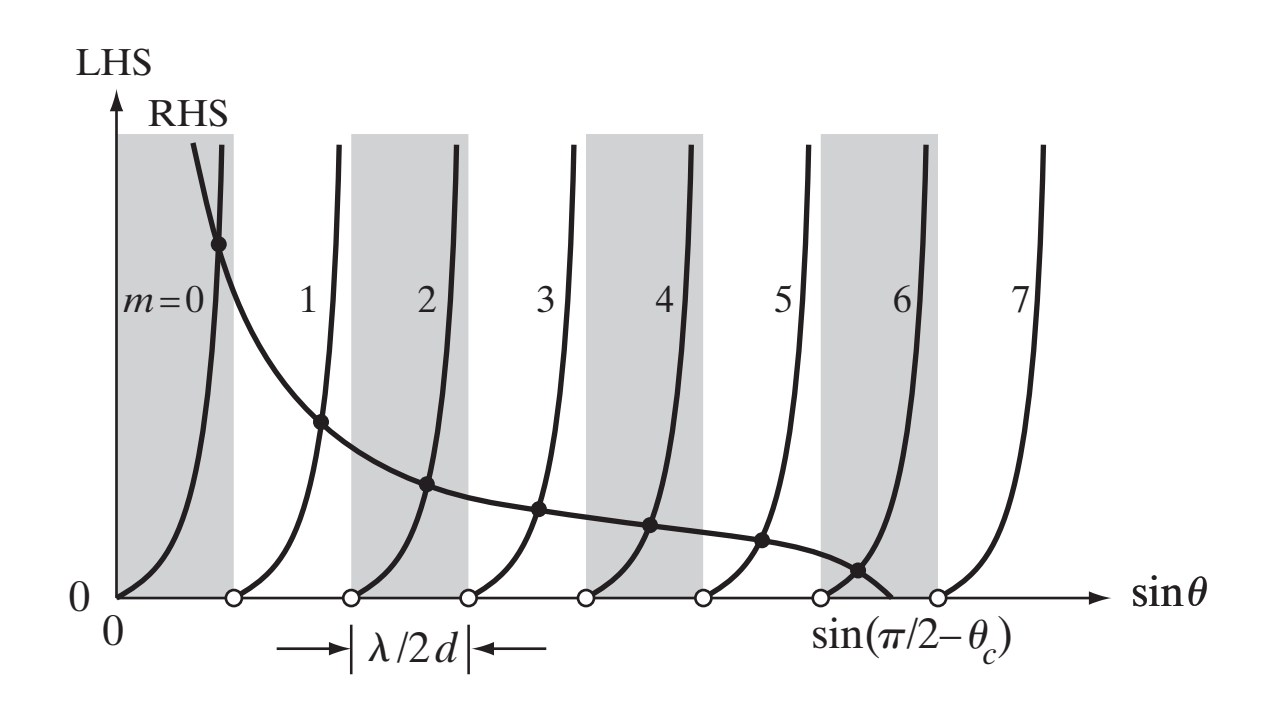

self consistency:

$$AC - AB = 2d\sin\theta - \frac{\varphi_r}{\pi}\lambda = m\lambda \quad (m = 0, 1, 2\ldots)$$

so:

$$\tan\left(\frac{\pi d}{\lambda}\sin\theta - m\frac{\pi}{2}\right) = \left(\frac{\sin^2(\pi/2-\theta_c)}{\sin^2\theta} - 1\right)^{1/2}$$

Waveguiding

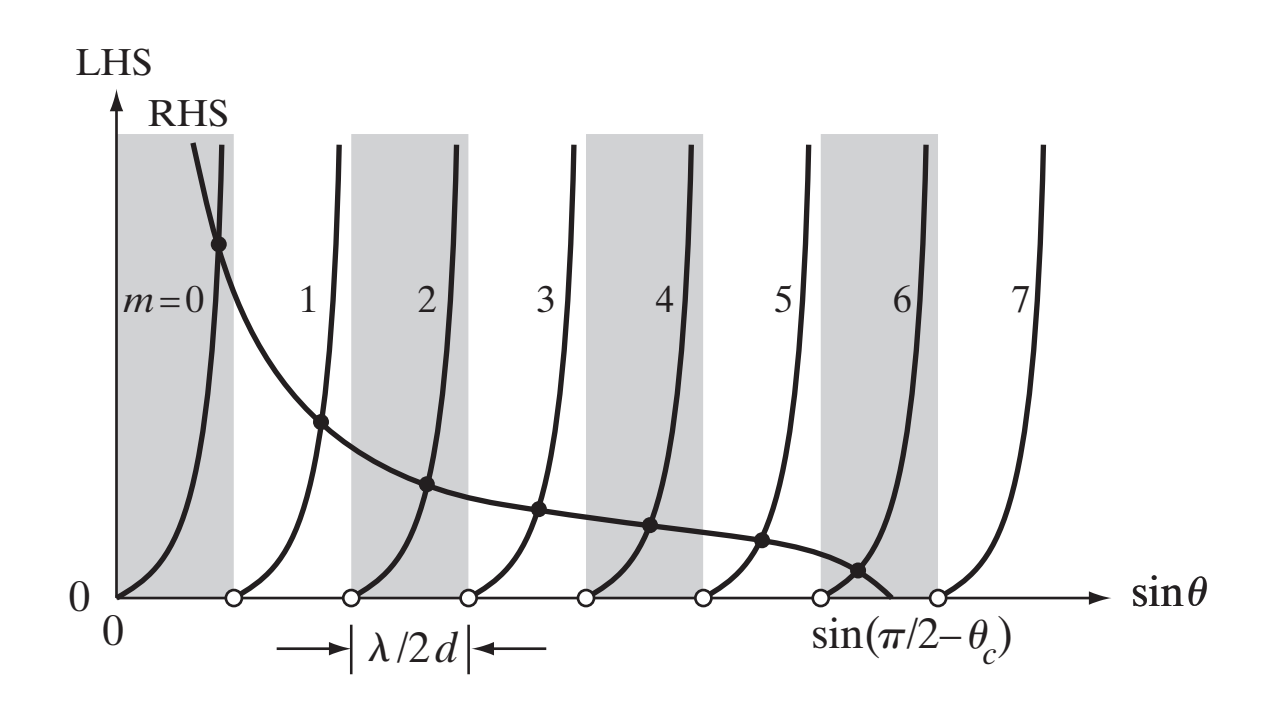

number of modes:

$$M \doteq \frac{\sin(\pi/2 - \theta_c)}{\lambda/2d}$$

Waveguiding

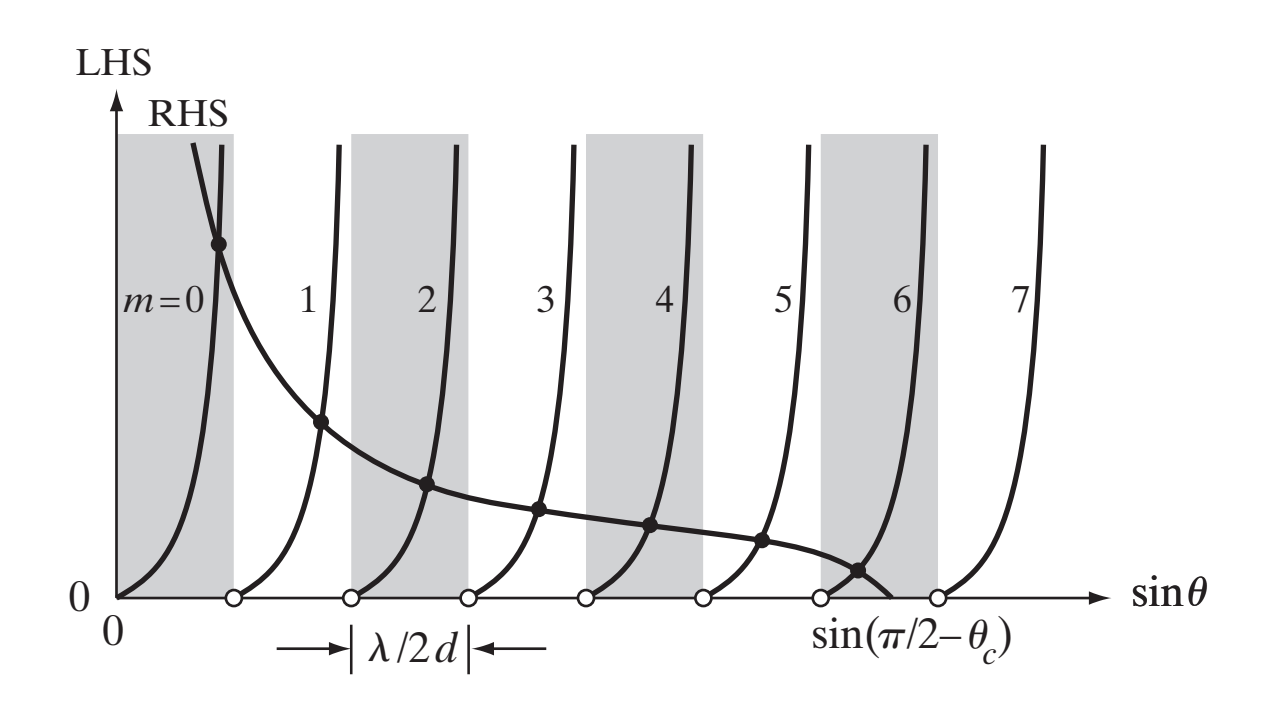

number of modes:

$$M \doteq \frac{\sin(\pi/2 - \theta_c)}{\lambda/2d}$$

or:

$$M \doteq 2\frac{d}{\lambda}(n_1^2 - n_2^2)^{1/2}$$

Waveguiding

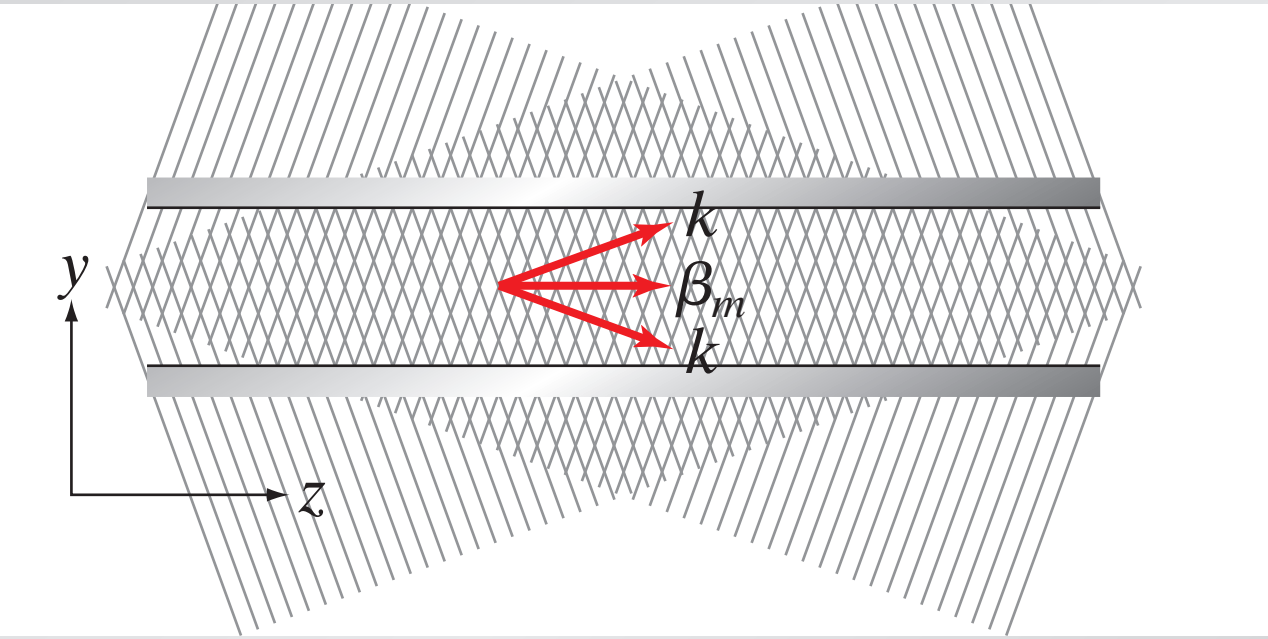

propagation constant of guided wave:

$$\beta_m^2 = k^2 - k_y^2 = k^2 - \frac{m^2\pi^2}{d^2}$$

group velocity:

$$v_m = c\cos\theta_m$$

Waveguiding

single mode condition for 600-nm light:

planar mirror $$M \doteqdot \frac{2d}{\lambda}$$ $$300 < d < 600 \text{ nm}$$

dielectric $$M \doteq 2\frac{d}{\lambda}(n_1^2 - n_2^2)^{1/2}$$ $$d < 268 \text{ nm}$$

Waveguiding

single mode condition for 600-nm light:

planar mirror $$M \doteq \frac{2d}{\lambda}$$ $$300 < d < 600 \text{ nm}$$

dielectric $$M \doteq 2\frac{d}{\lambda}(n_1^2 - n_2^2)^{1/2}$$ $$d < 268 \text{ nm}$$

can make d **larger by making** $n_1 - n_2$ **smaller!**

Waveguiding

Vector potential obeys:

$$\nabla^2 \vec{A} + \omega^2 \mu_o \epsilon \vec{A} = -i\omega\mu_o \nabla \epsilon \Phi$$

Waveguiding

Vector potential obeys:

$$\nabla^2 \vec{A} + \omega^2 \mu_o \epsilon \vec{A} = 0$$

Waveguiding

Vector potential obeys:

$$\nabla^2 \vec{A} + \omega^2 \mu_o \epsilon \vec{A} = 0$$

Substituting $$\vec{A} = \hat{y} u(x,y) e^{-i\beta z}$$

Waveguiding

Vector potential obeys:

$$\nabla^2 \vec{A} + \omega^2 \mu_o \epsilon \vec{A} = 0$$

Substituting $$\vec{A} = \hat{y} u(x,y) e^{-i\beta z}$$

yields:

$$\nabla_T^2 u + [-\beta^2 + \omega^2 \mu \epsilon(r)] u = 0$$

Waveguiding

Vector potential obeys:

$$\nabla^2 \vec{A} + \omega^2 \mu_o \epsilon \vec{A} = 0$$

Substituting $$\vec{A} = \hat{y} u(x,y) e^{-i\beta z}$$

yields:

$$\nabla_T^2 u + [-\beta^2 + \omega^2 \mu \epsilon(r)] u = 0$$

Compare to time-independent Schrödinger equation:

$$\nabla^2 \psi + \frac{2m}{\hbar^2}[E - V(r)]\psi = 0$$

Waveguiding

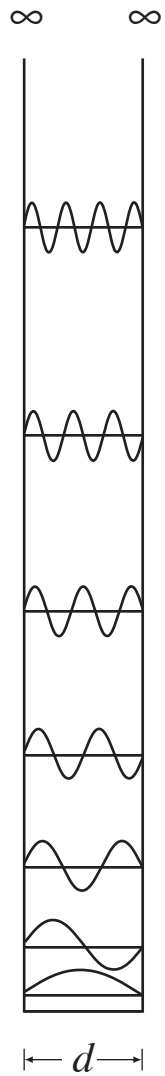

Waveguiding

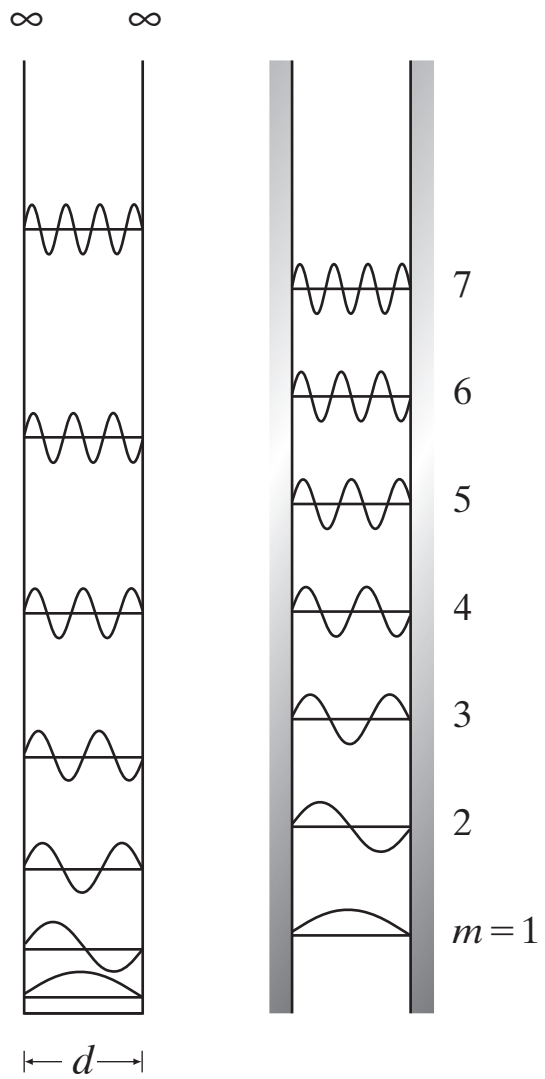

Waveguiding

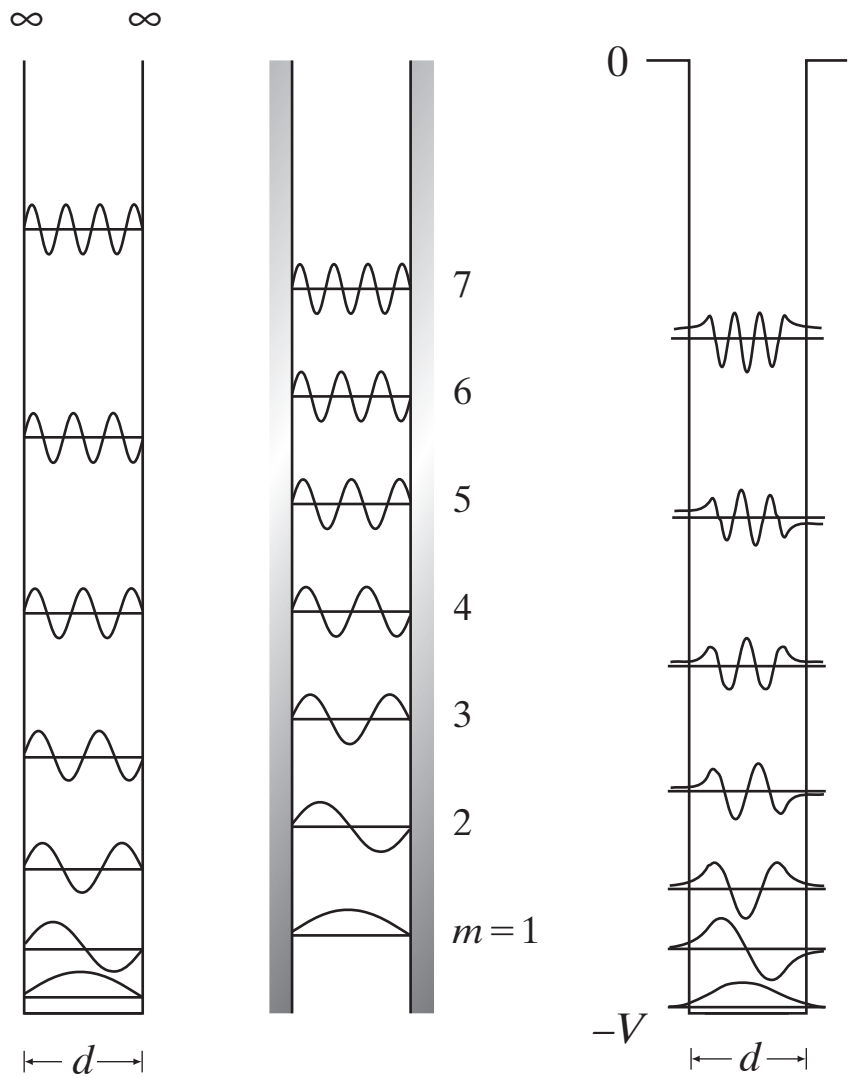

Waveguiding

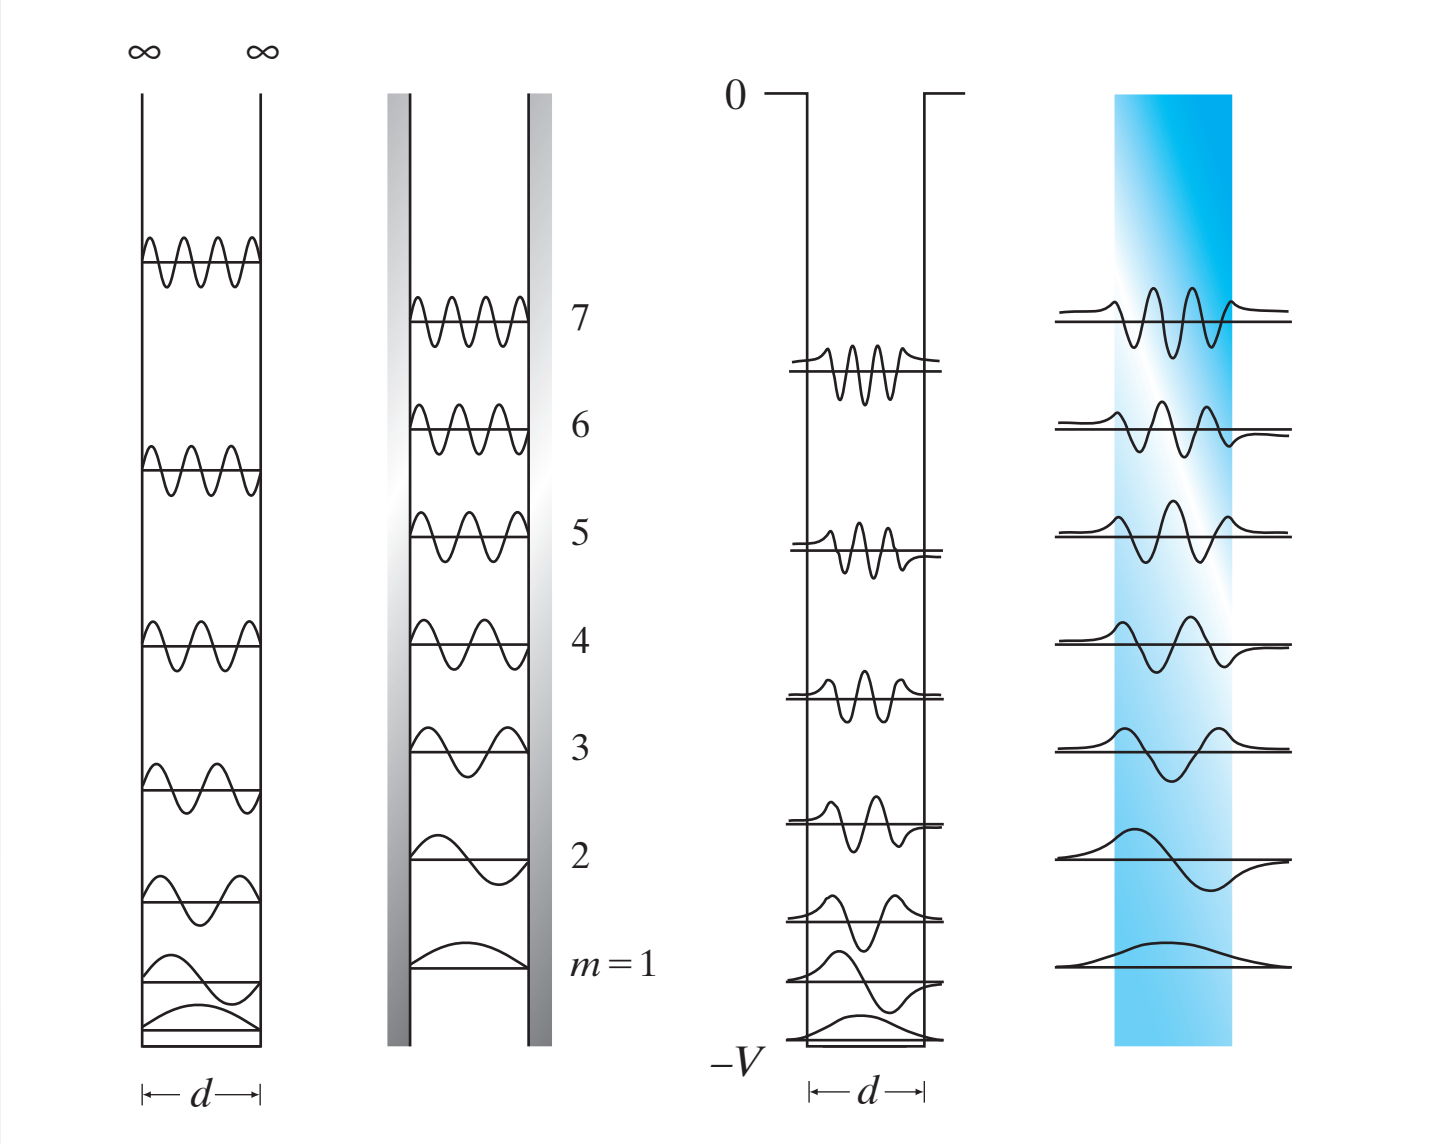

Waveguiding

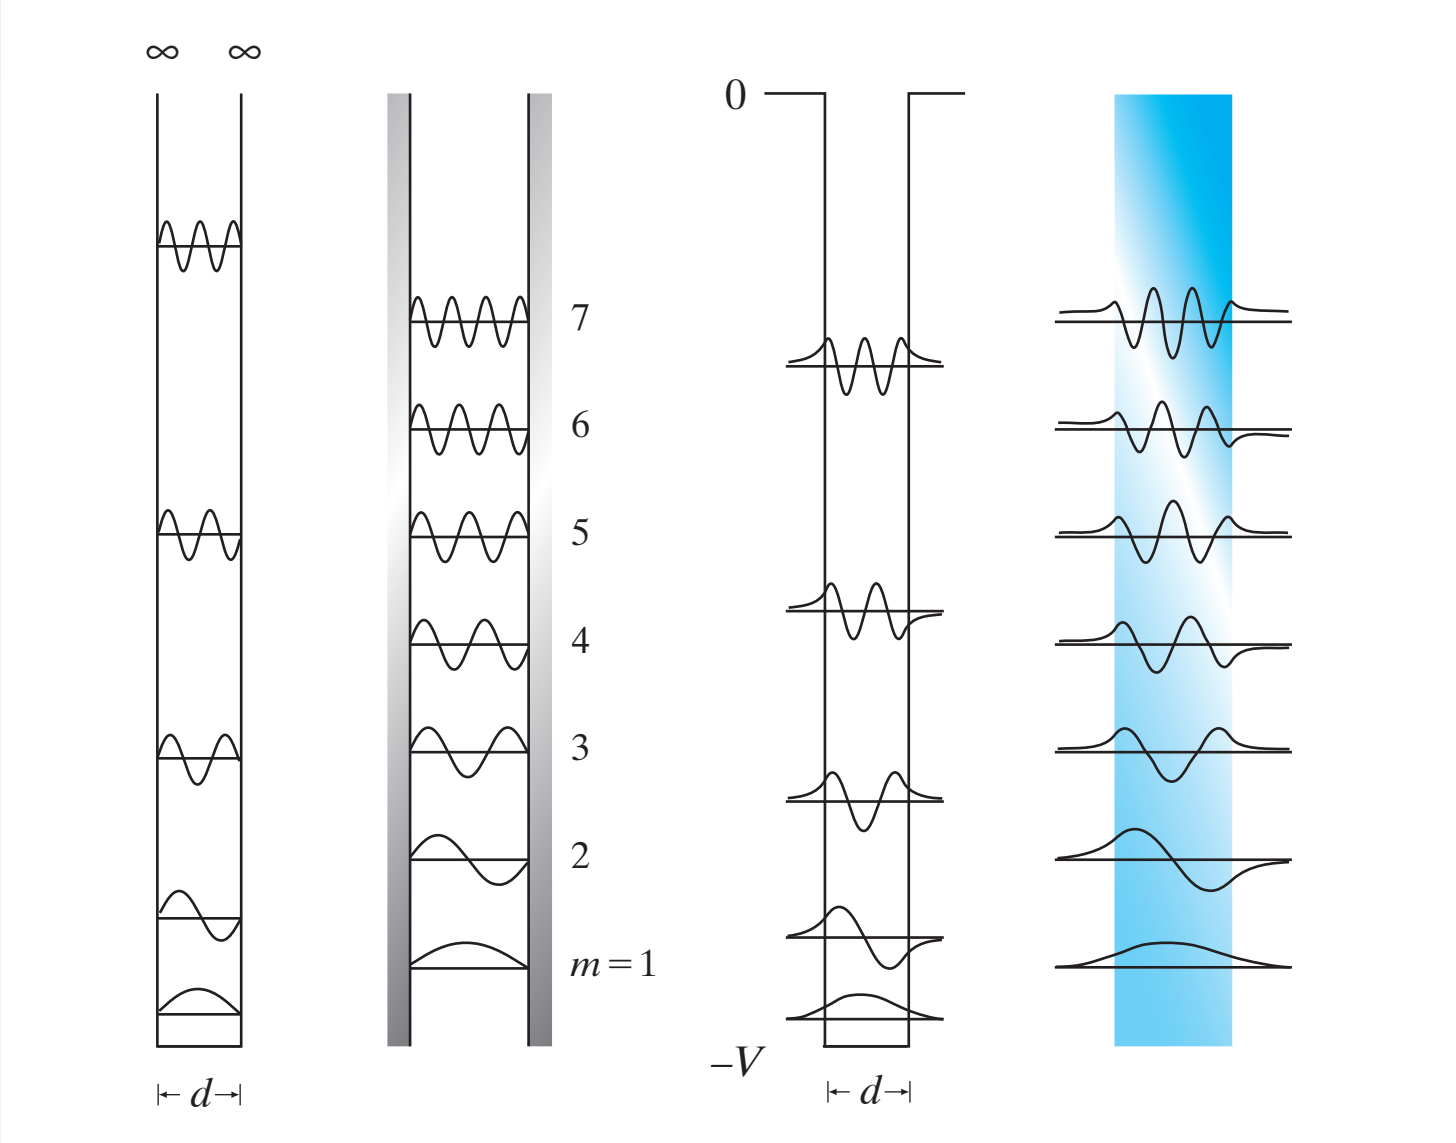

Waveguiding

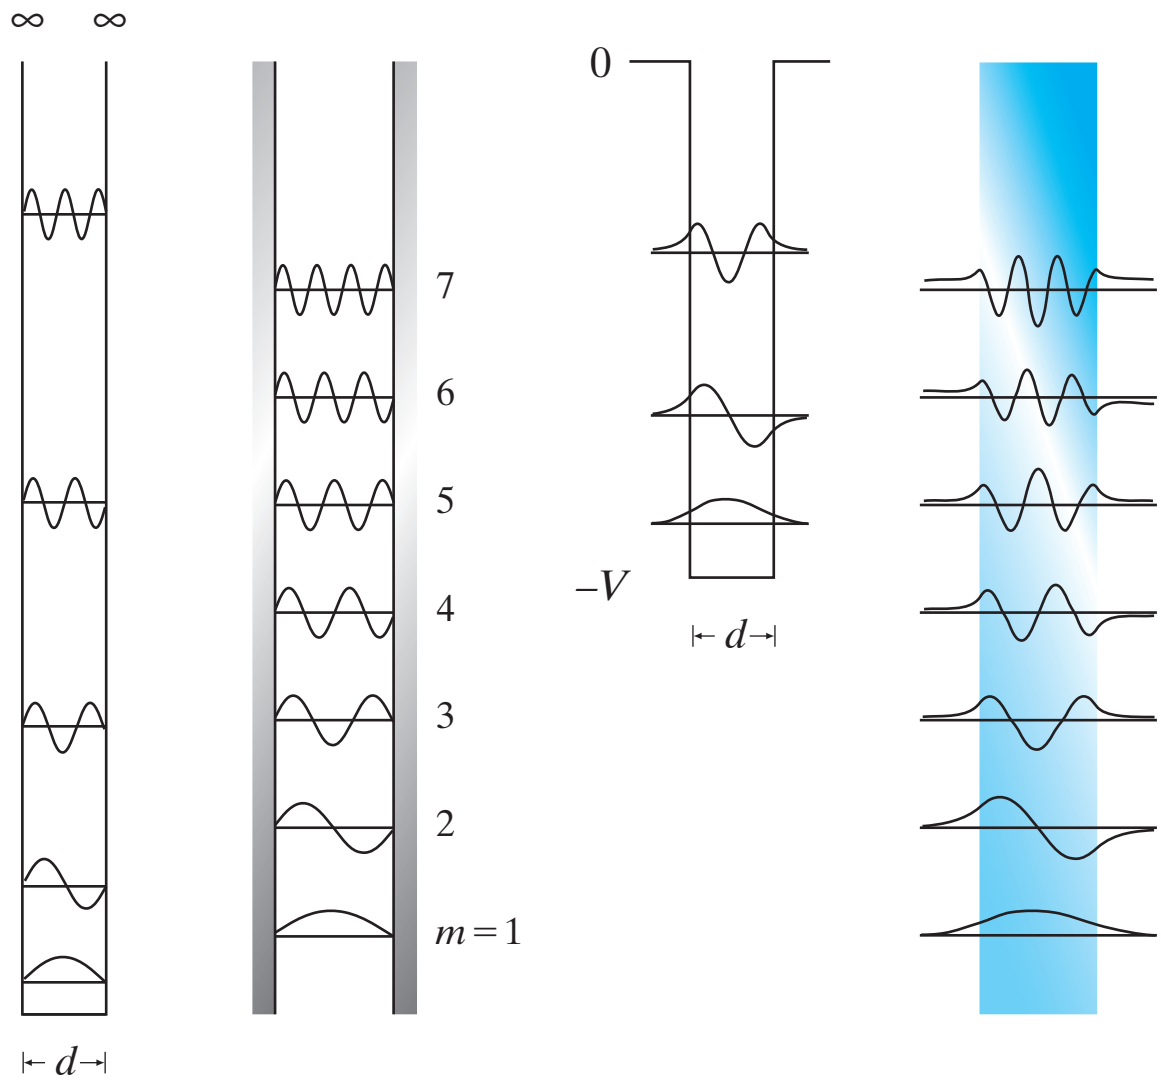

Waveguiding

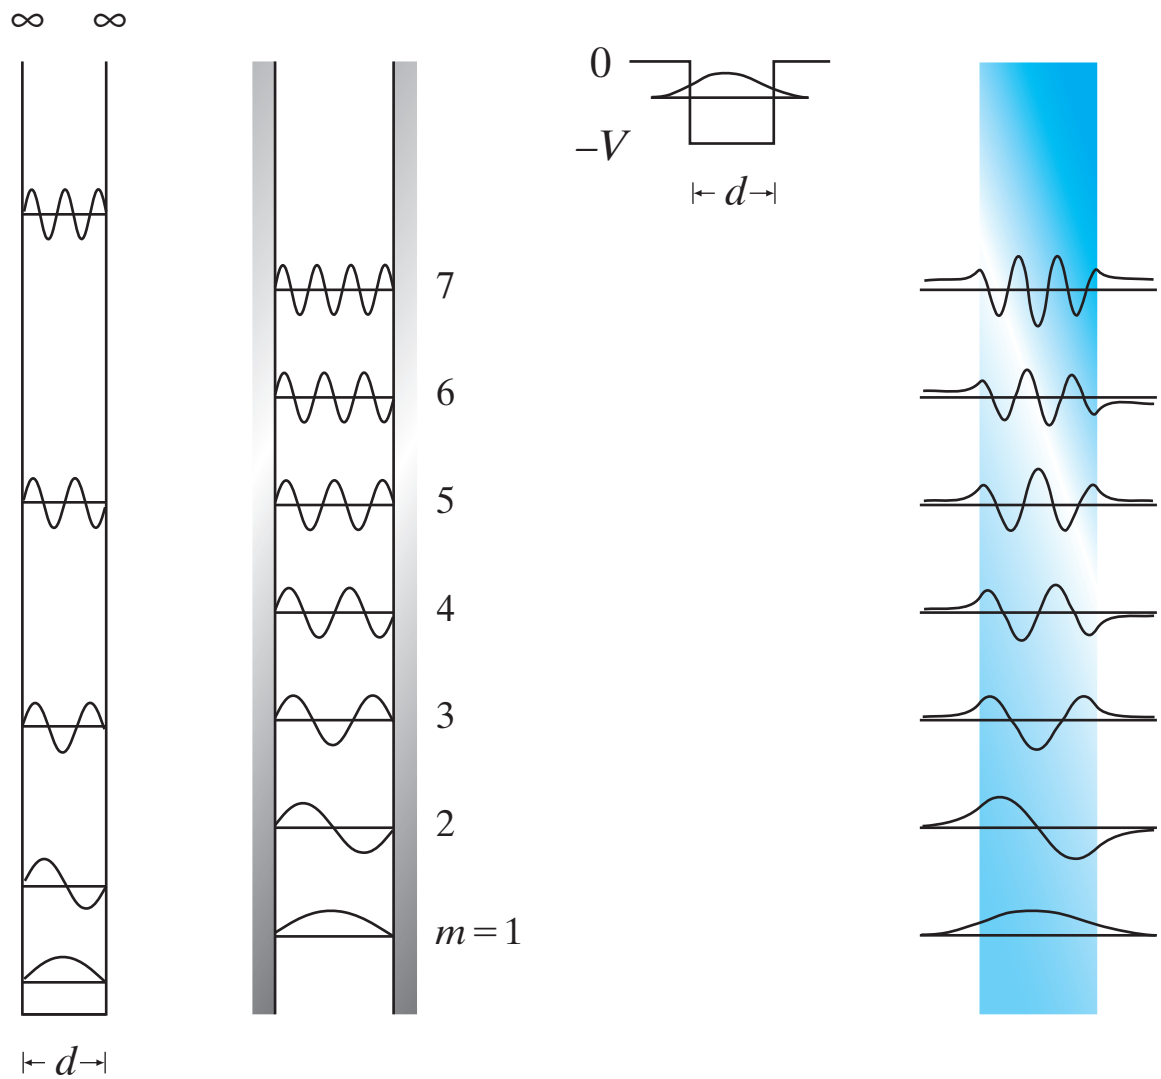

Waveguiding

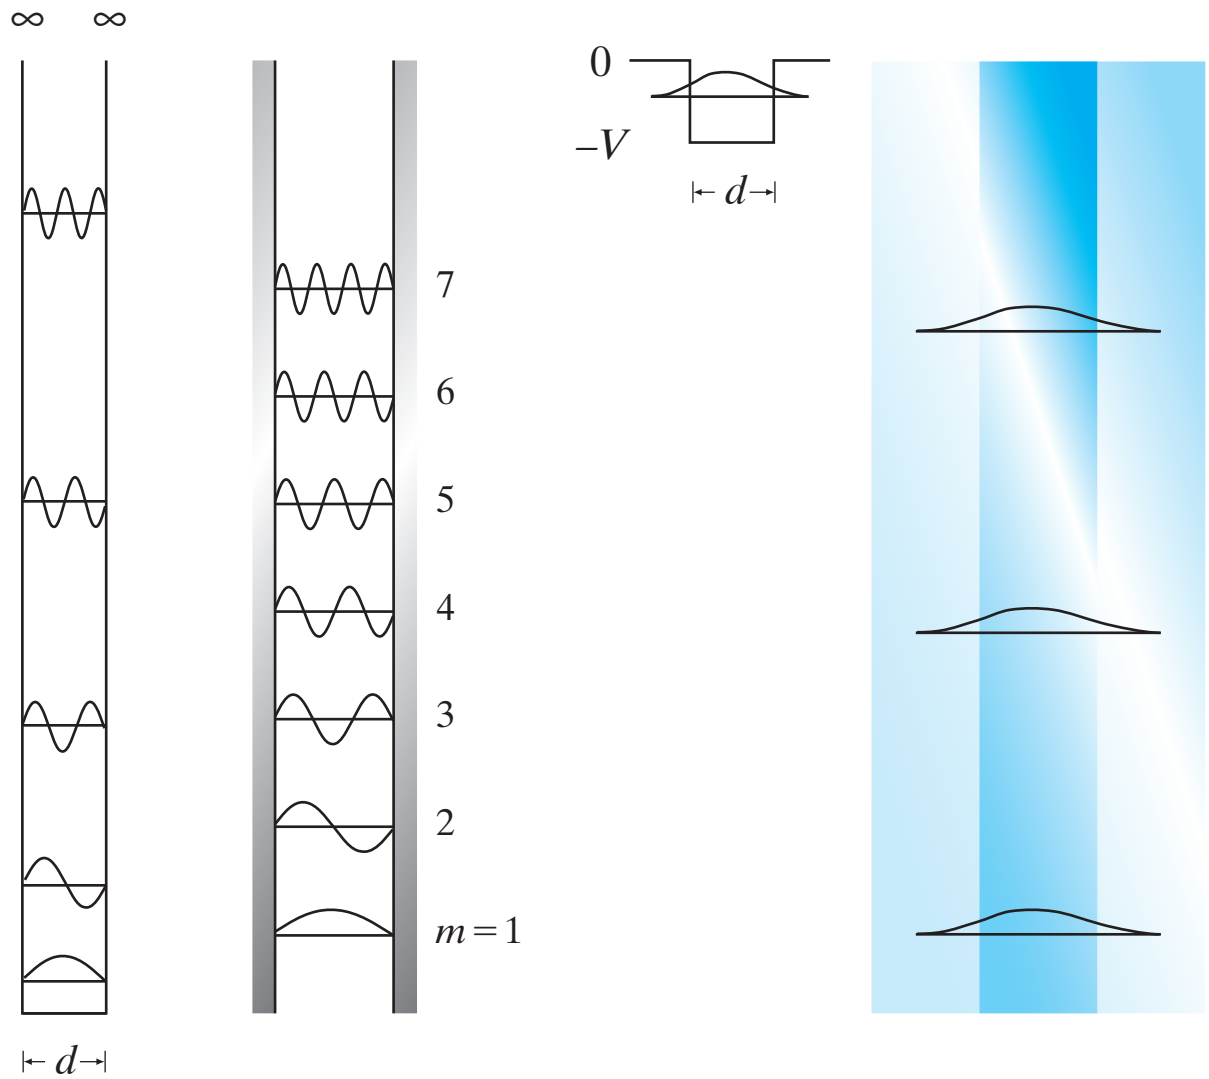

Waveguiding

single mode condition for 600-nm light:

$$M \doteq 2\,\frac{d}{\lambda}(n_1^2 - n_2^2)^{1/2}$$

without cladding: $d < 268\ \mathrm{nm}$

Add cladding with 0.4% index difference:

$$d < 5\ \mu\mathrm{m}$$

Waveguiding

commercial single-mode fiber (Corning Titan®)

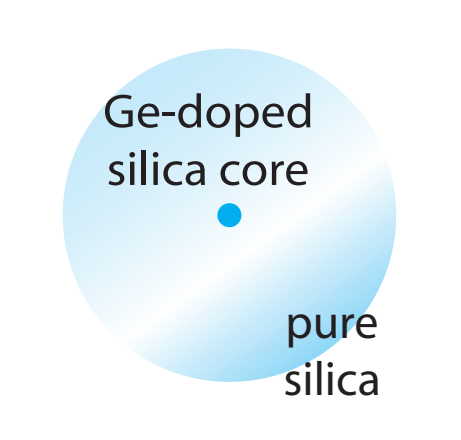

	core	cladding
index	$n_1 = 1.468$	$n_2 = 1.462$
diameter:	$8.3\ \mu\text{m}$	$125.0 \pm 1.0\ \mu\text{m}$

operating wavelength: $\lambda = 1310\ \text{nm}/1550\ \text{nm}$

Waveguiding

drawbacks of clad fibers:

- weak confinement
- no tight bending
- coupling requires splicing

Waveguiding

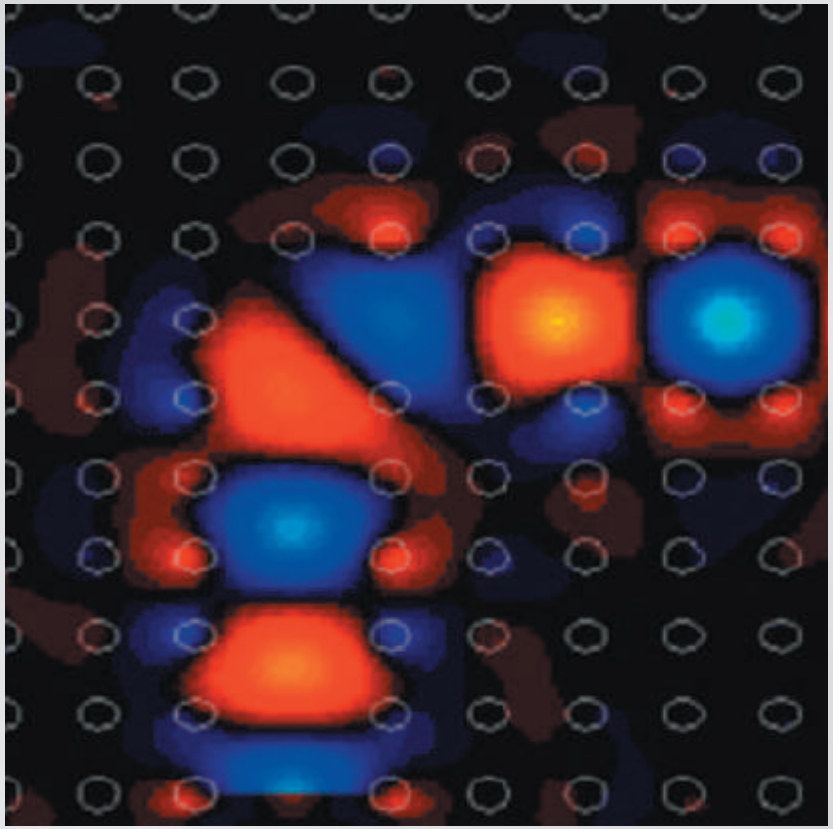

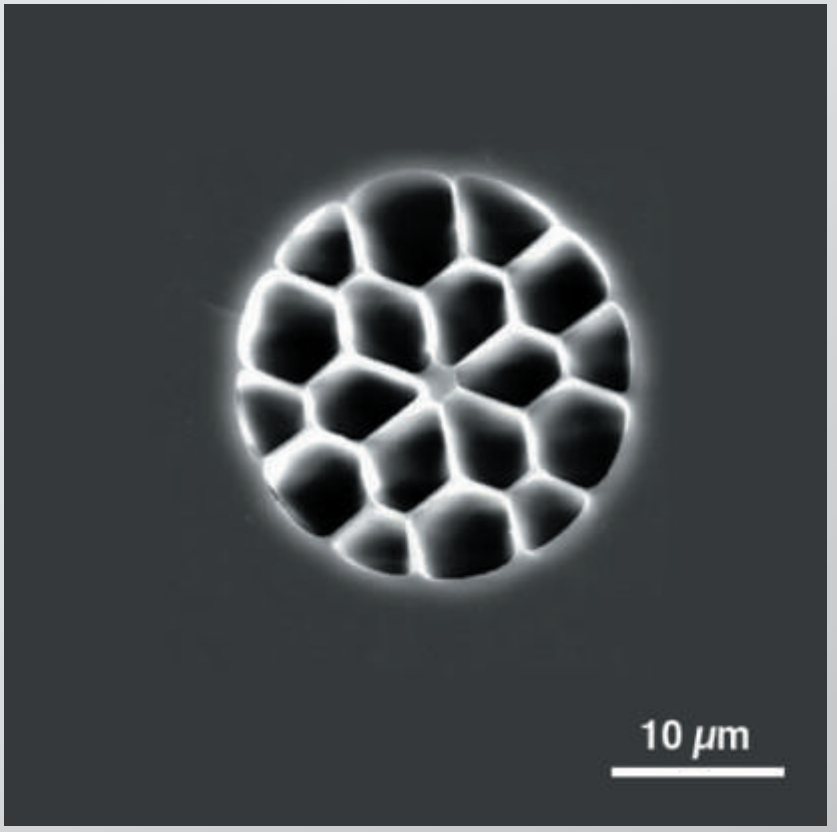

Outline

- waveguiding
- nanowire fabrication
- optical properties

Nanowire fabrication

two-step drawing process

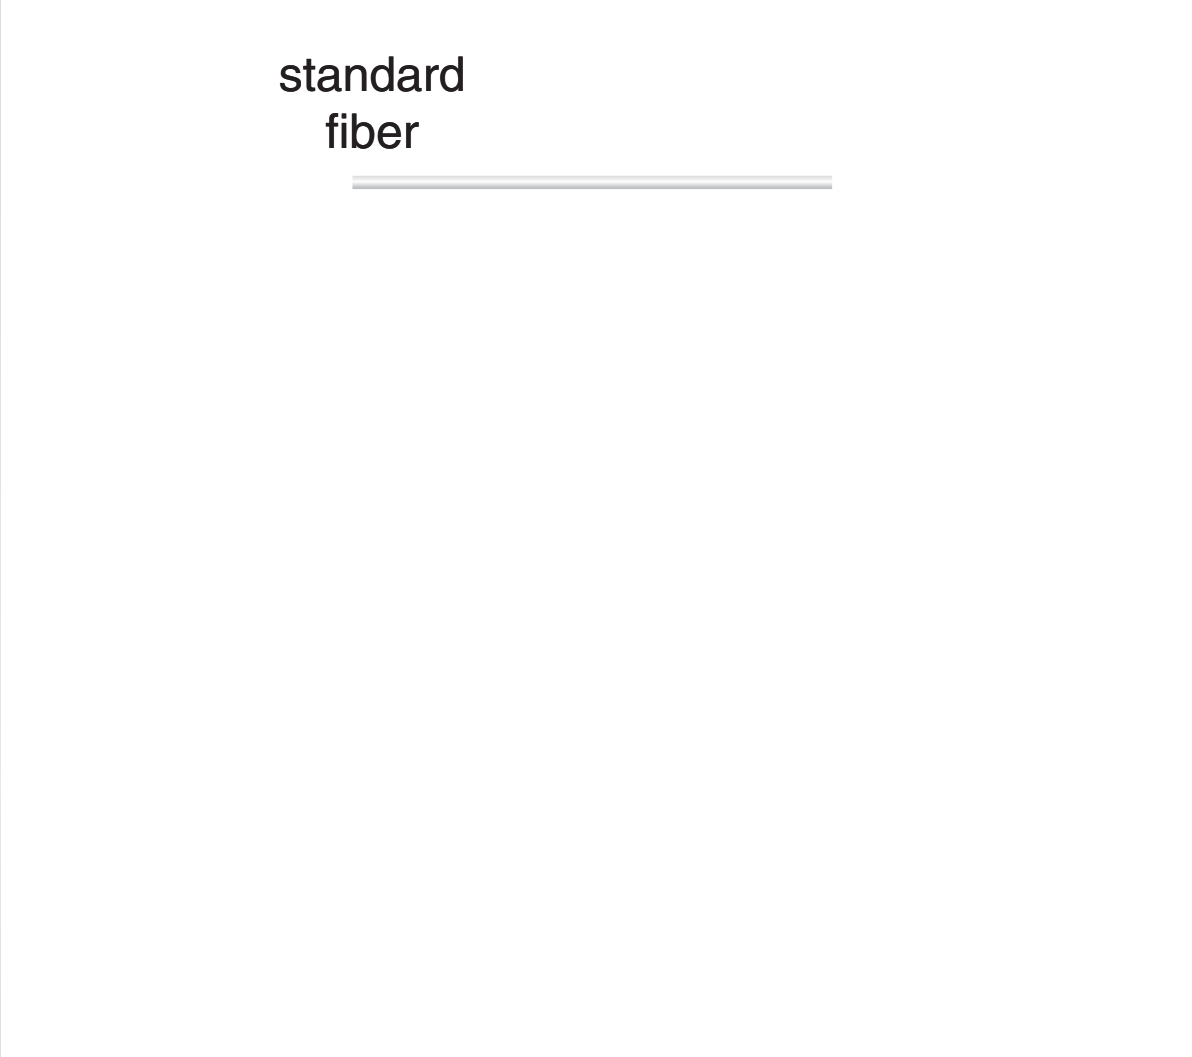

Nanowire fabrication

two-step drawing process

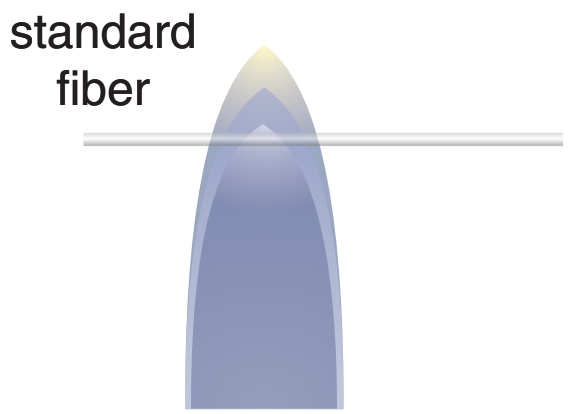

Nanowire fabrication

two-step drawing process

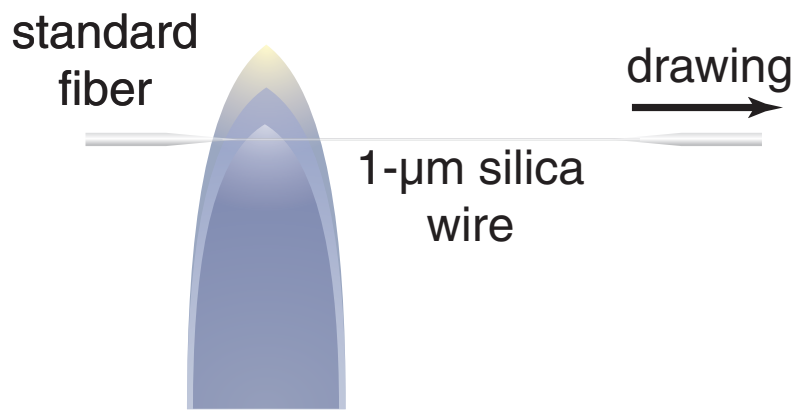

Nanowire fabrication

two-step drawing process

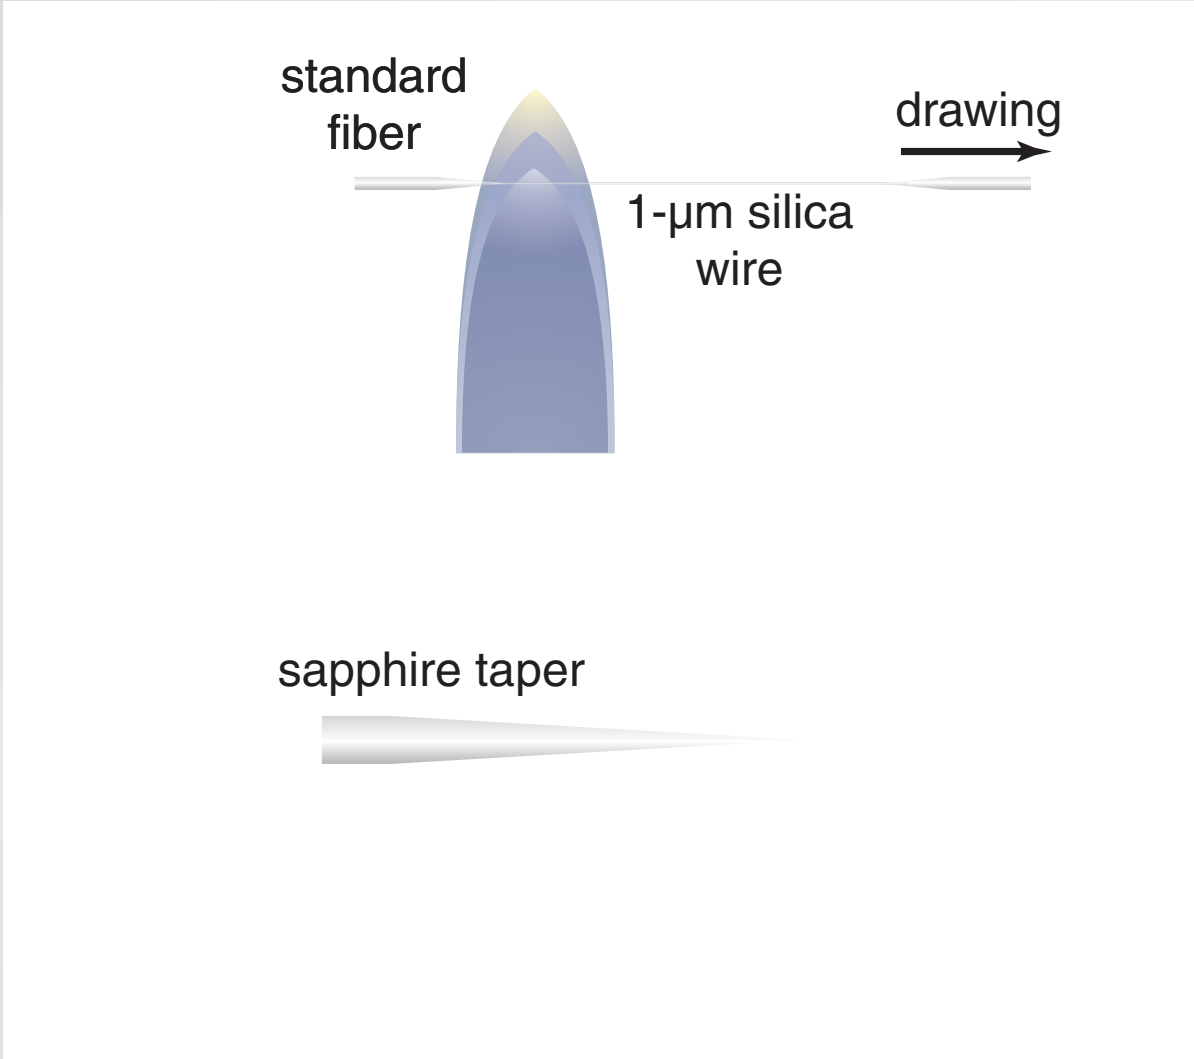

Nanowire fabrication

two-step drawing process

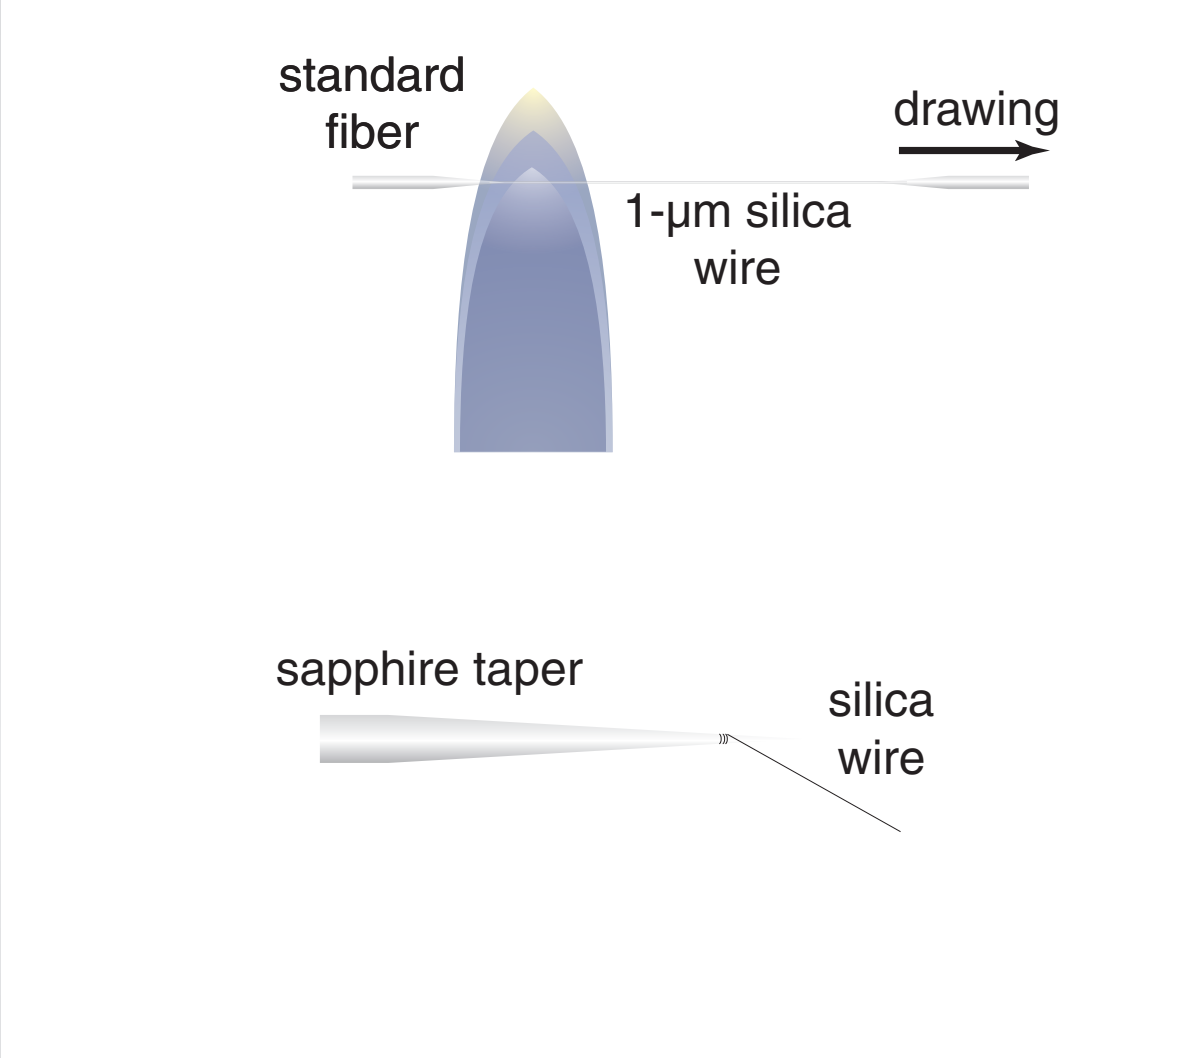

Nanowire fabrication

two-step drawing process

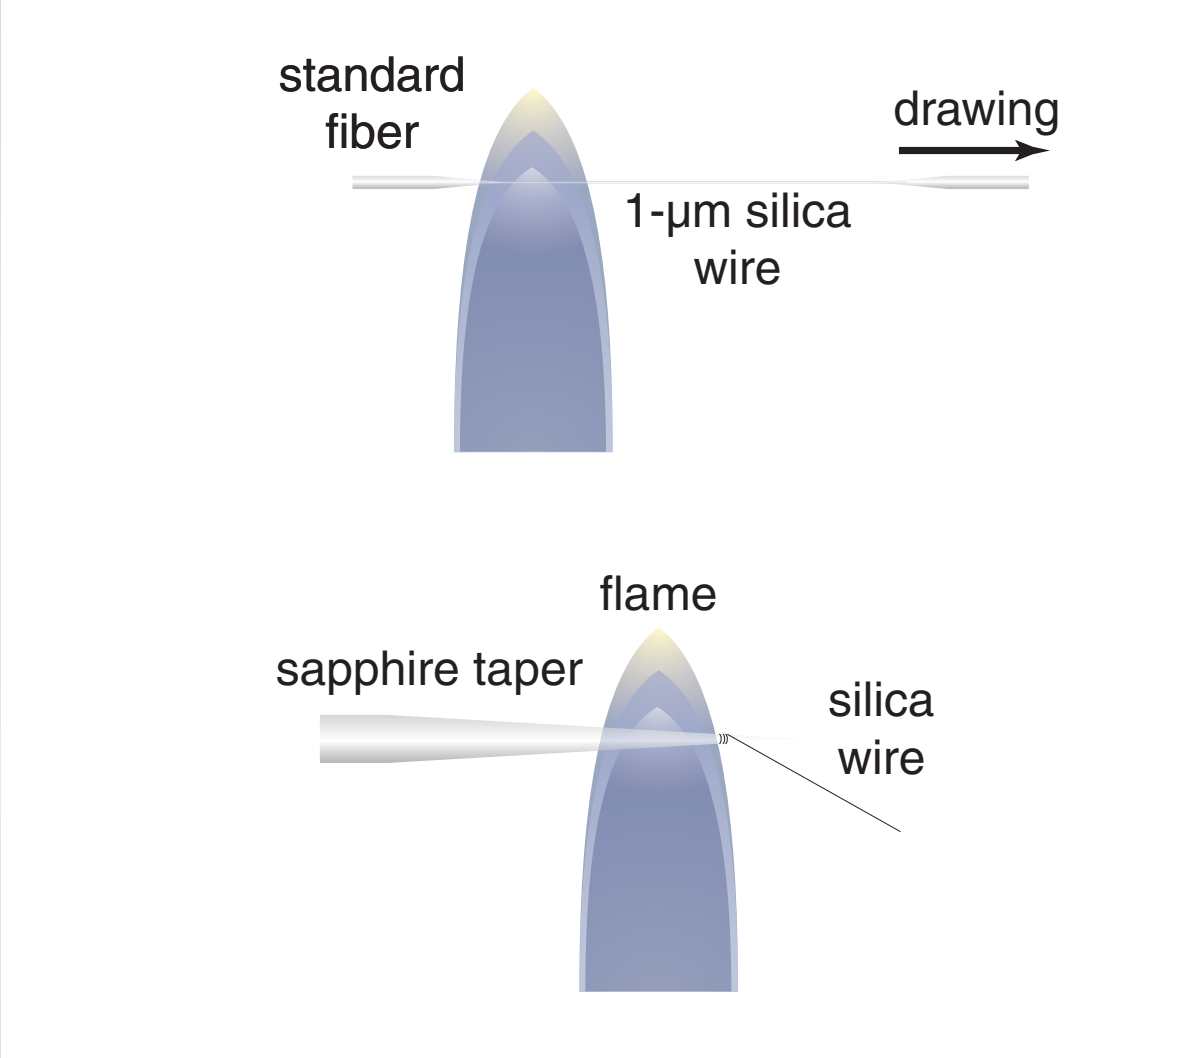

Nanowire fabrication

two-step drawing process

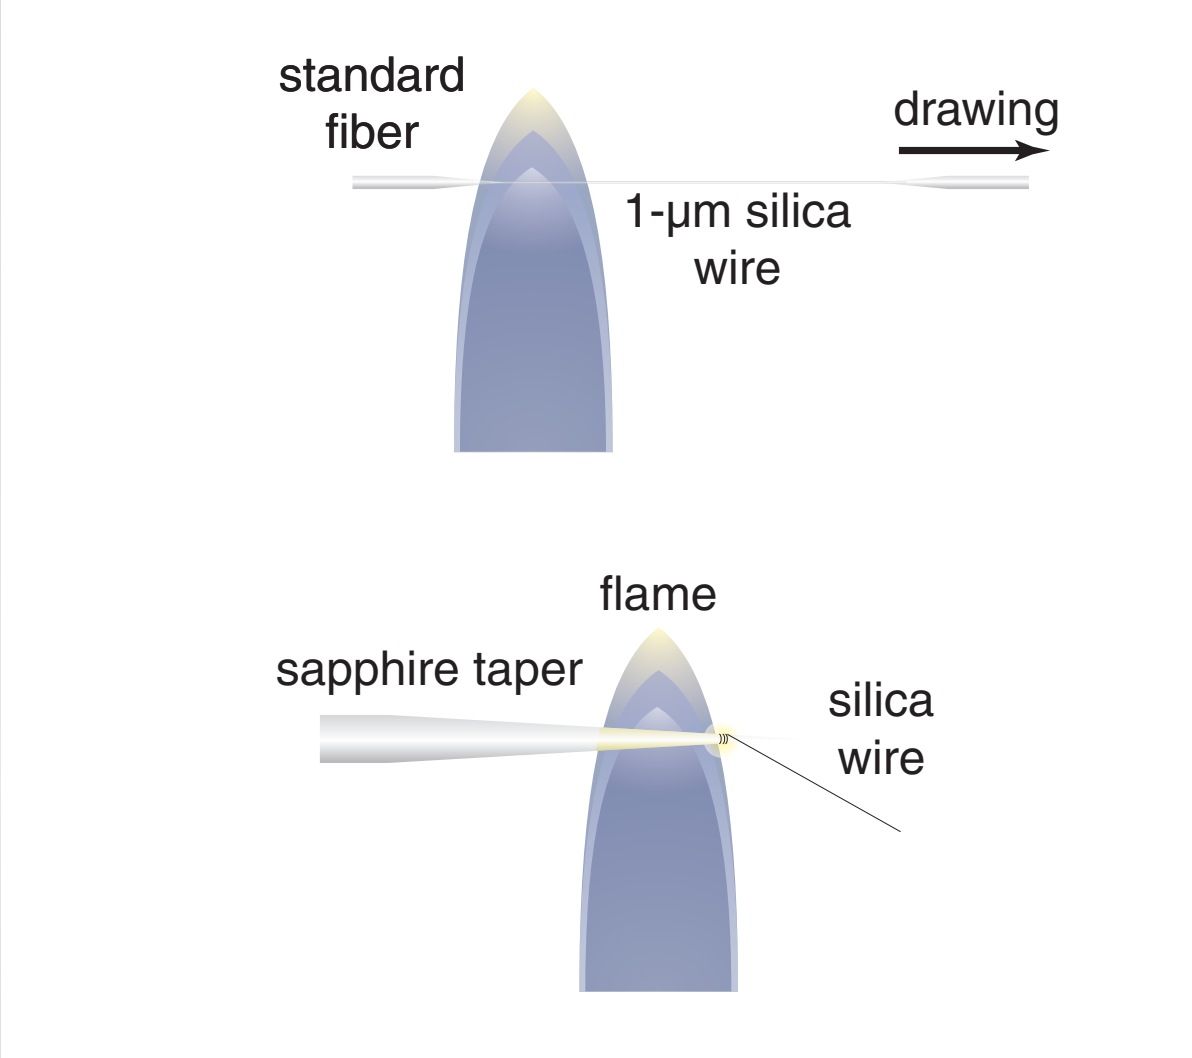

Nanowire fabrication

two-step drawing process

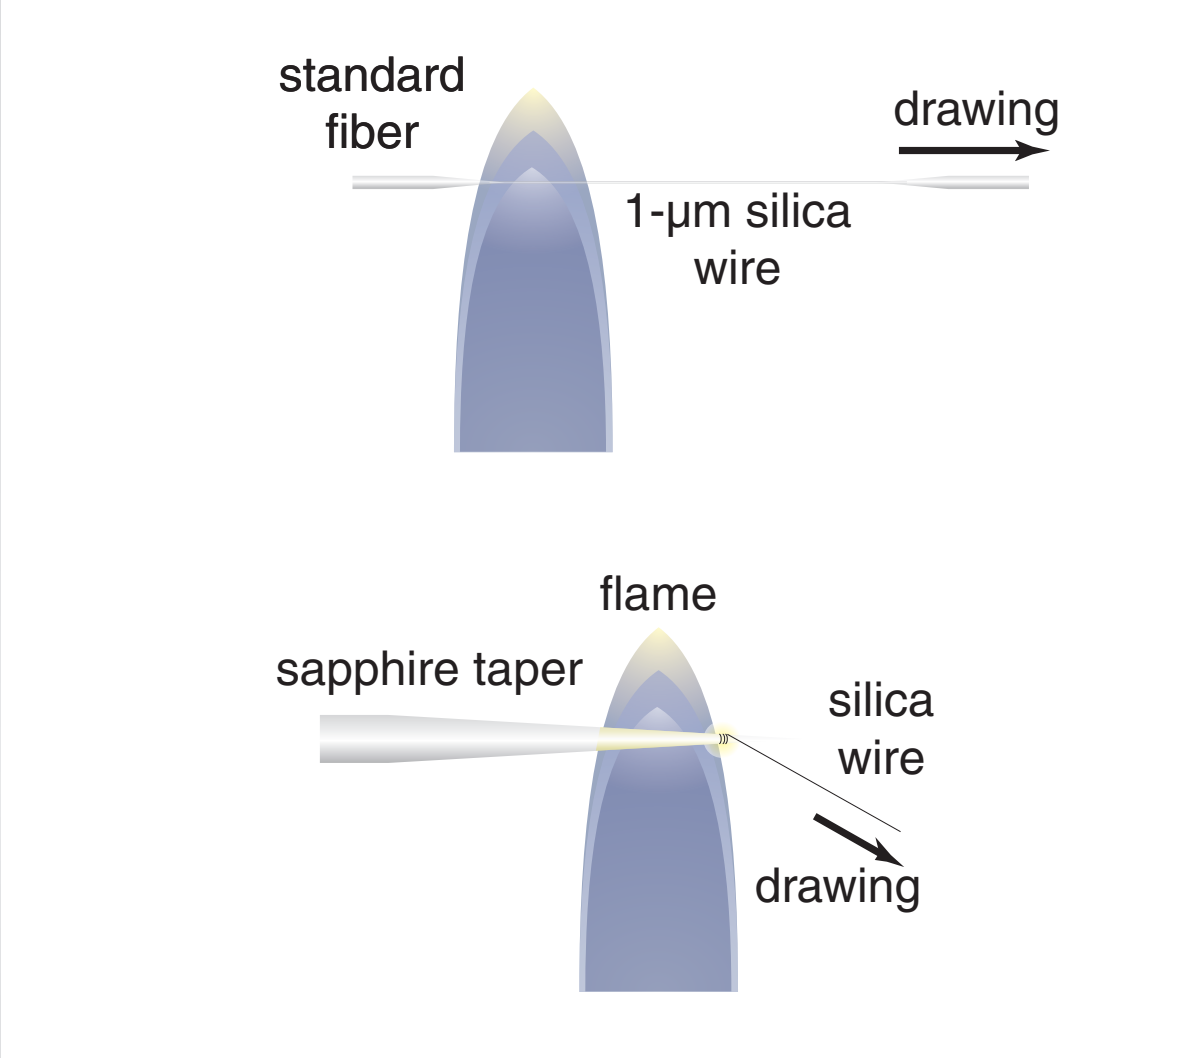

Nanowire fabrication

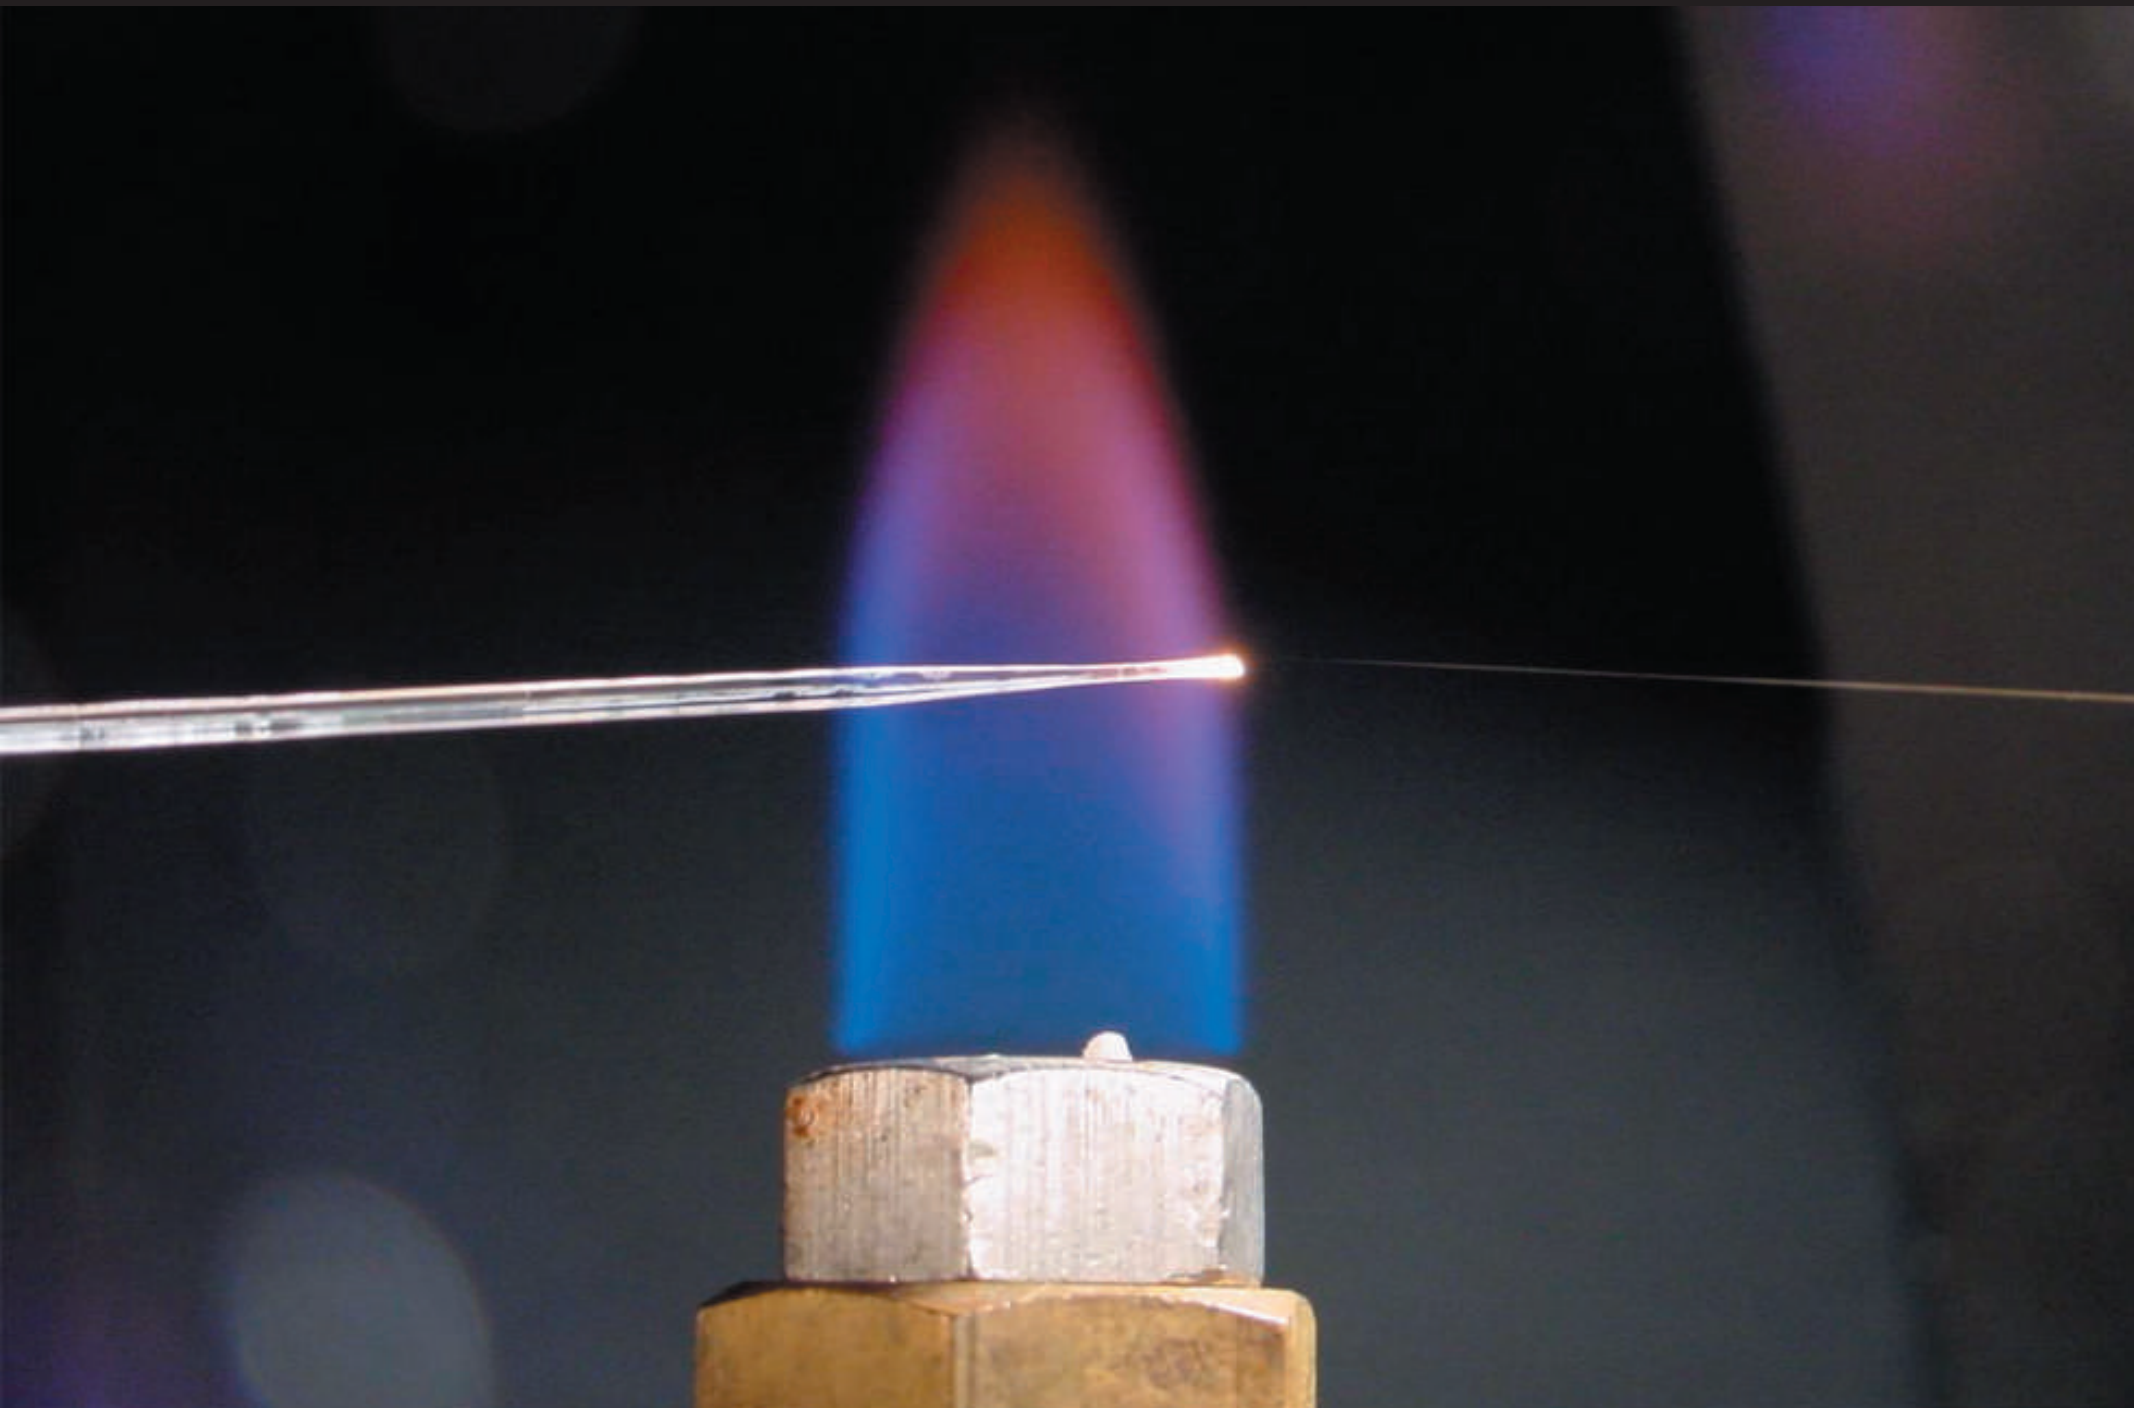

Nanowire fabrication

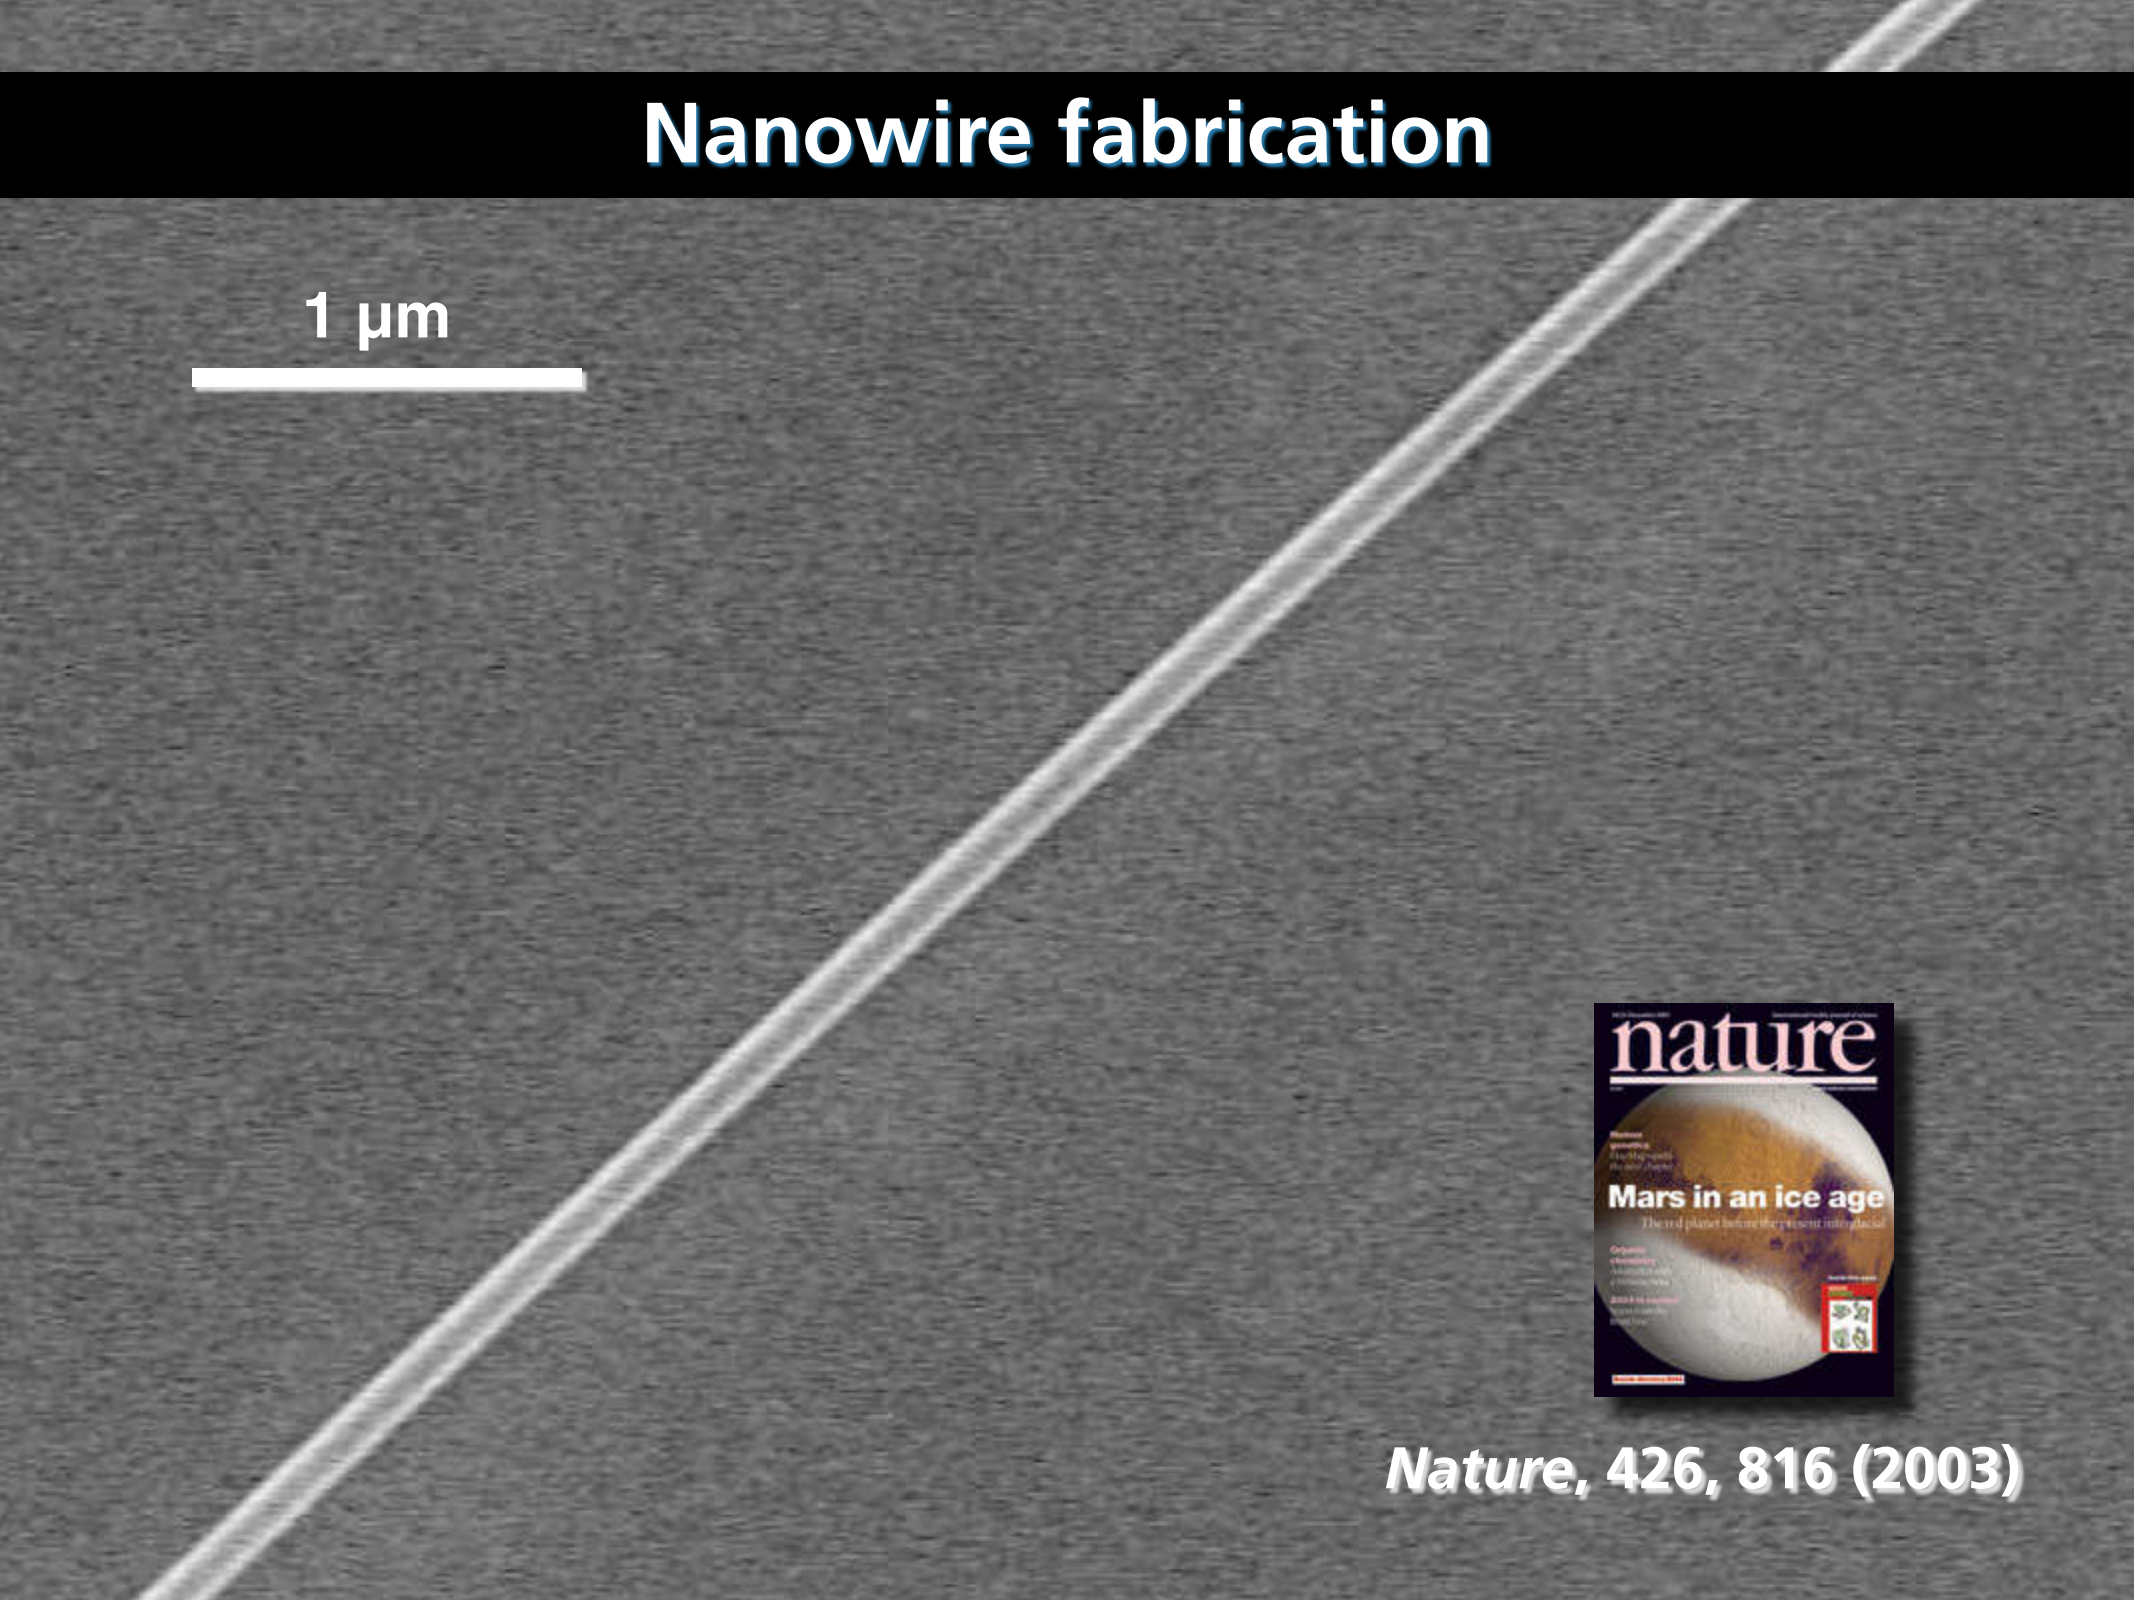

Nature, 426, 816 (2003)

Nanowire fabrication

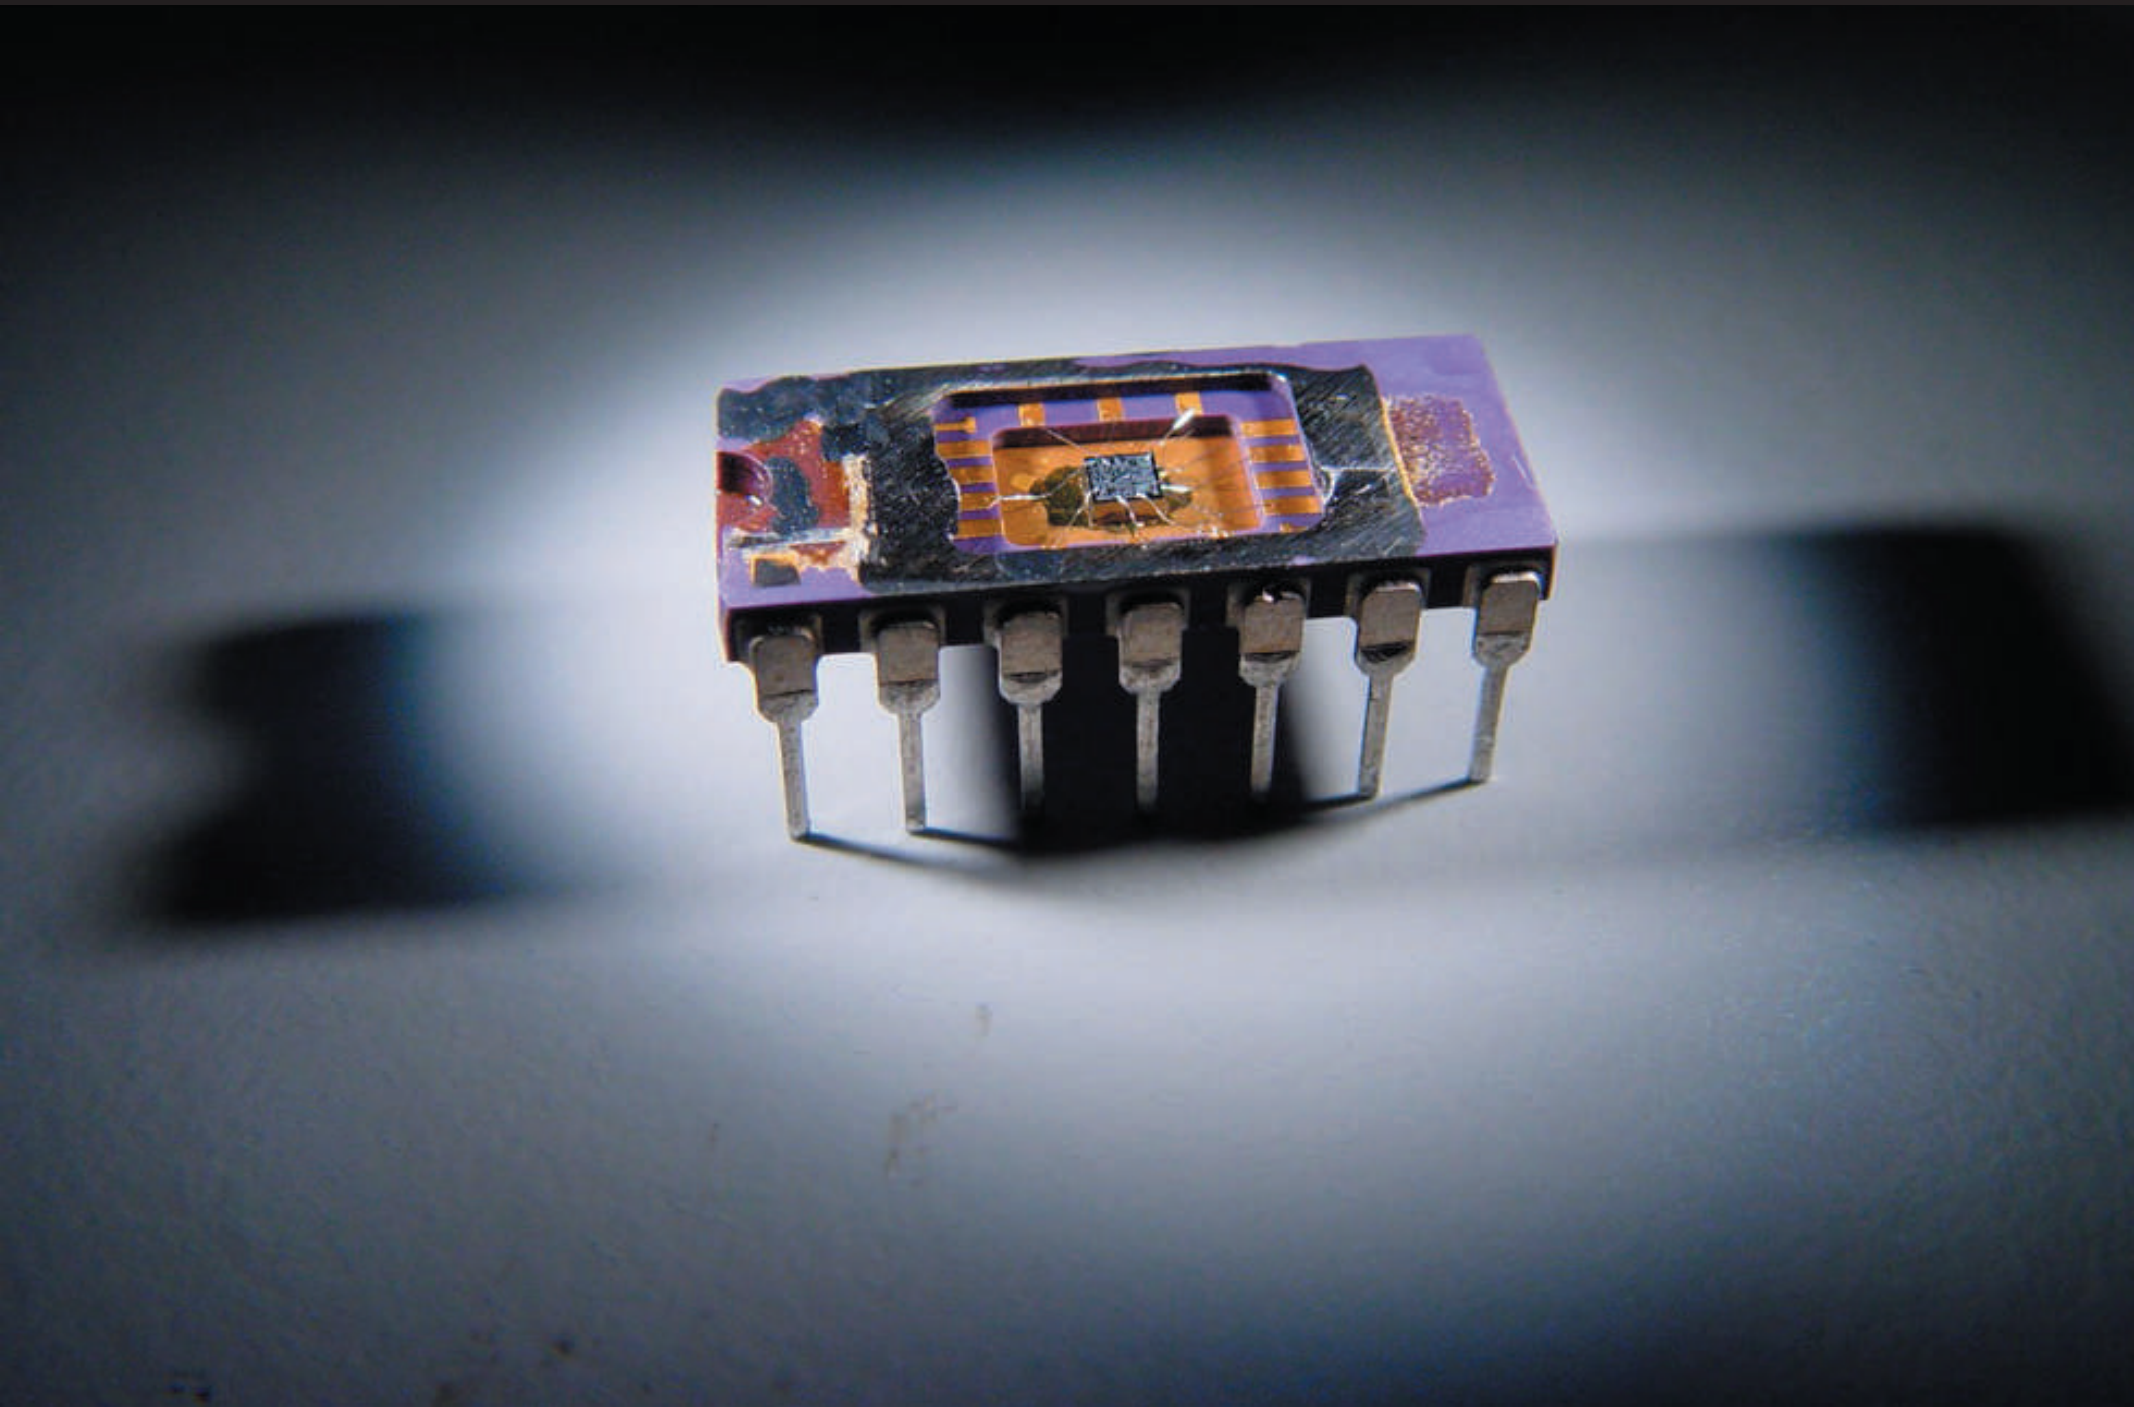

Nanowire fabrication

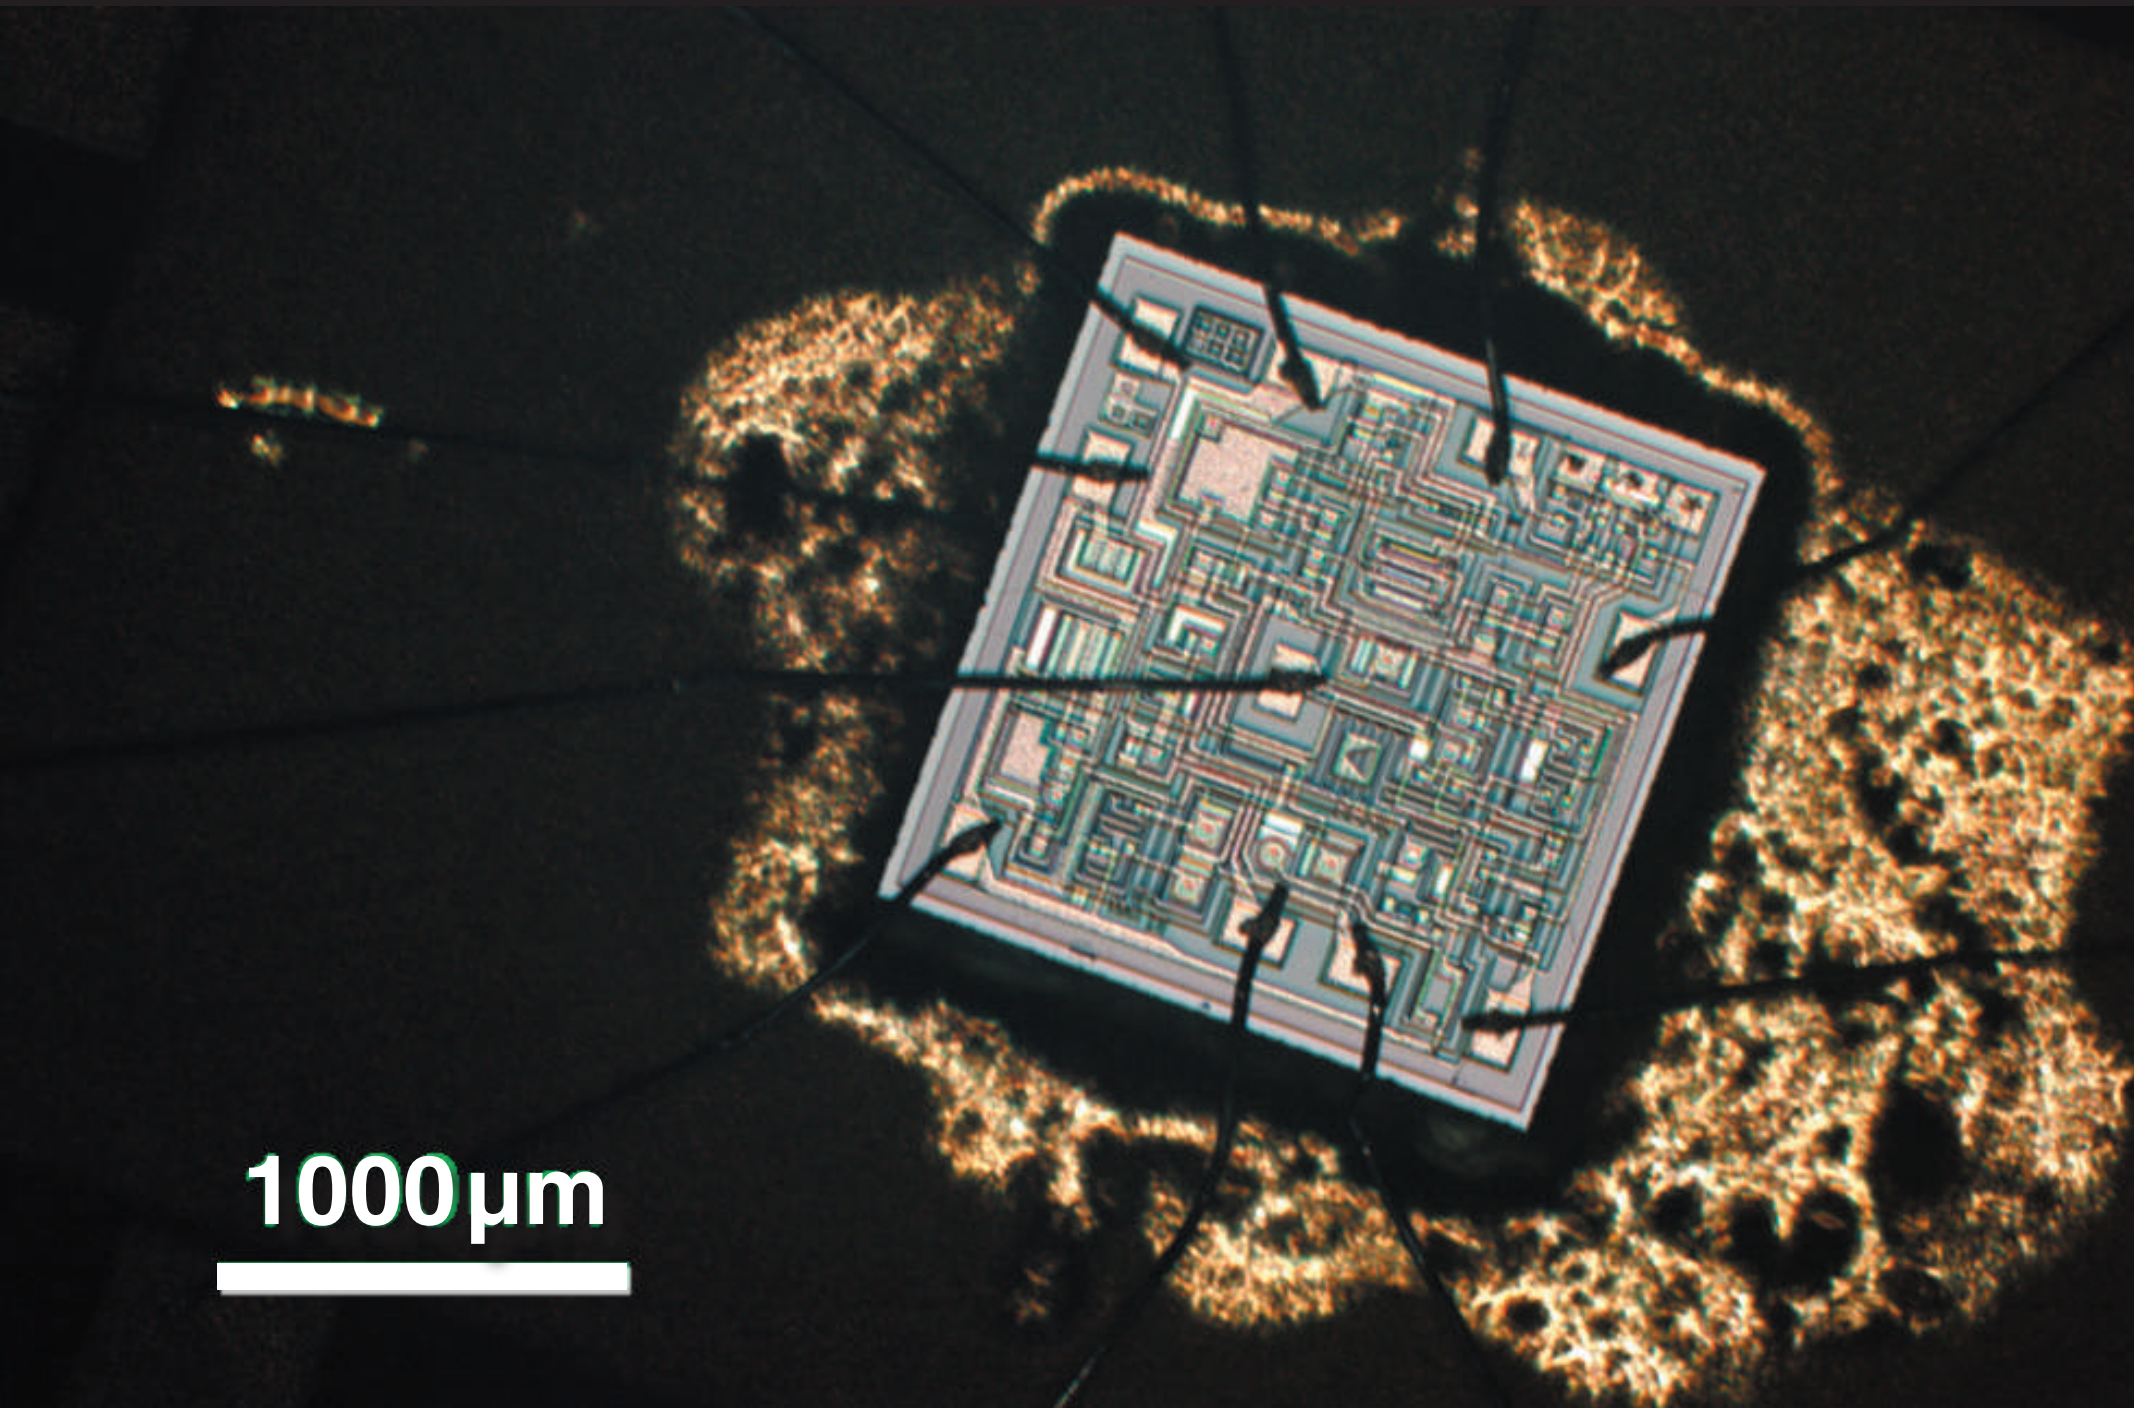

Nanowire fabrication

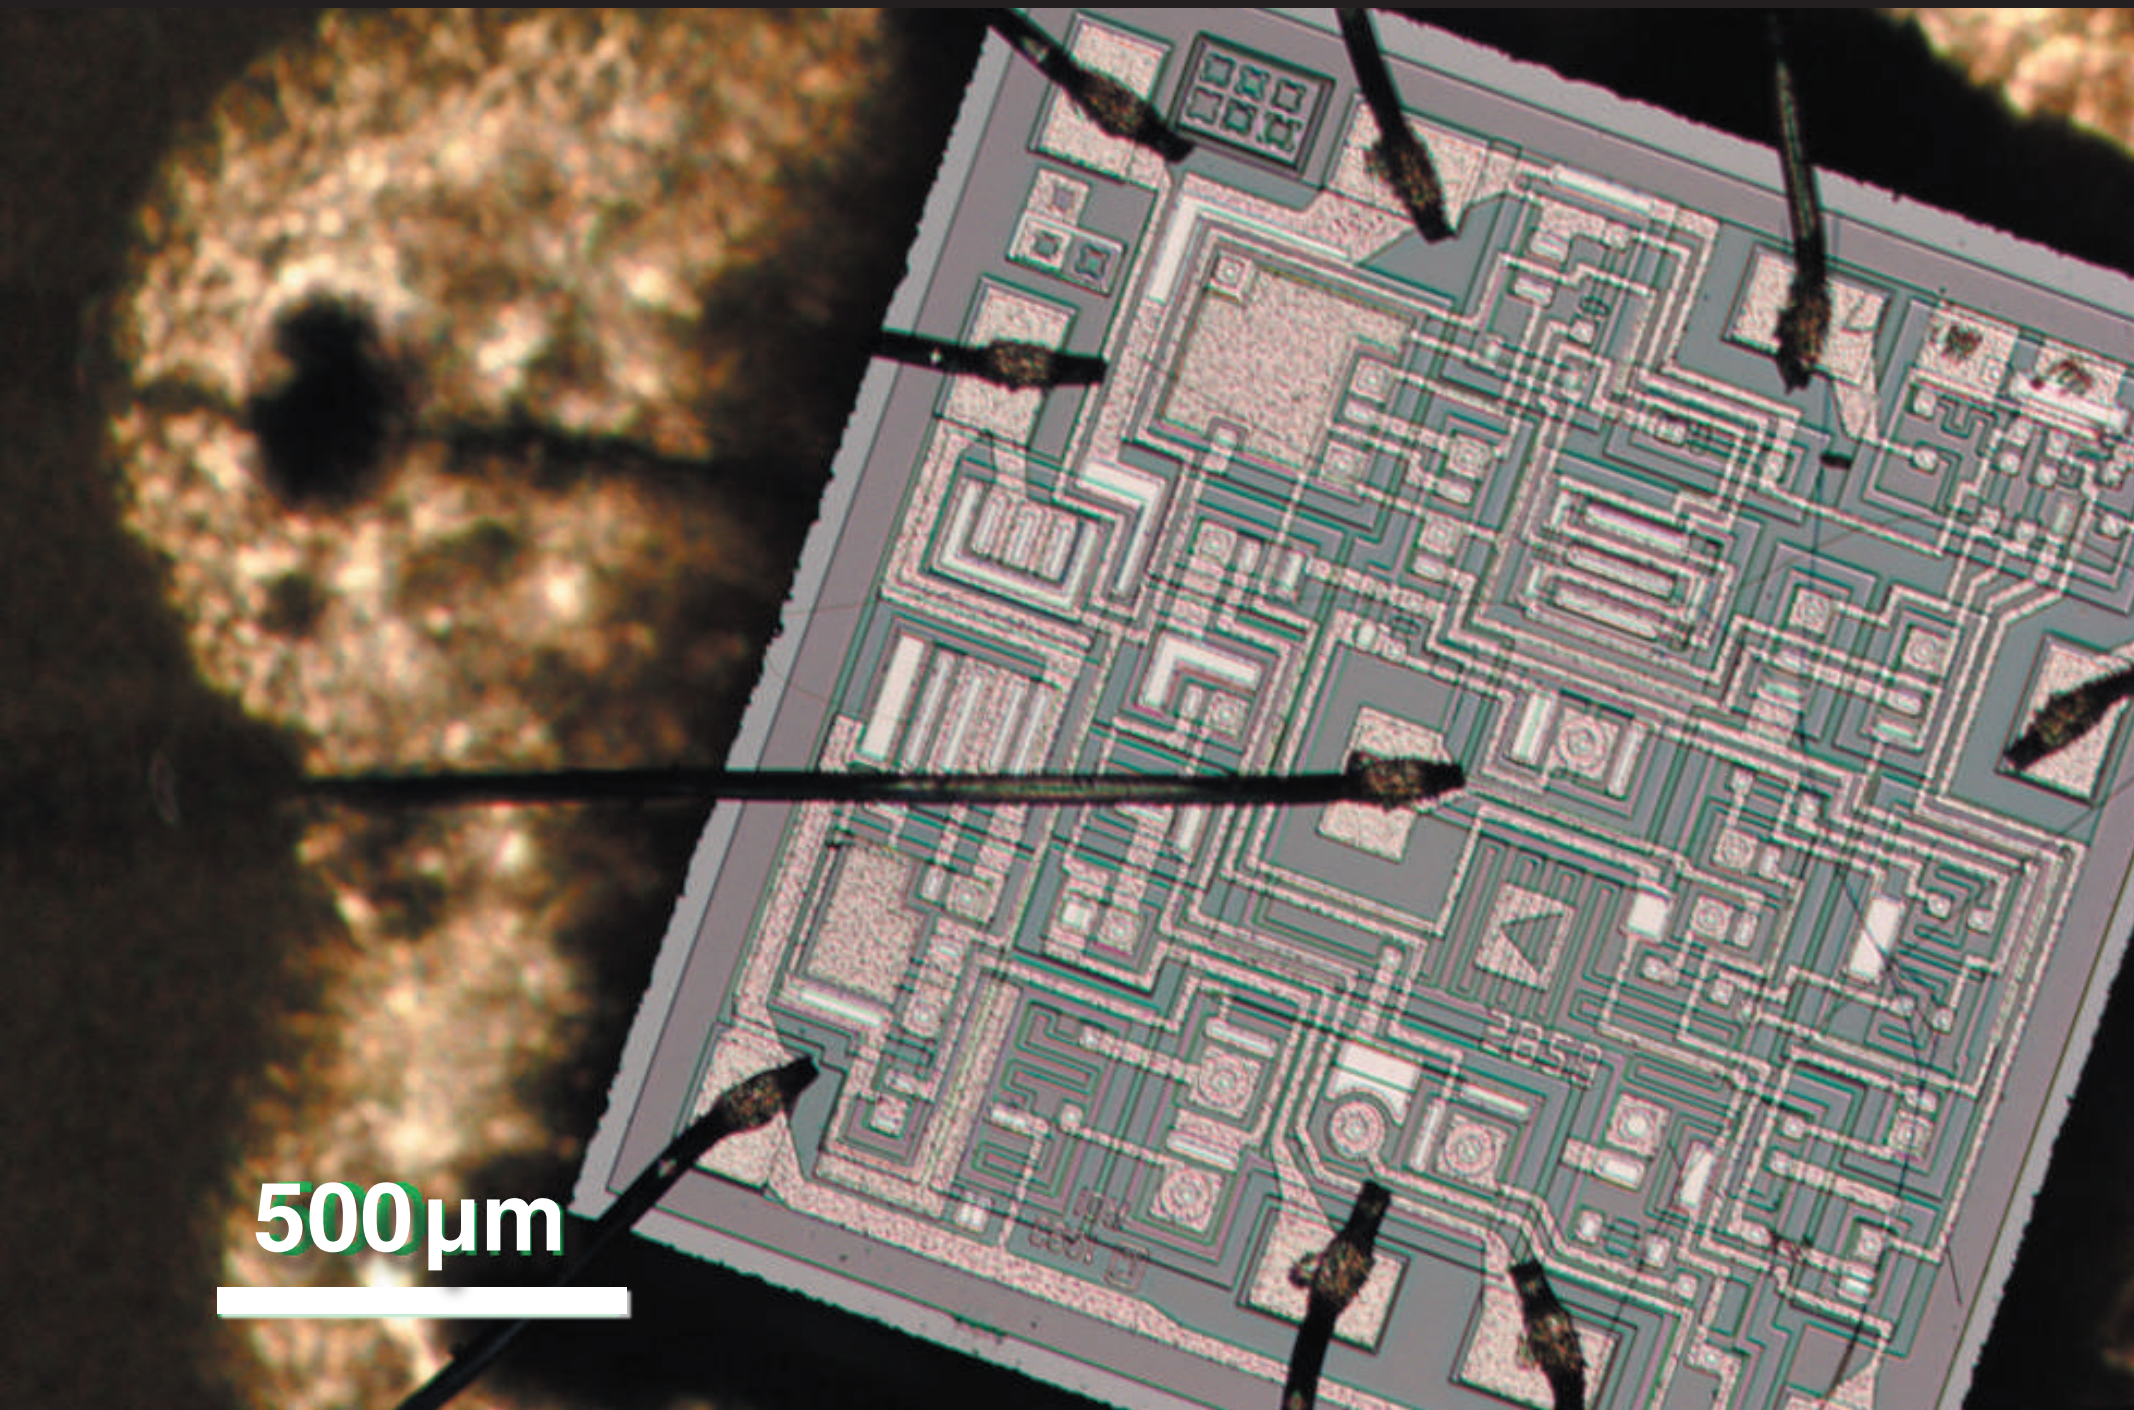

Nanowire fabrication

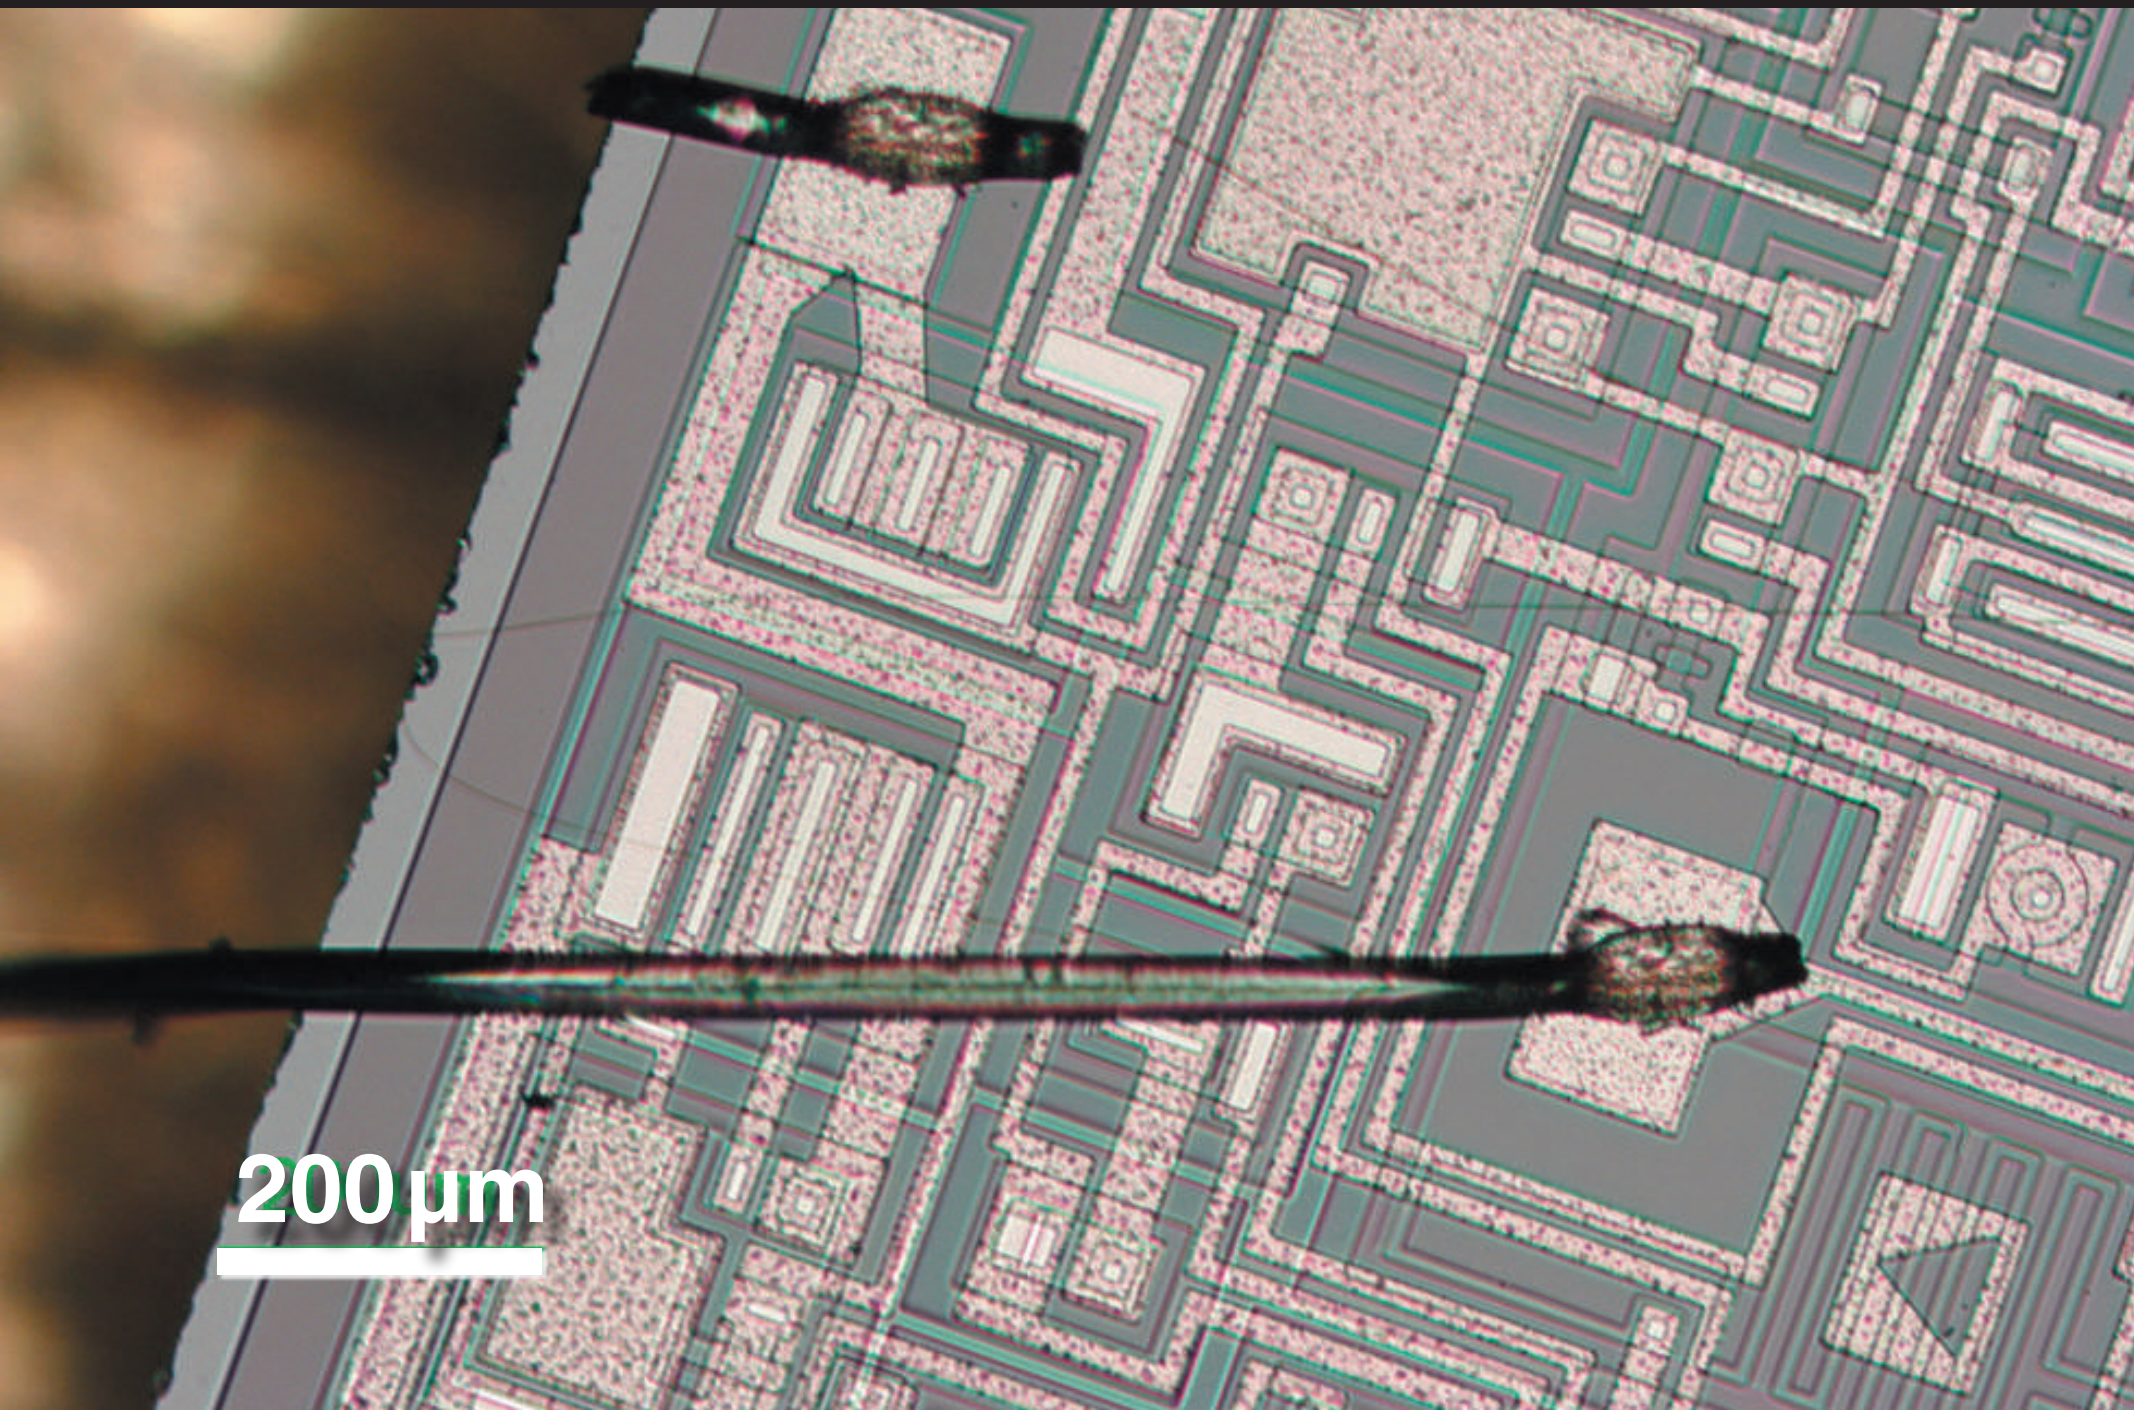

Nanowire fabrication

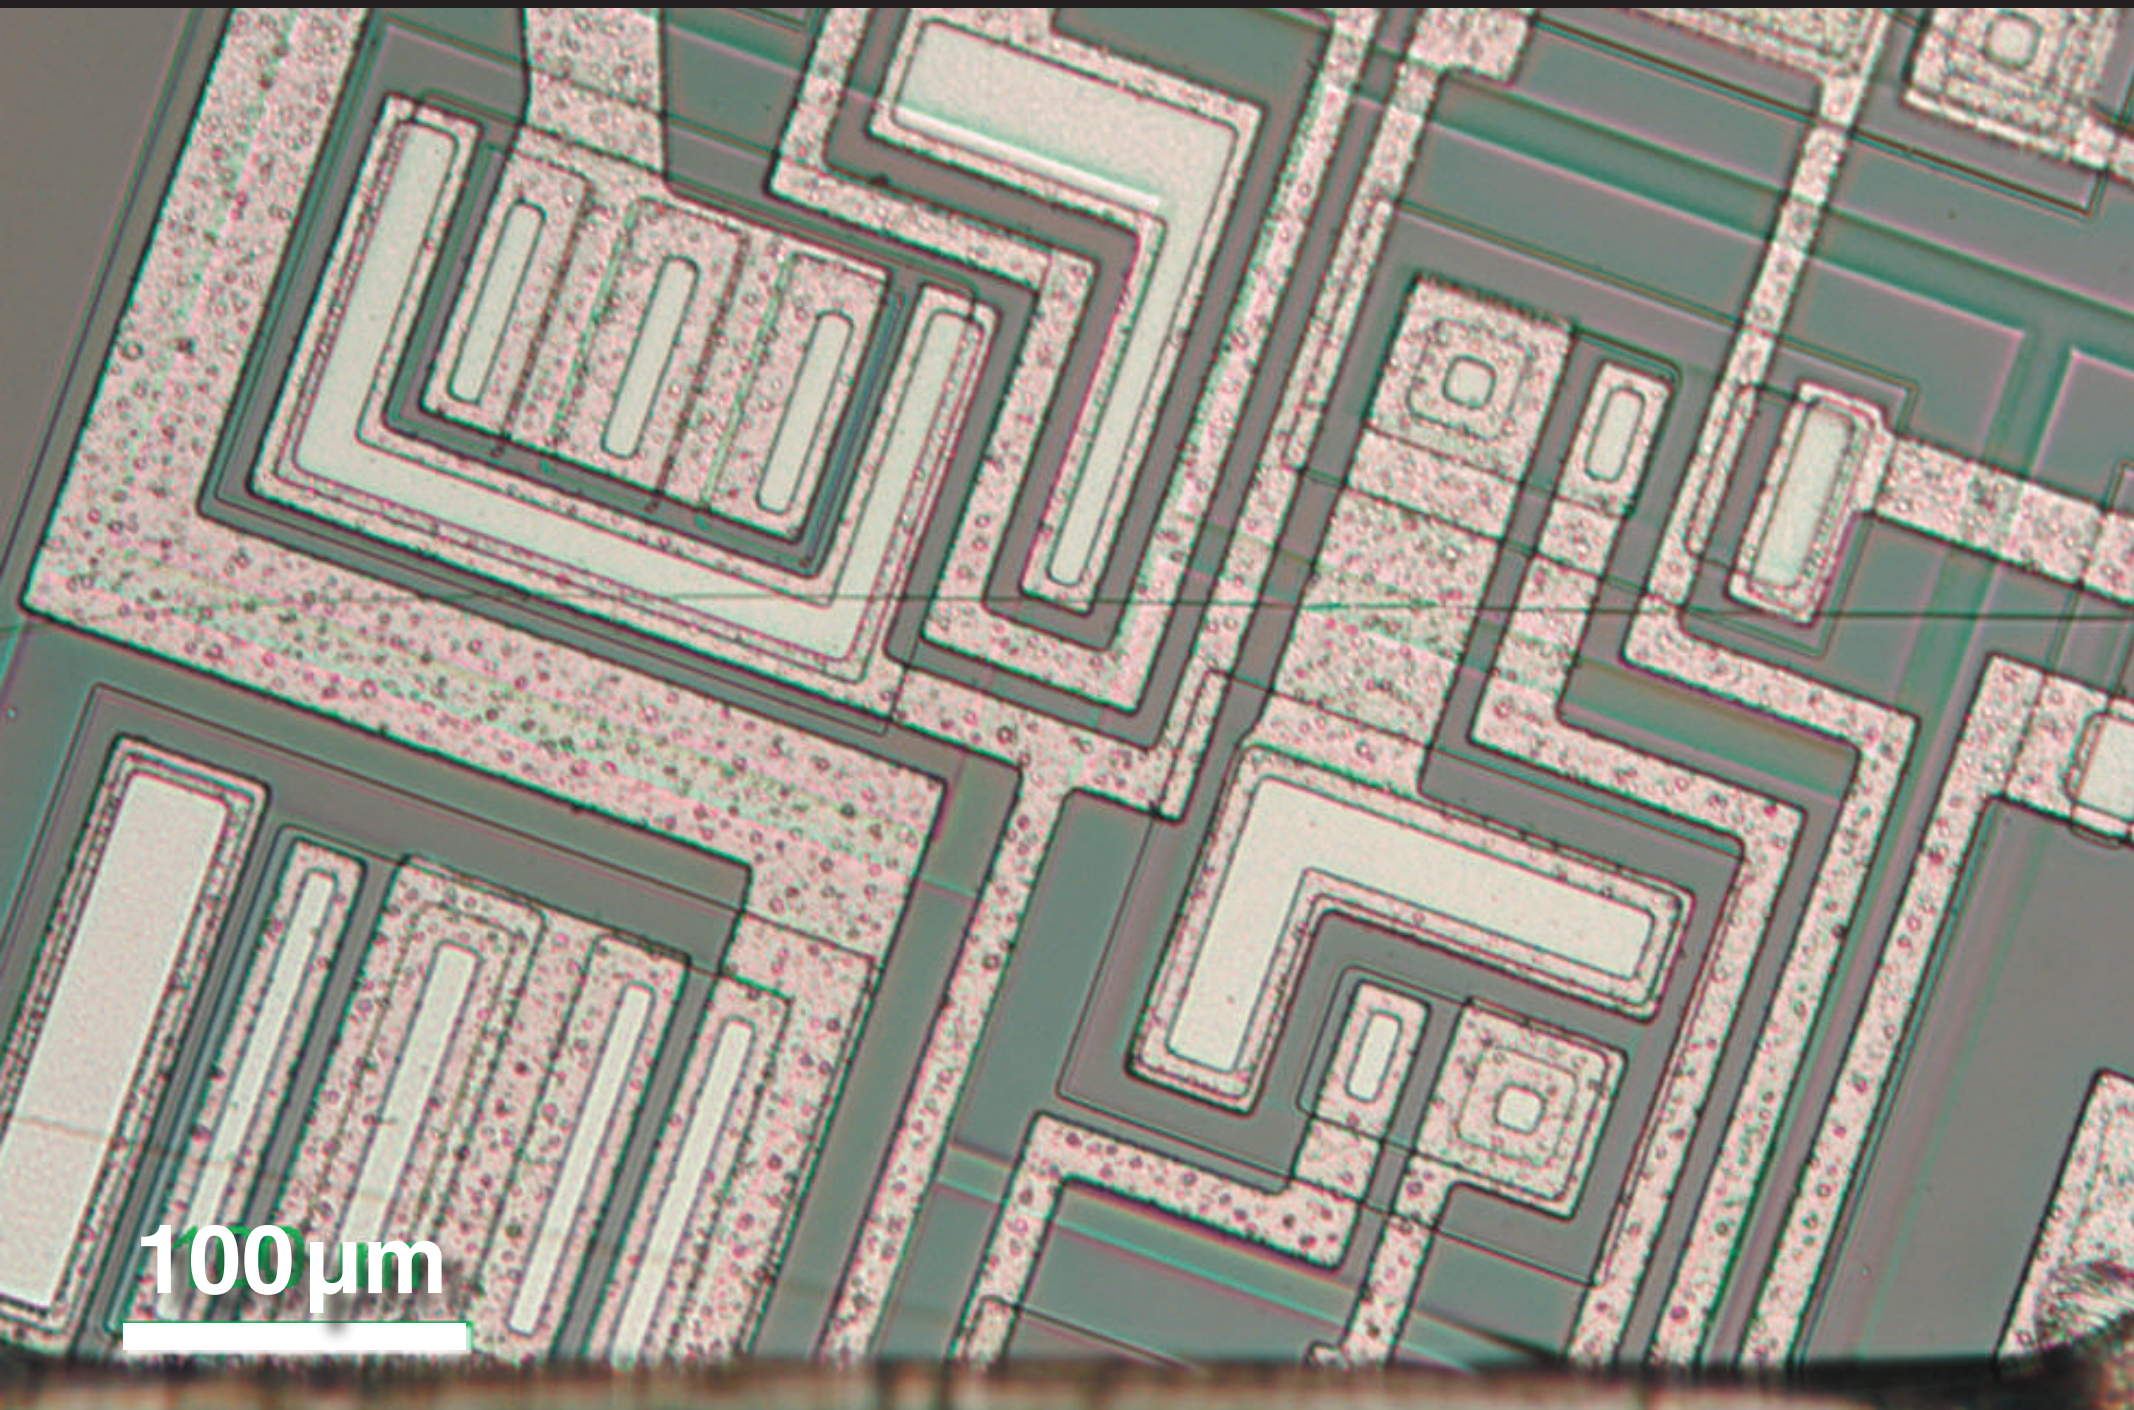

Nanowire fabrication

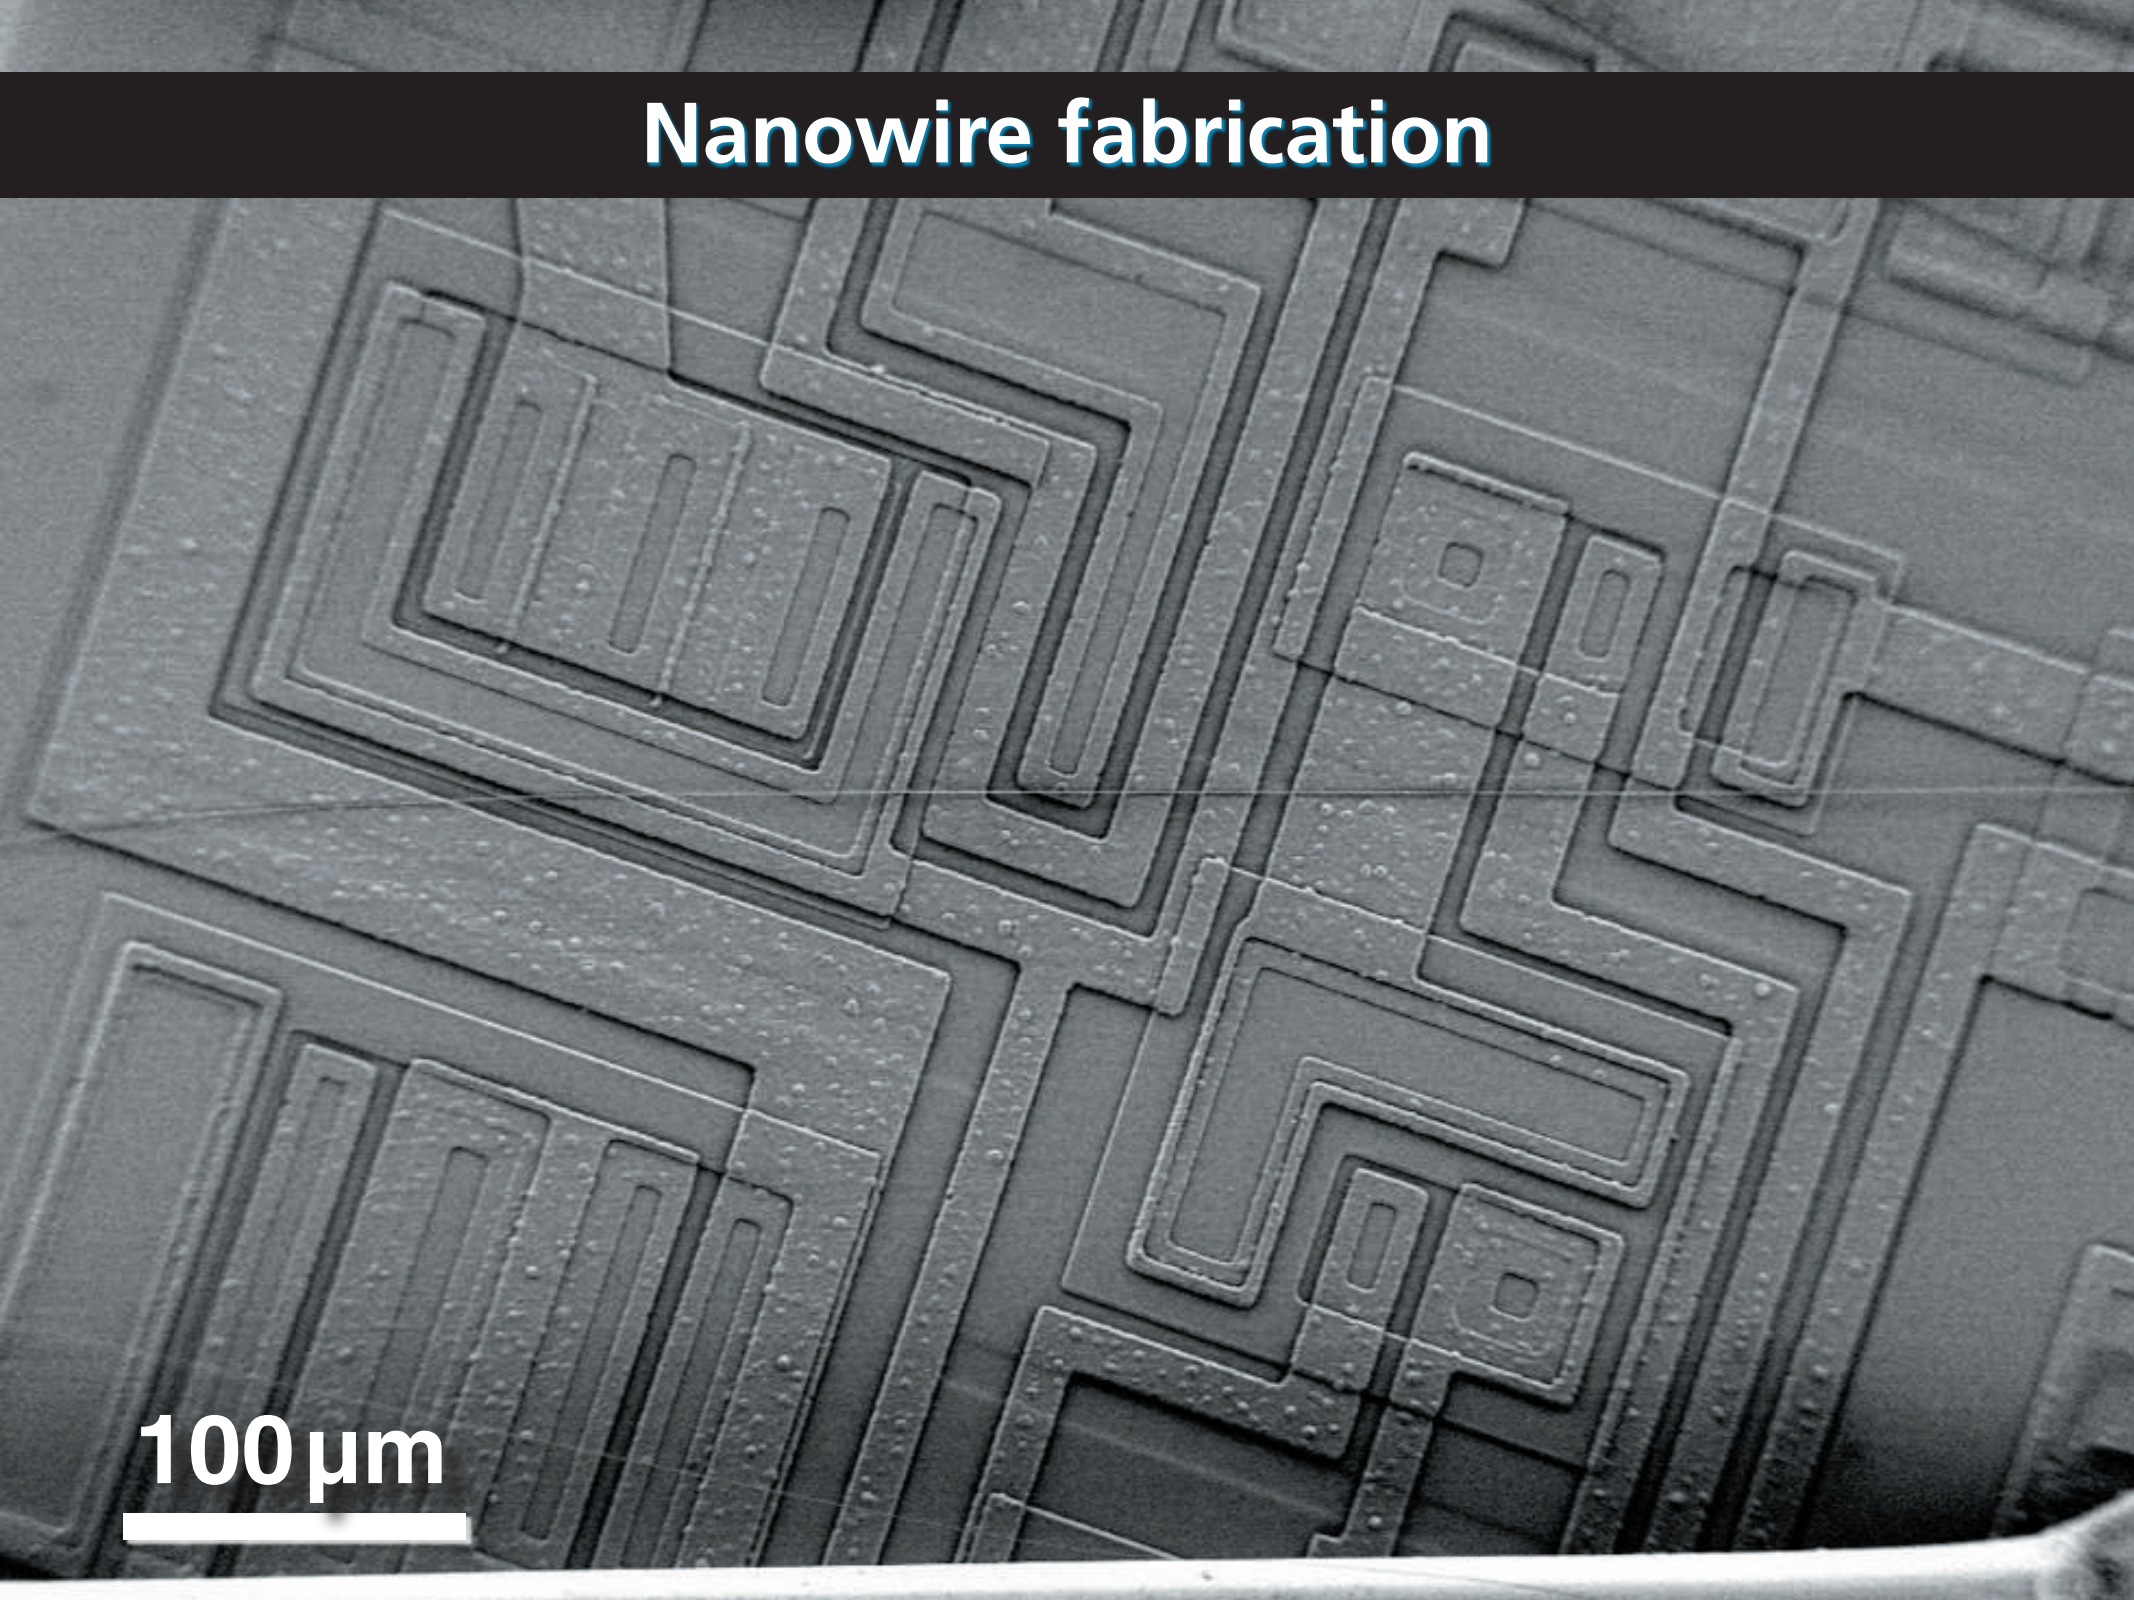

Nanowire fabrication

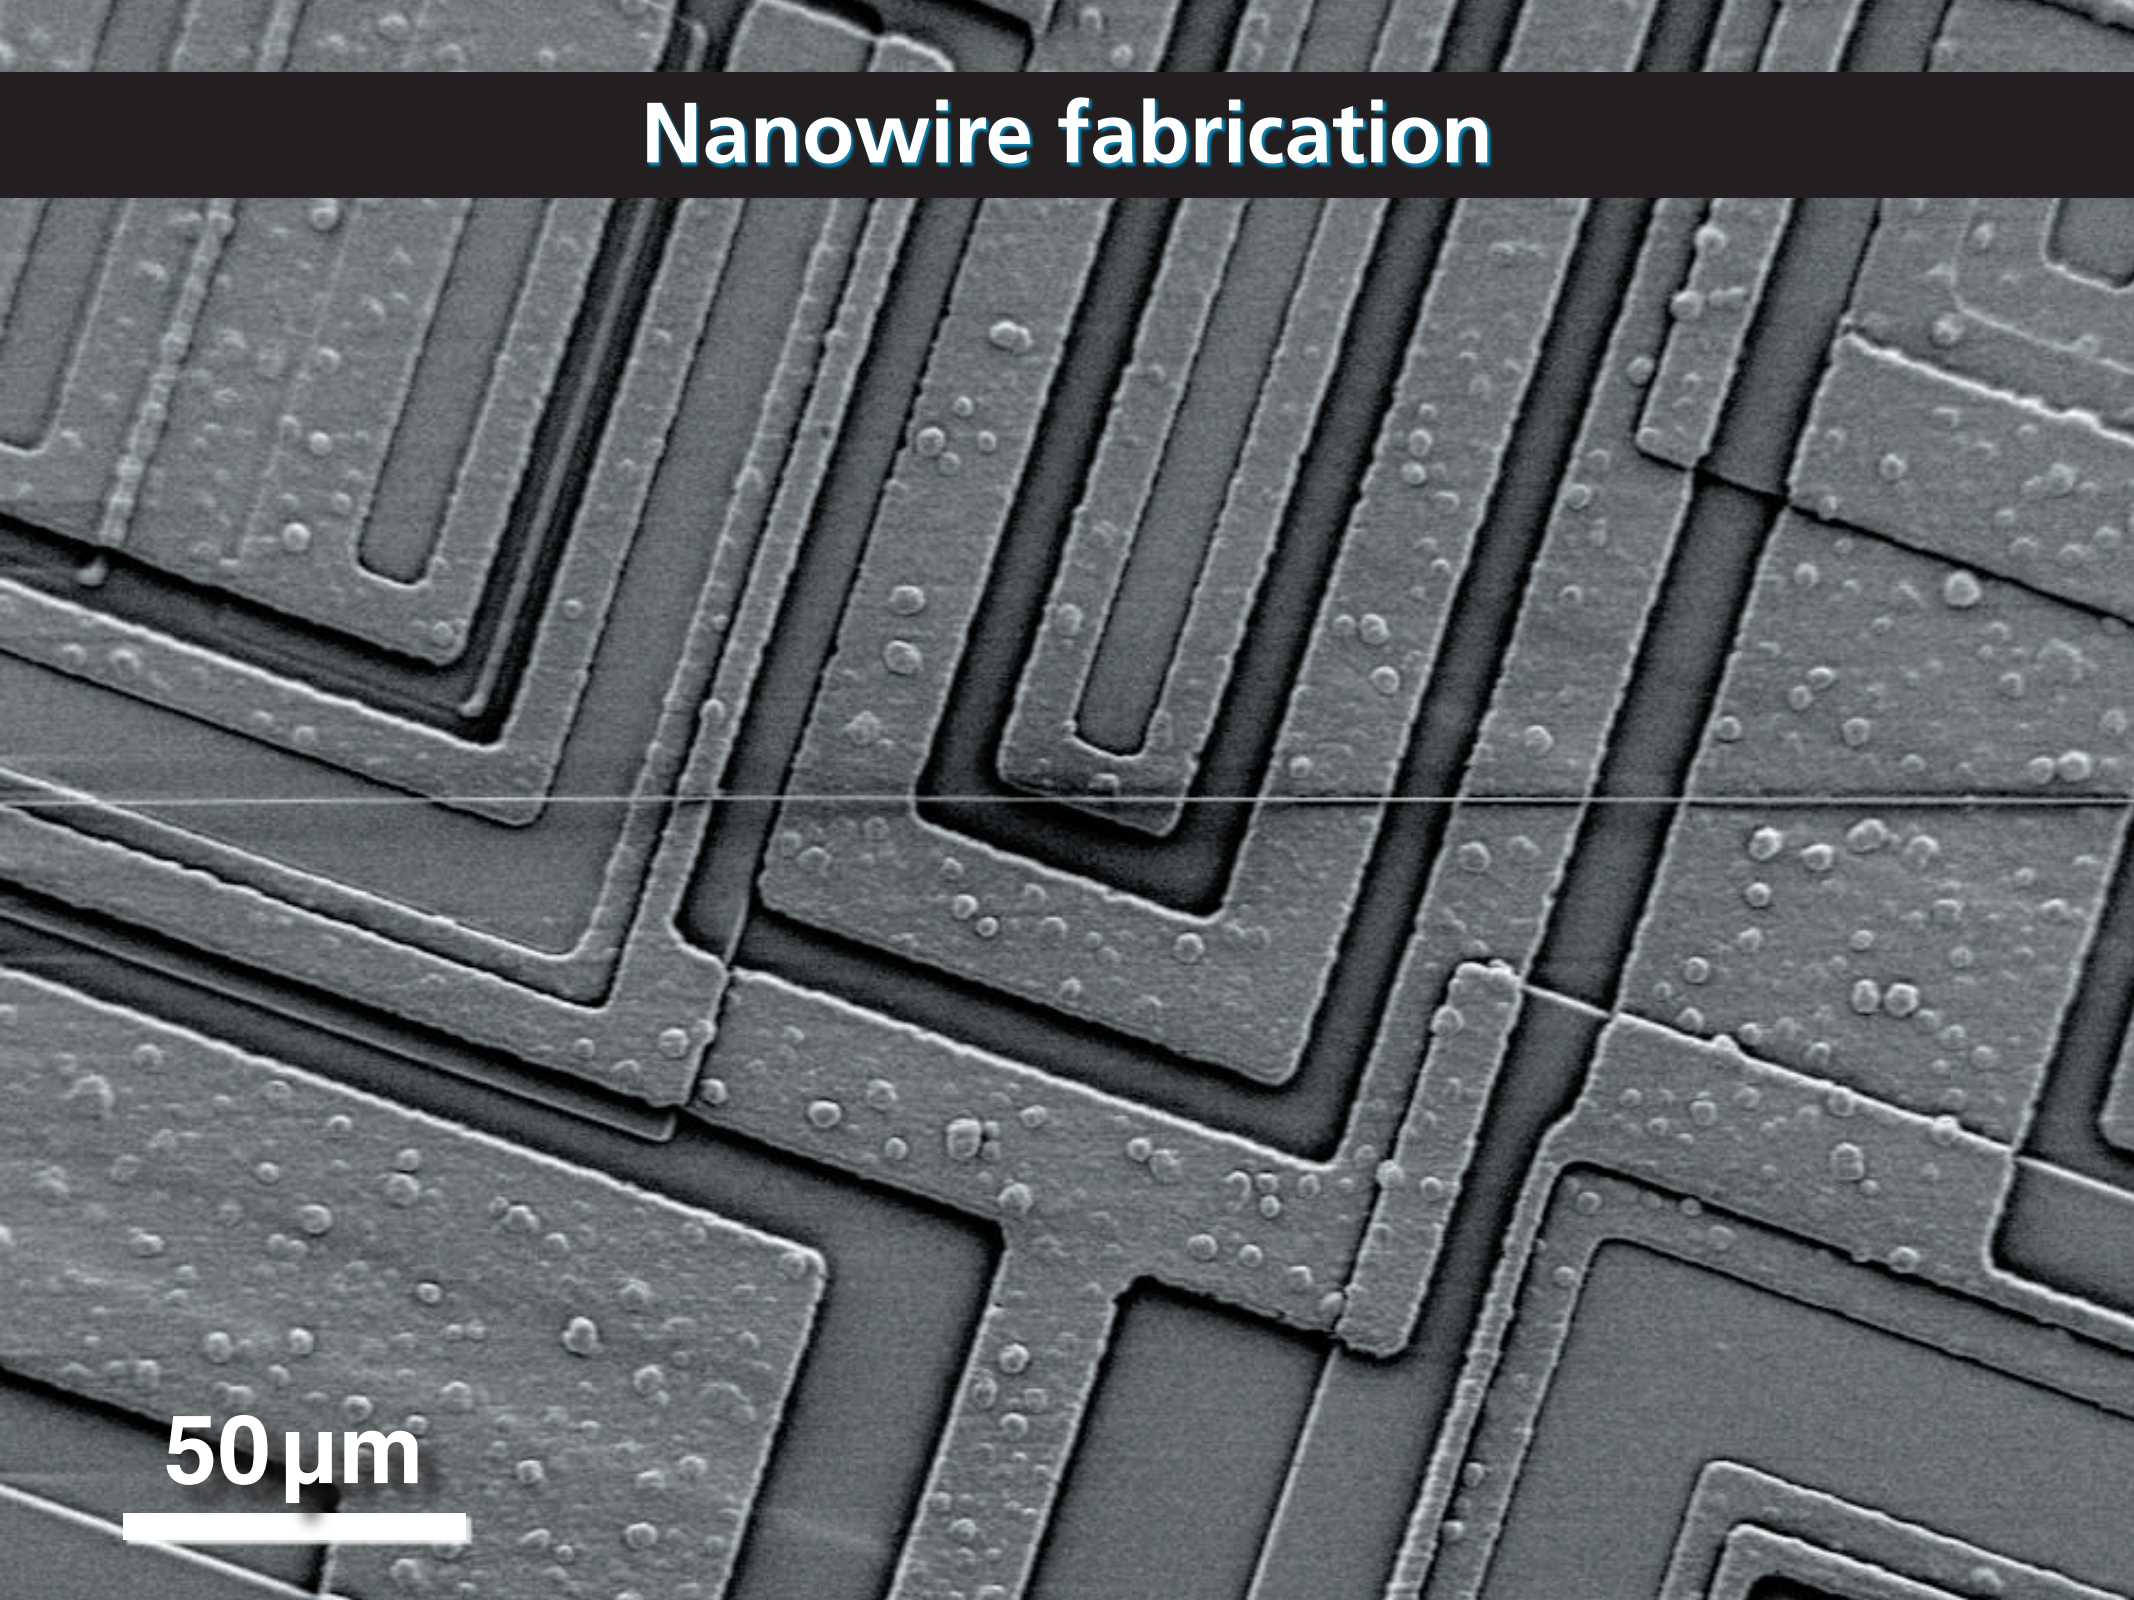

Nanowire fabrication

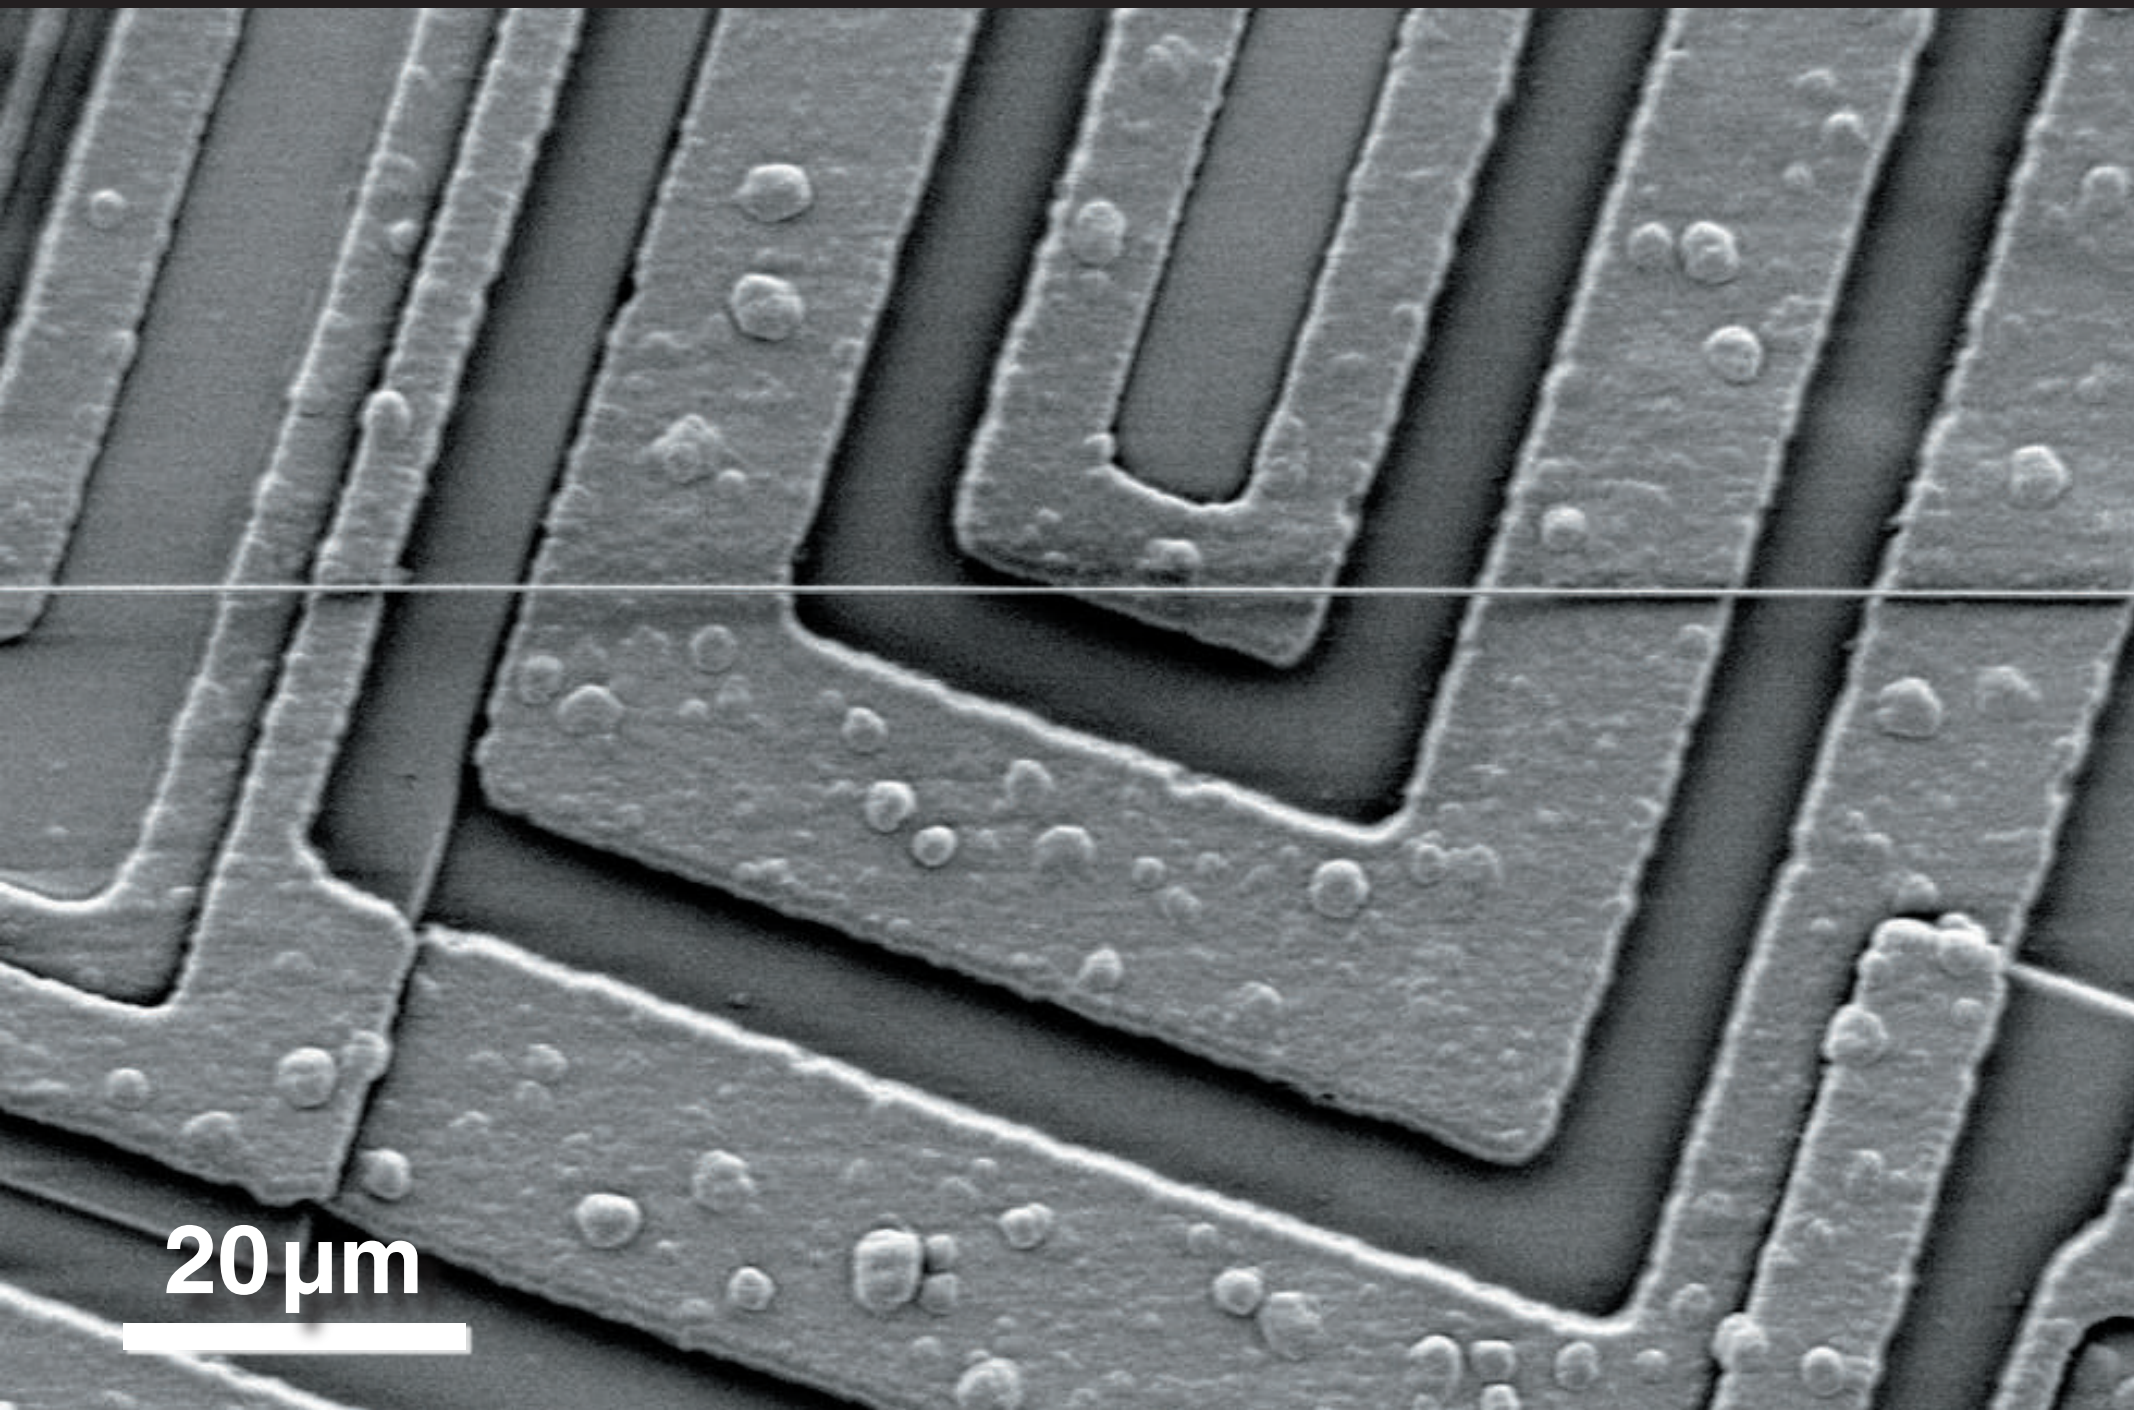

Nanowire fabrication

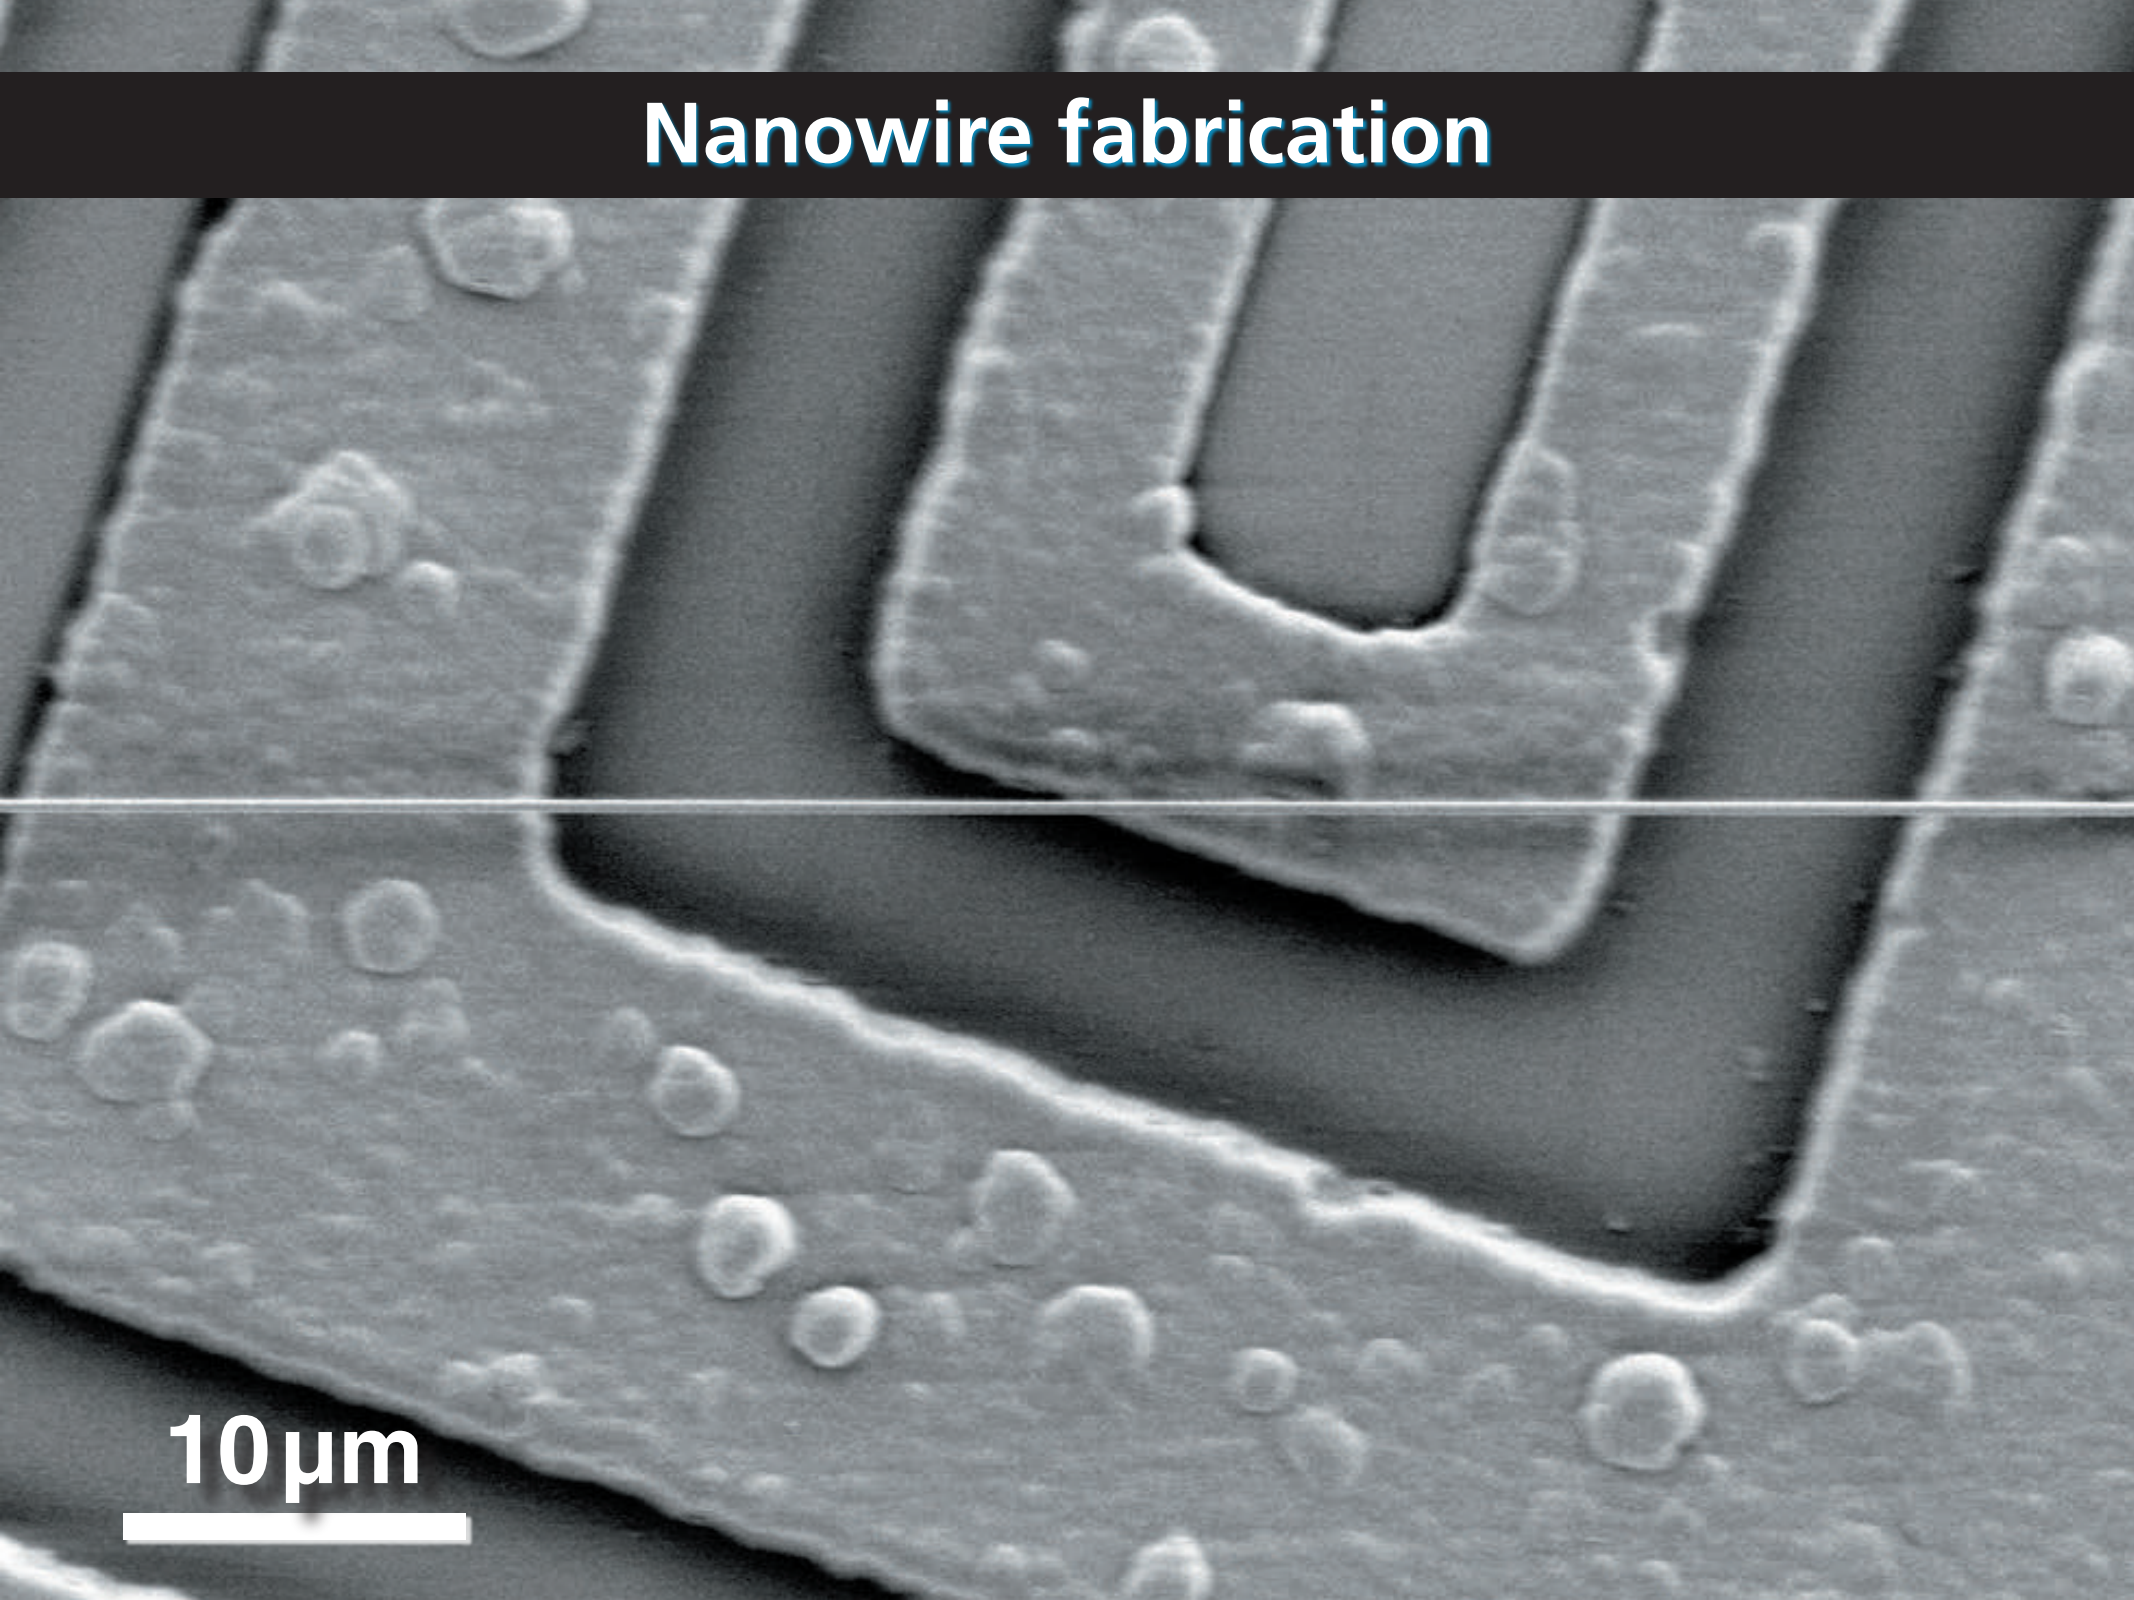

Nanowire fabrication

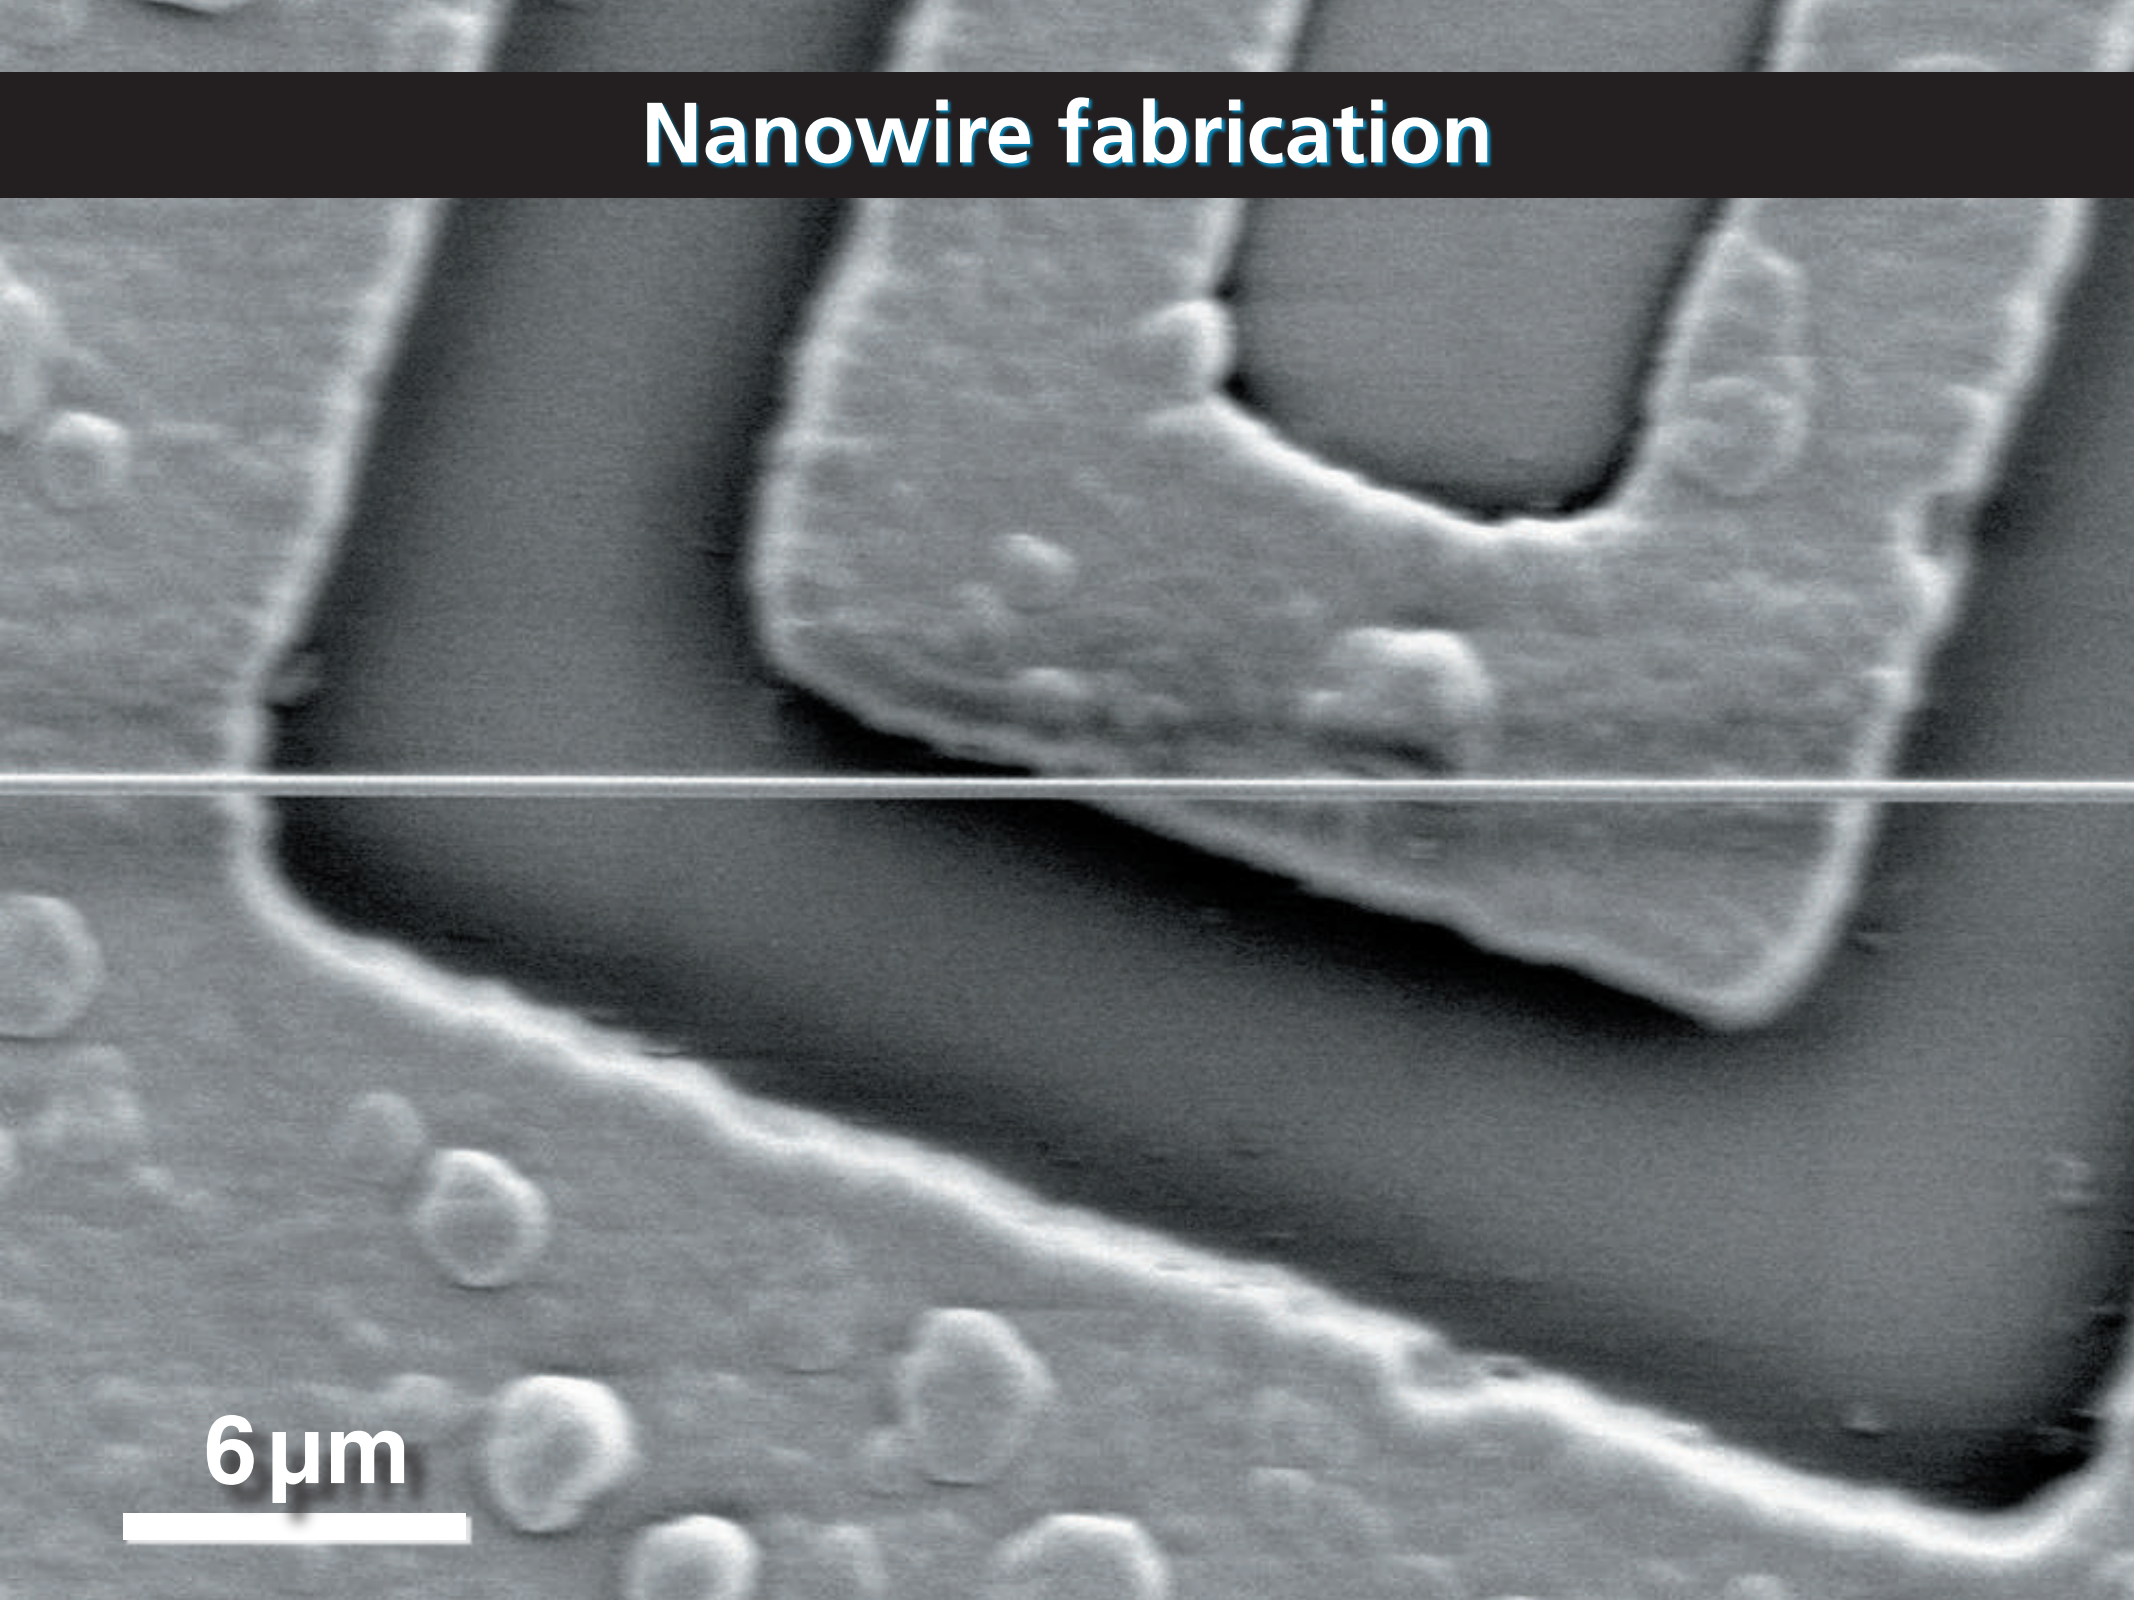

Nanowire fabrication

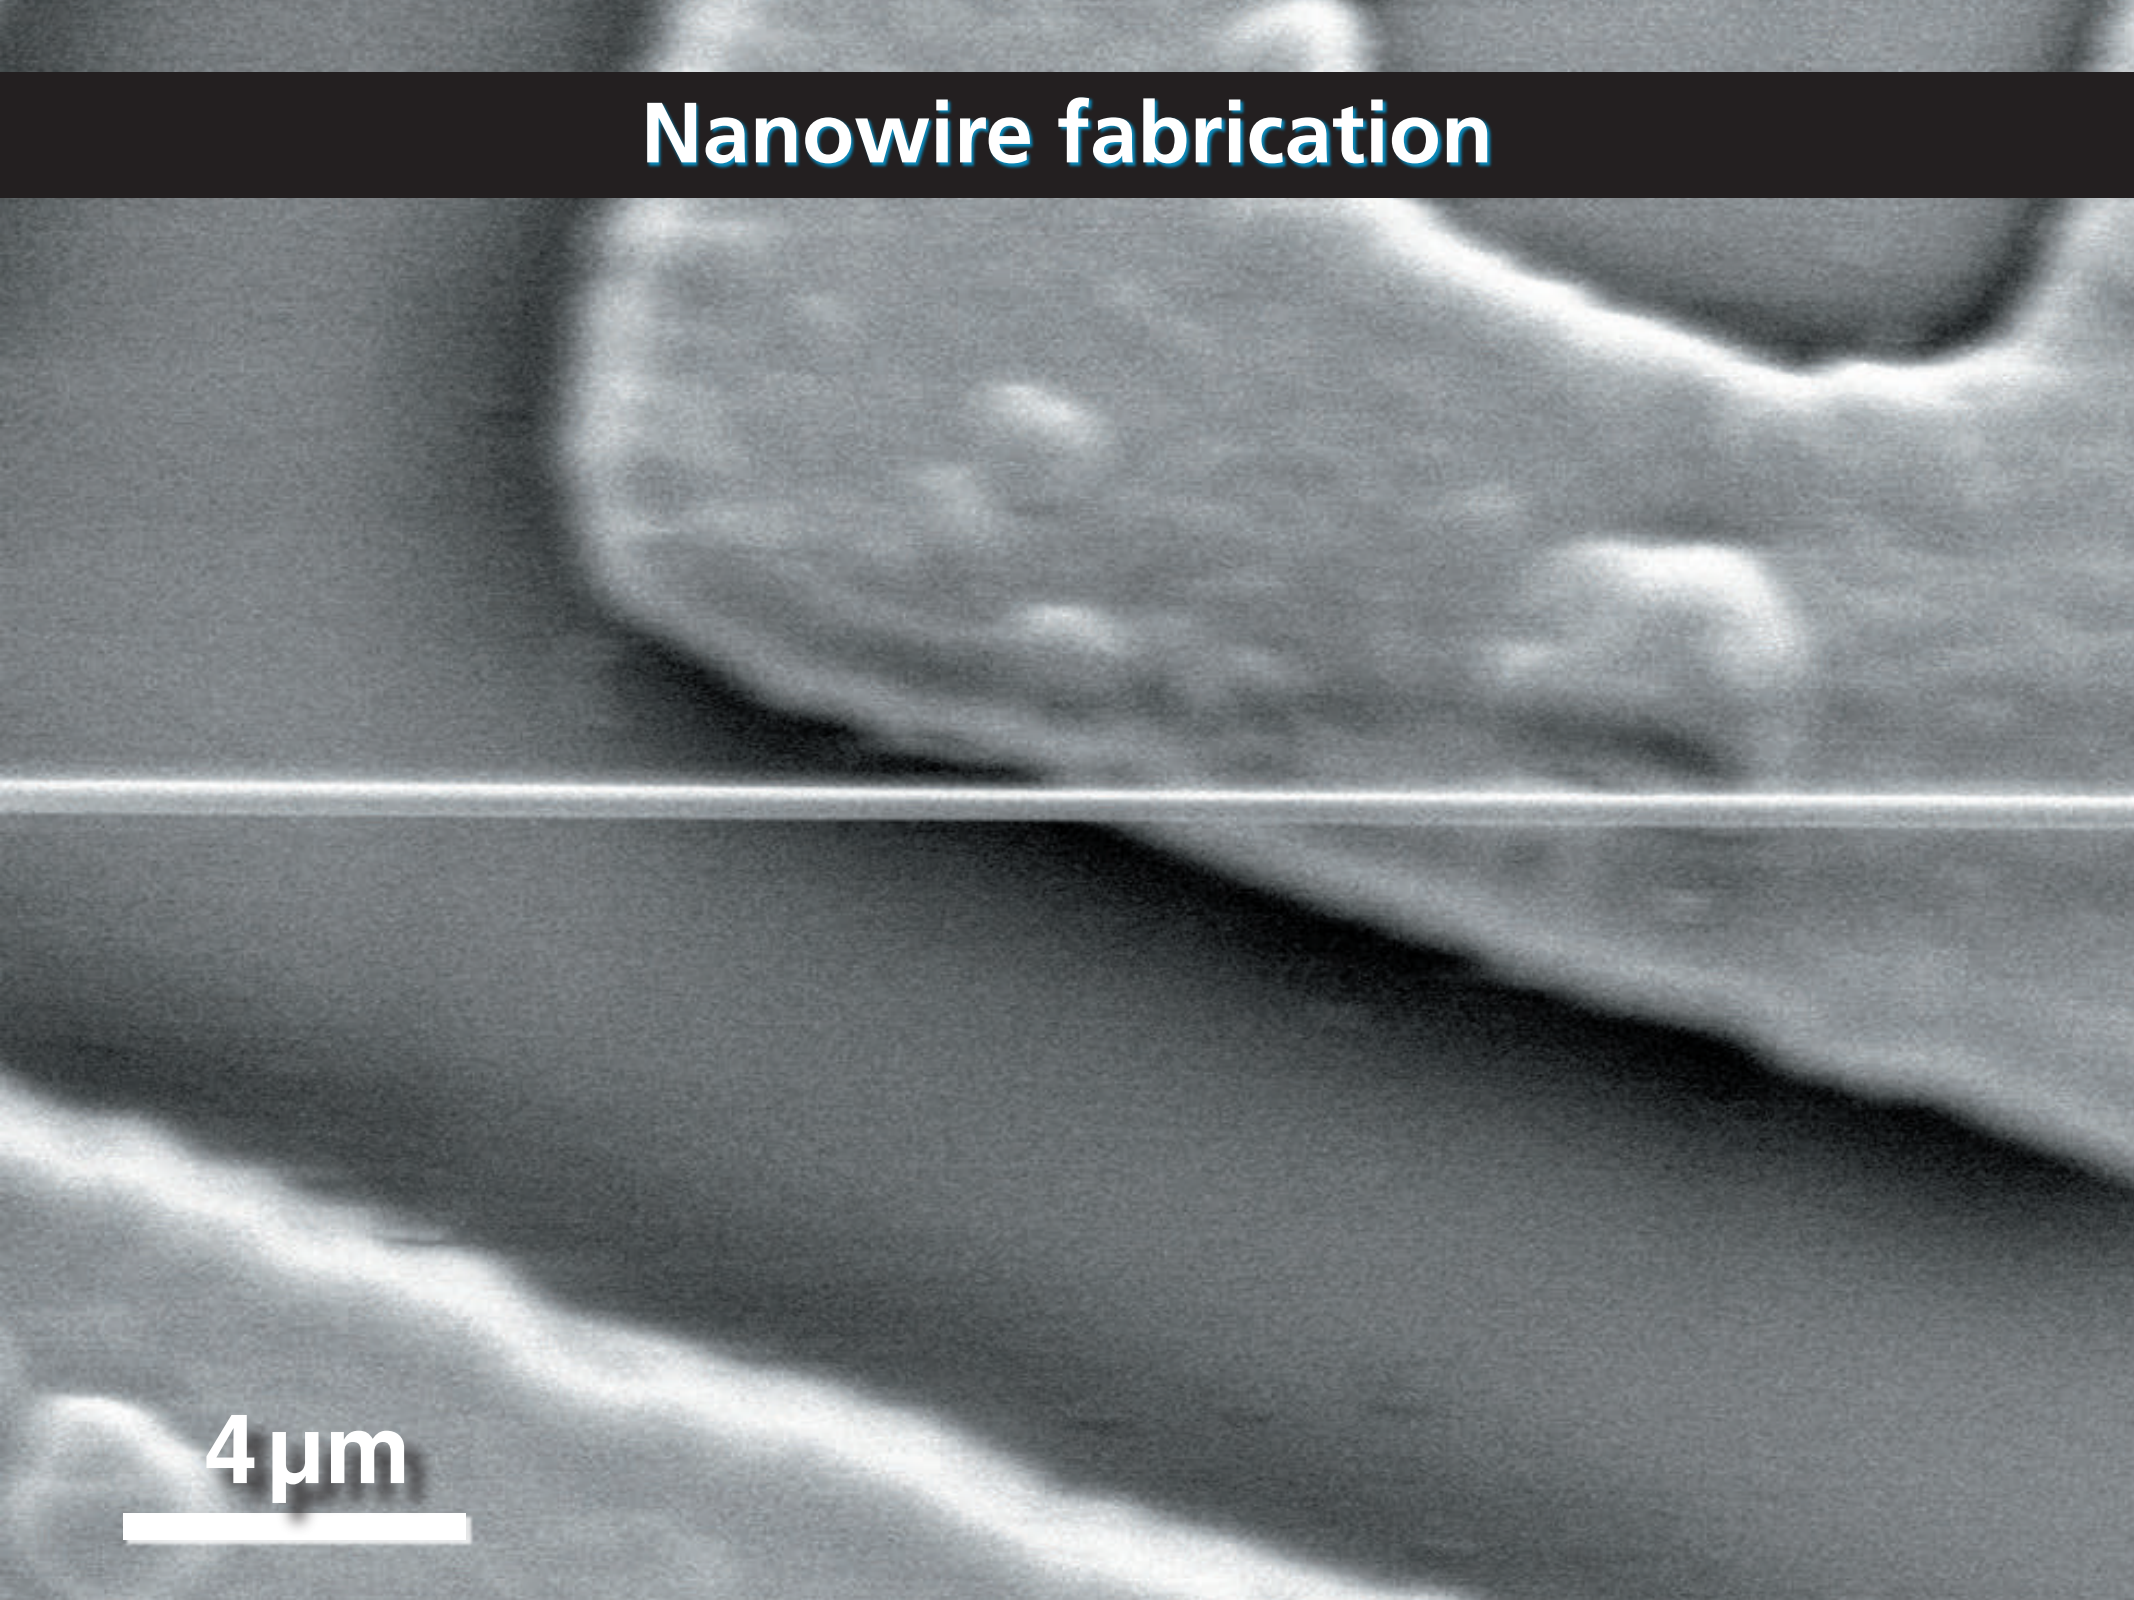

Nanowire fabrication

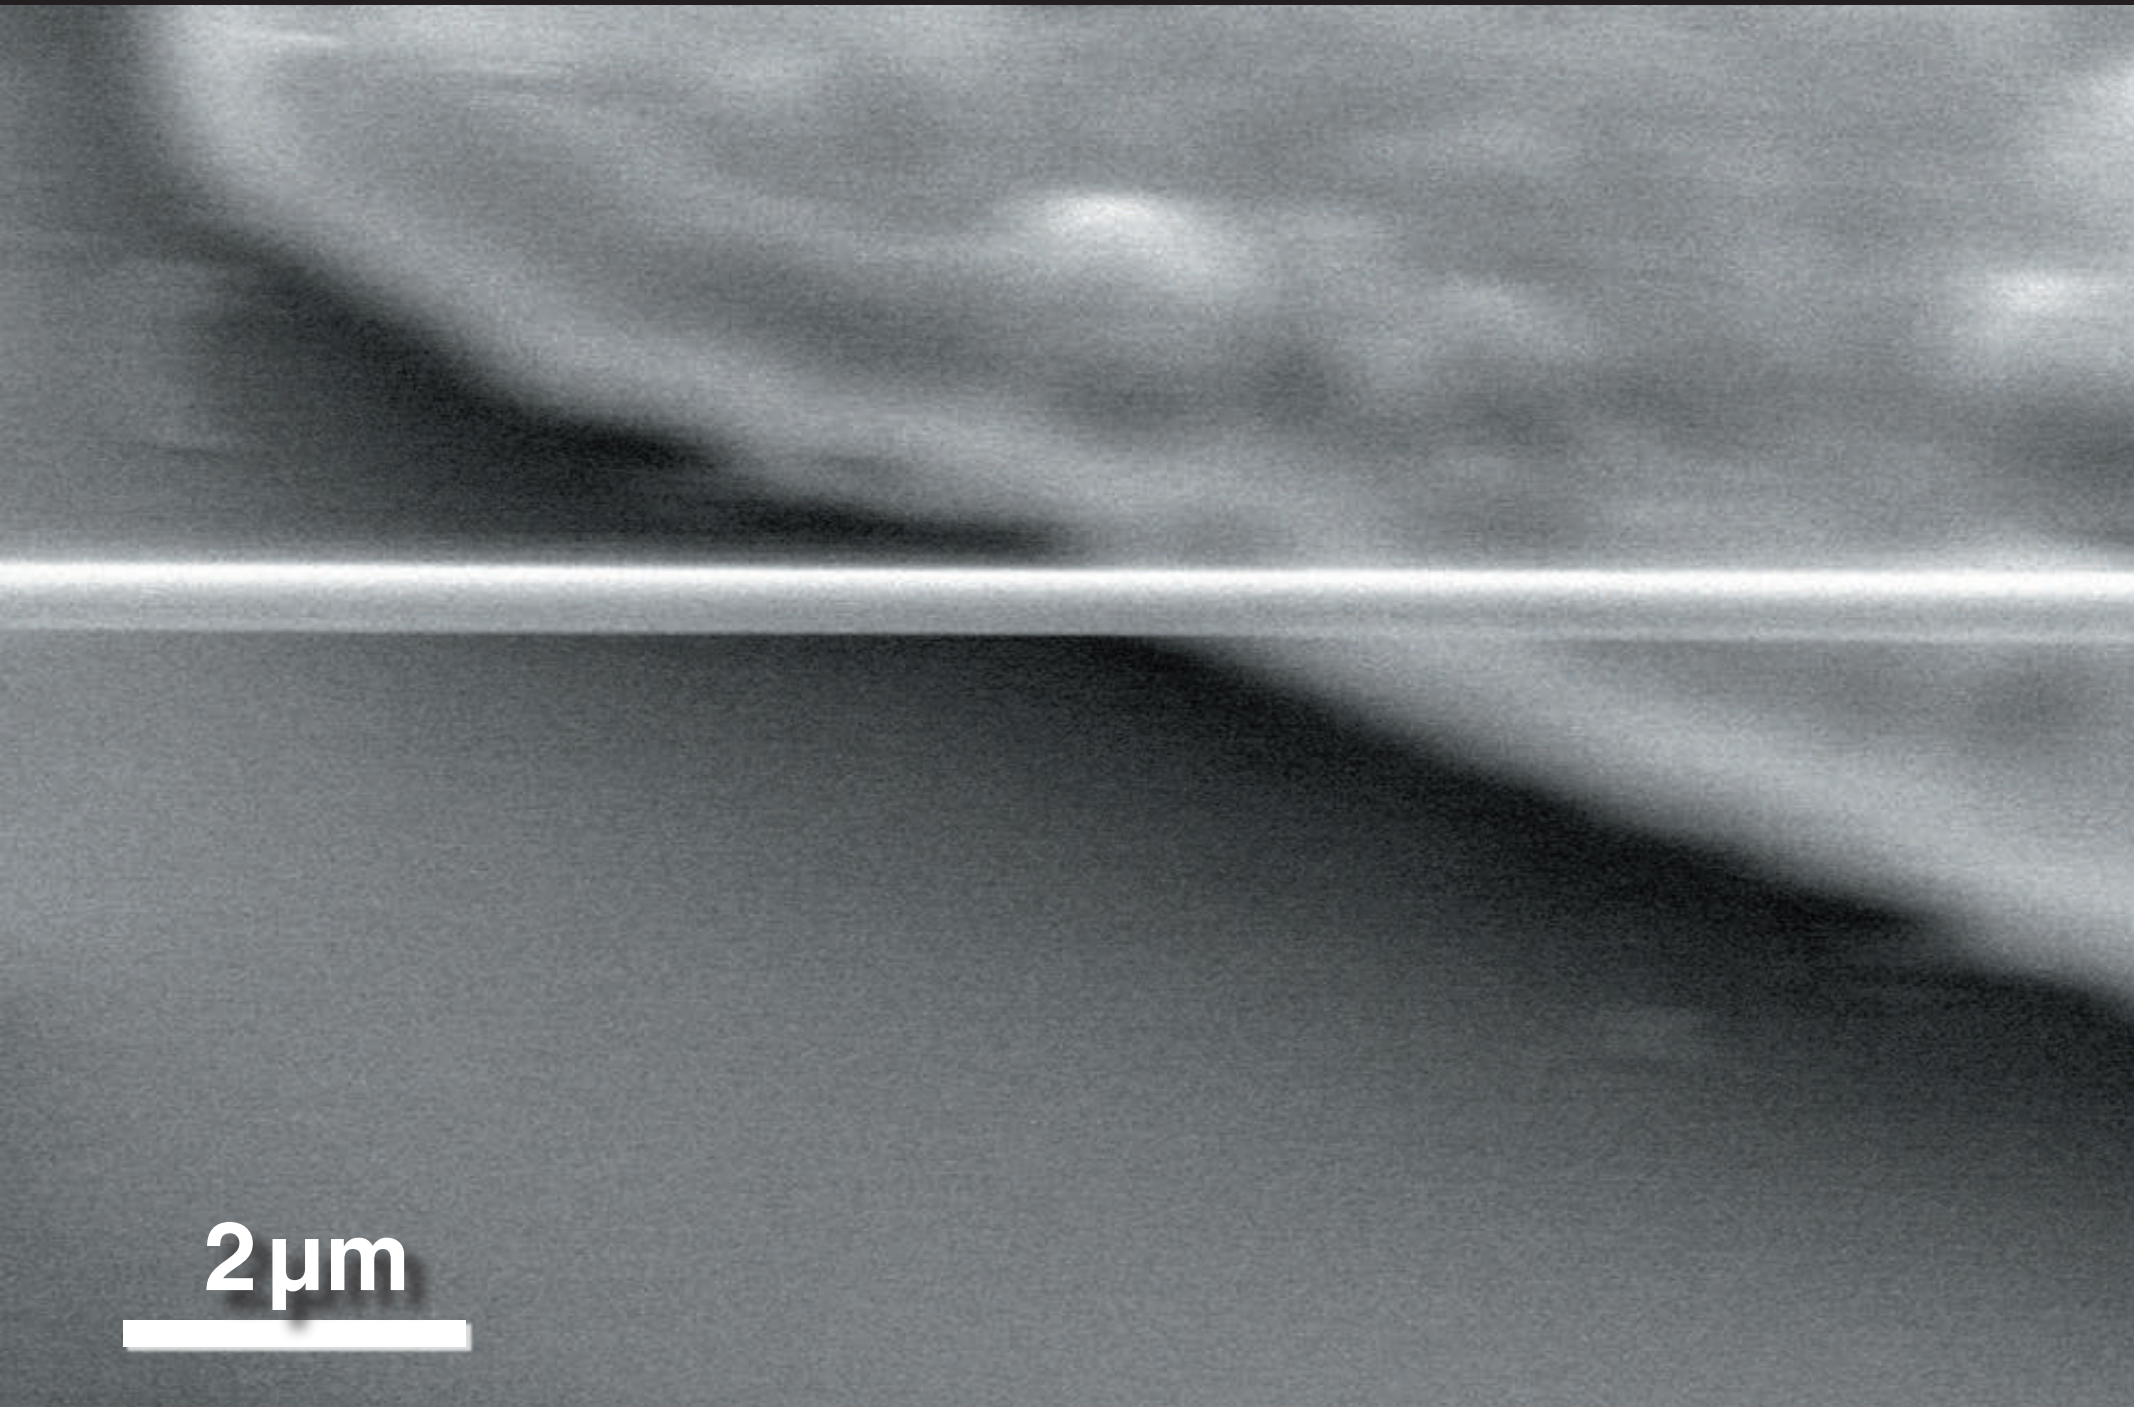

Nanowire fabrication

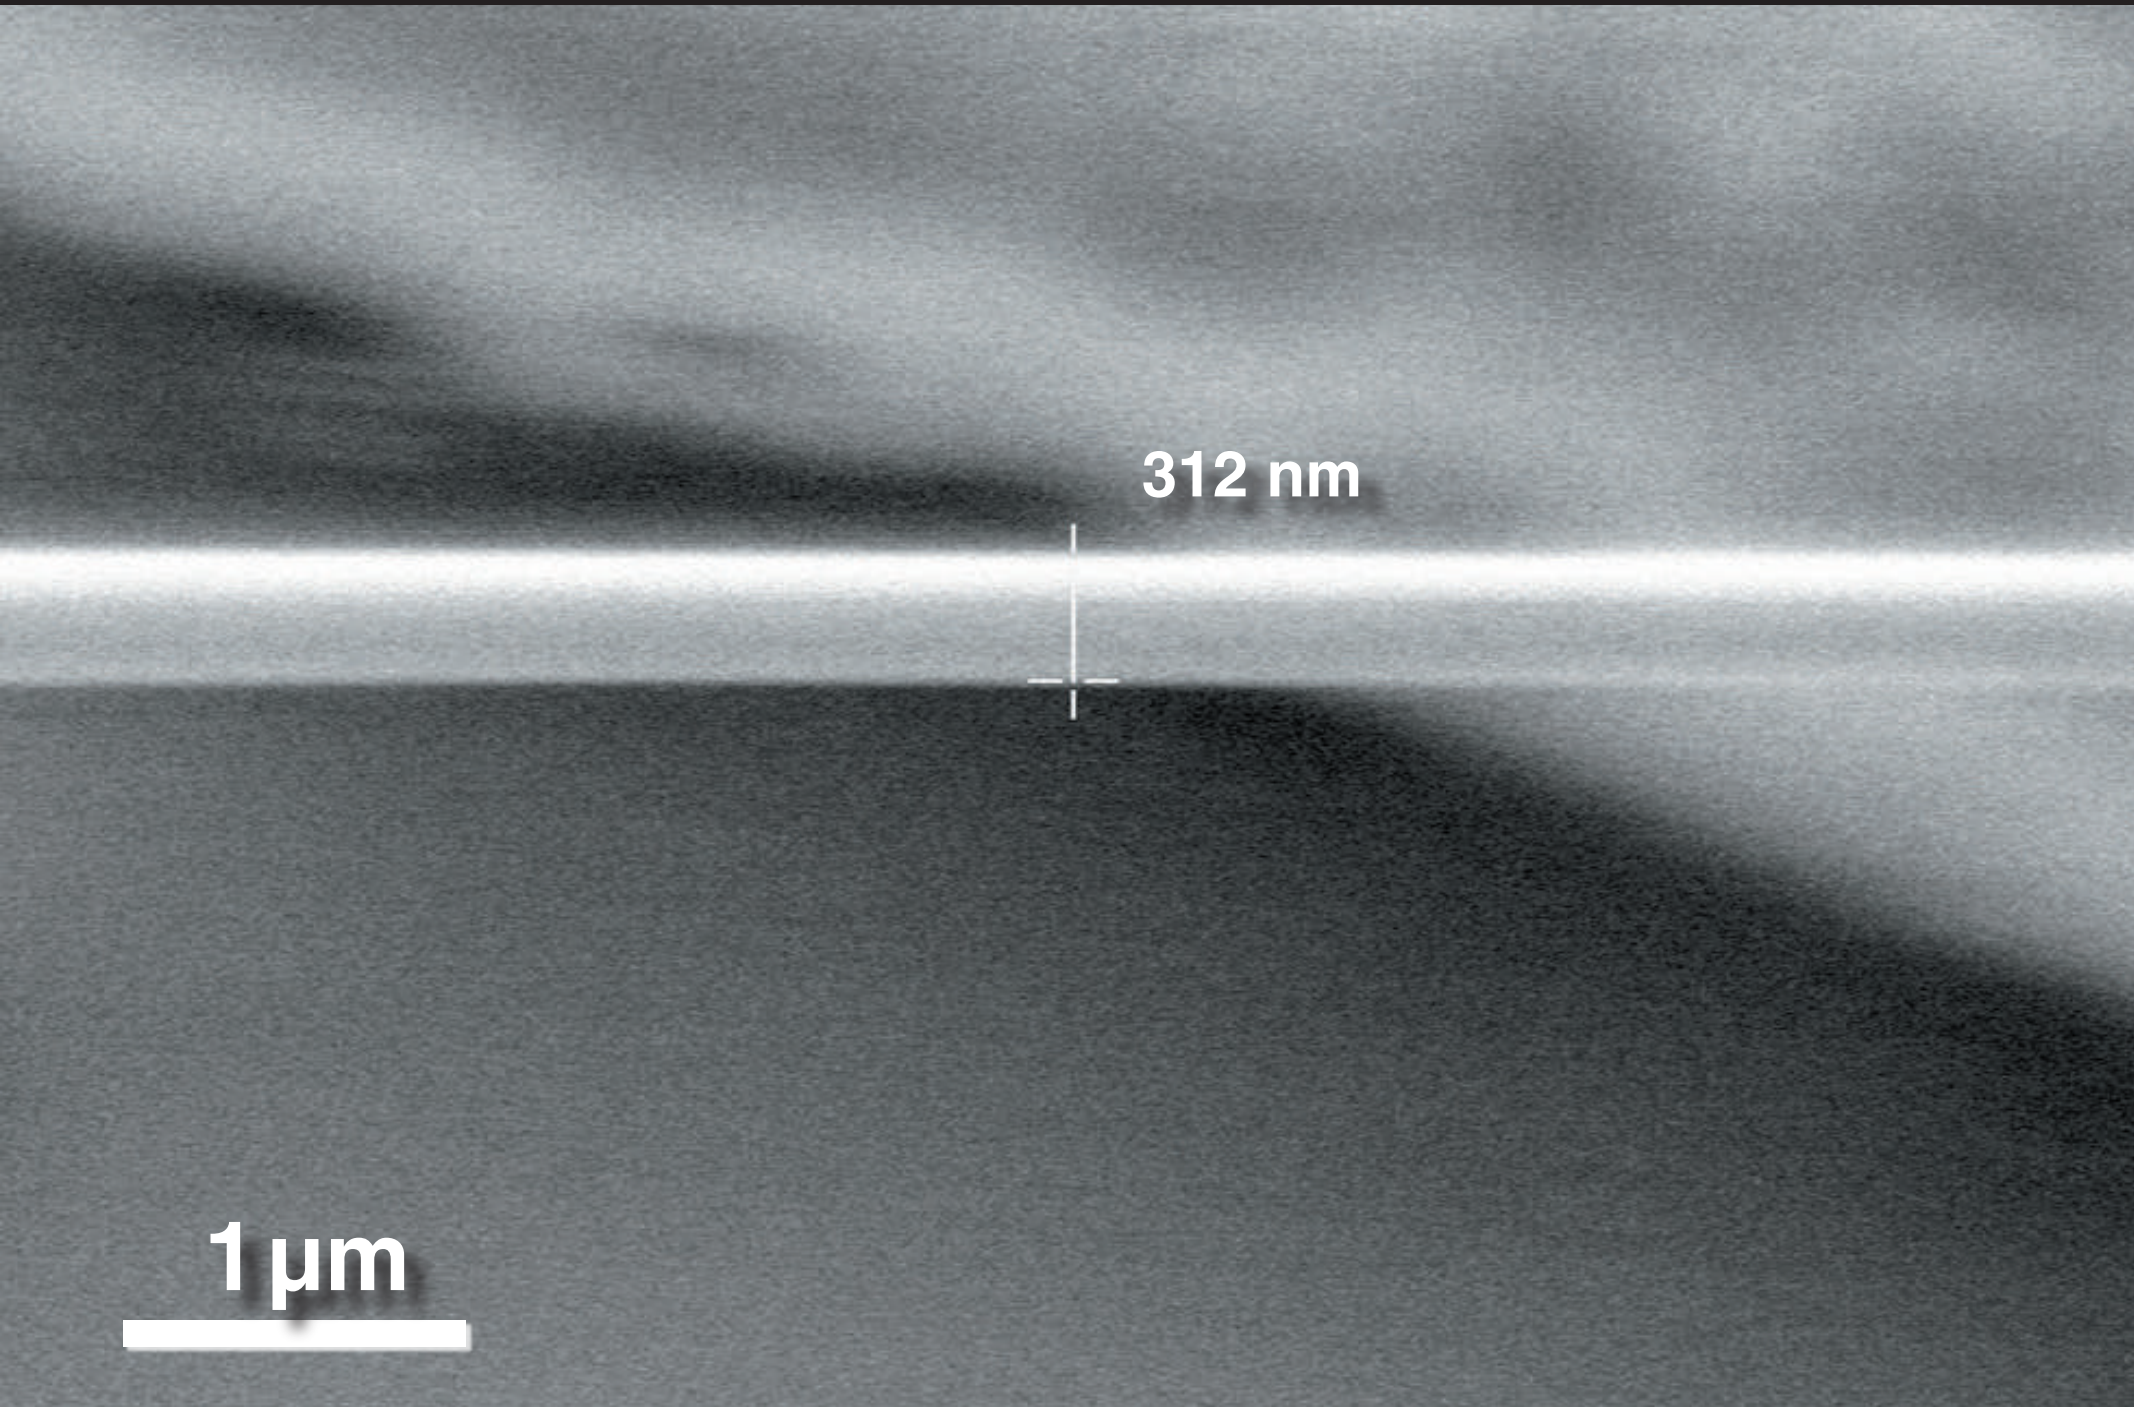

Waveguiding

Specifications

diameter D:	down to 20 nm
length L:	up to 90 mm
aspect ratio D/L:	up to 10^6
diameter uniformity $\Delta D/L$:	2×10^{-6}

Nanowire fabrication

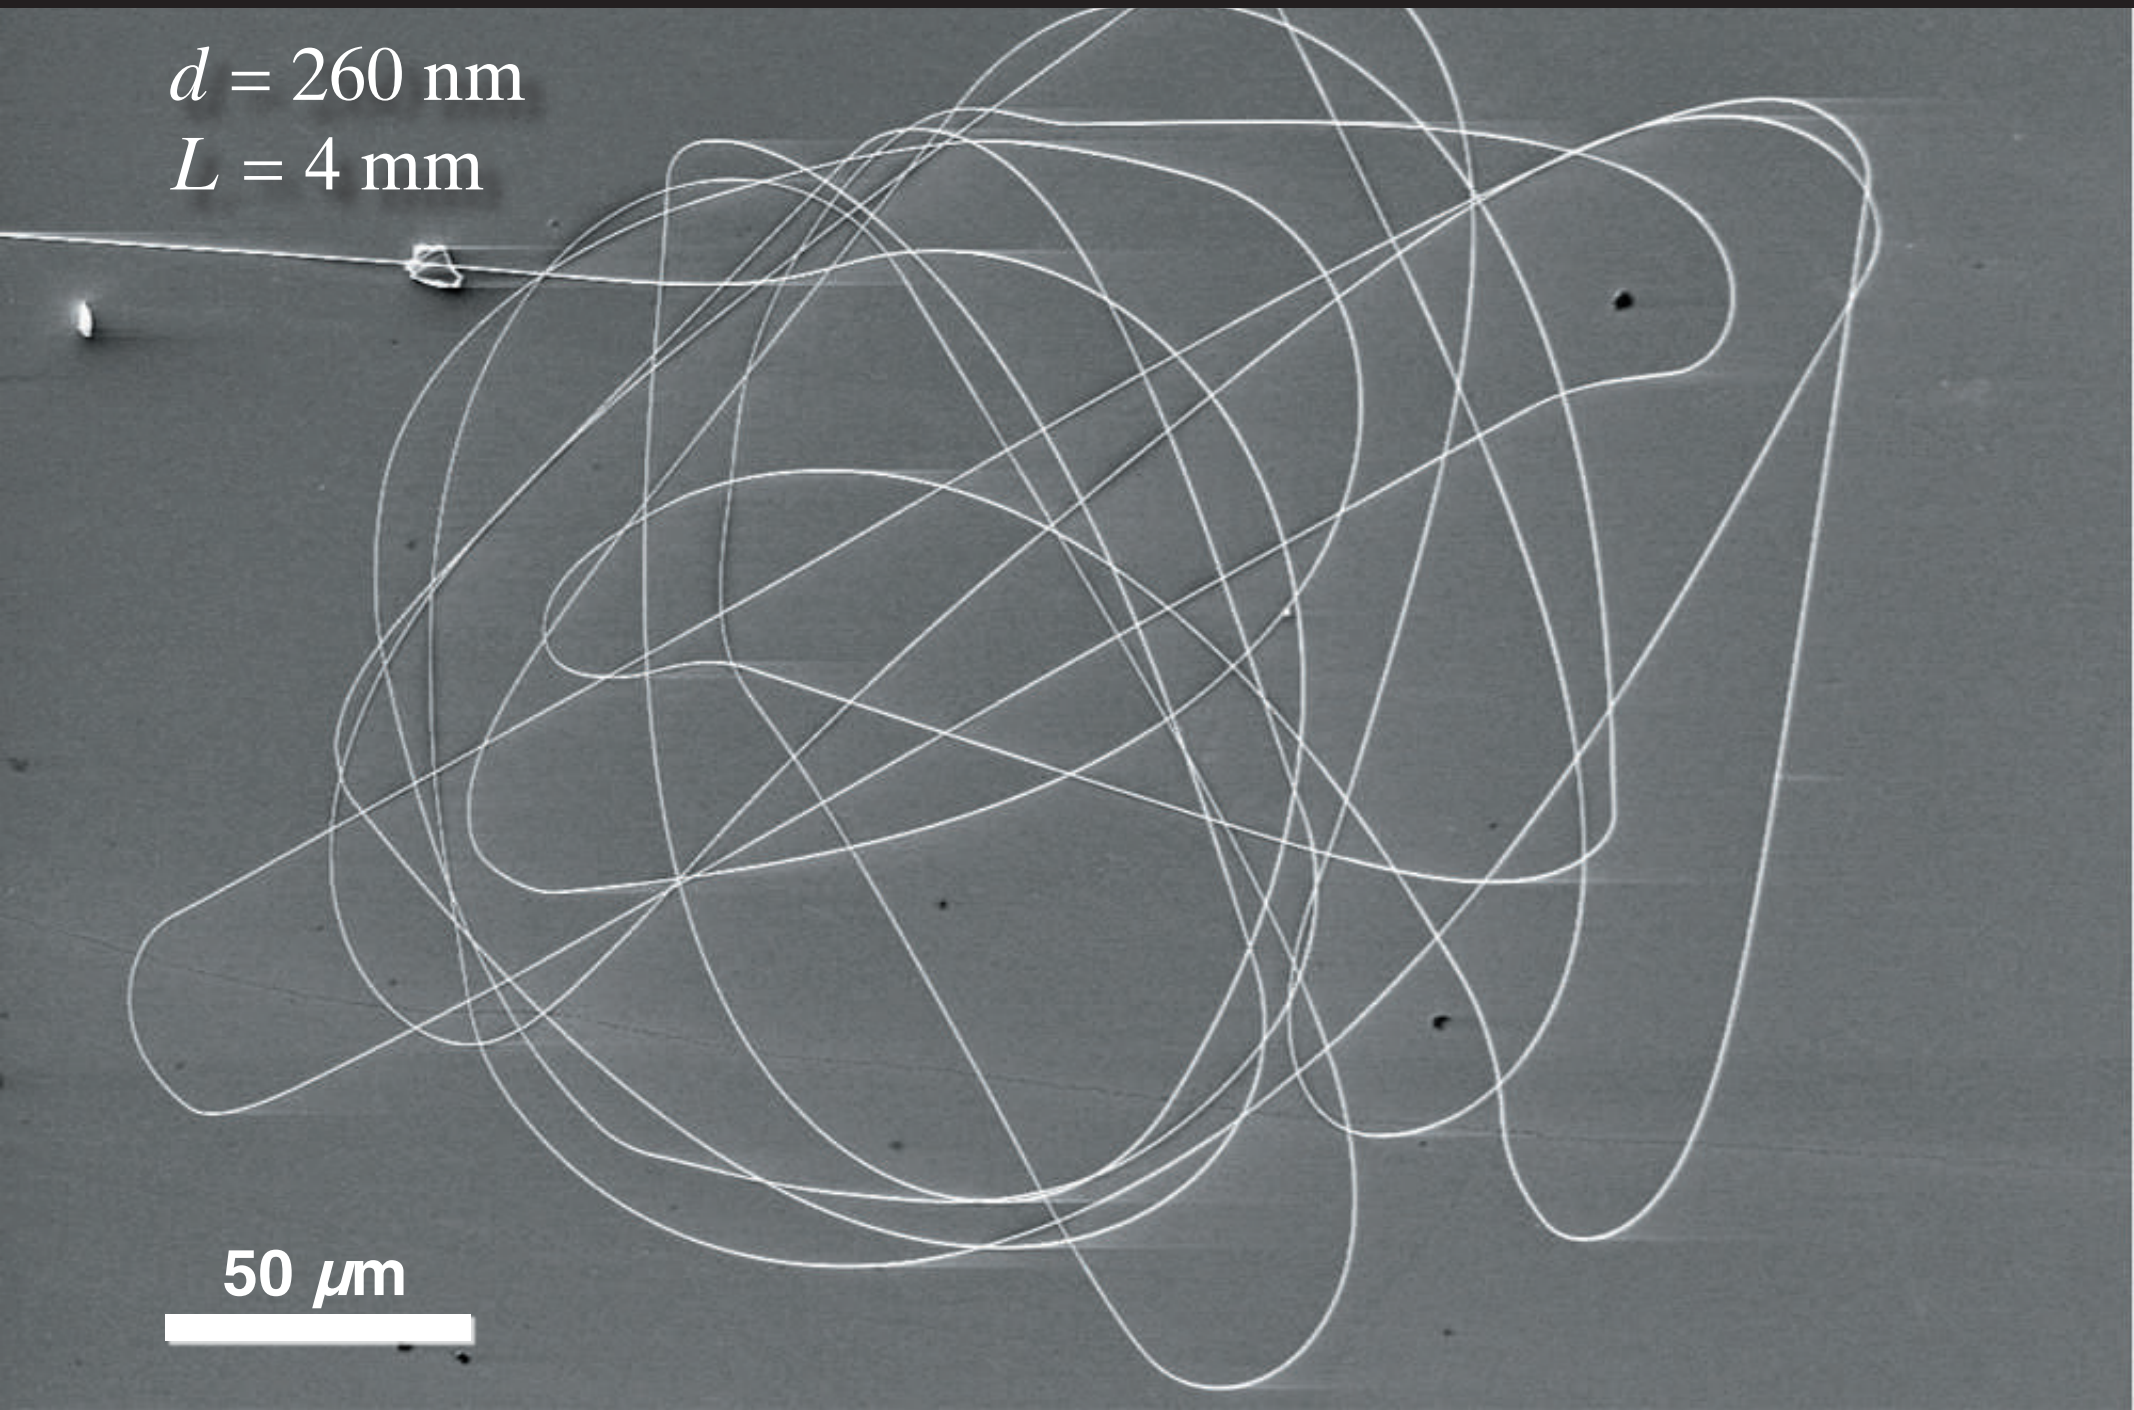

Nanowire fabrication

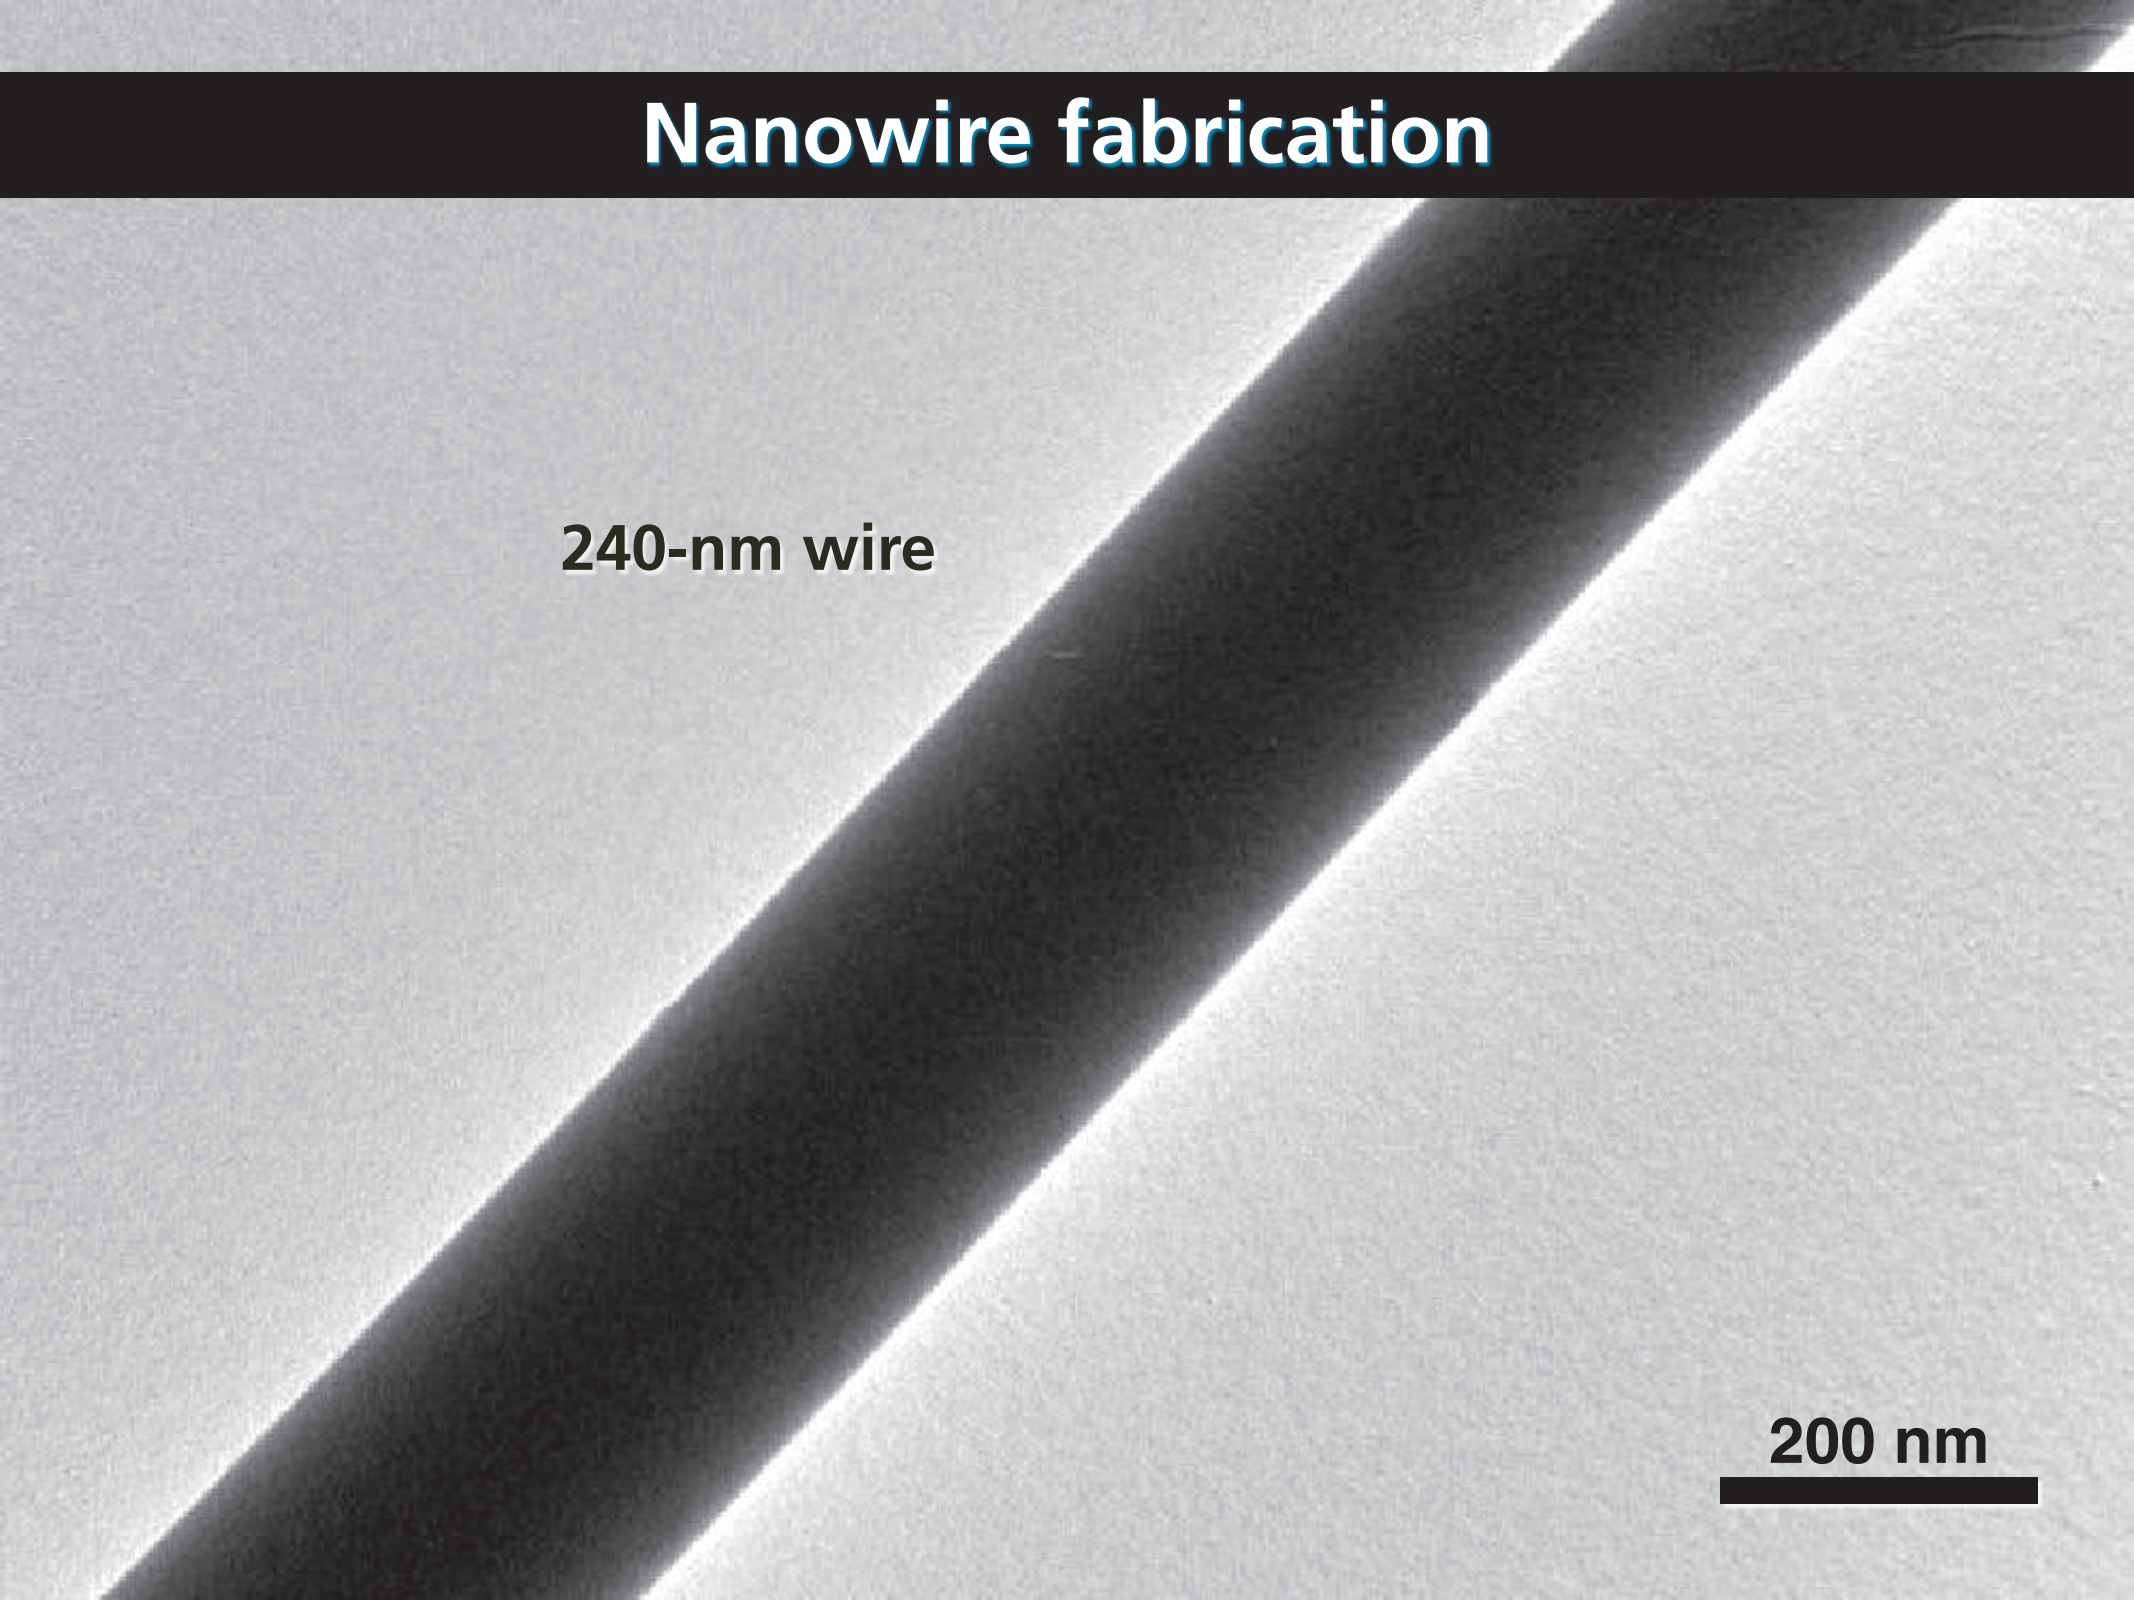

Nanowire fabrication

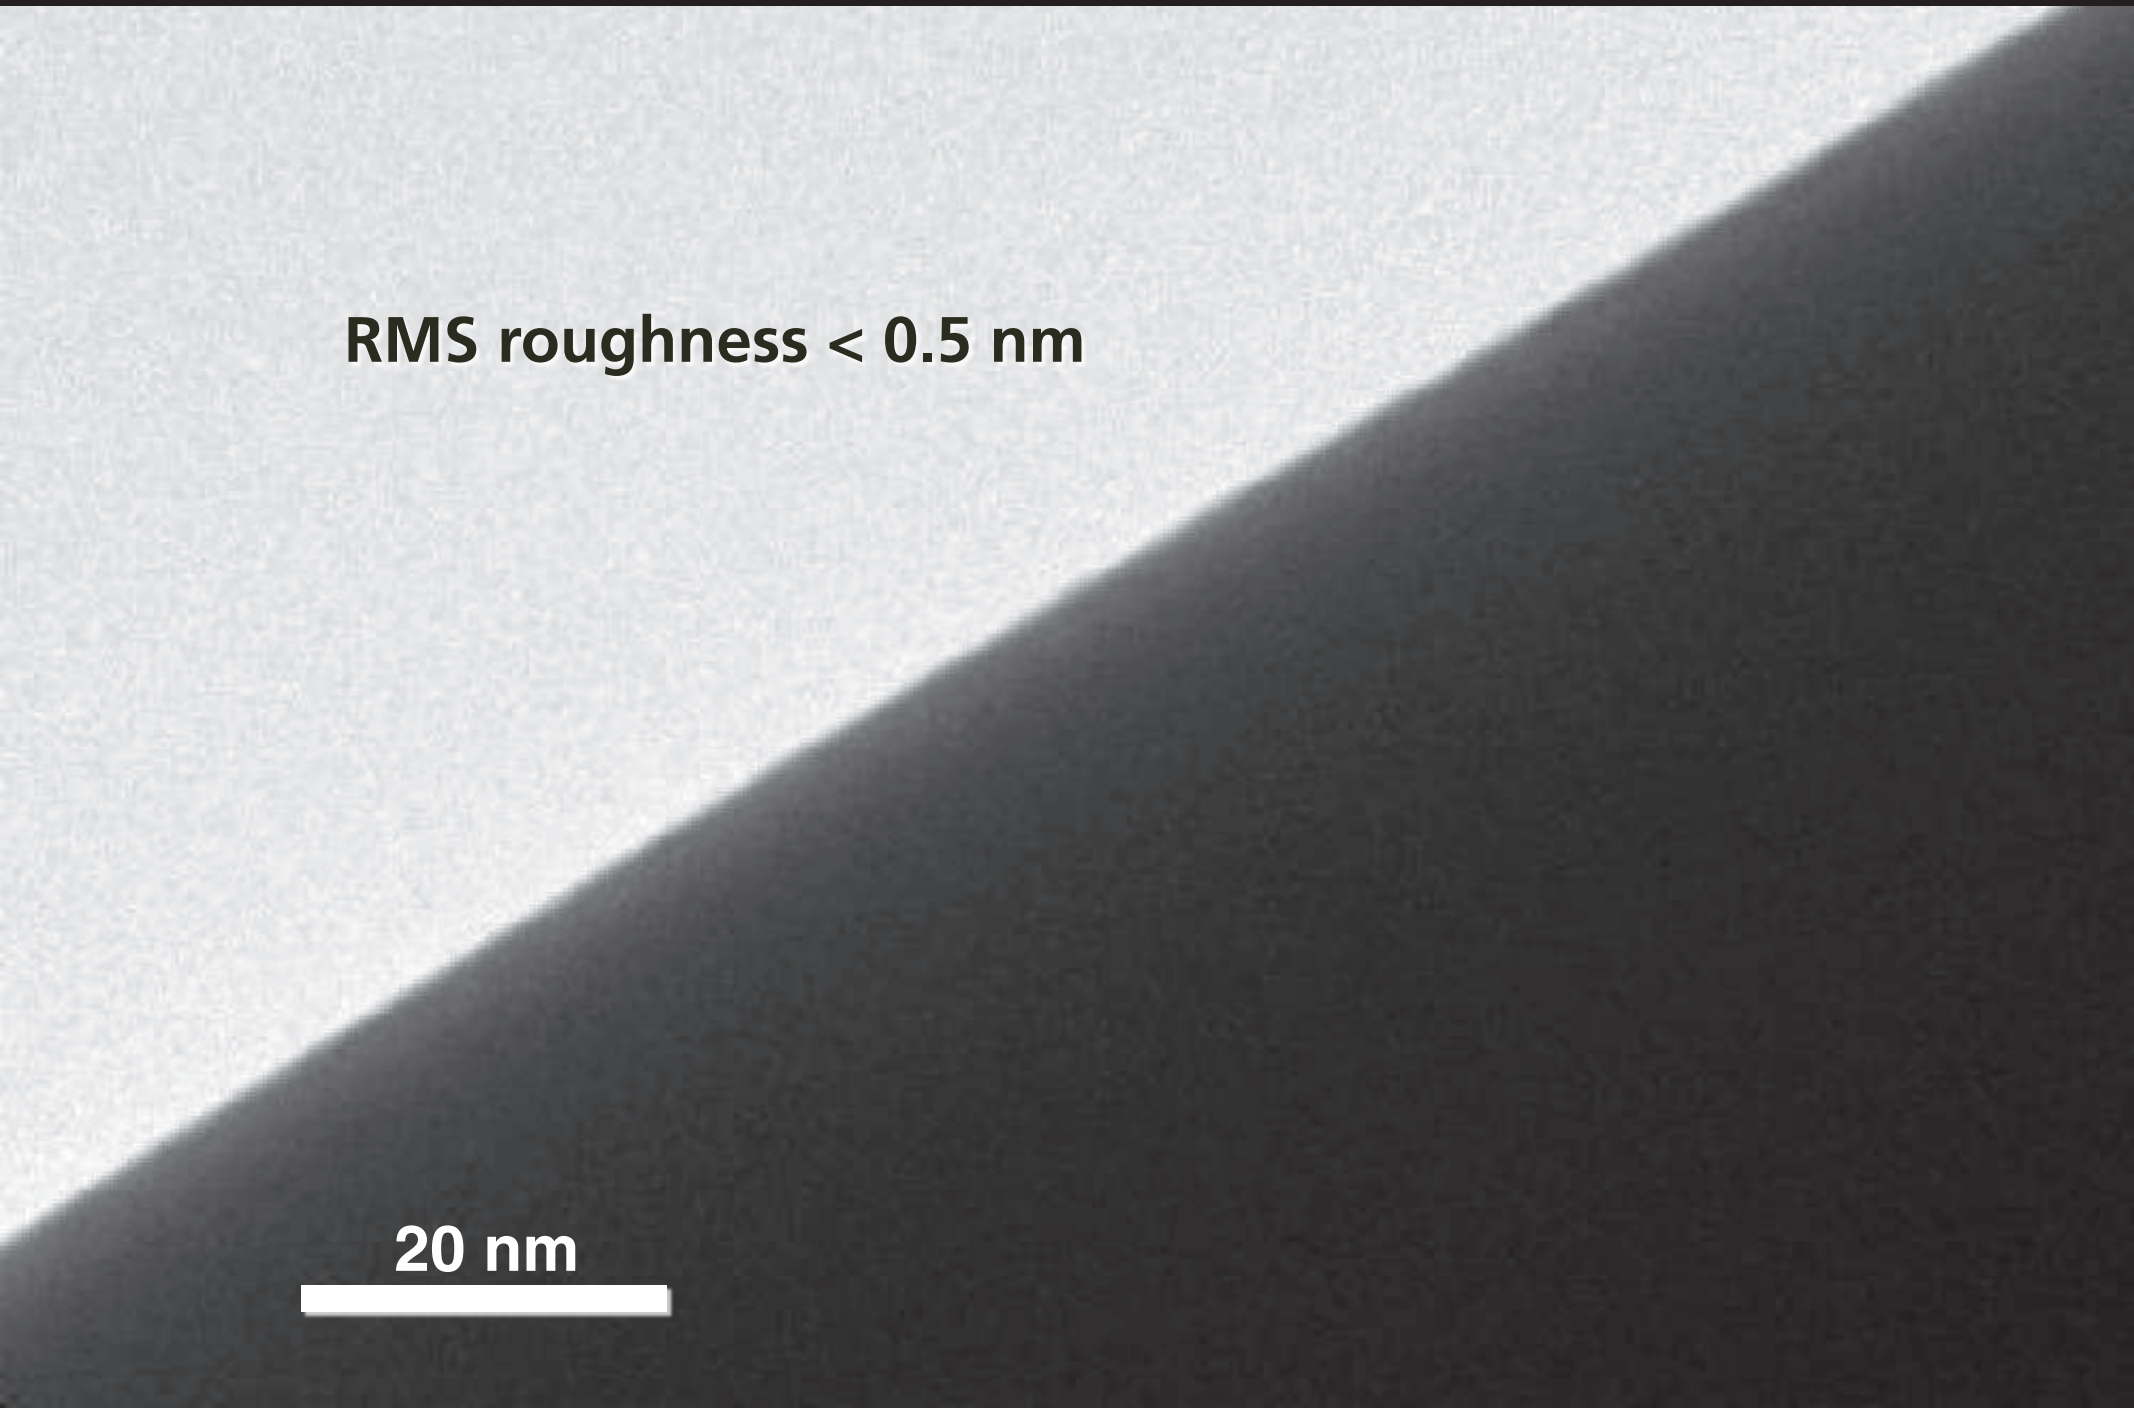

Nanowire fabrication

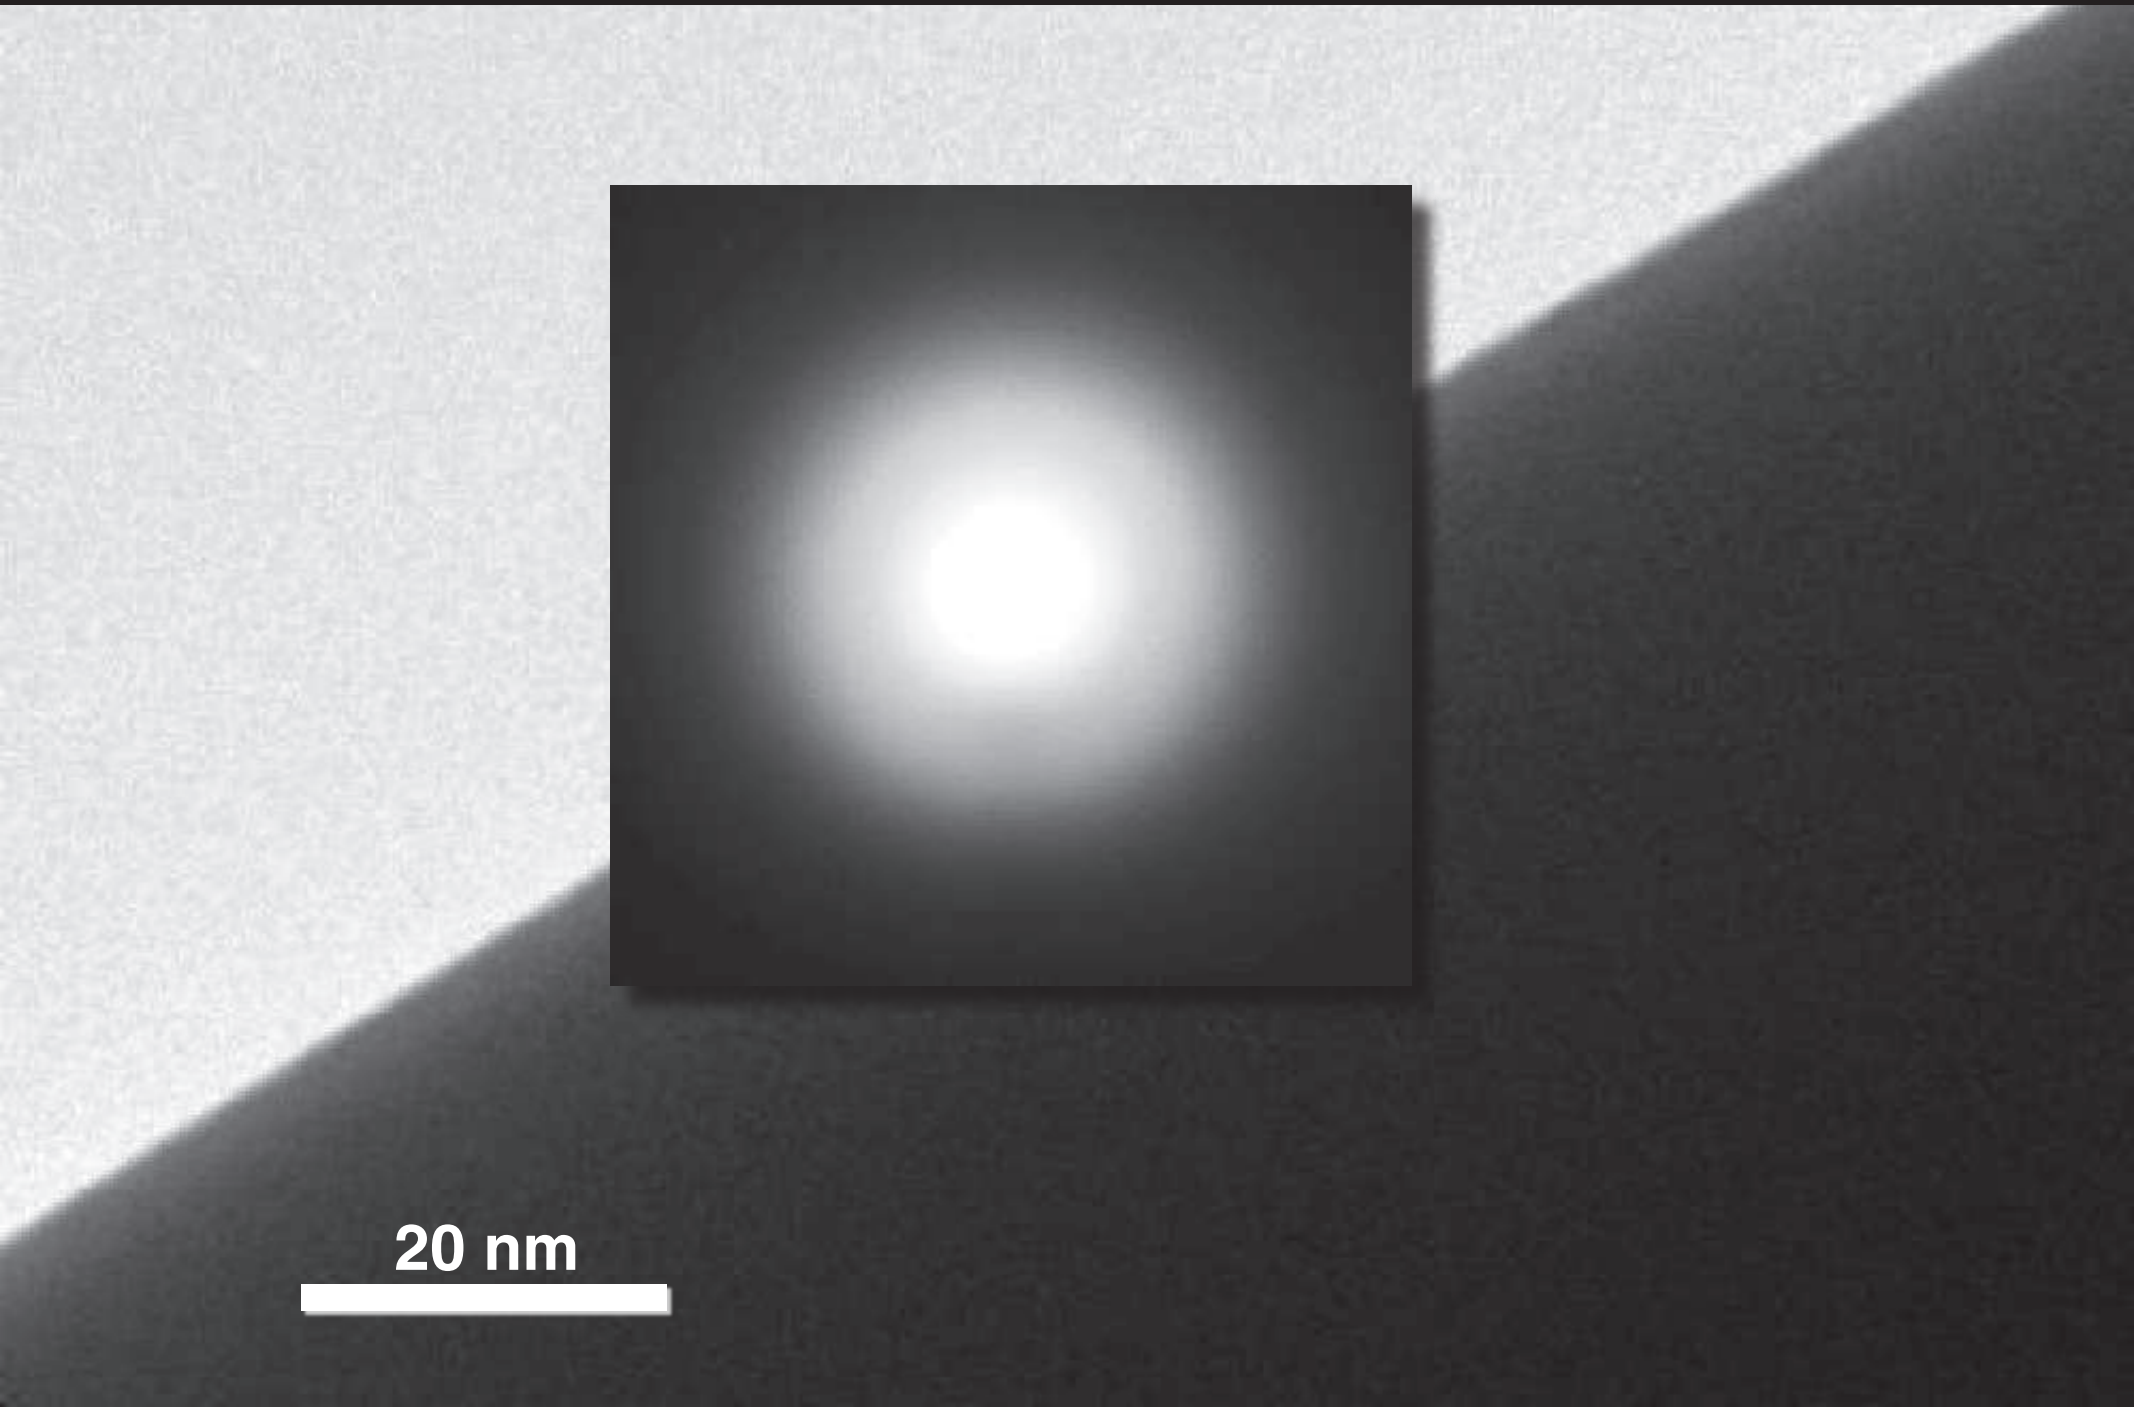

Nanowire fabrication

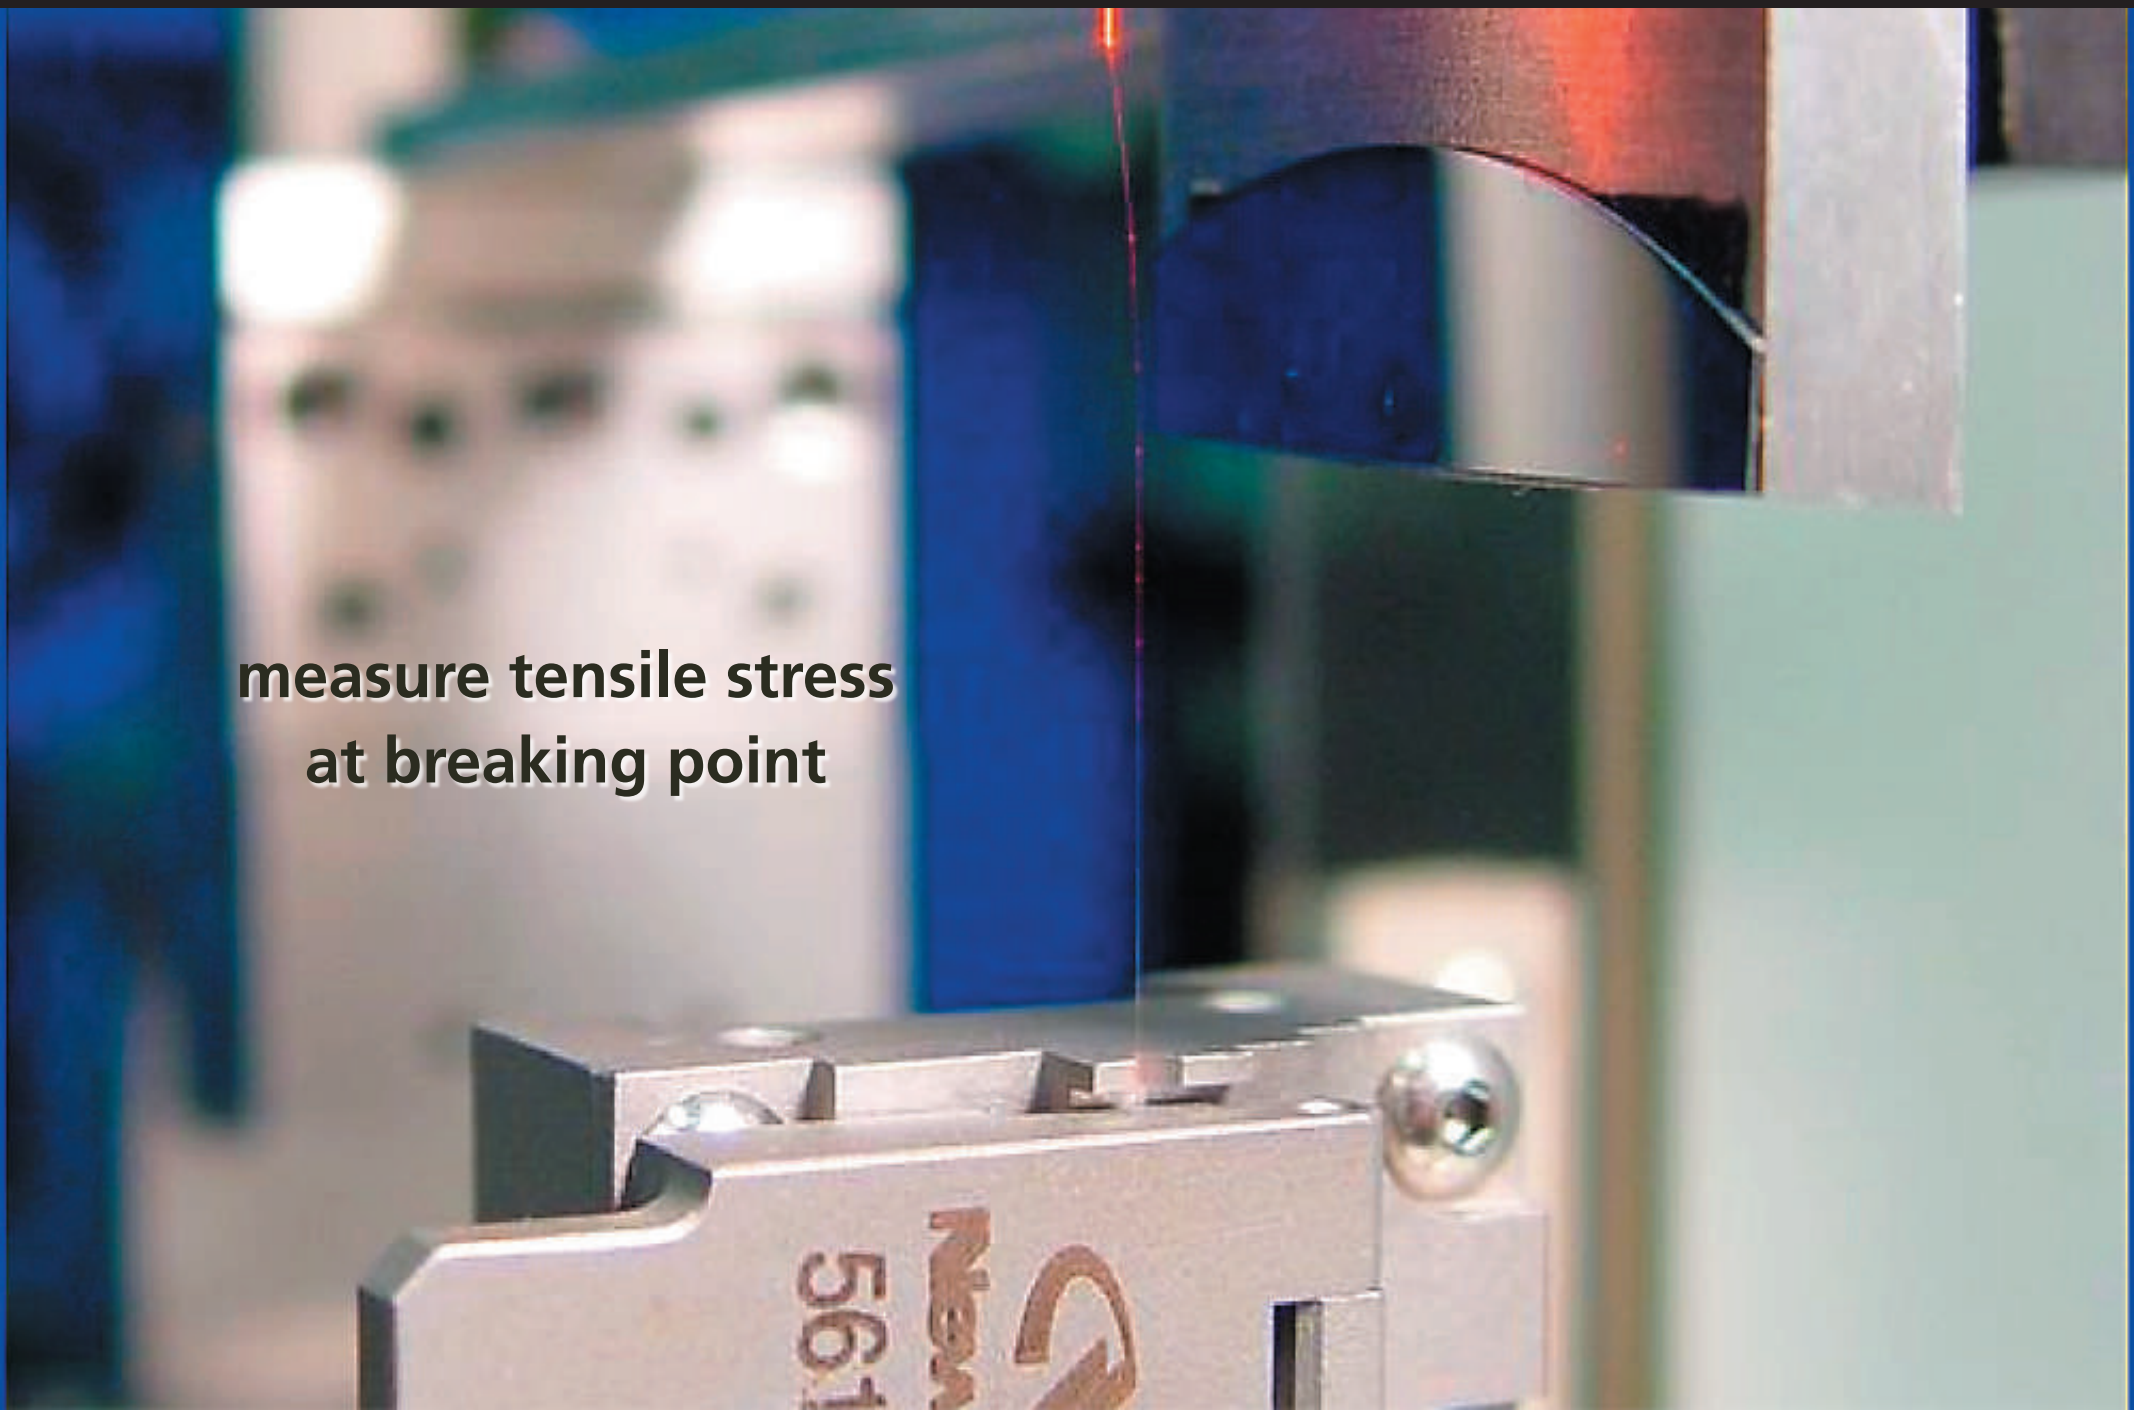

Nanowire fabrication

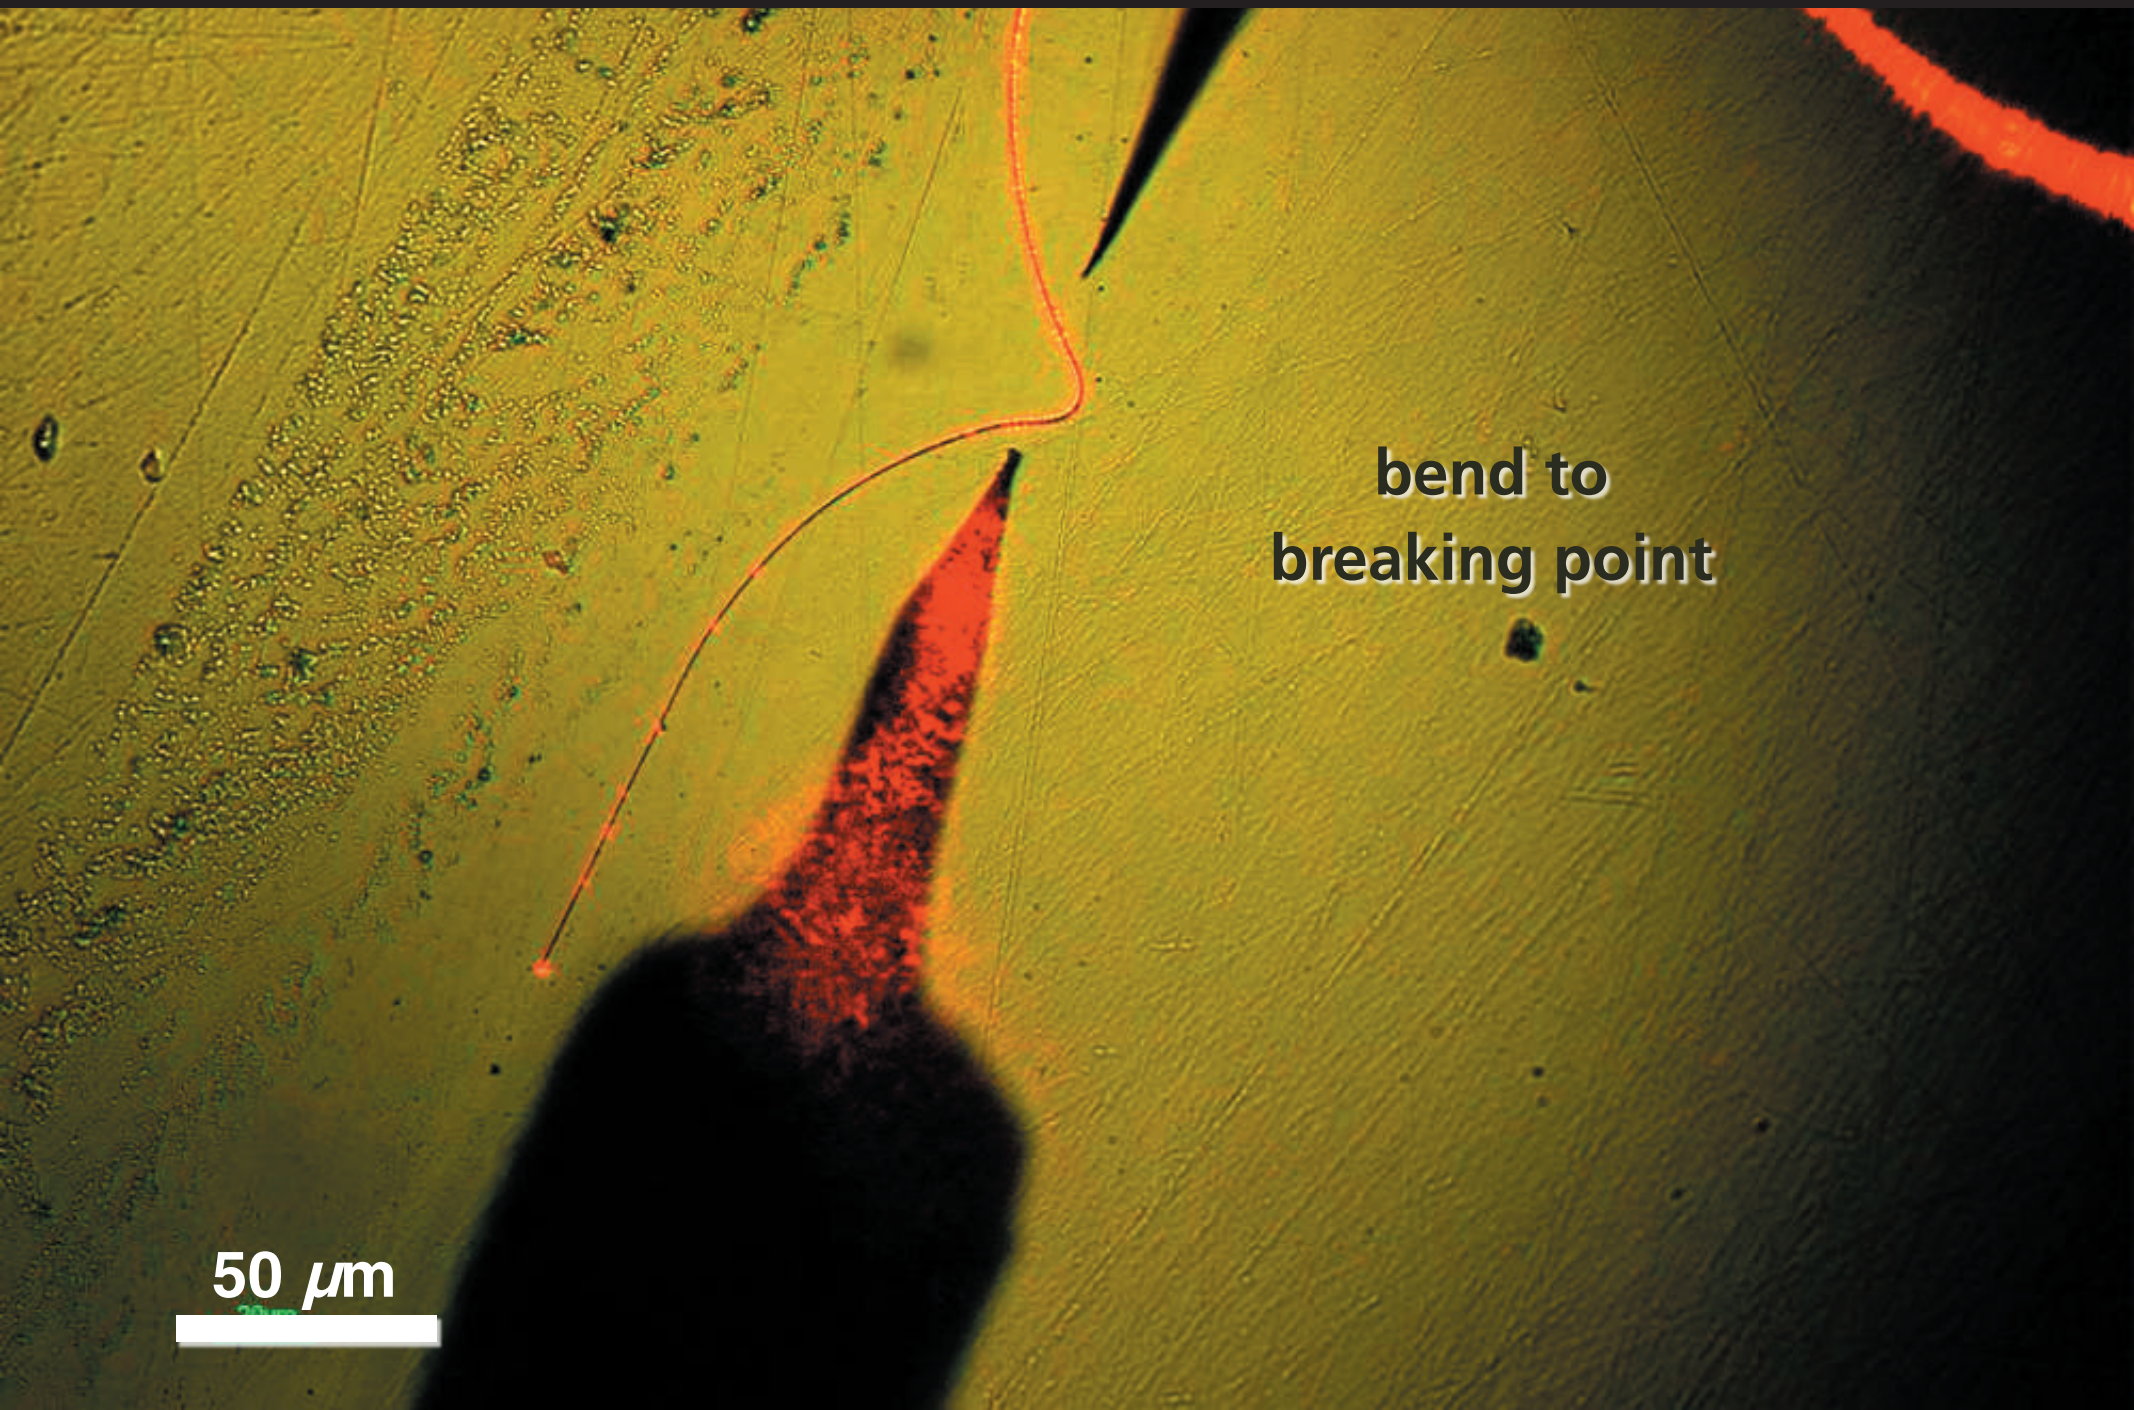

Nanowire fabrication

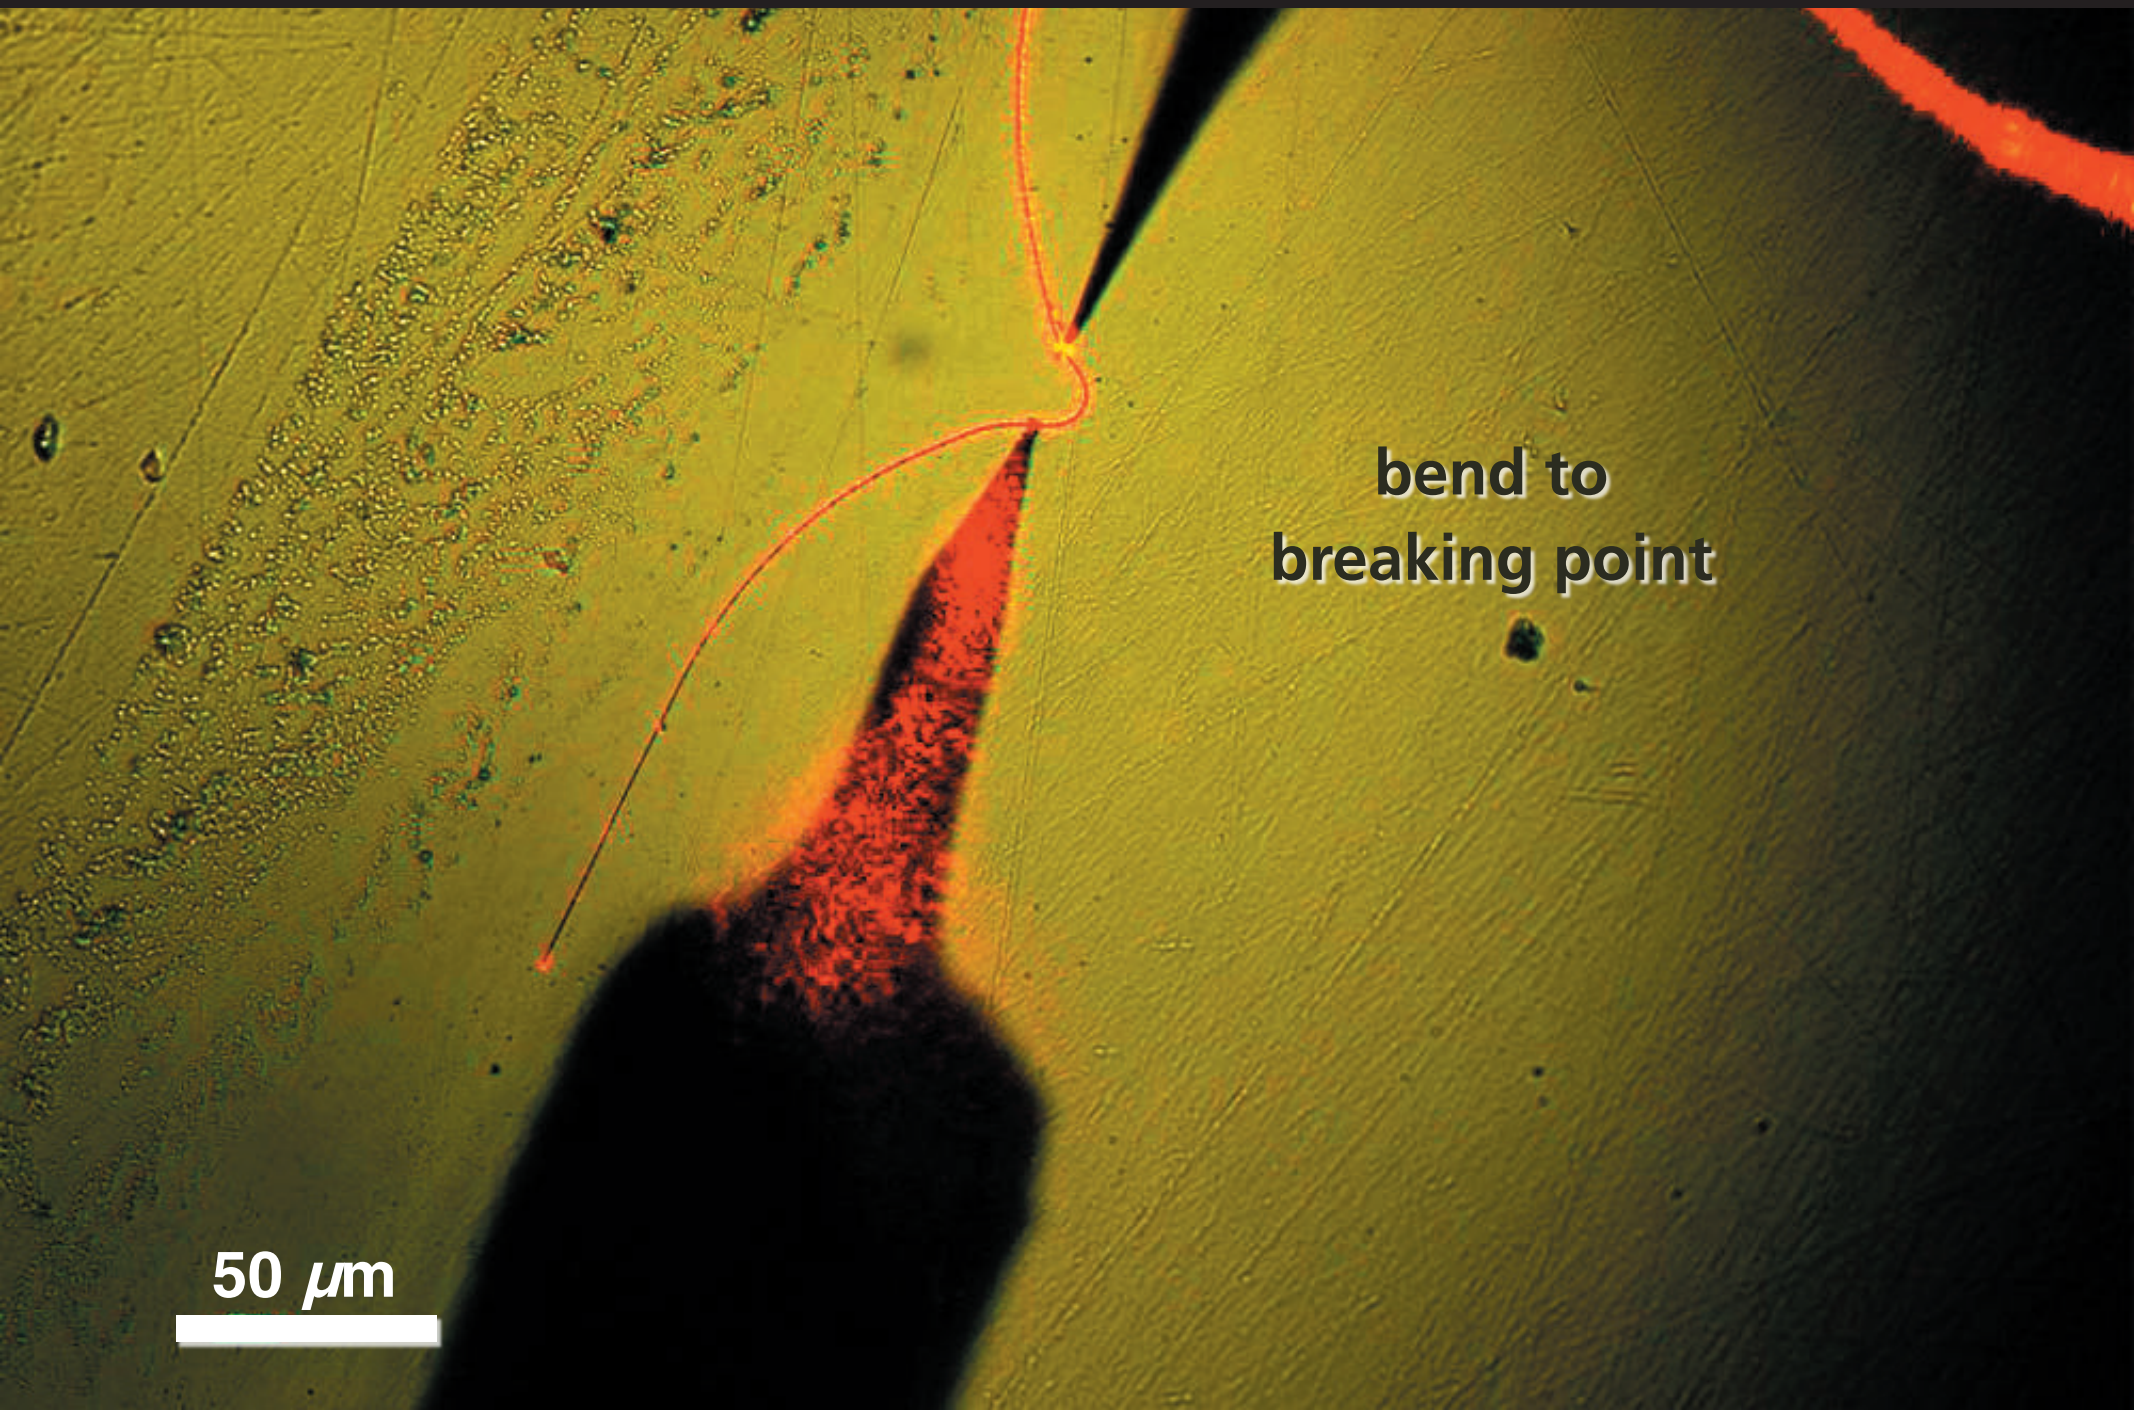

Nanowire fabrication

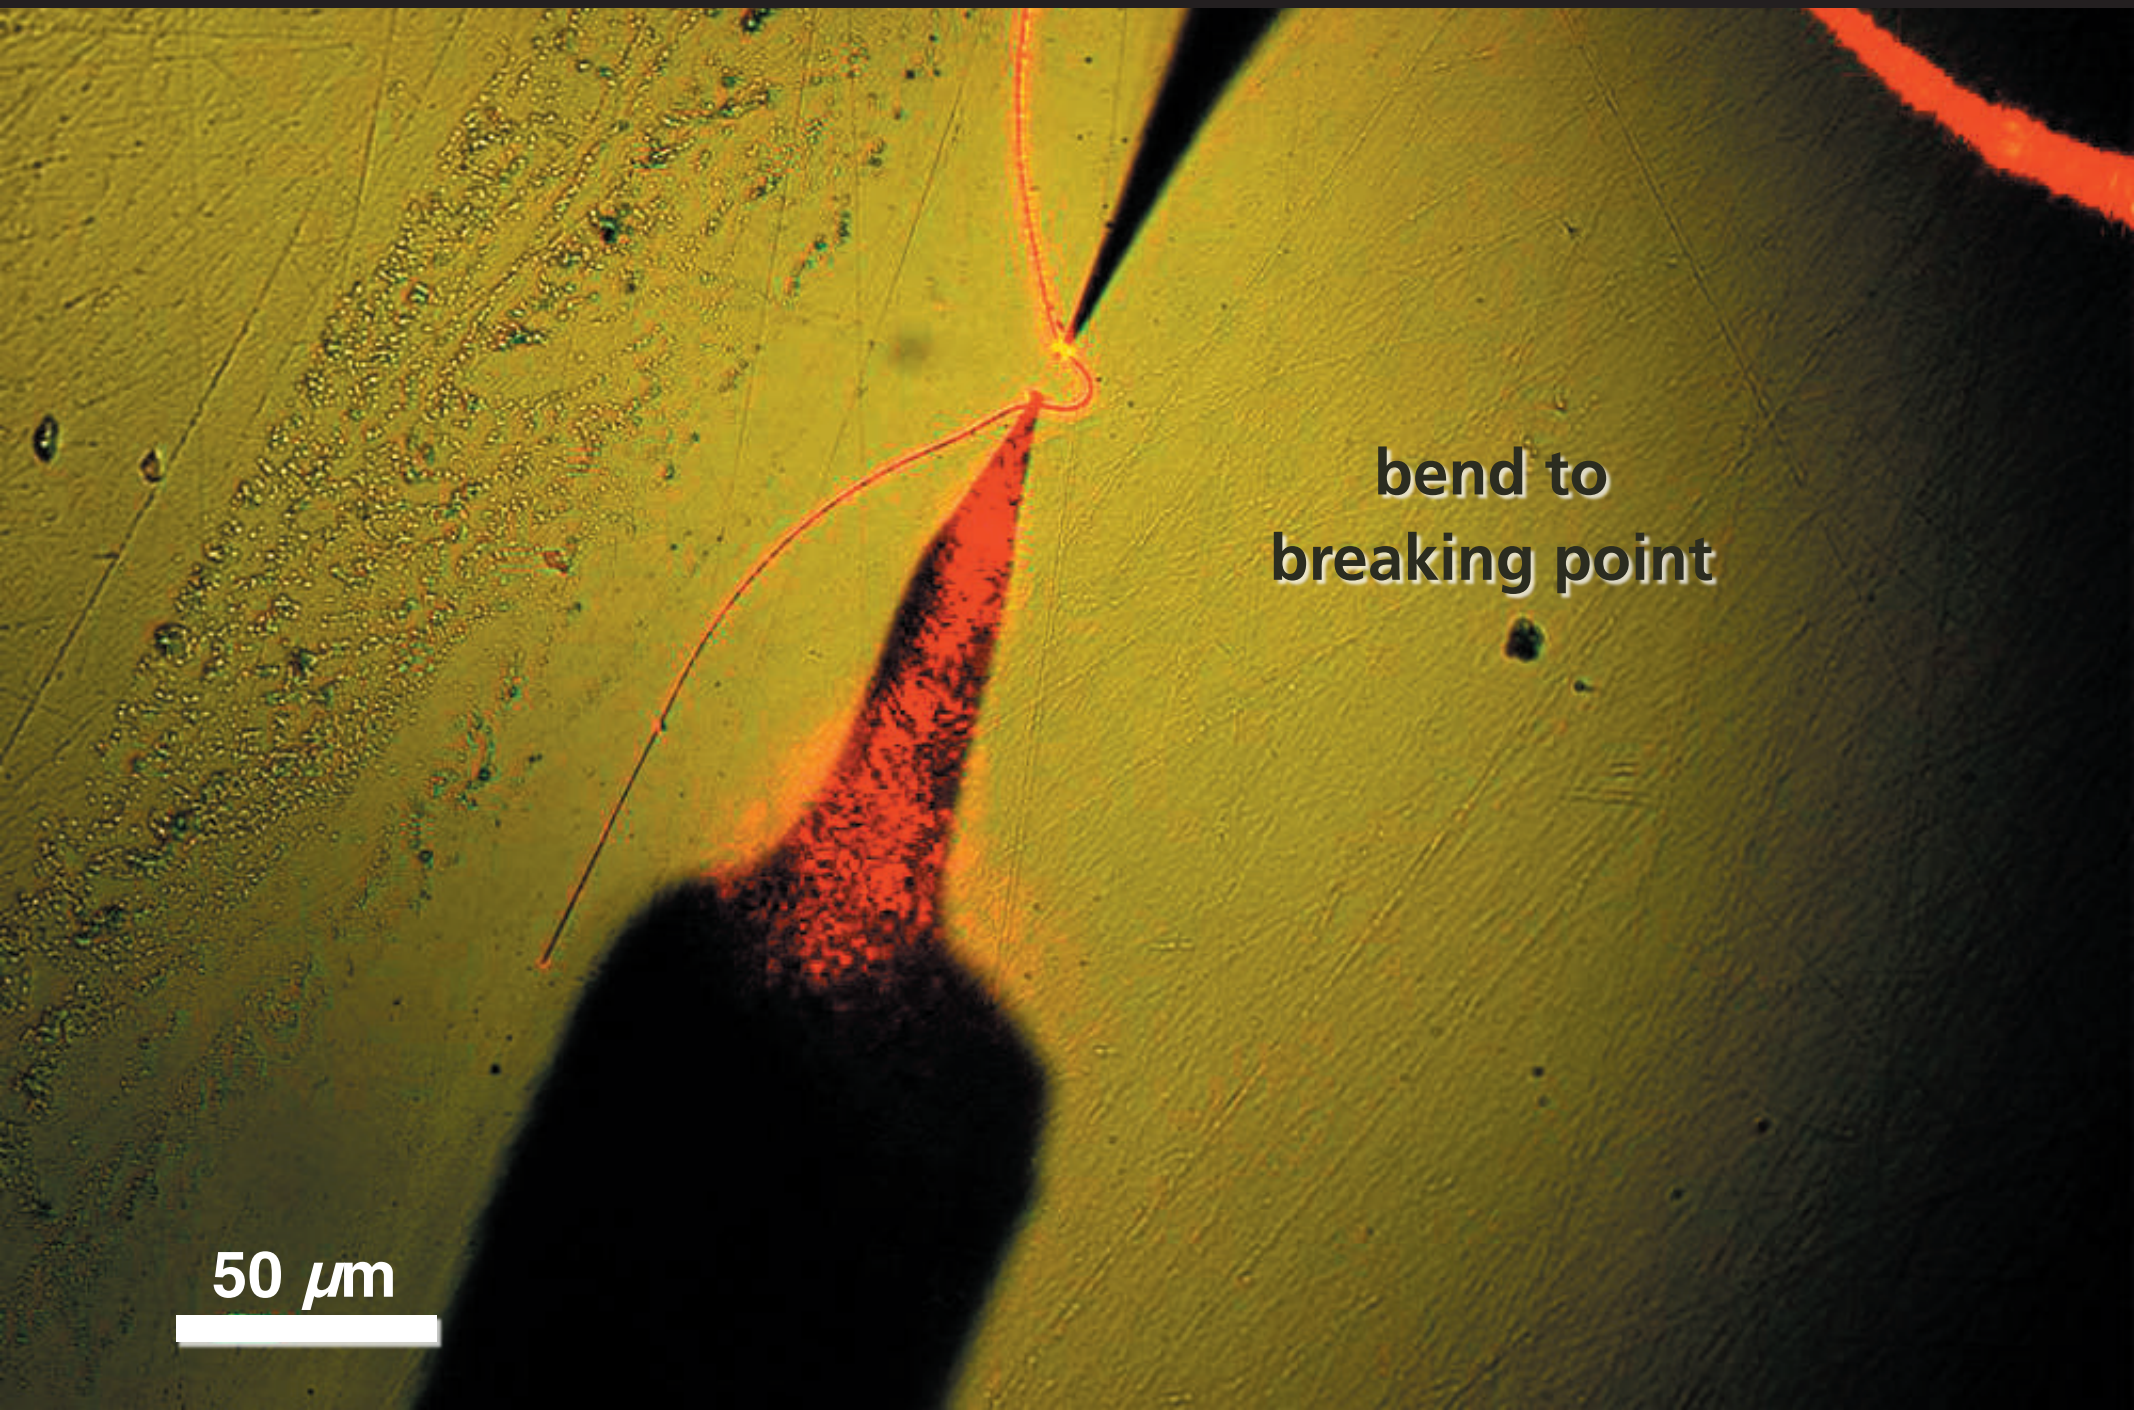

Nanowire fabrication

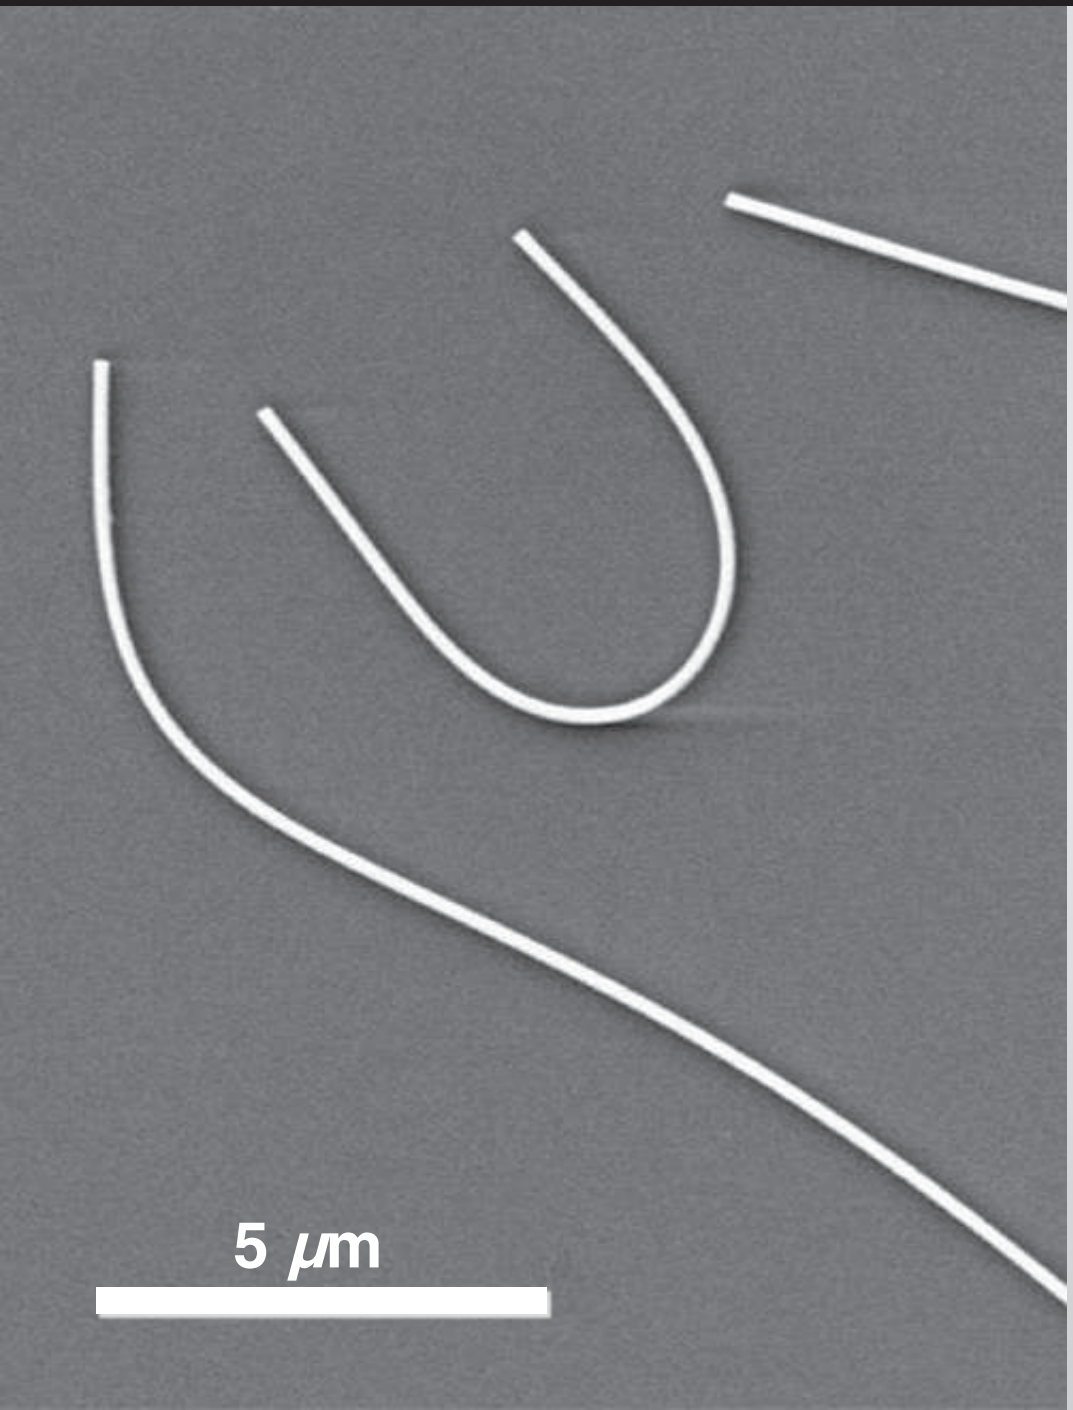

minimum bending radius R_{EB} gives tensile stress:

$$\sigma = \frac{ED}{2R_{EB}}$$

E = **Young's modulus**
D = **wire diameter**

Waveguiding

tensile strength

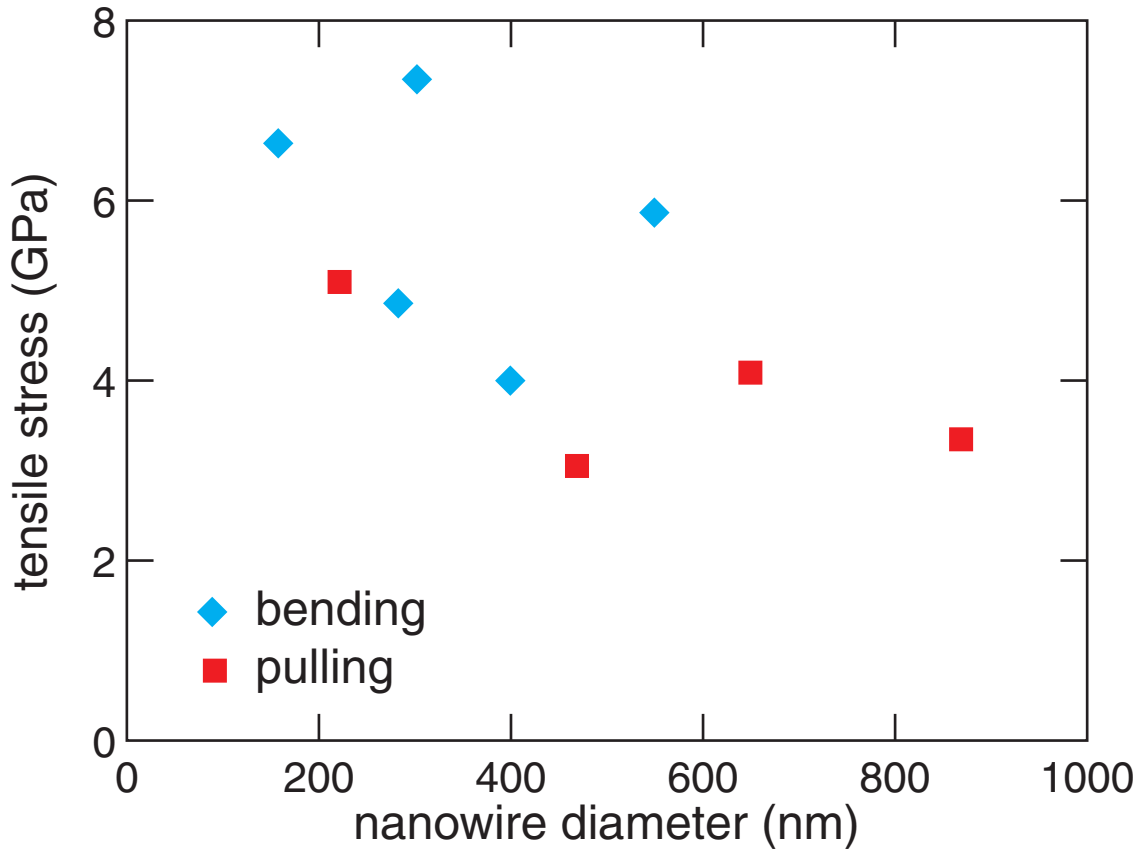

Nanowire fabrication

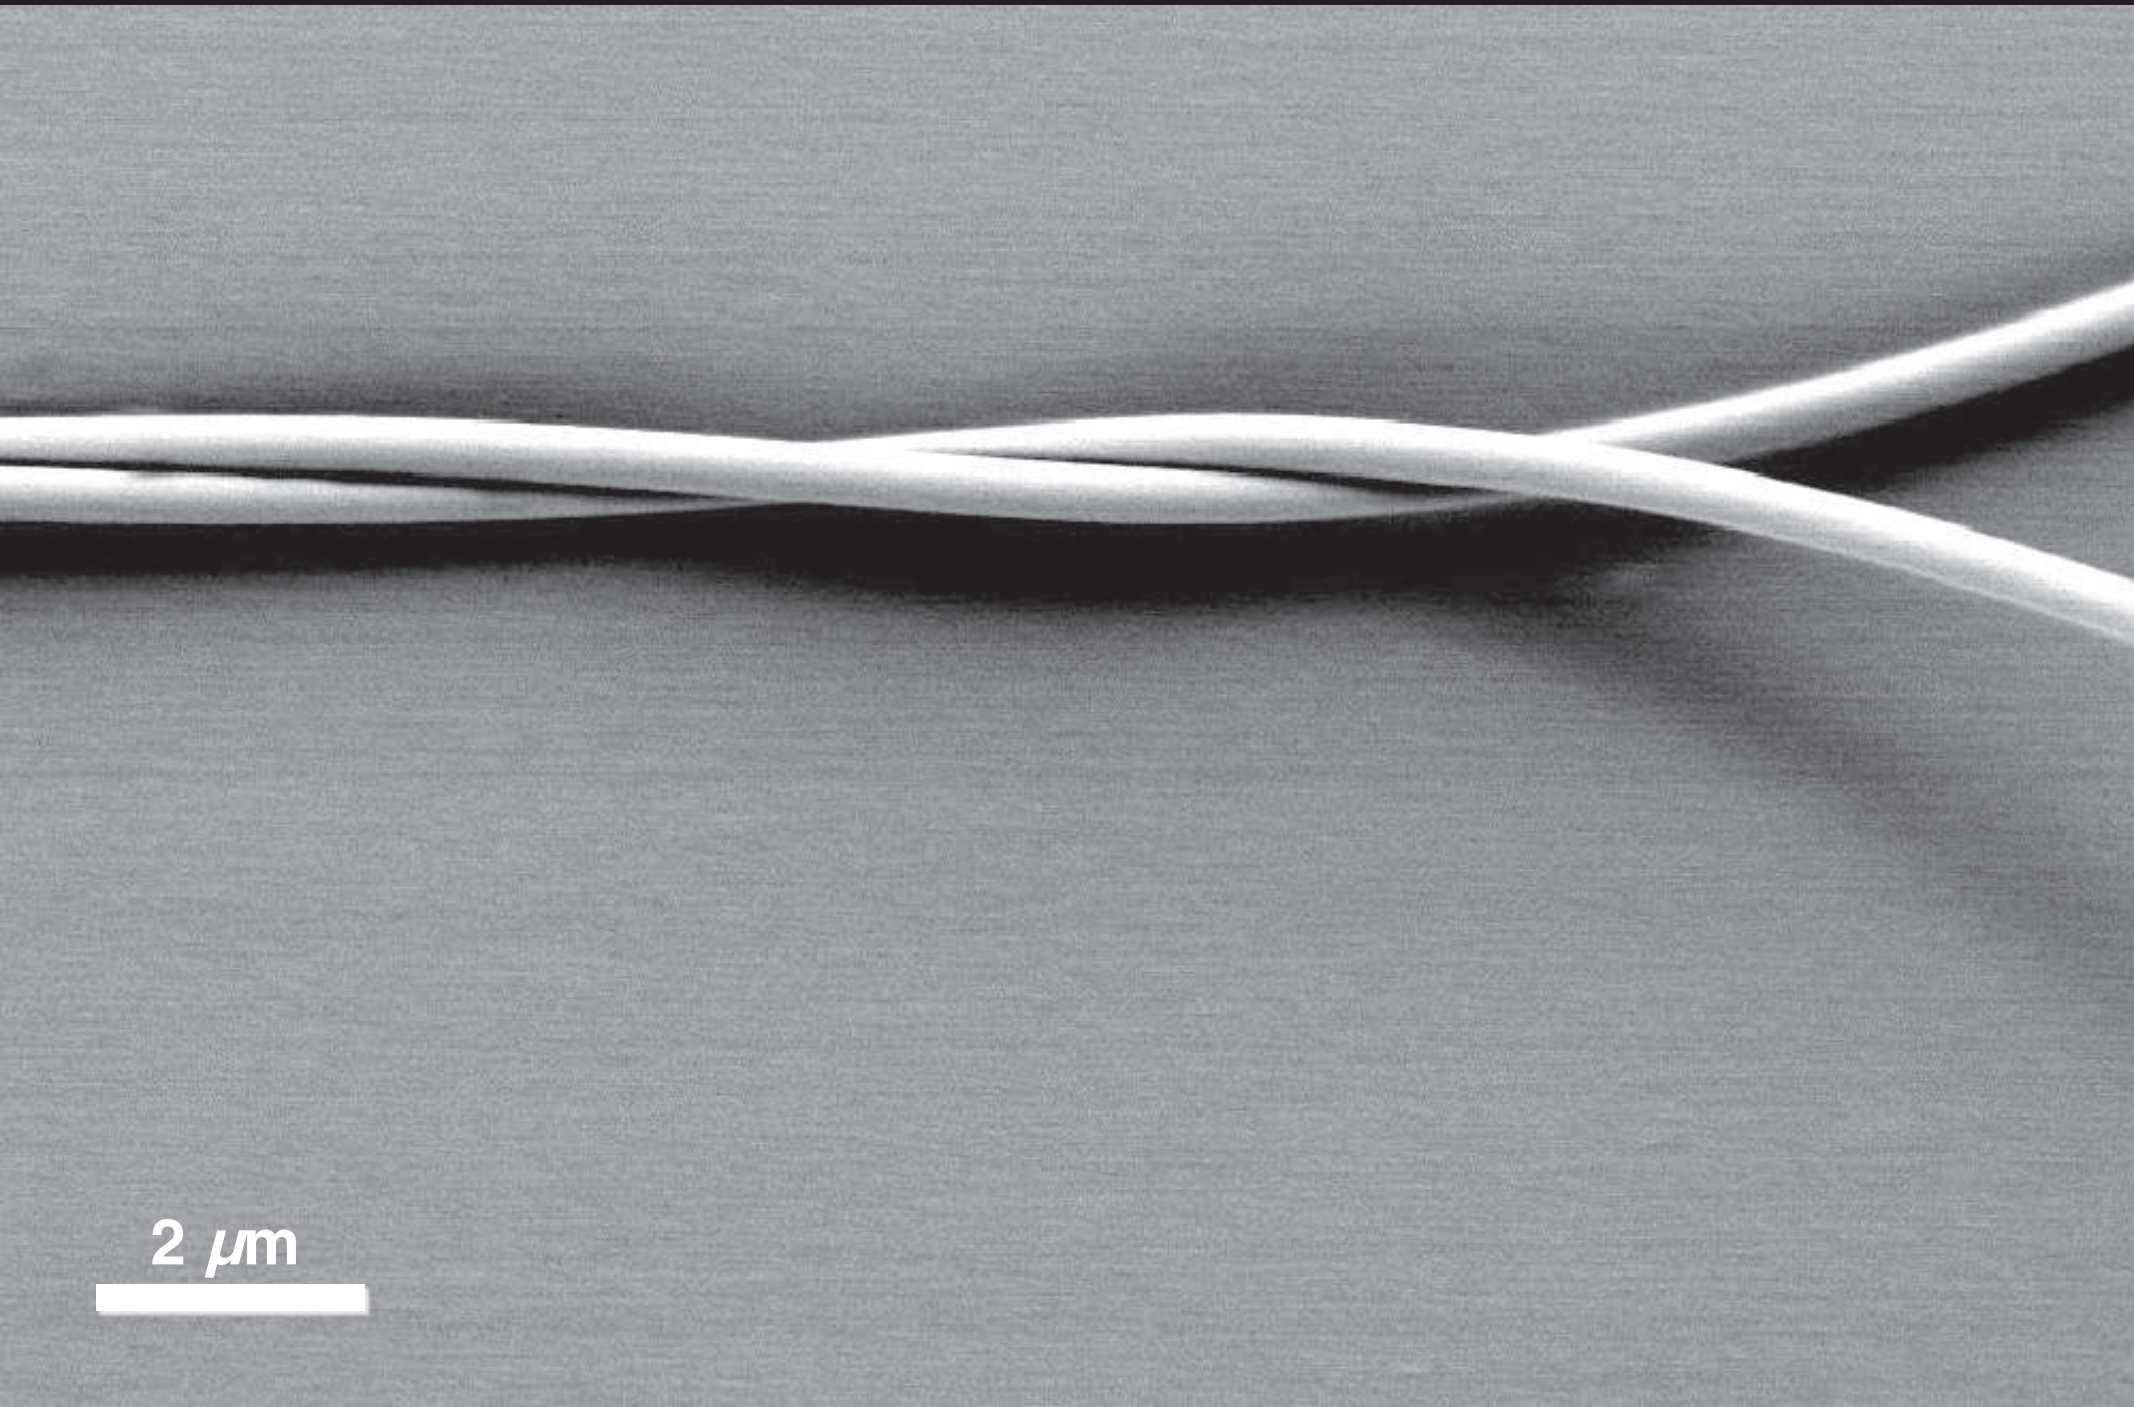

Nanowire fabrication

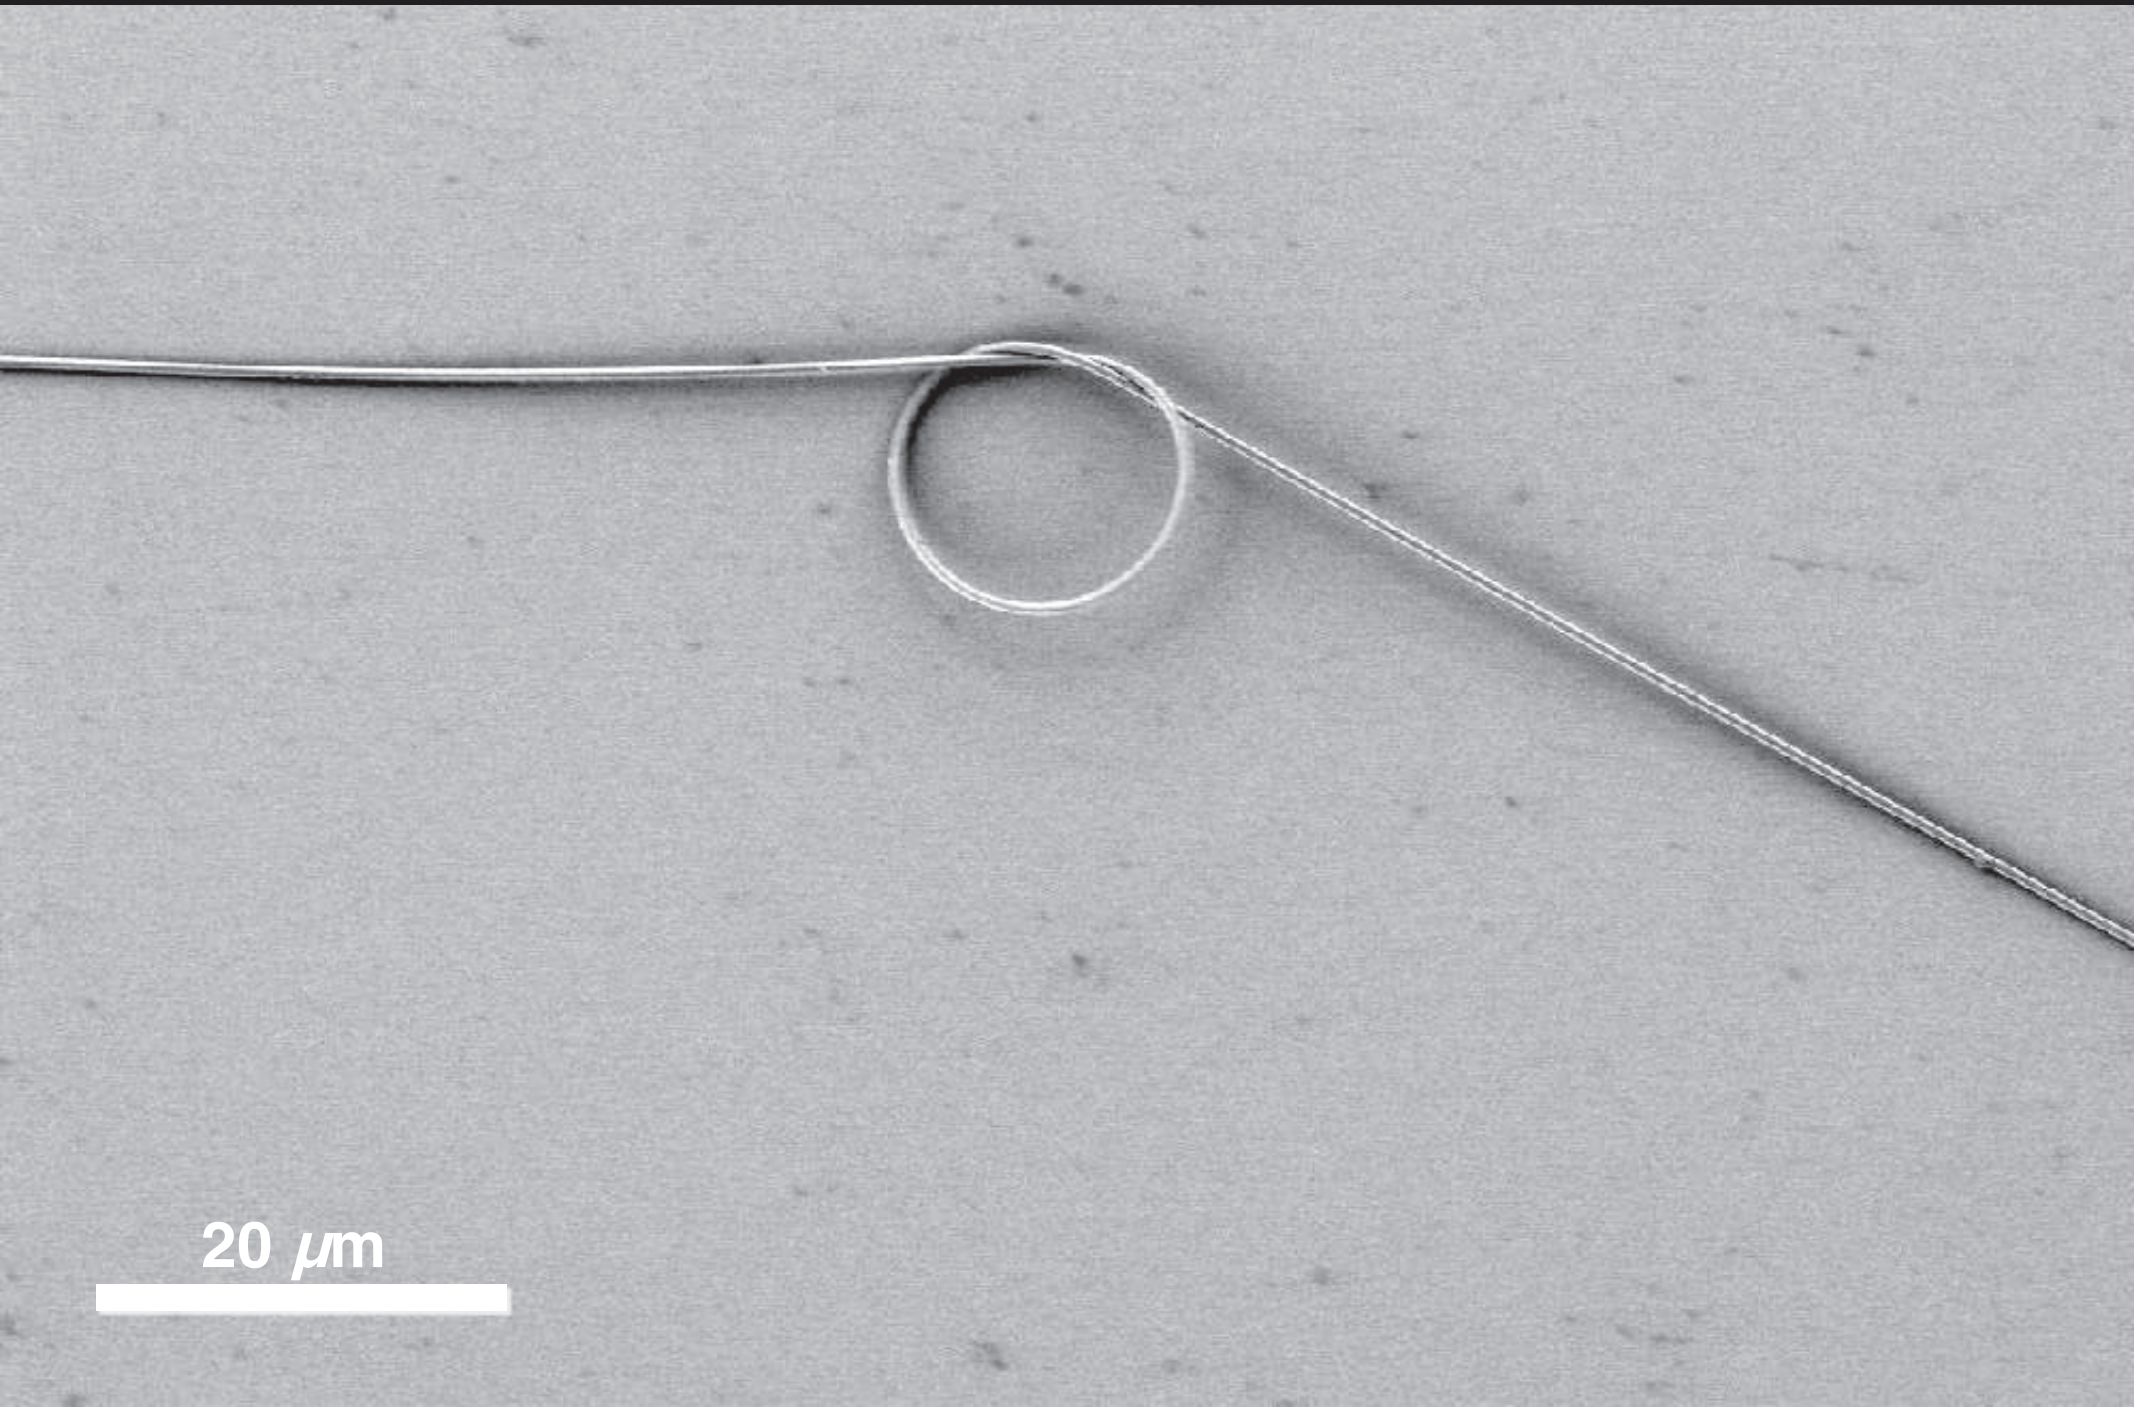

Nanowire fabrication

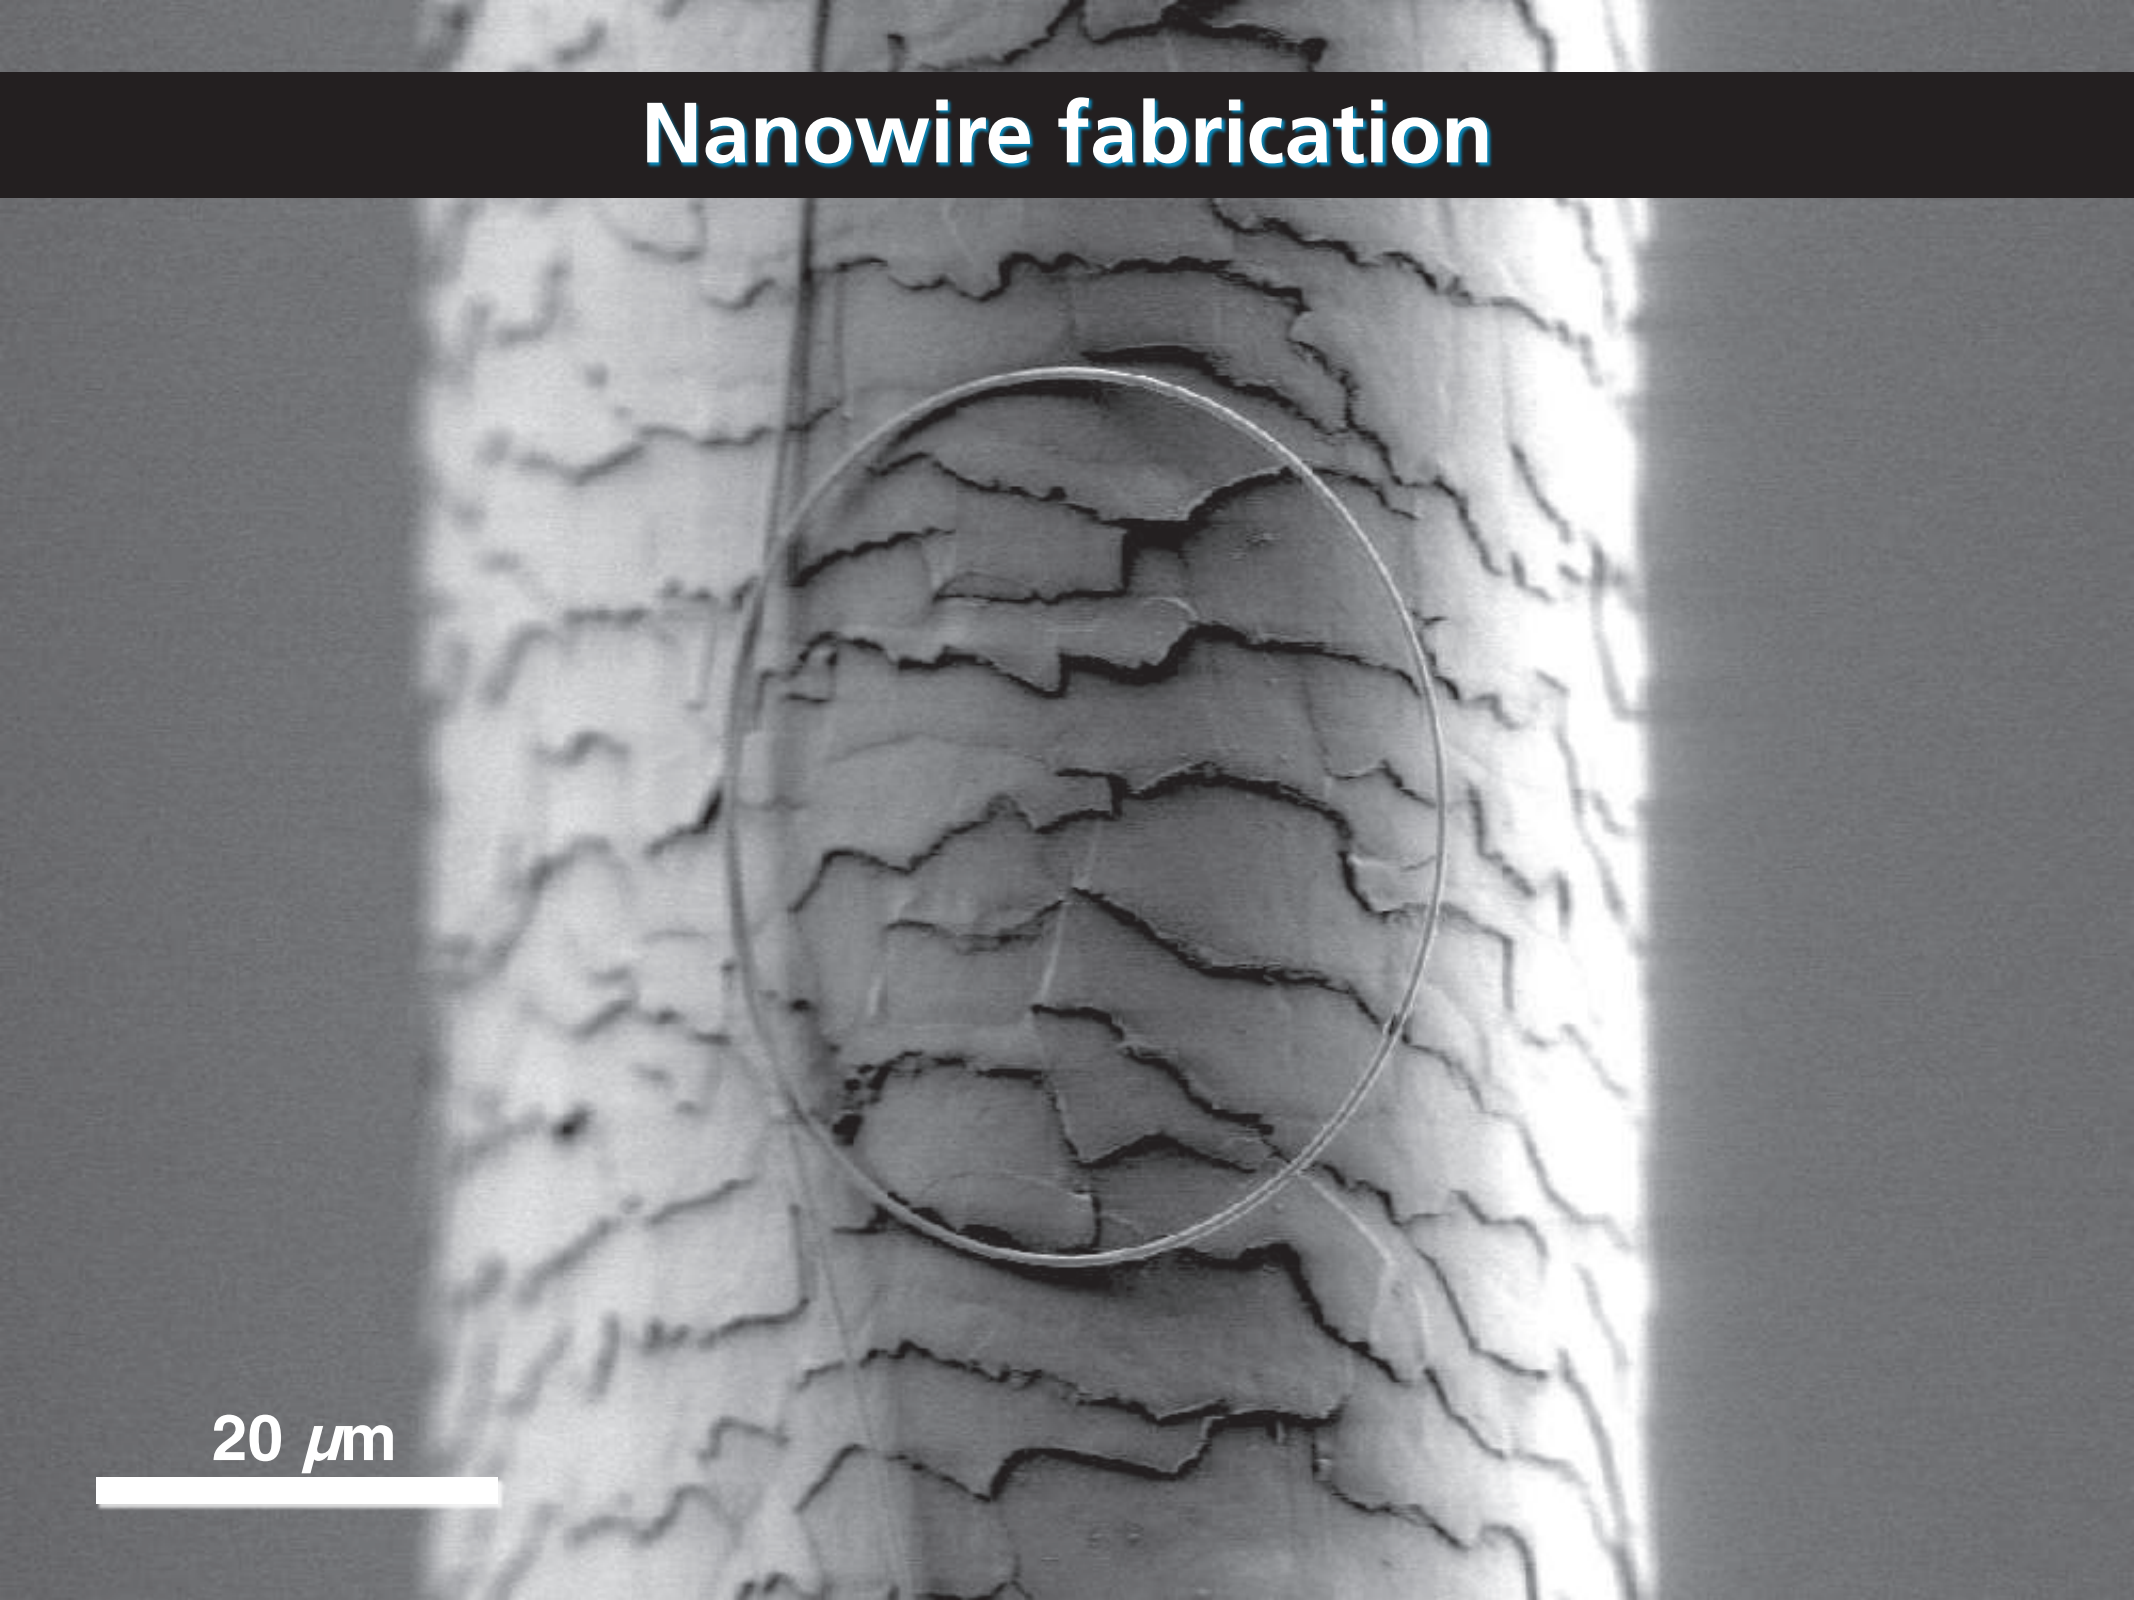

Outline

- waveguiding
- nanowire fabrication
- optical properties

Optical properties

coupling light into nanowires

Optical properties

coupling light into nanowires

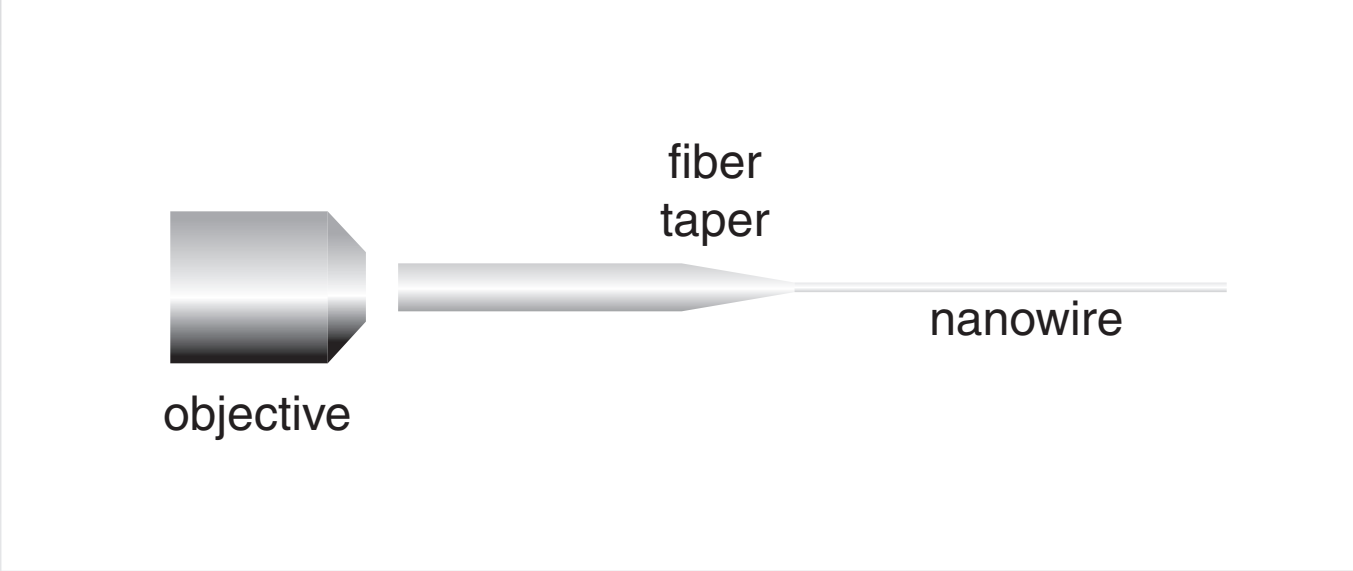

Optical properties

coupling light into nanowires

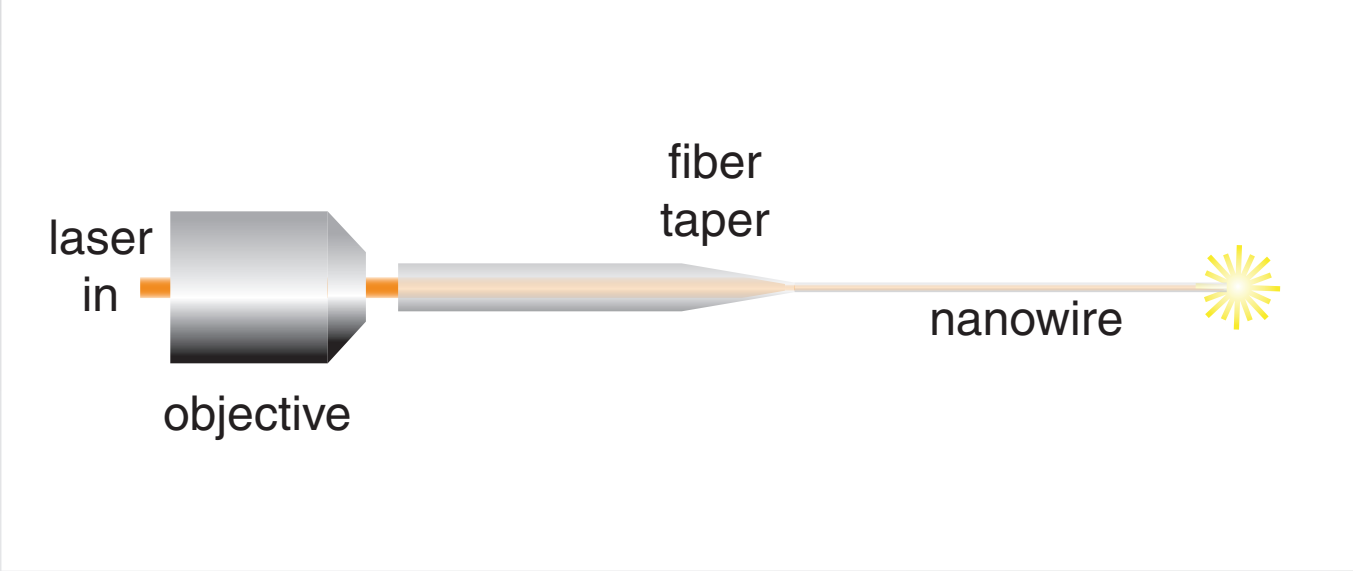

Optical properties

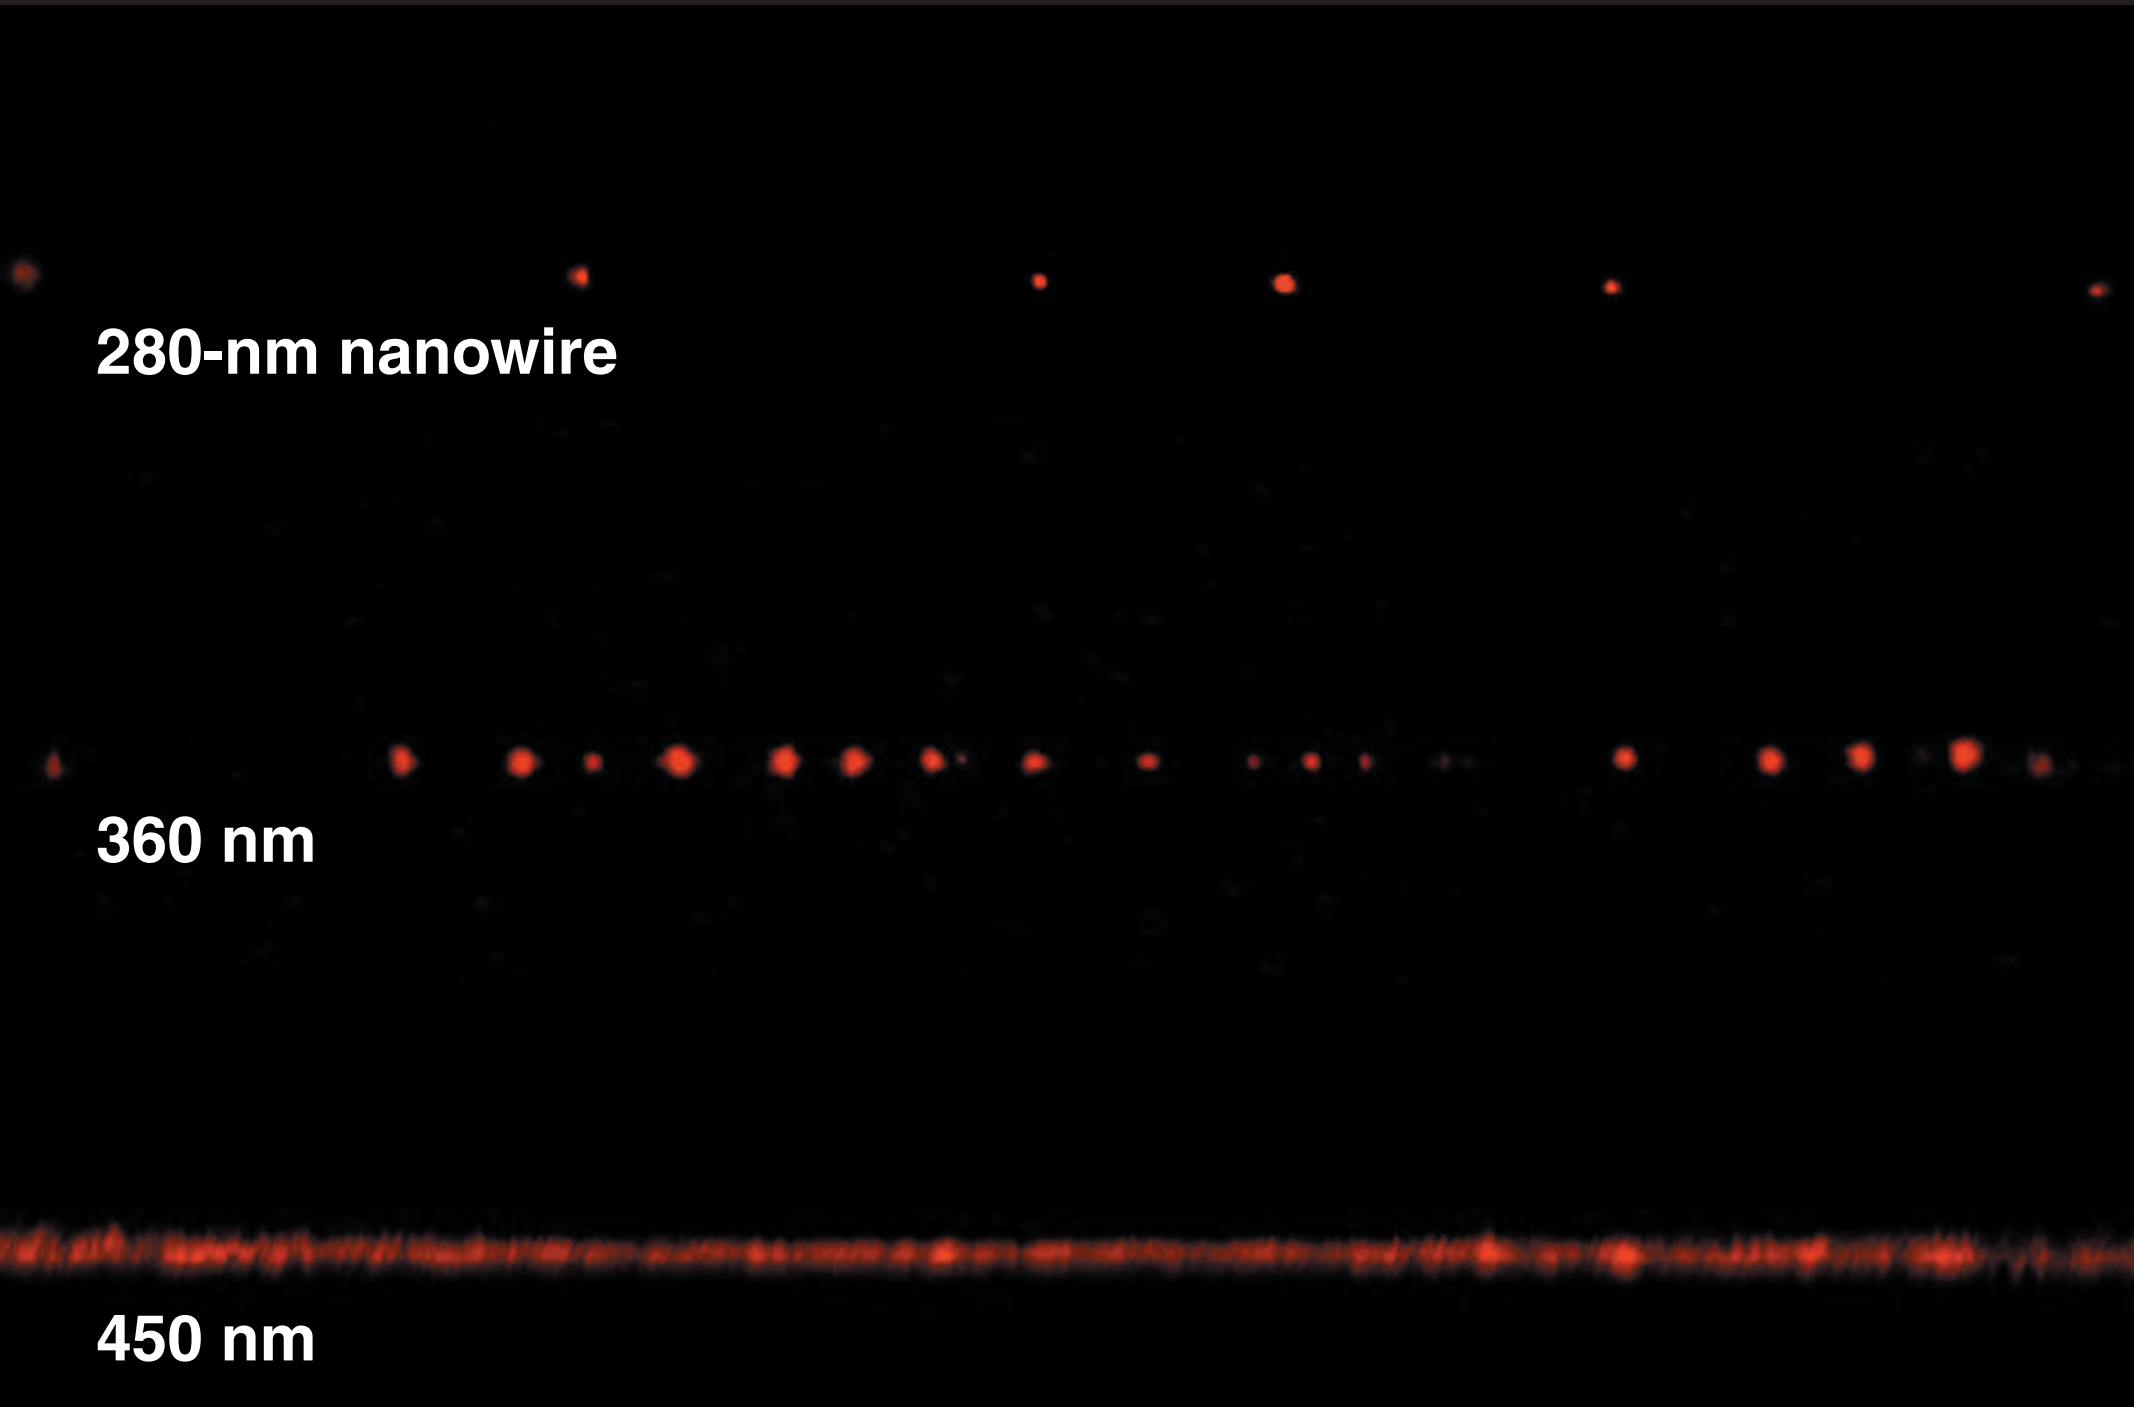

Optical properties

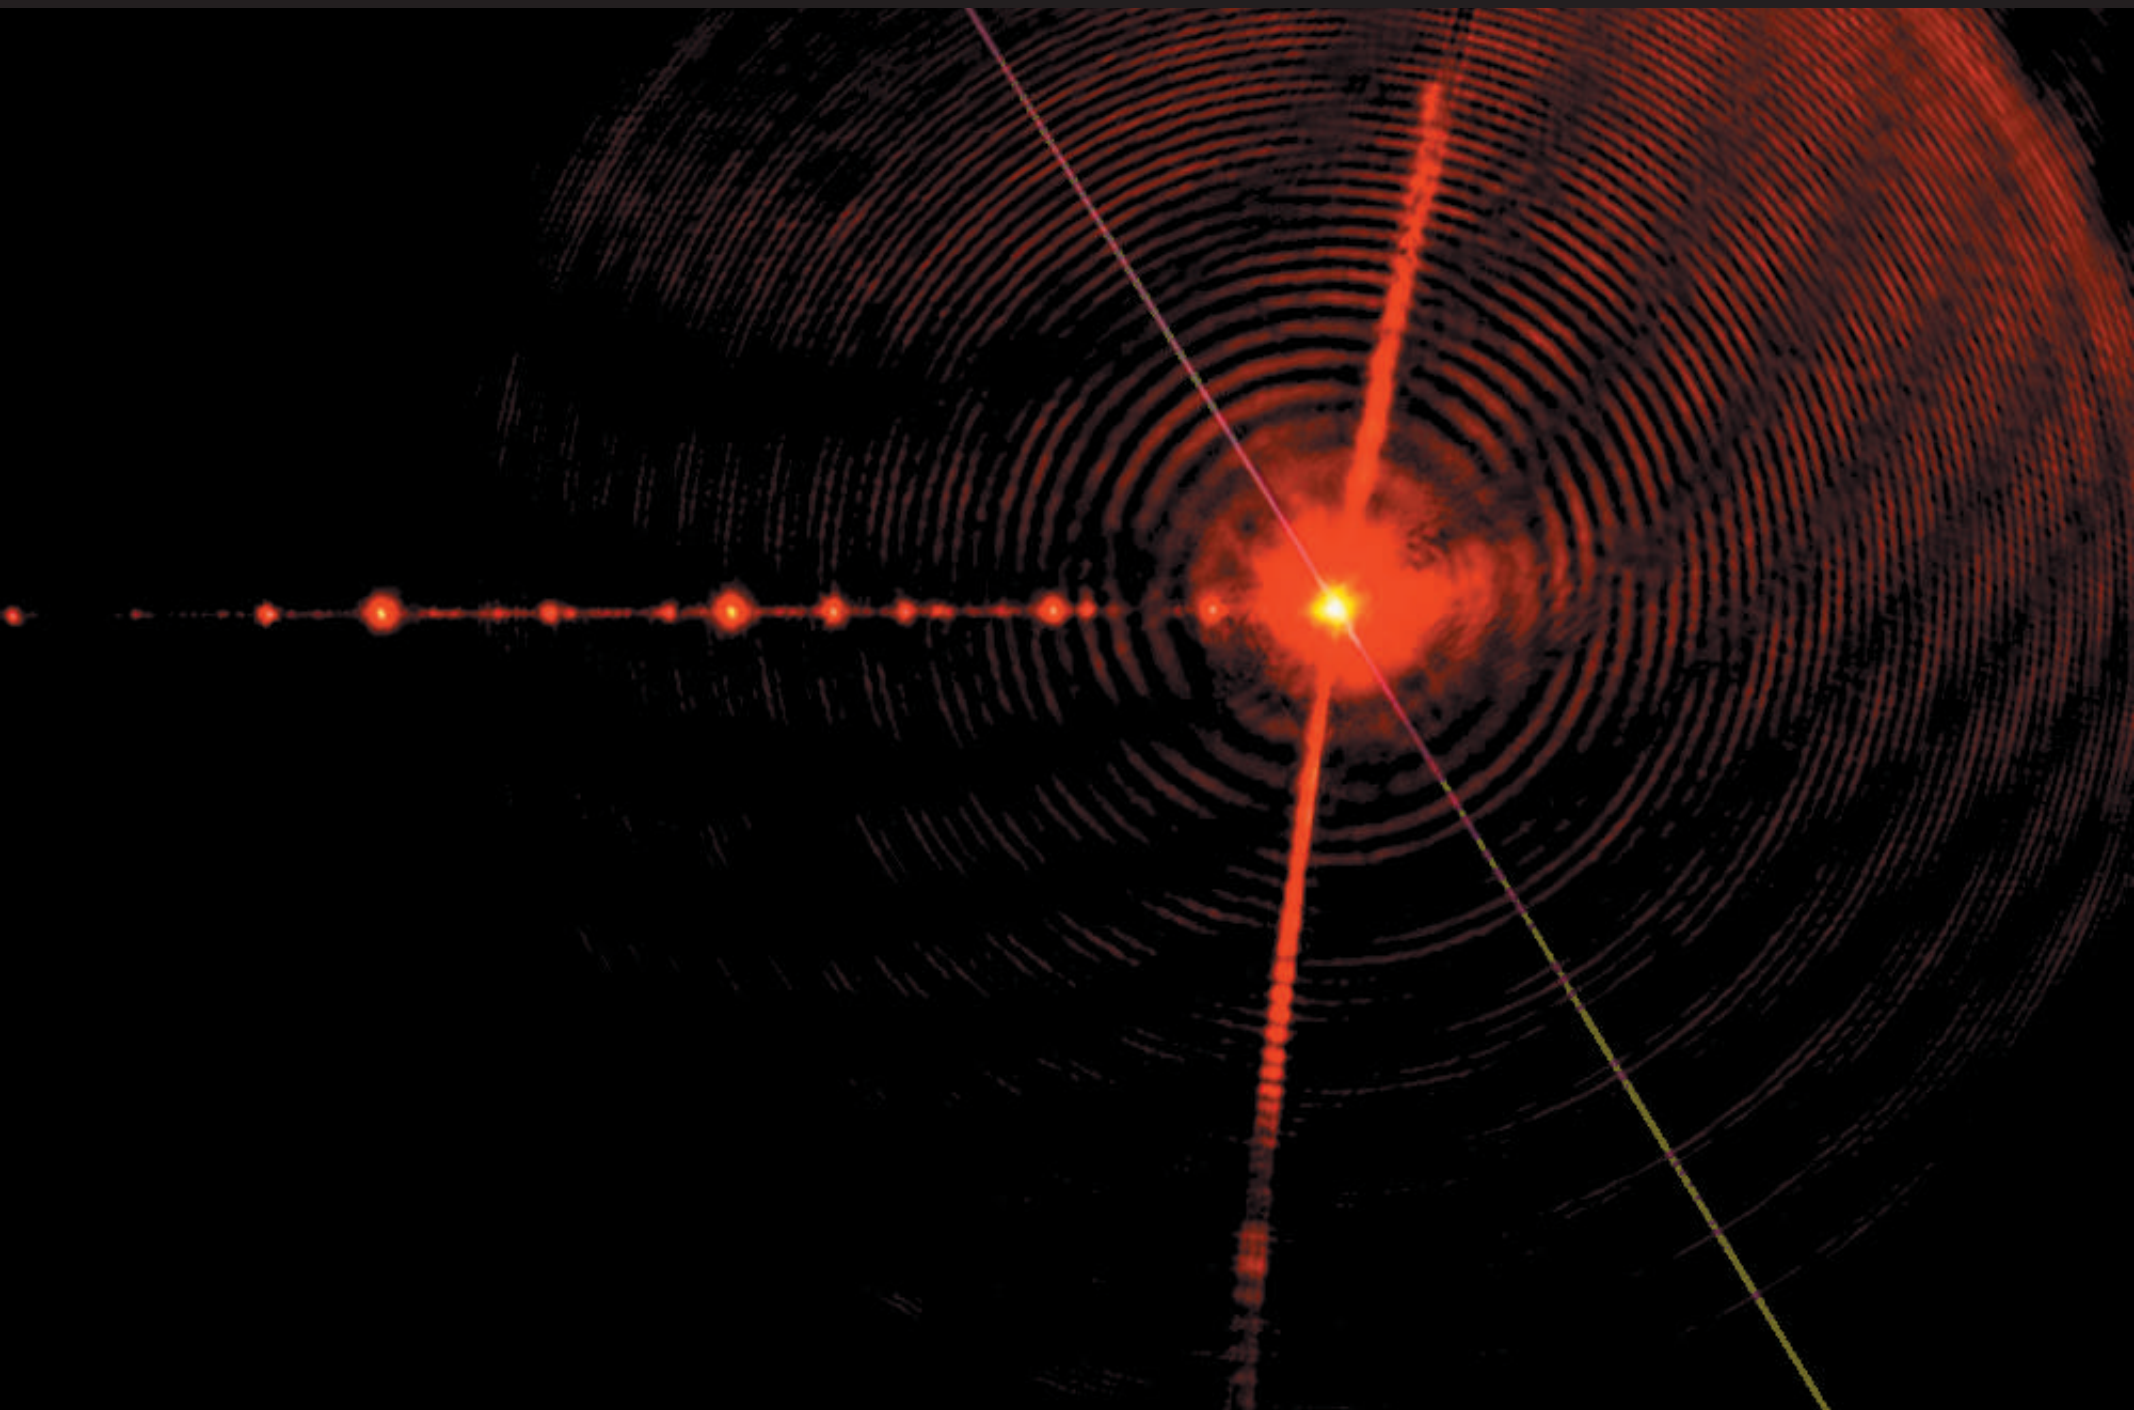

Optical properties

Optical properties

Poynting vector profile for 800-nm nanowire

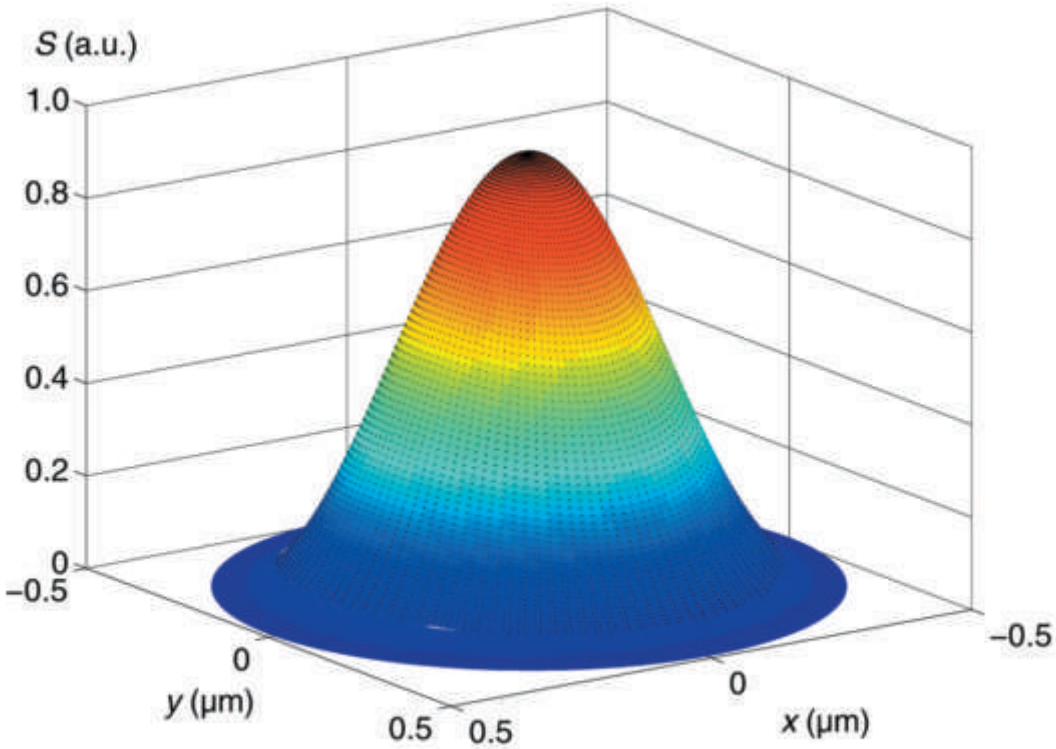

Optical properties

Poynting vector profile for 800-nm nanowire

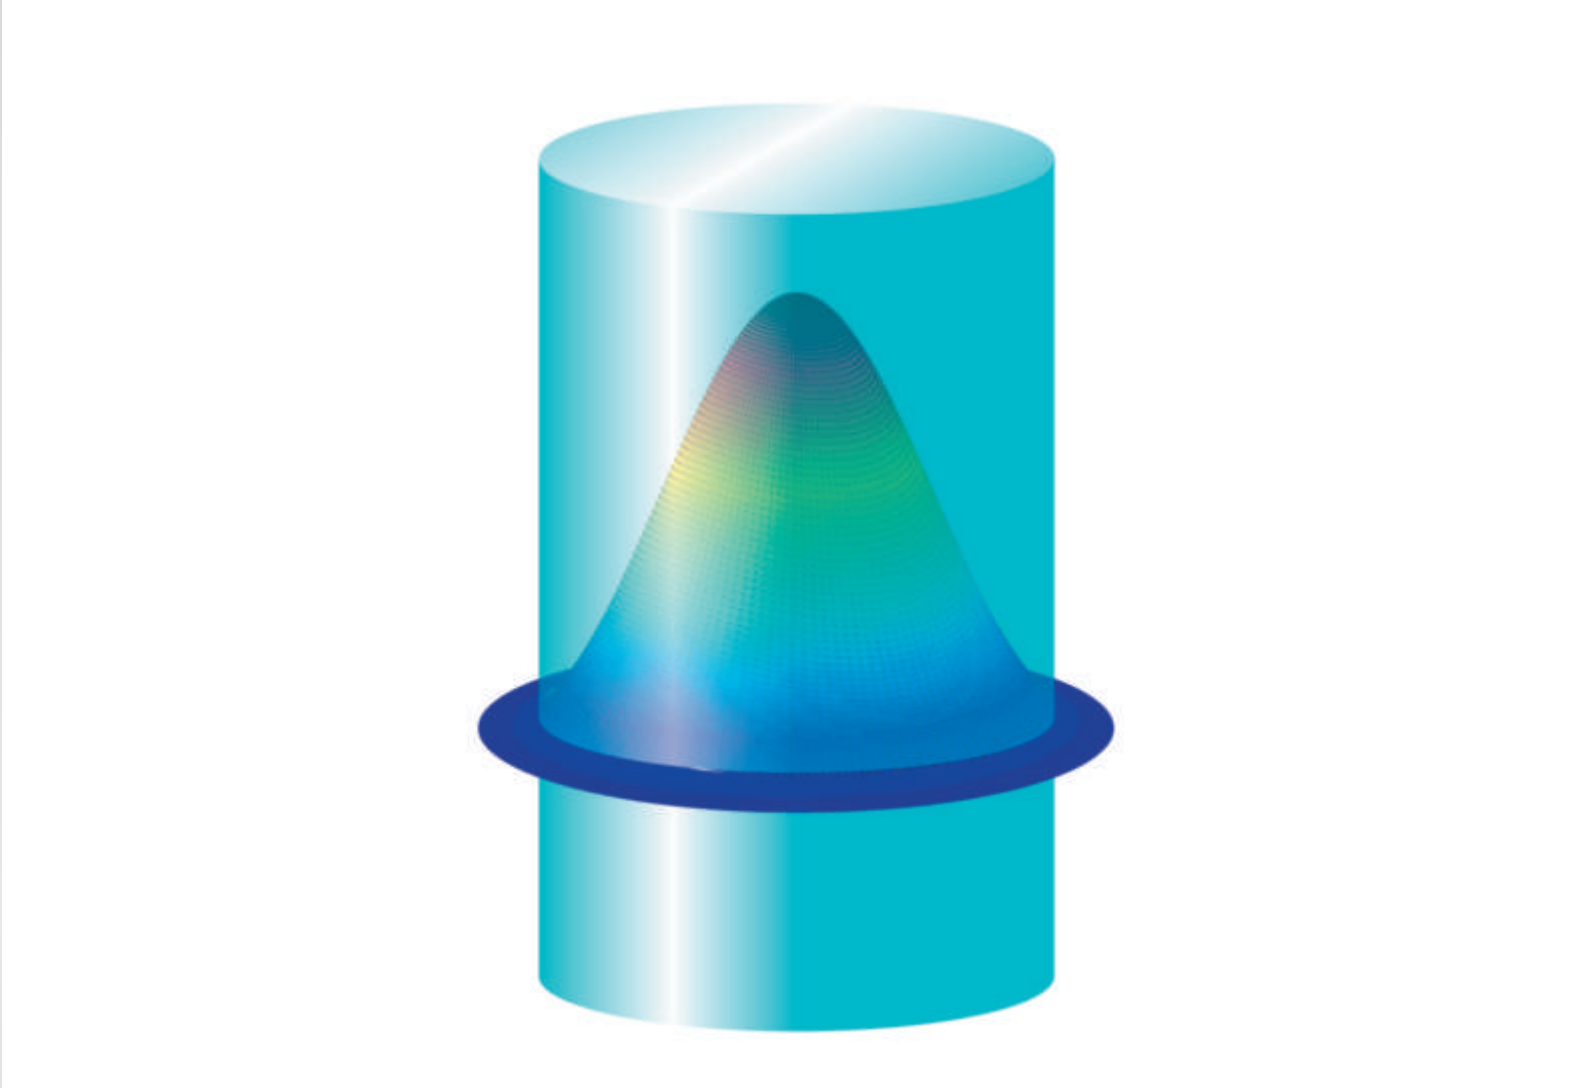

Optical properties

Poynting vector profile for 800-nm nanowire

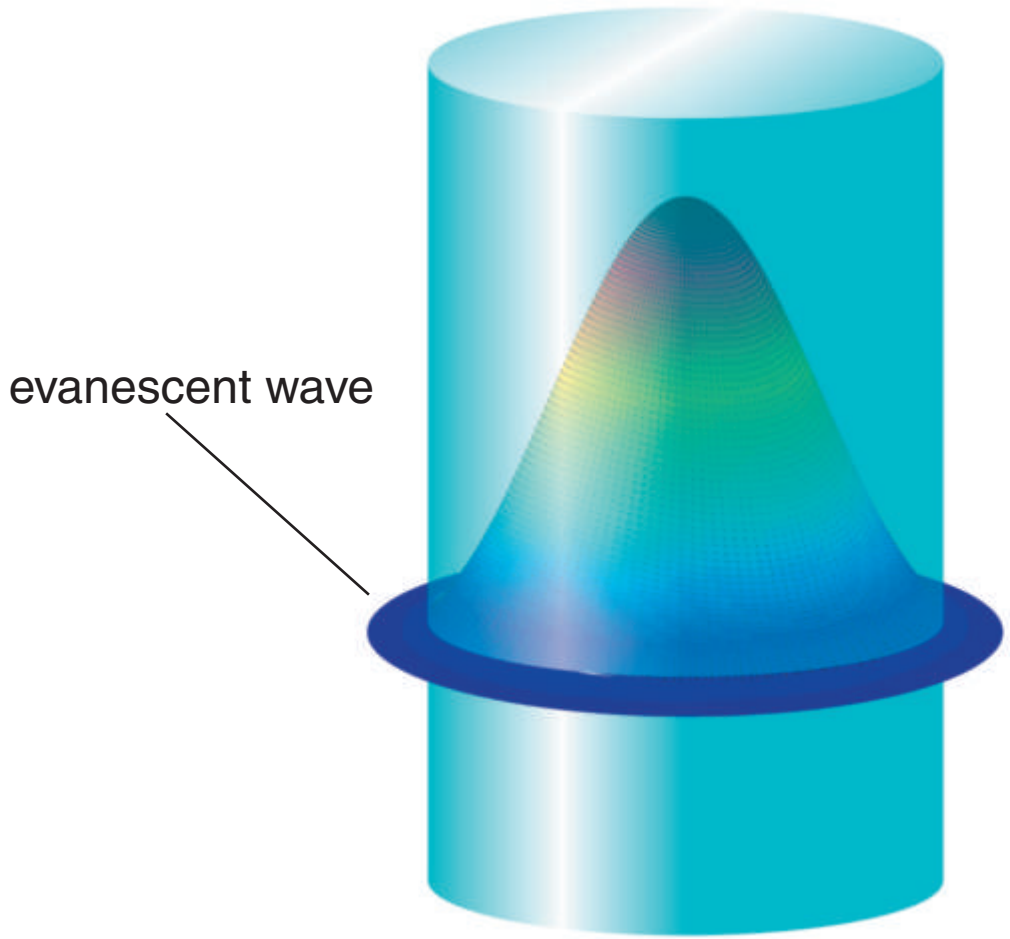

Optical properties

Poynting vector profile for 600-nm nanowire

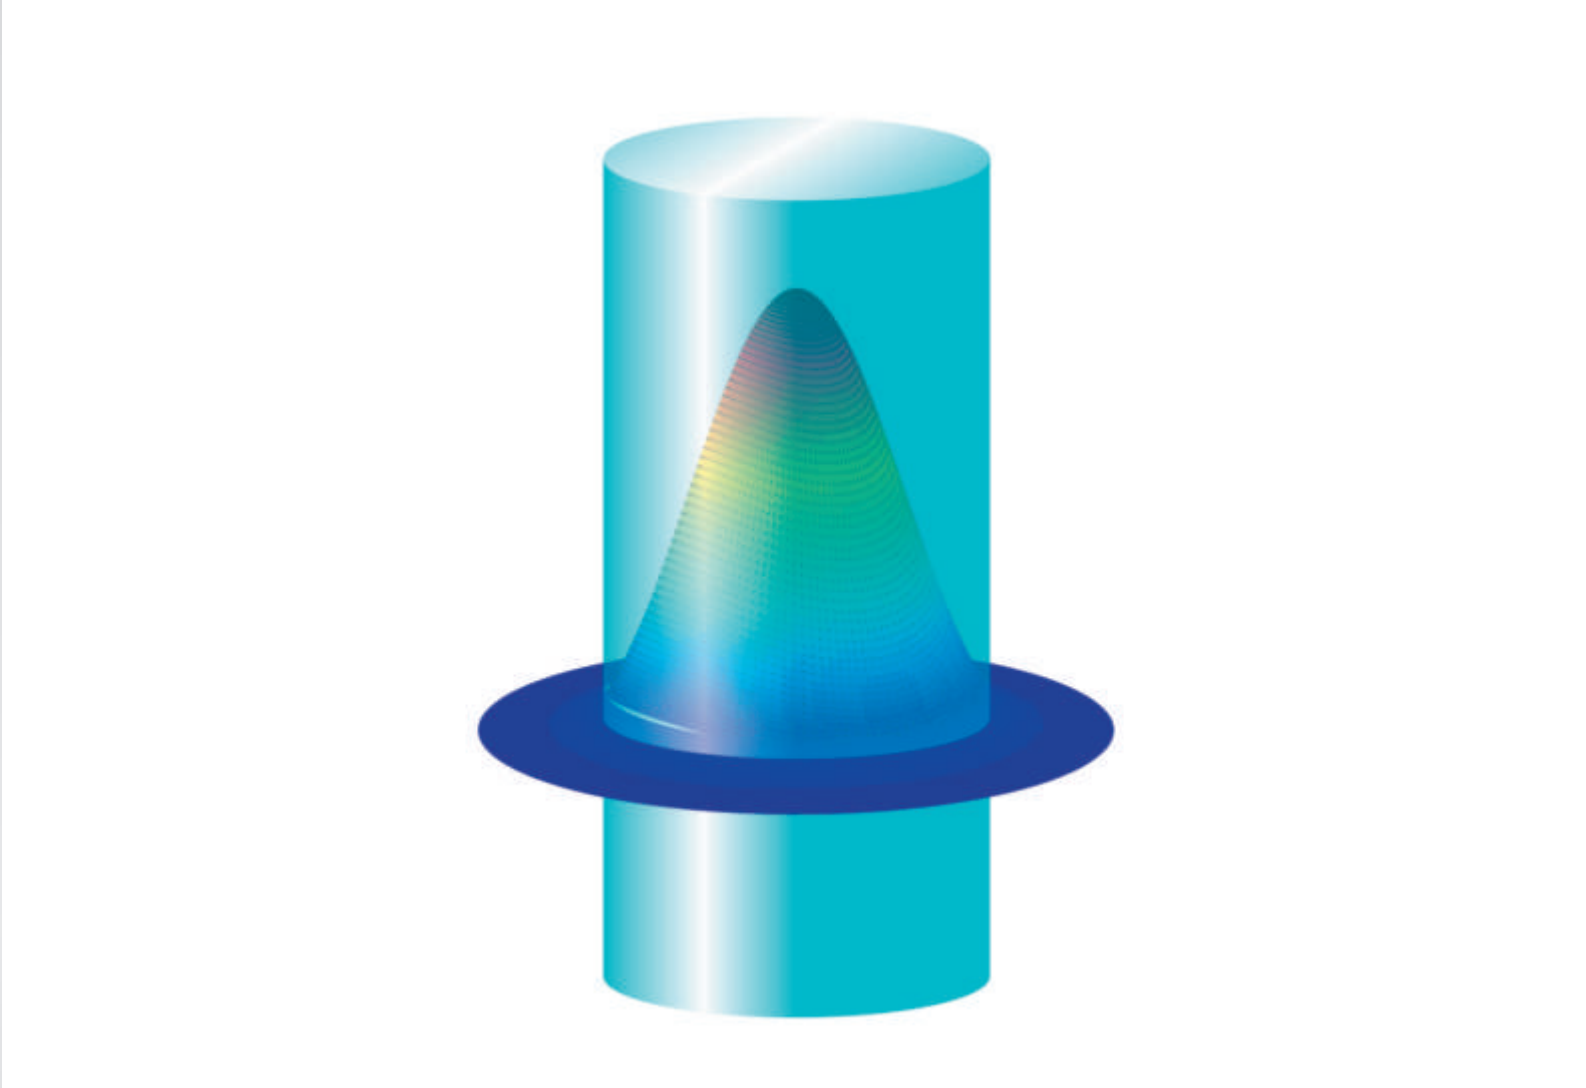

Optical properties

Poynting vector profile for 500-nm nanowire

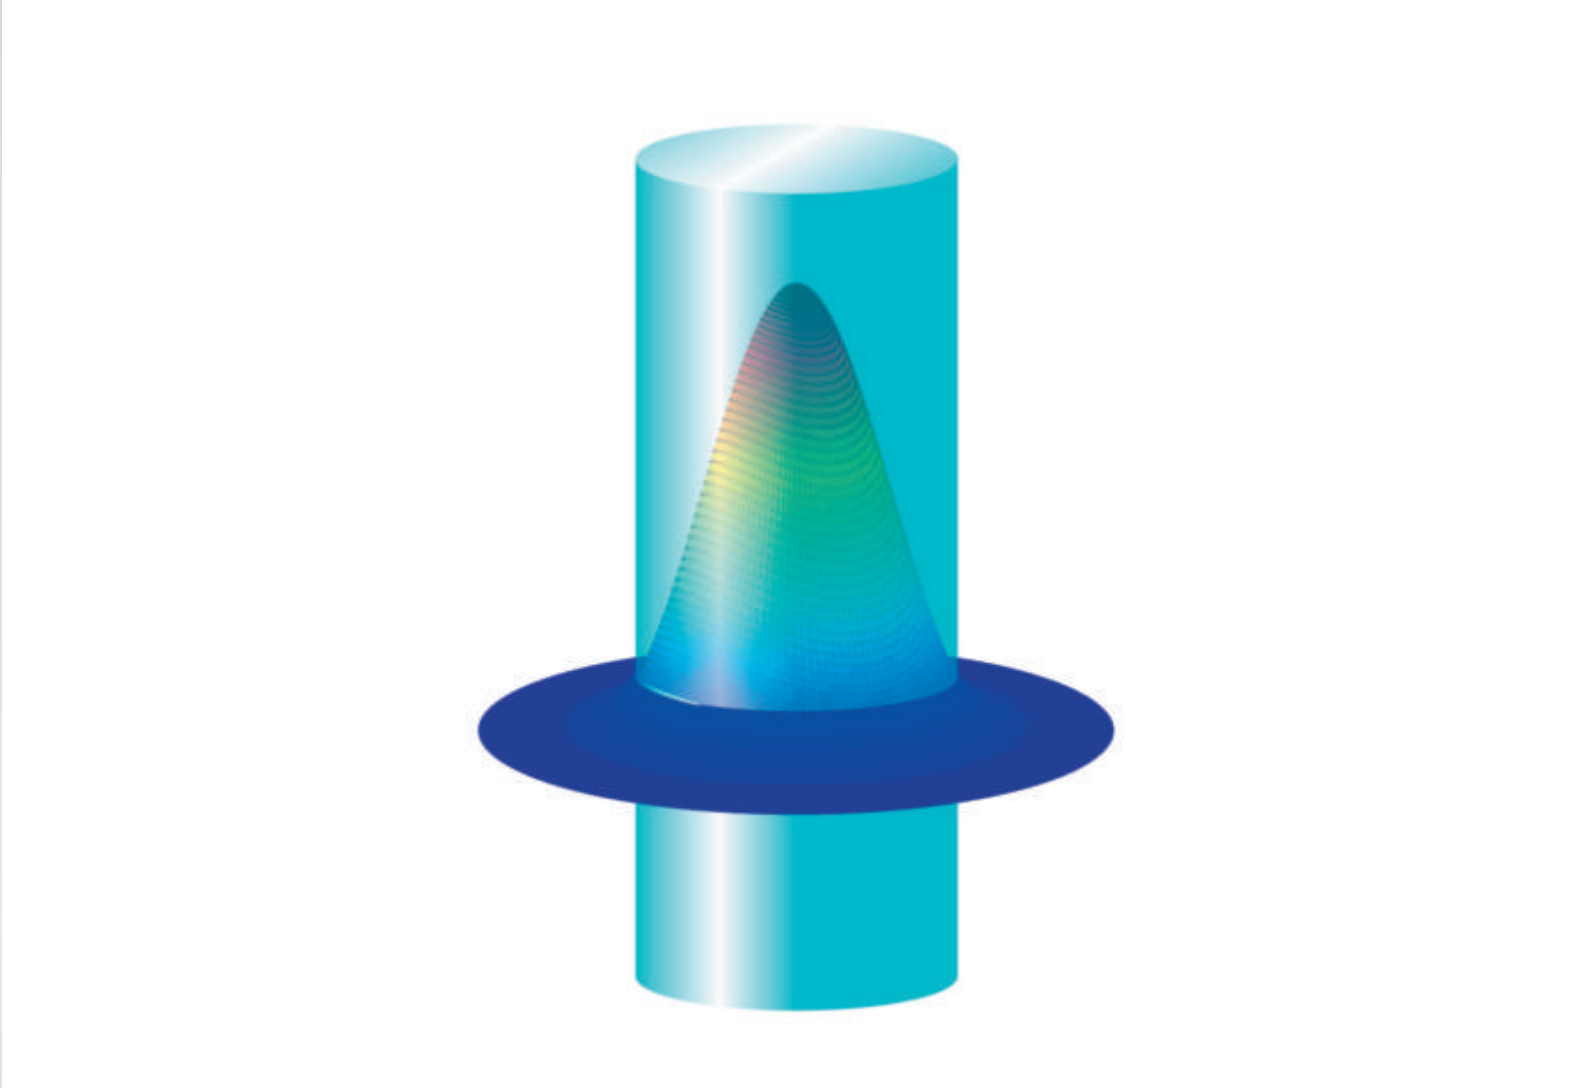

Optical properties

Poynting vector profile for 400-nm nanowire

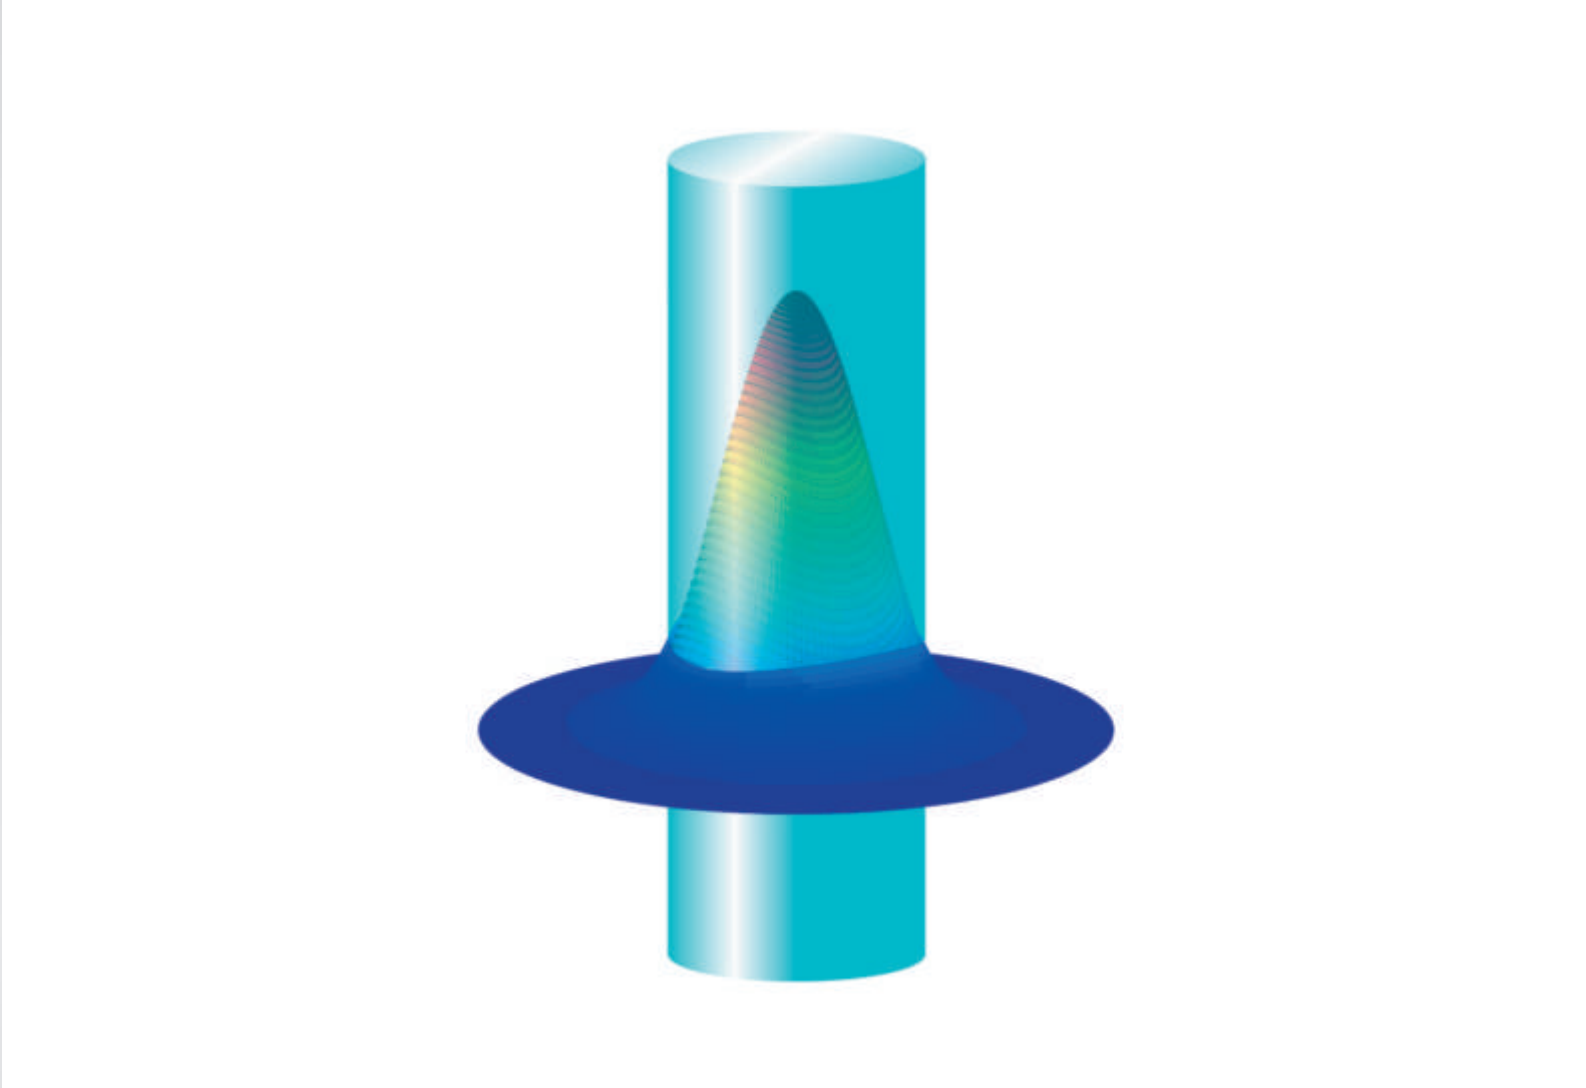

Optical properties

Poynting vector profile for 300-nm nanowire

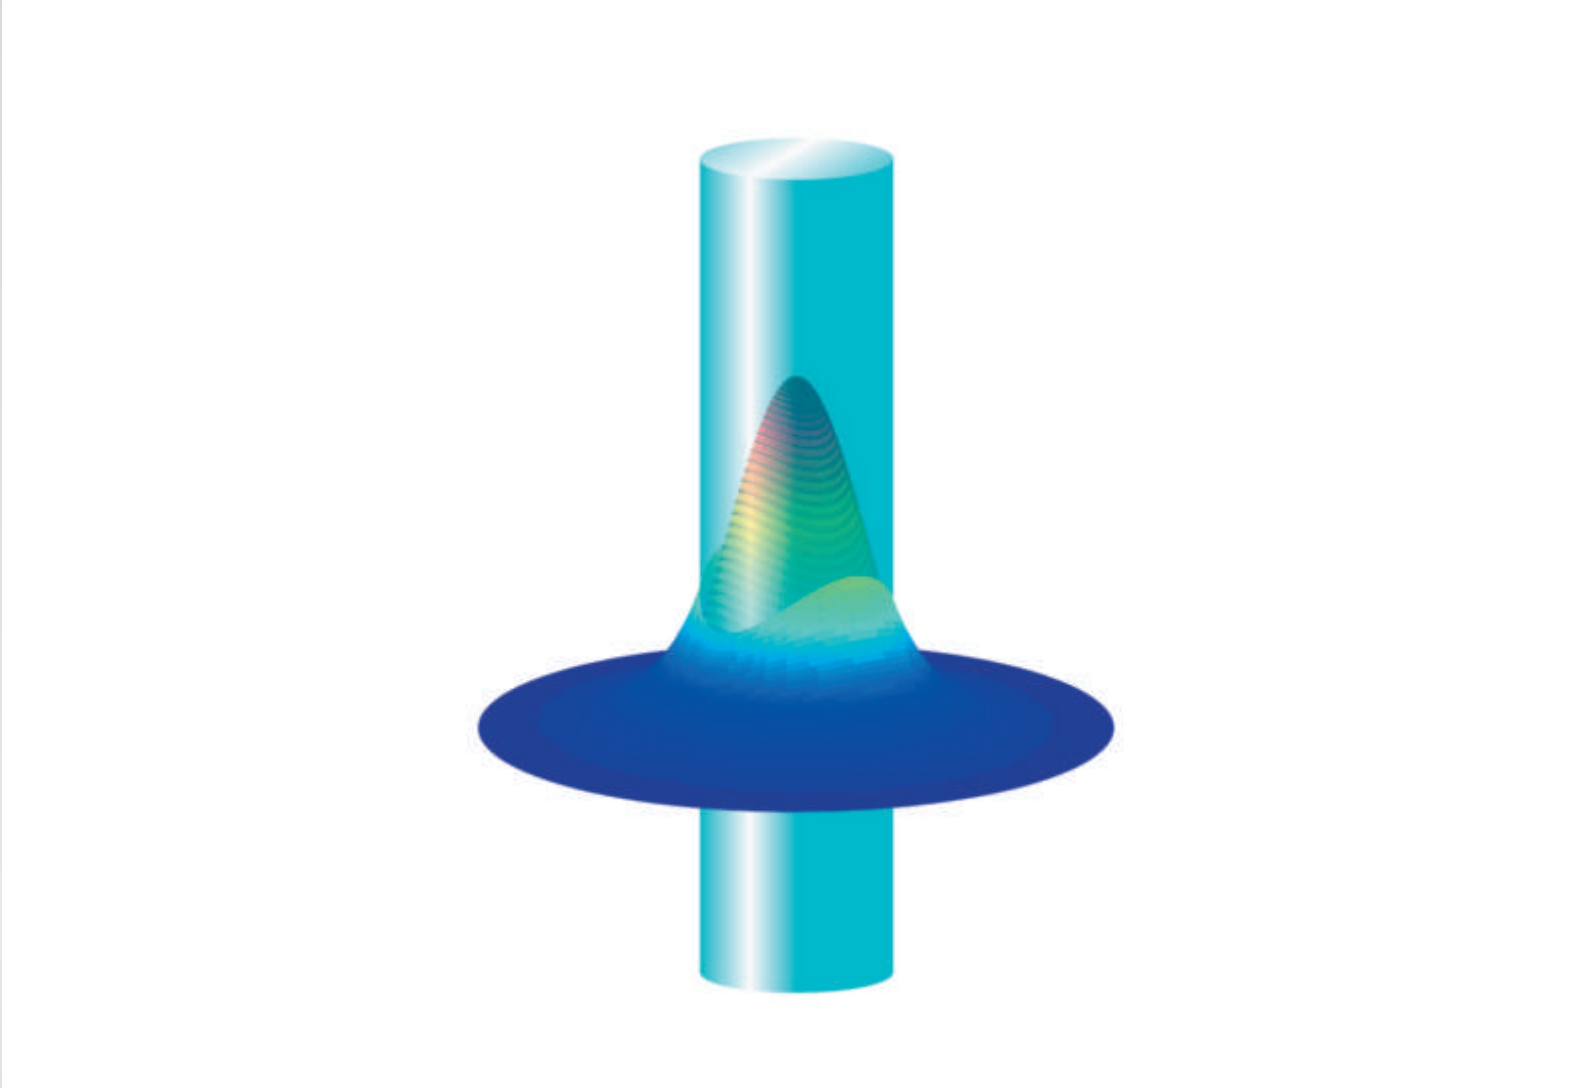

Optical properties

Poynting vector profile for 200-nm nanowire

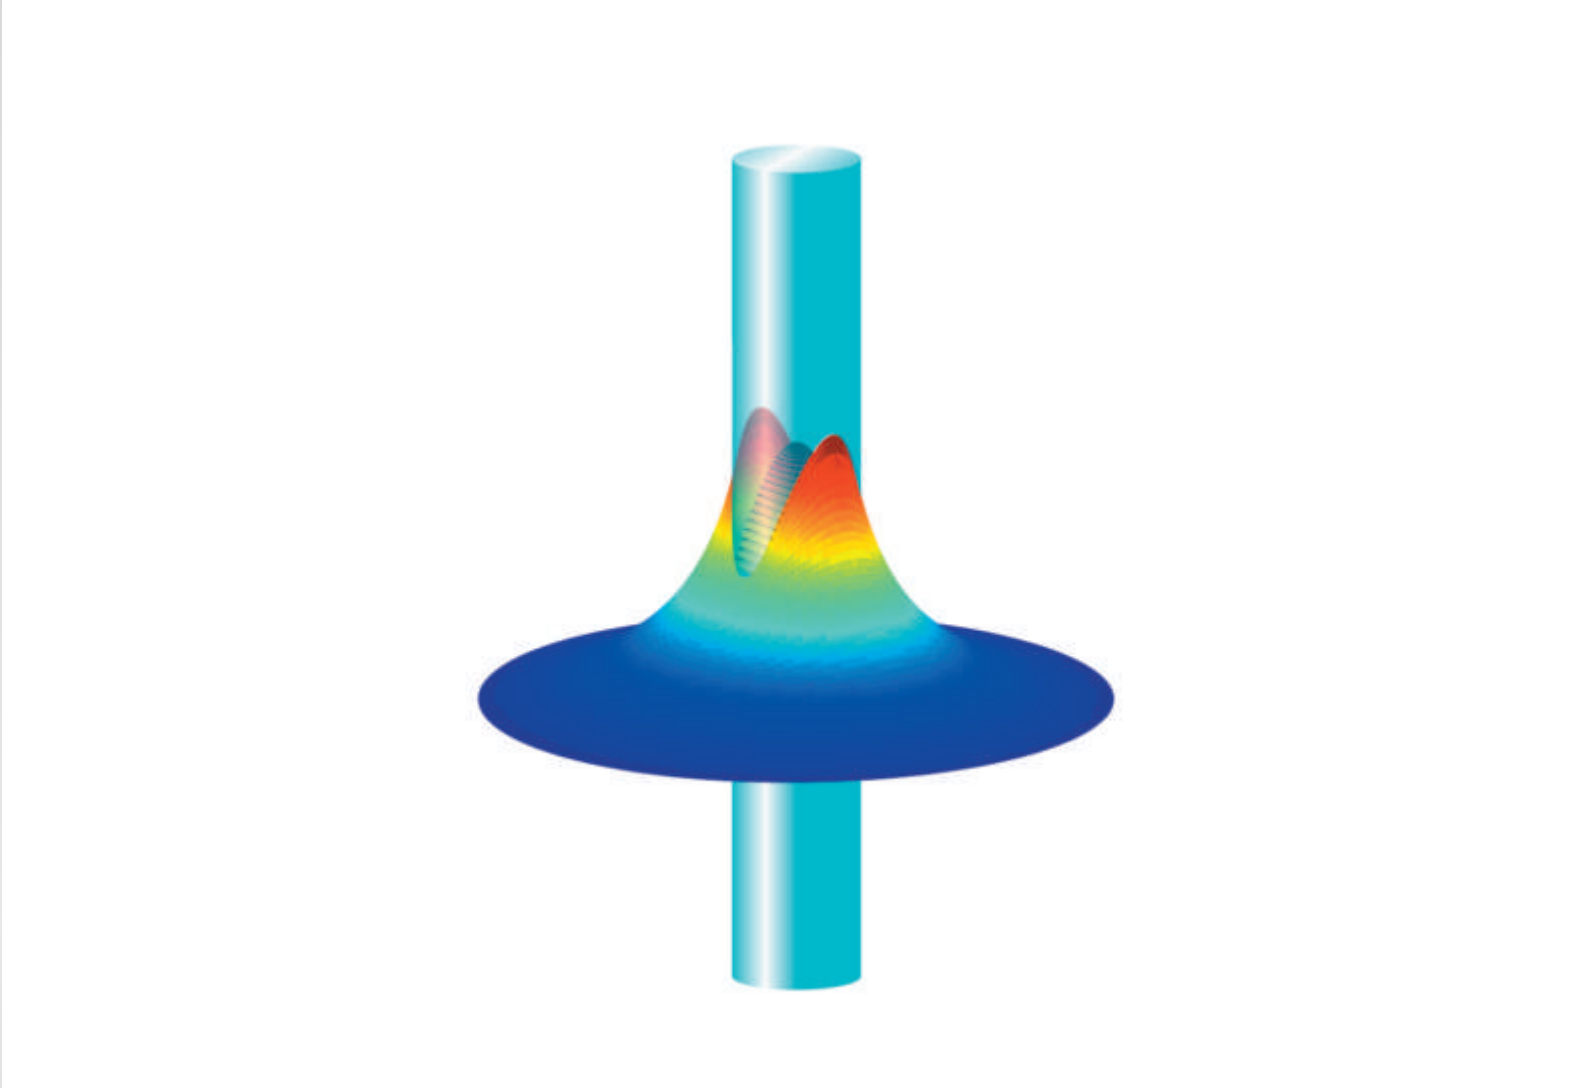

Waveguiding

fraction of power carried in core

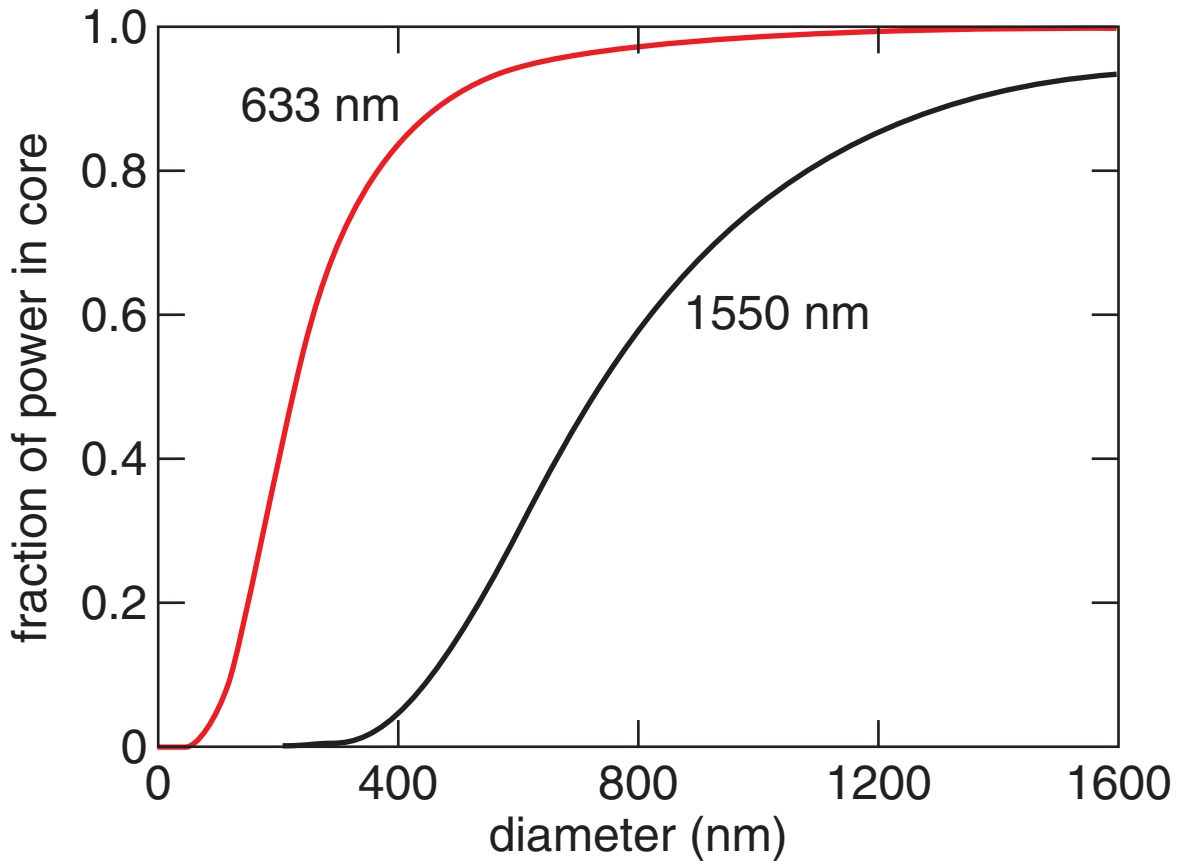

Optical properties

coupling light between nanowires

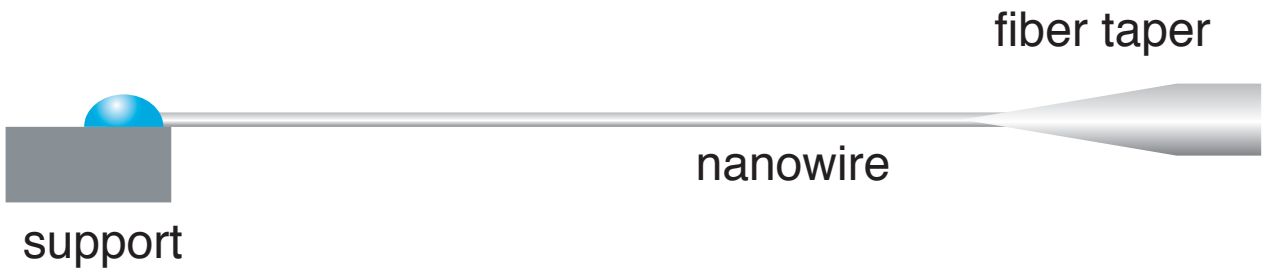

Optical properties

coupling light between nanowires

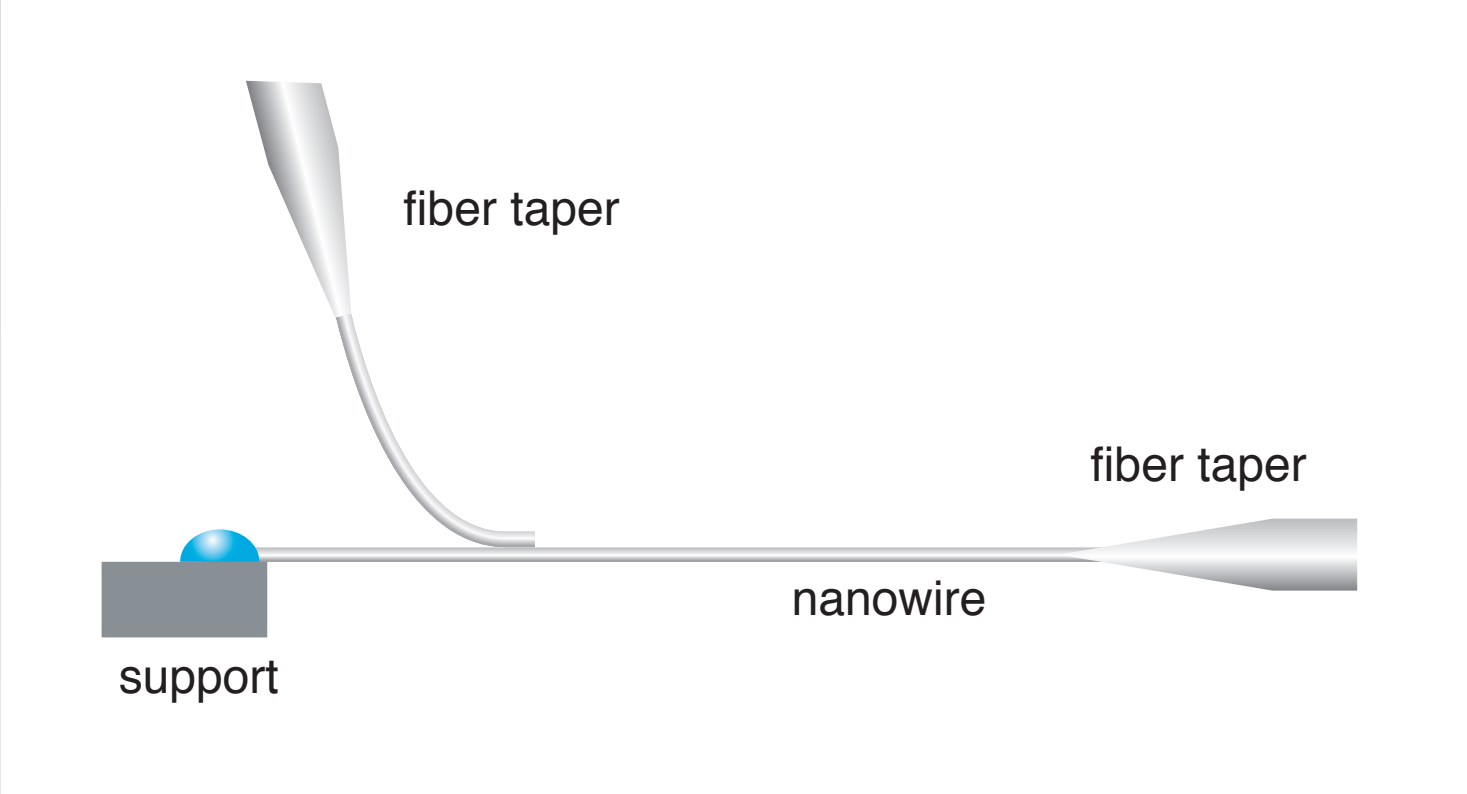

Optical properties

coupling light between nanowires

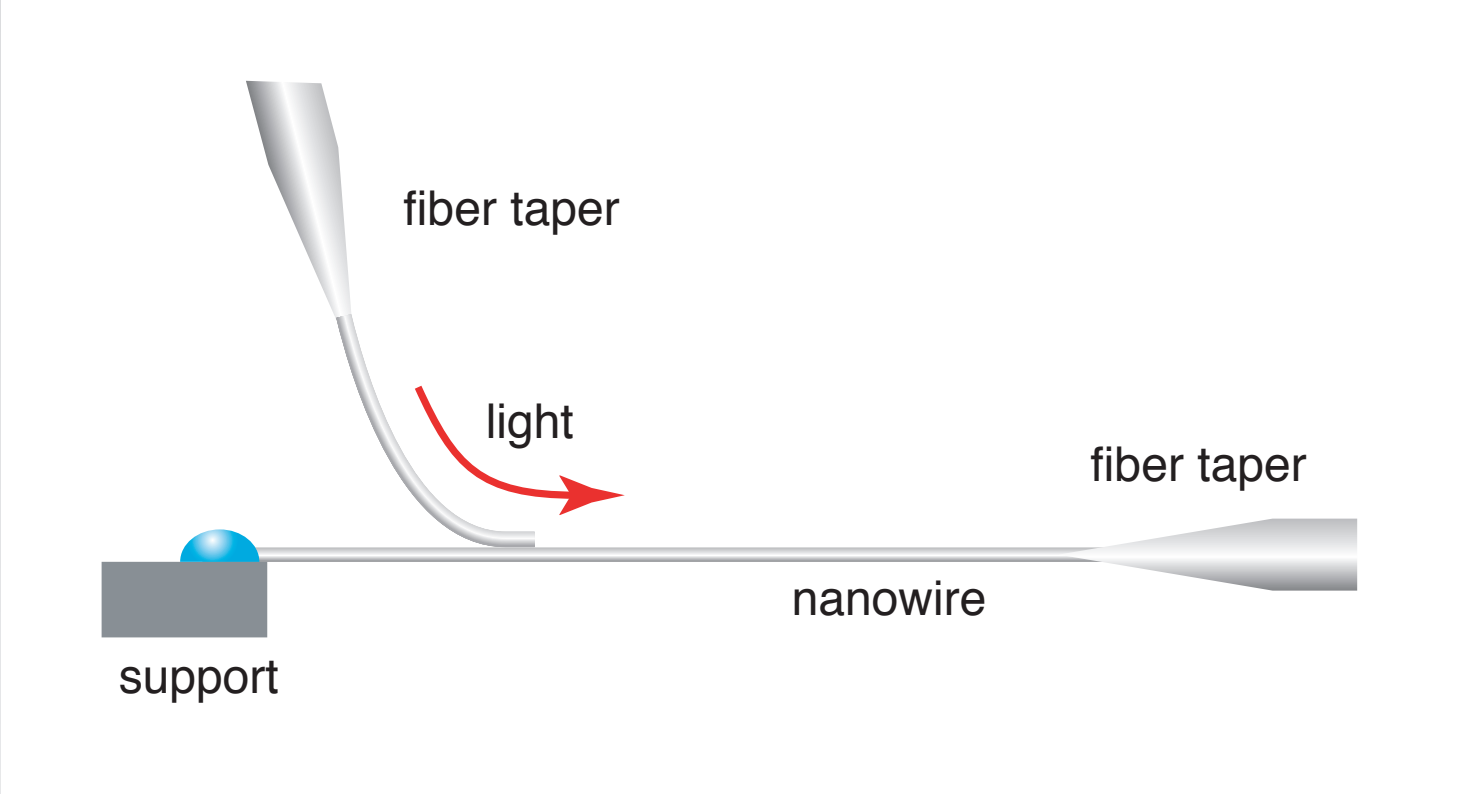

Optical properties

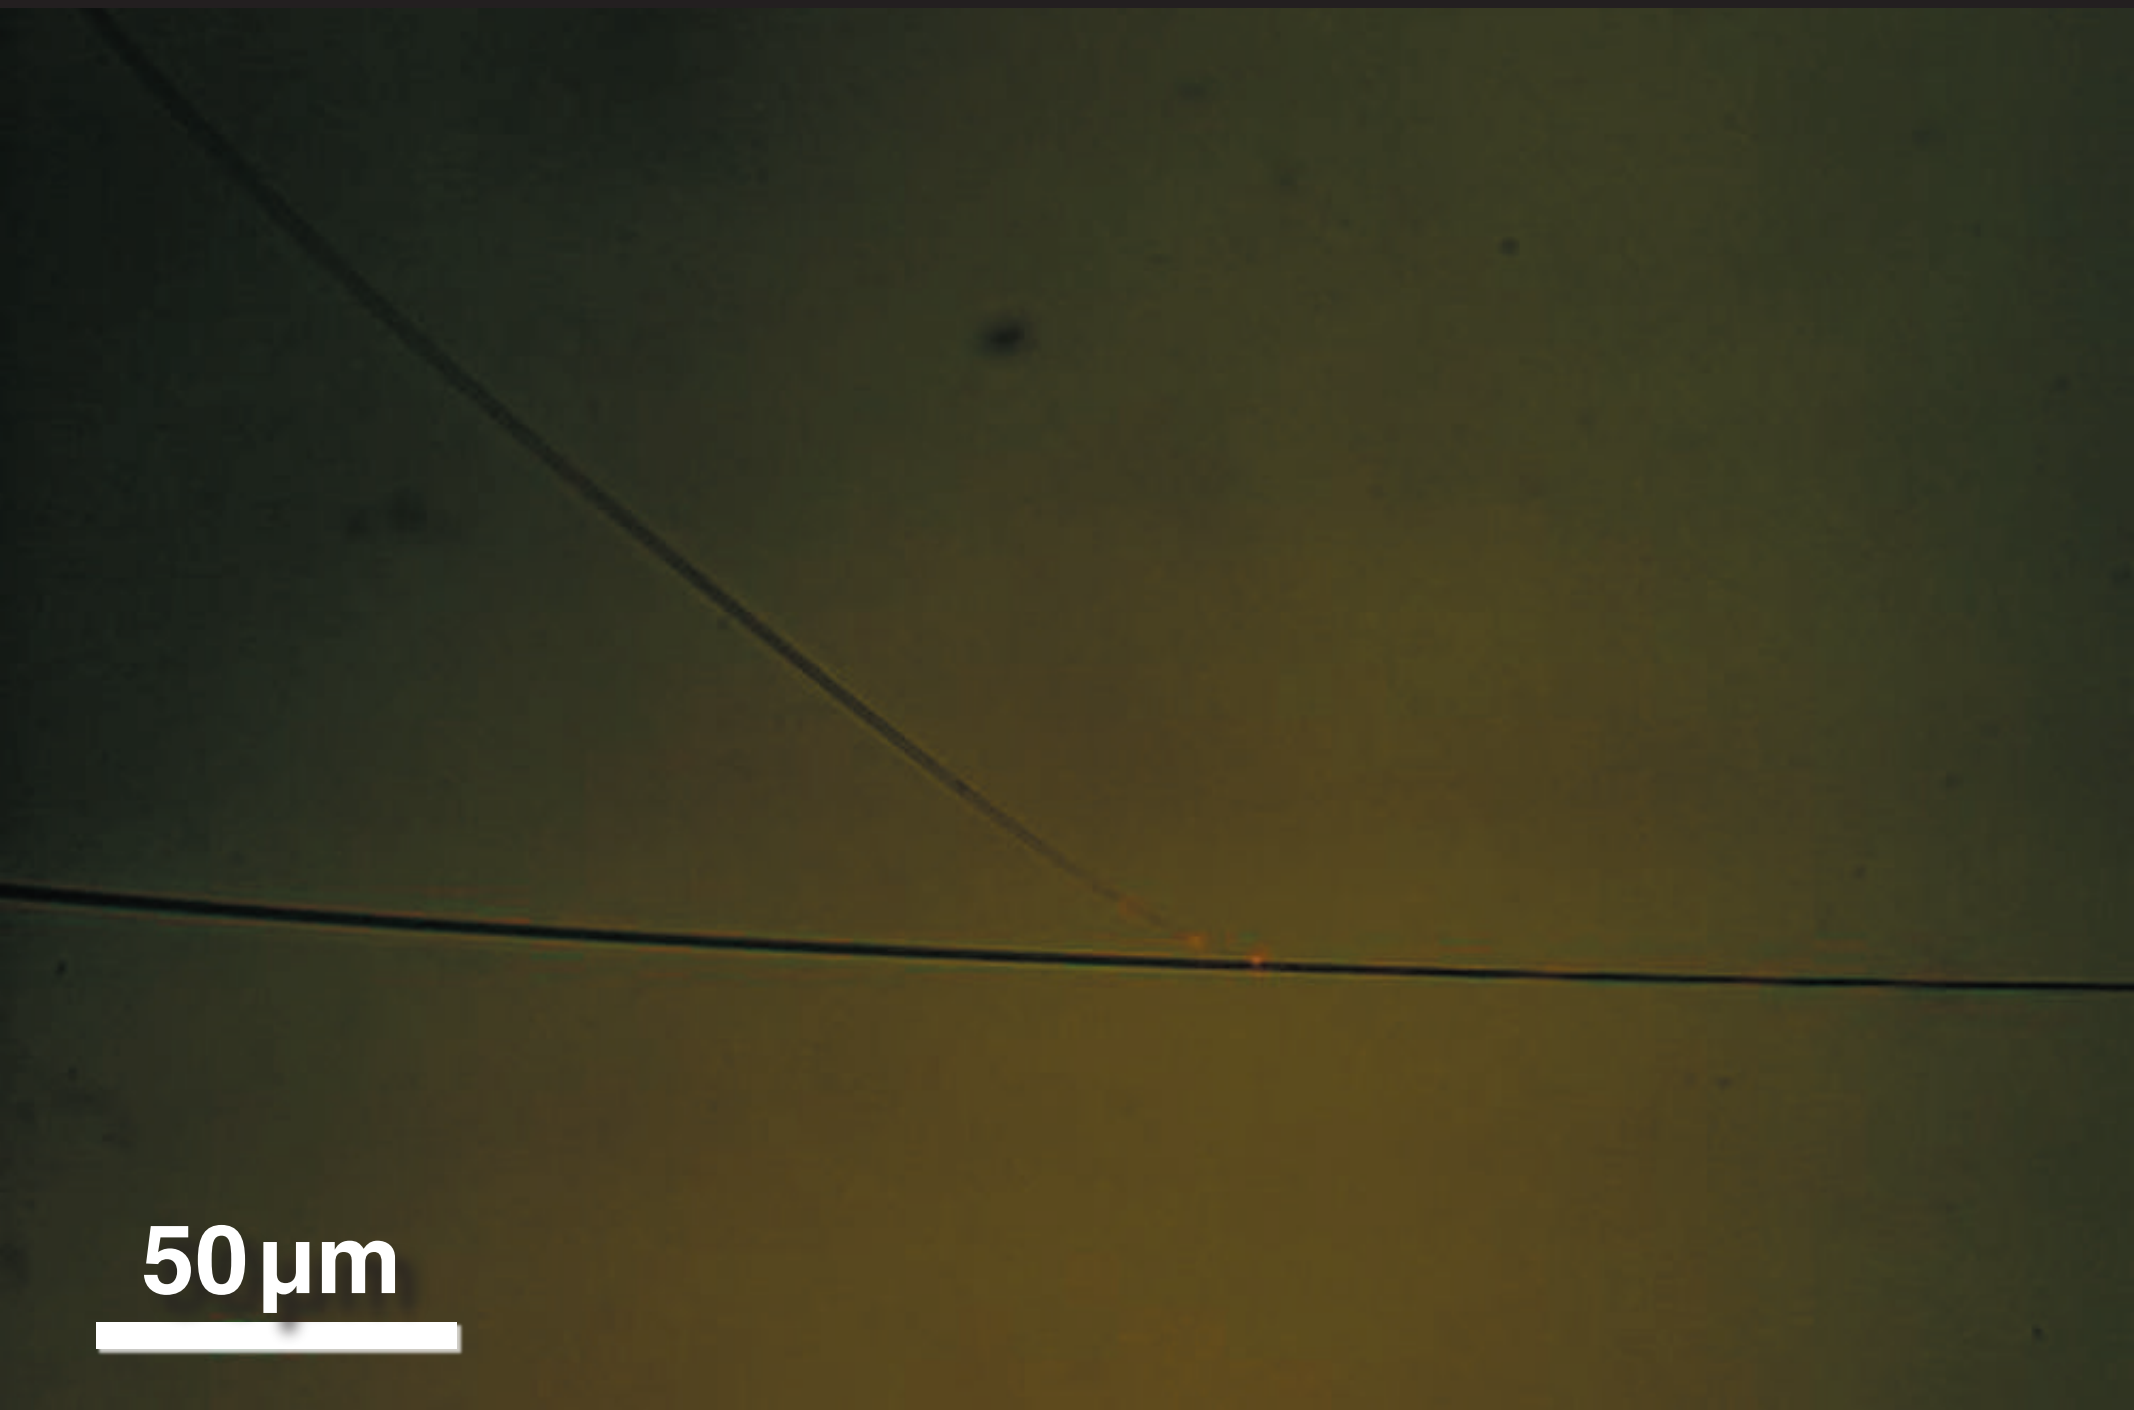

Optical properties

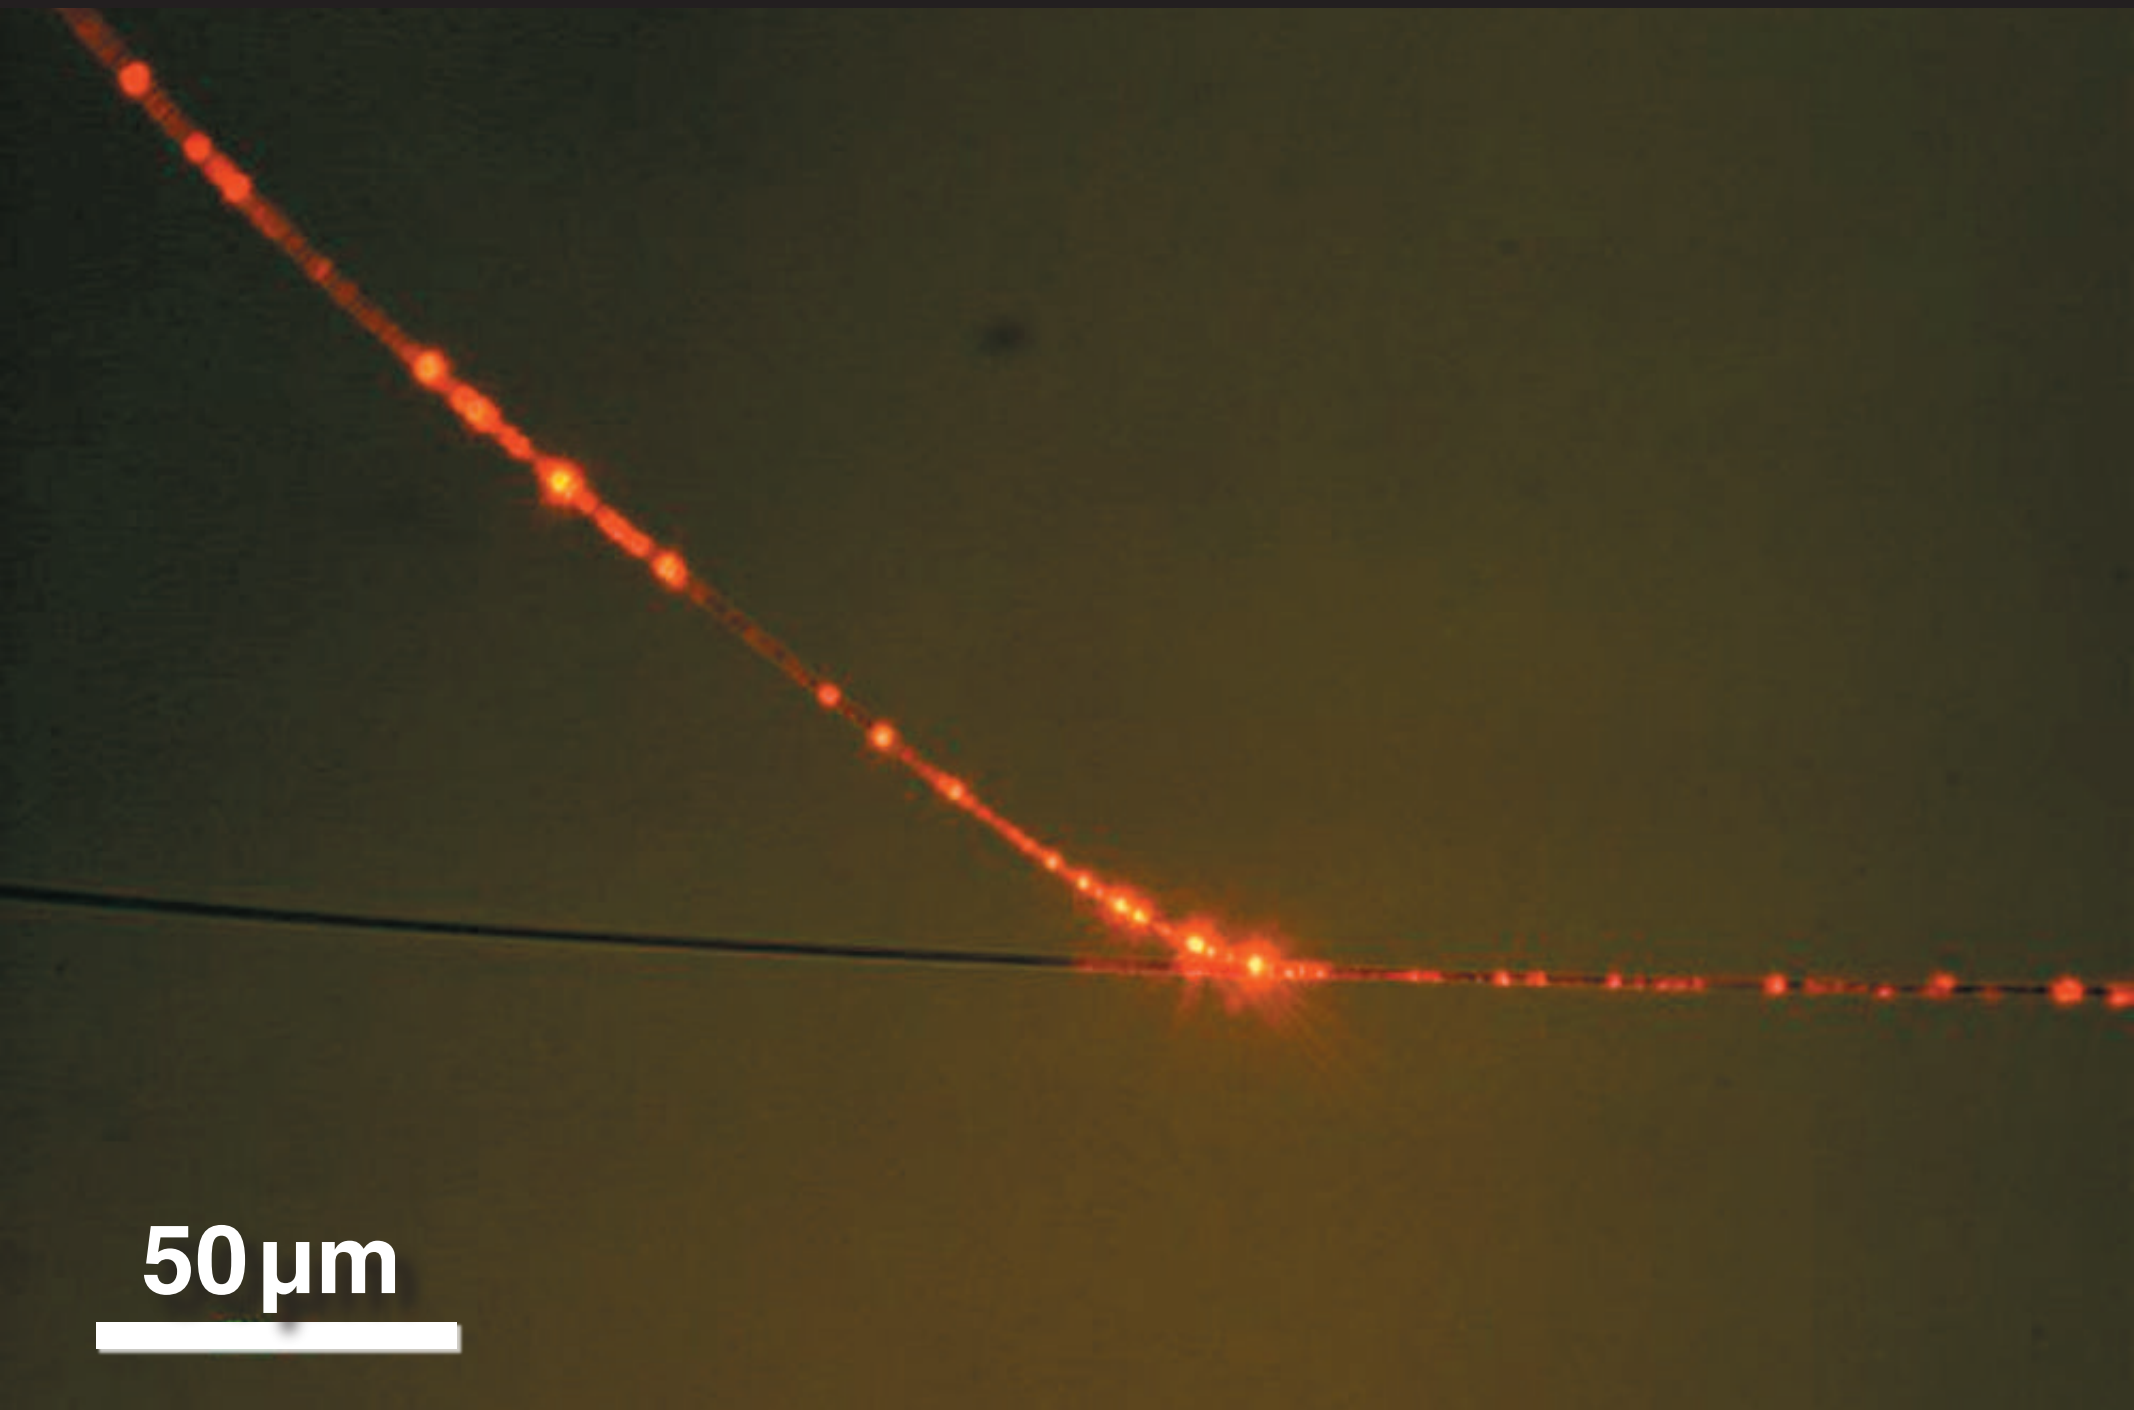

Optical properties

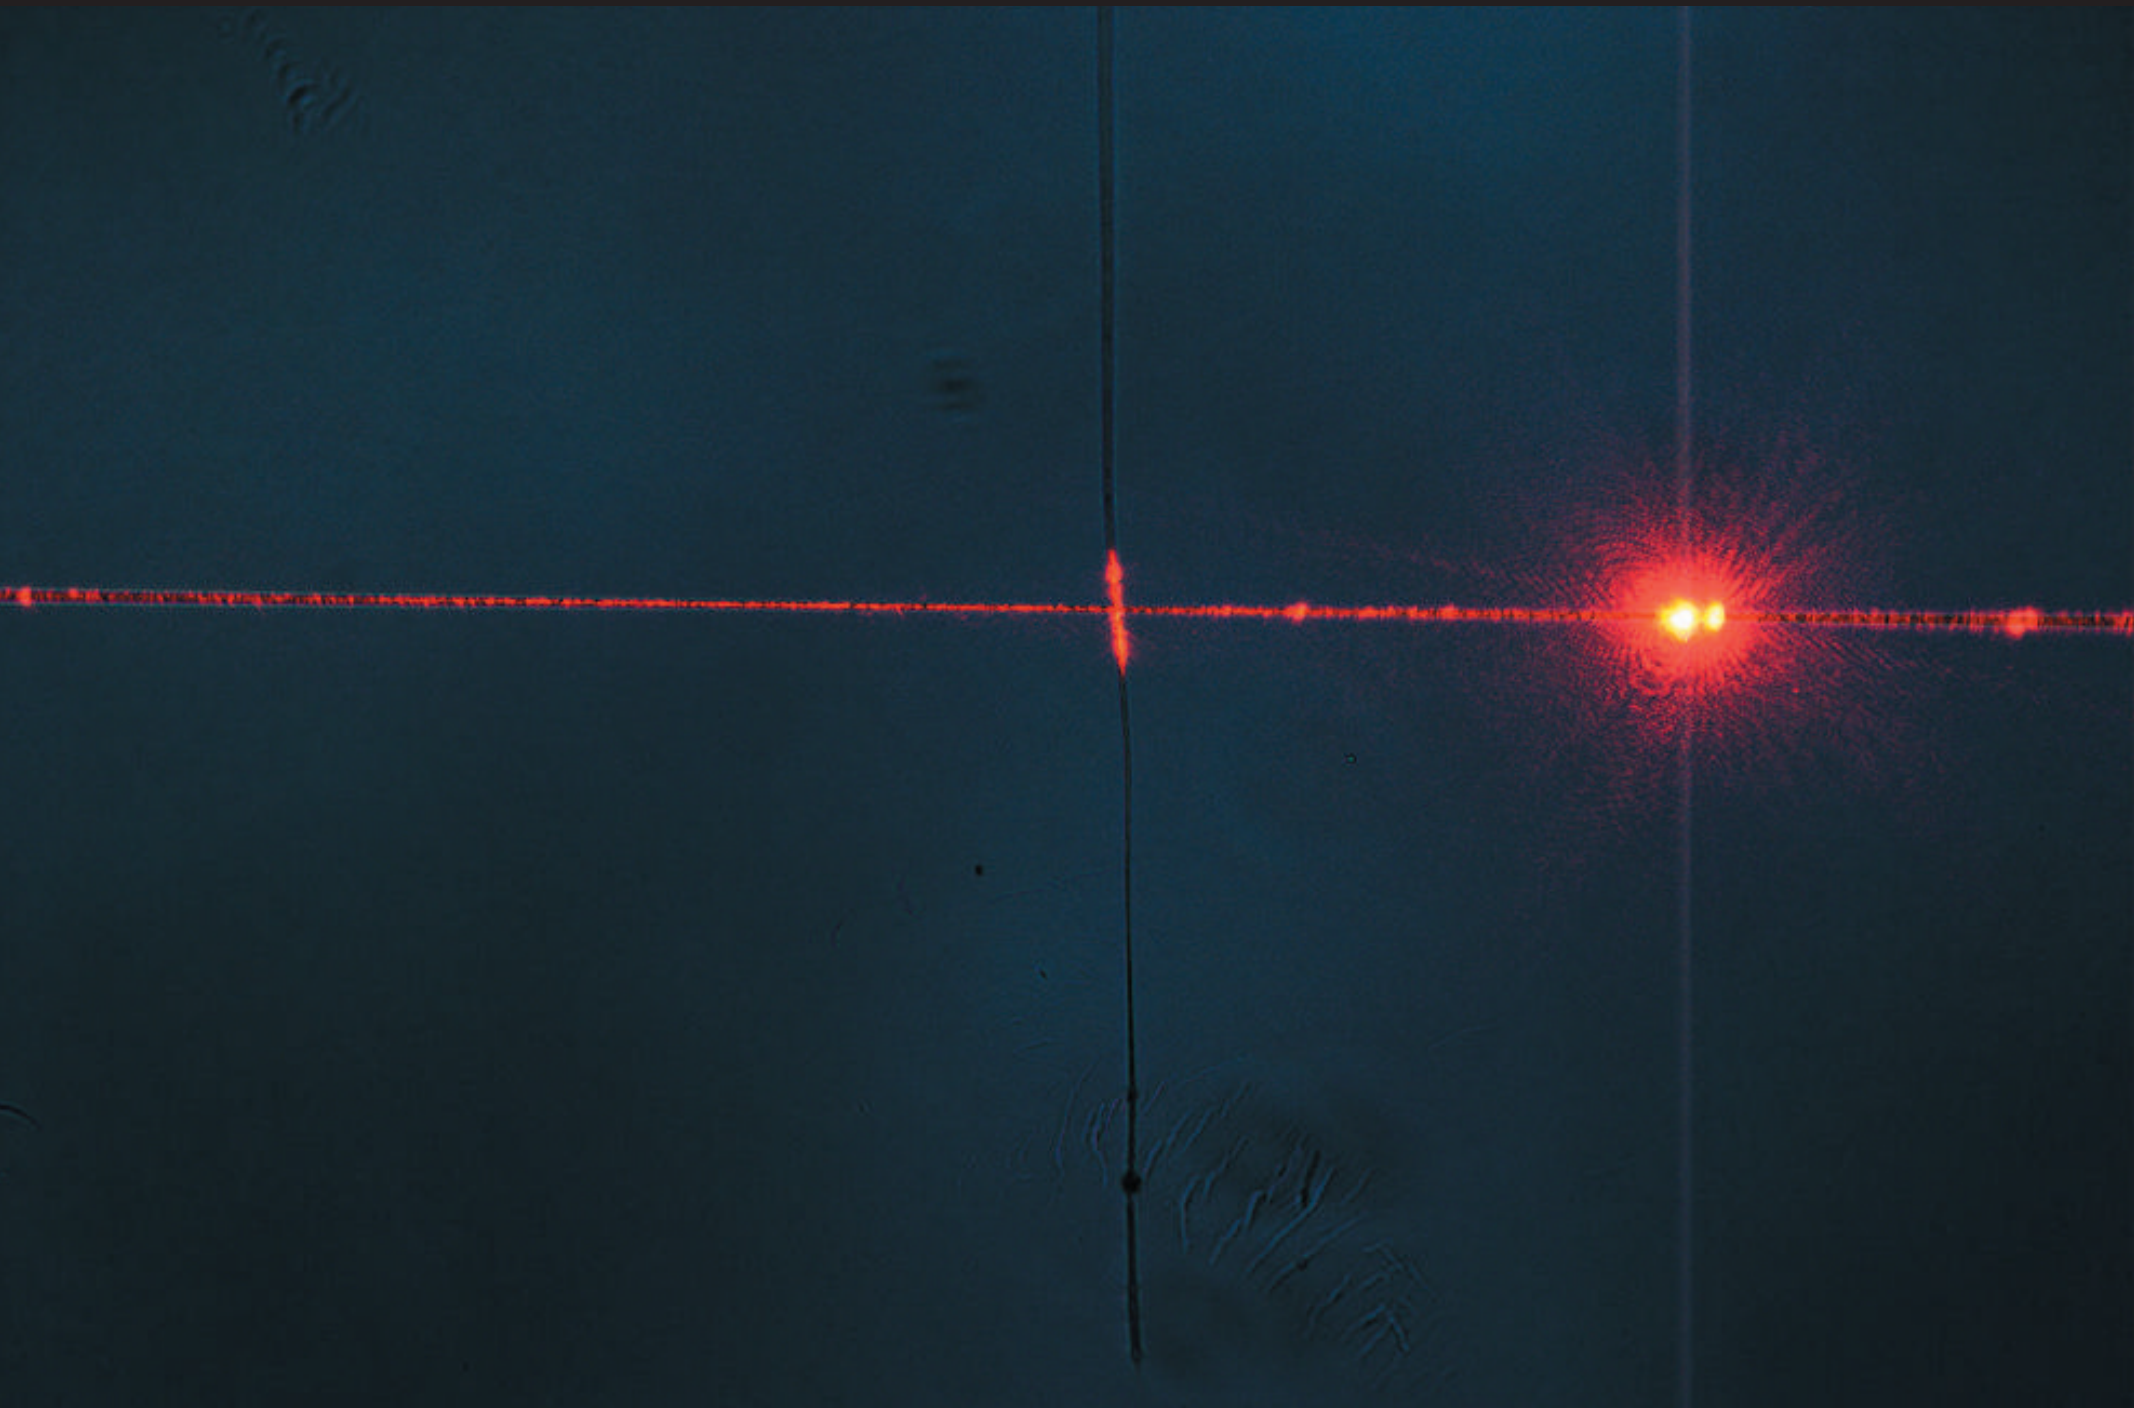

Optical properties

loss measurement

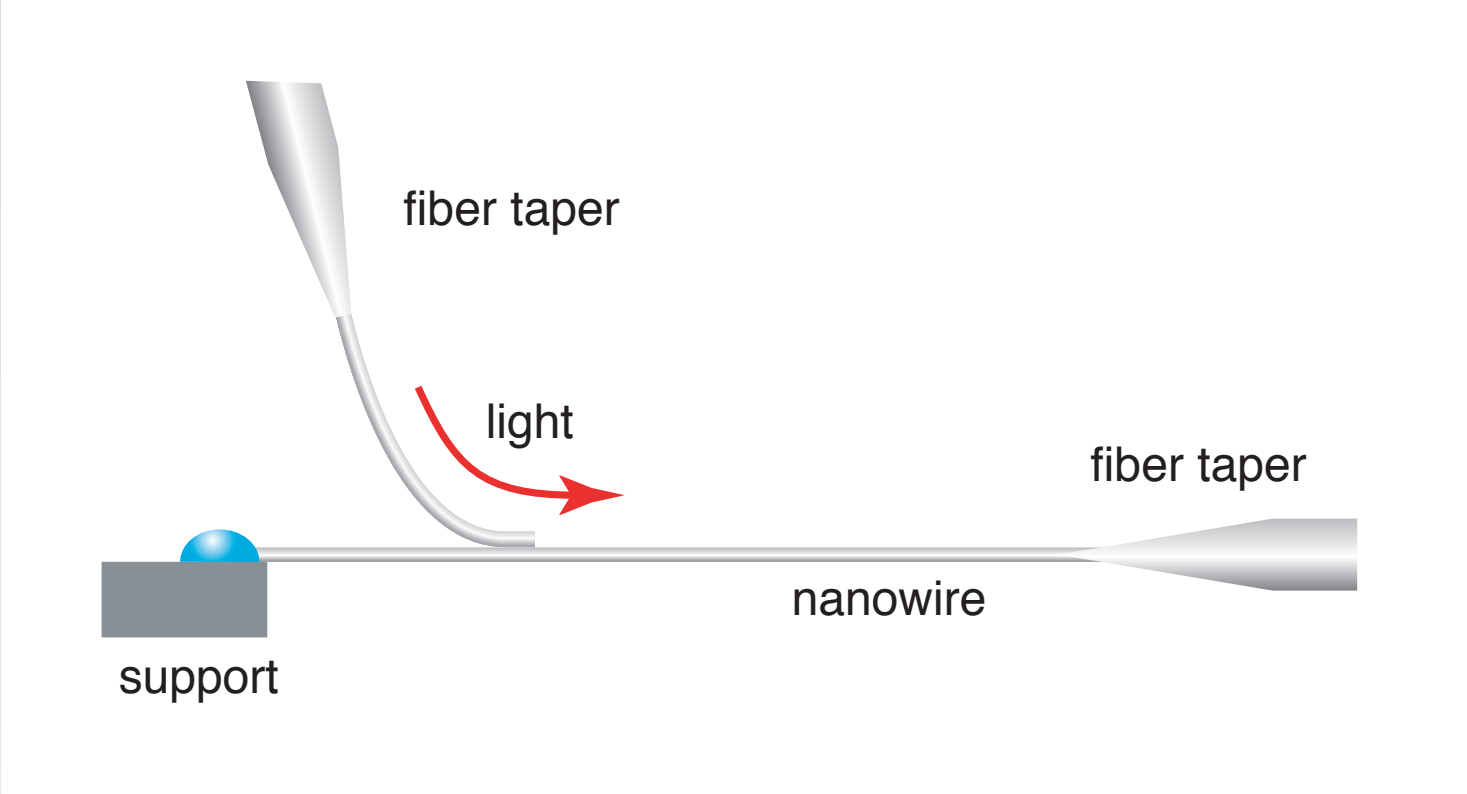

Nature, 426, 816 (2003)

Optical properties

loss measurement

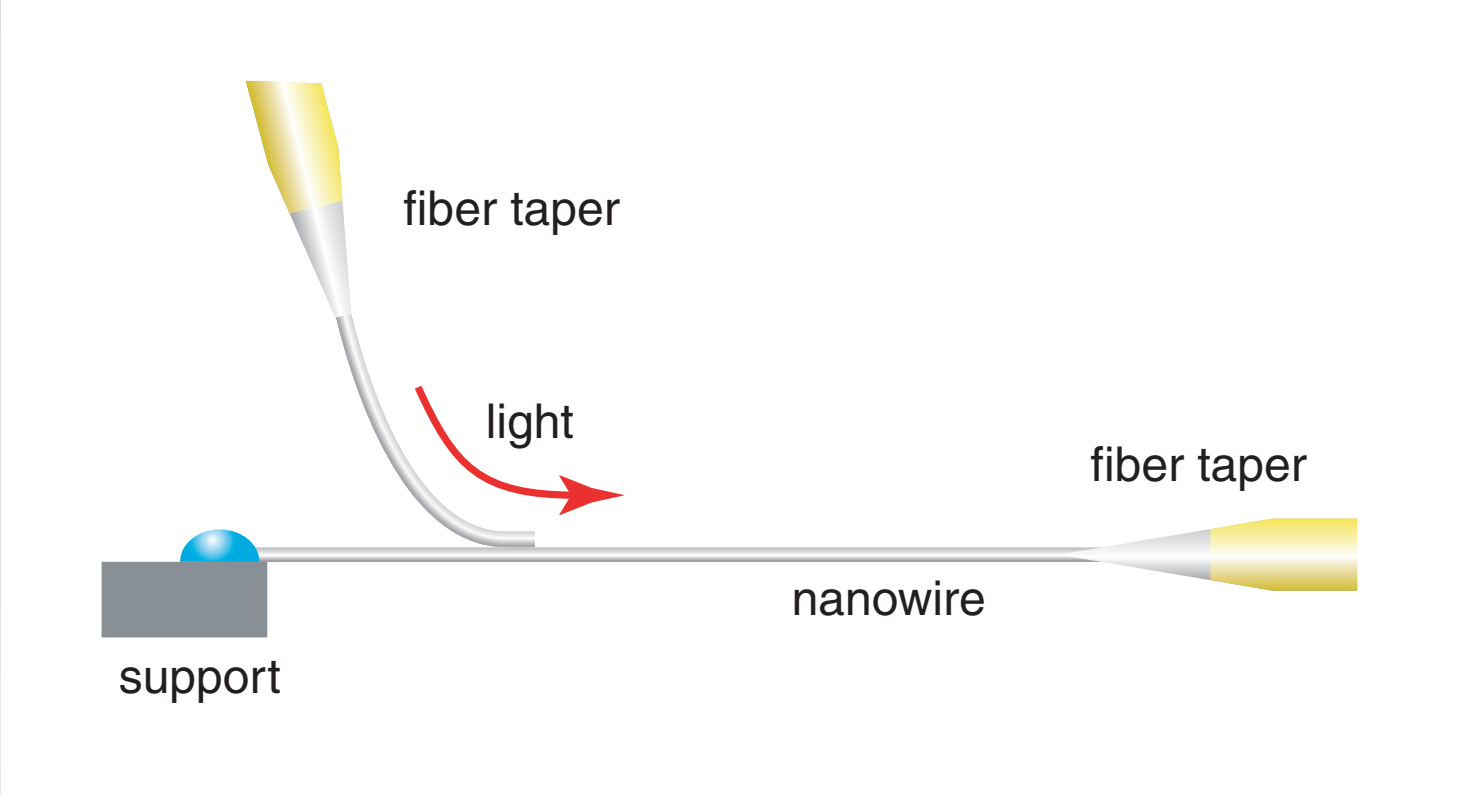

Nature, 426, 816 (2003)

Optical properties

loss measurement

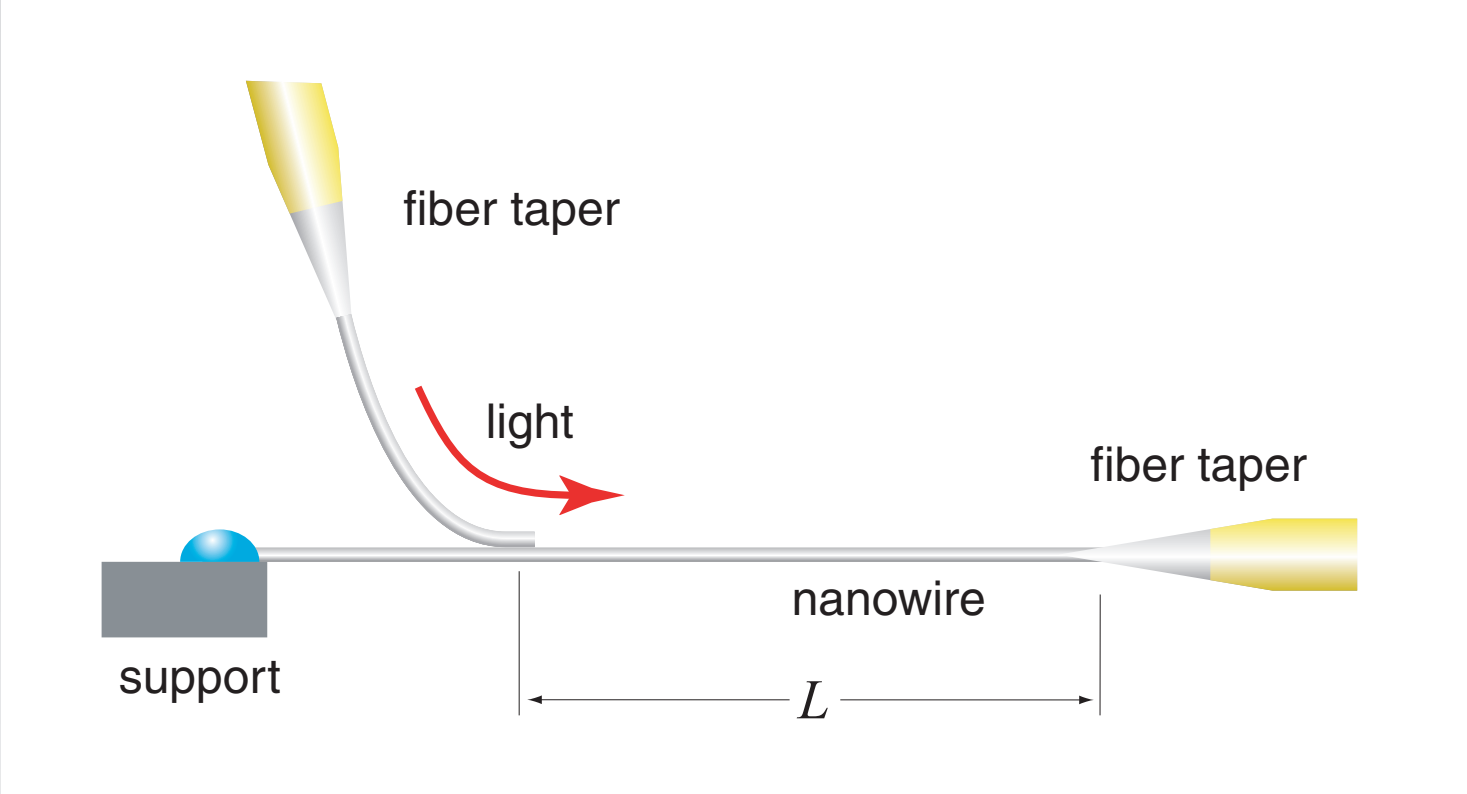

Nature, 426, 816 (2003)

Optical properties

loss measurement

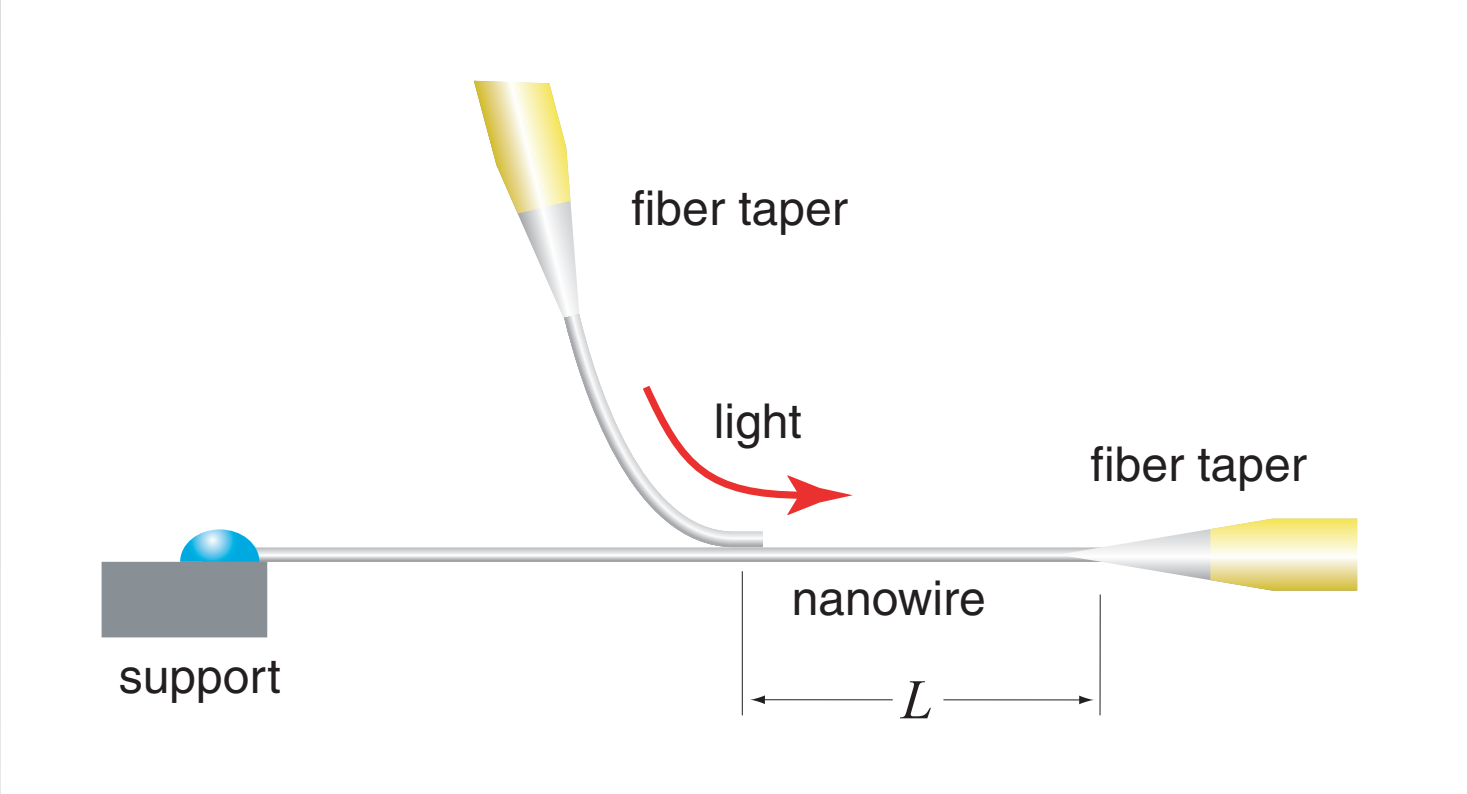

Nature, 426, 816 (2003)

Optical properties

loss measurement

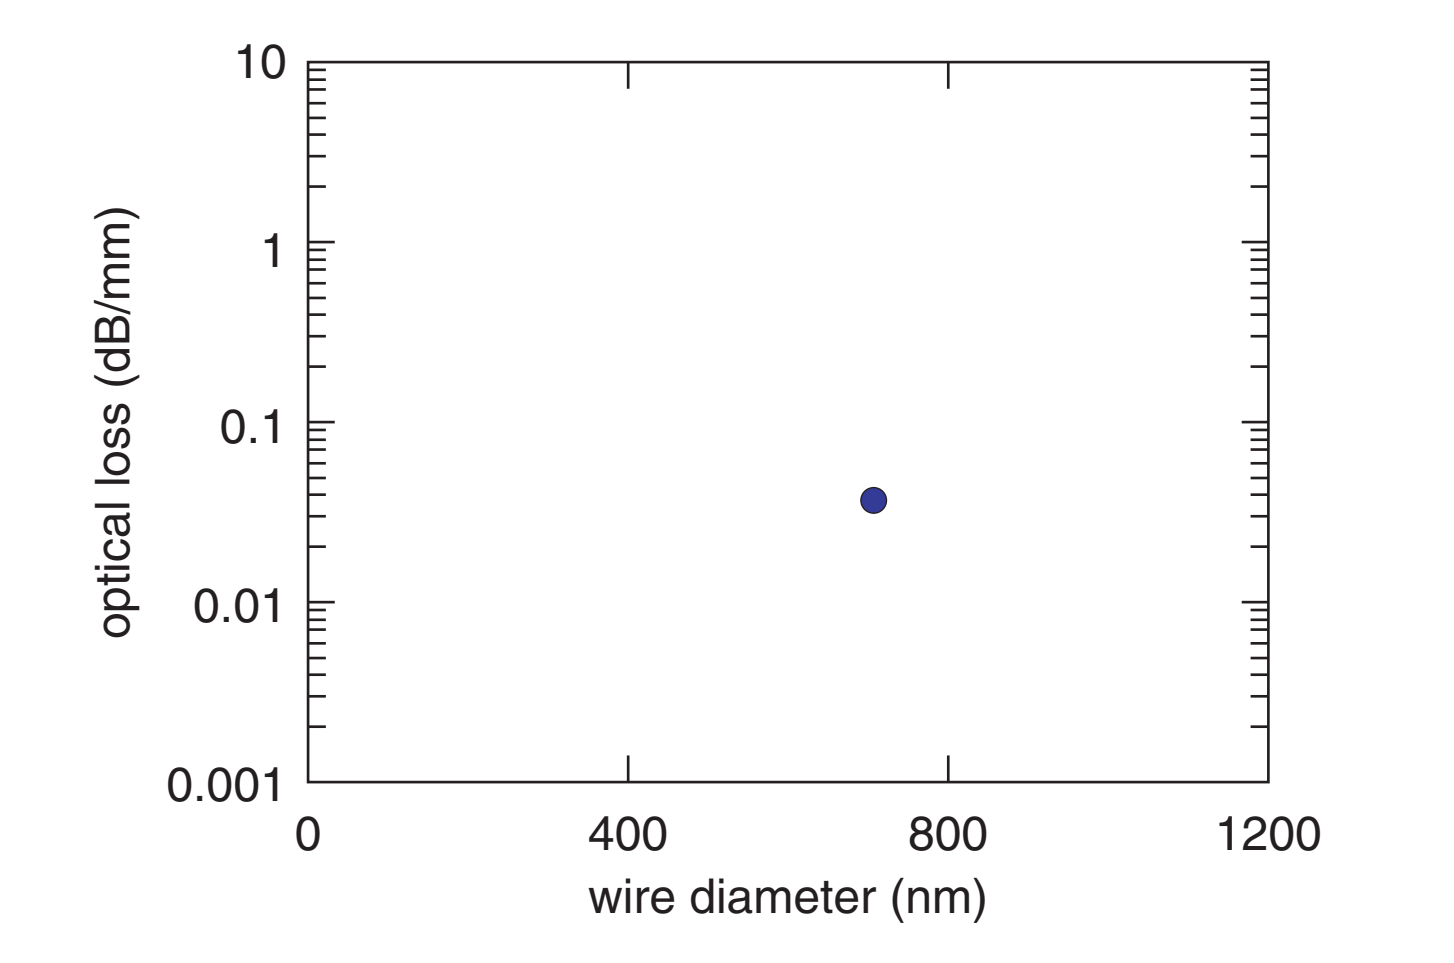

Nature, 426, 816 (2003)

Optical properties

loss measurement

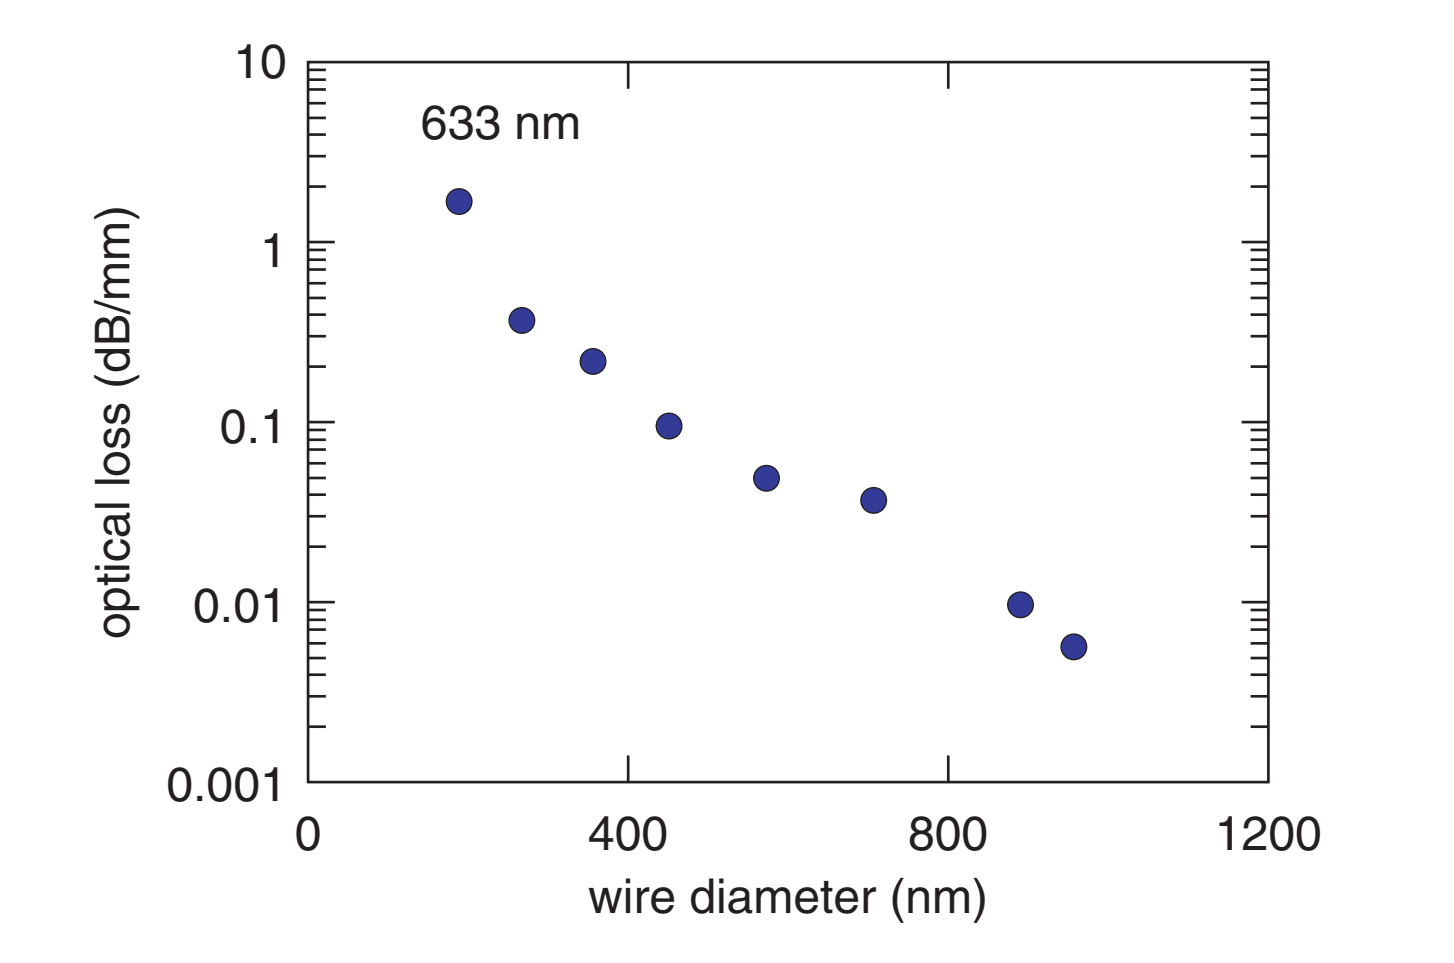

Nature, 426, 816 (2003)

Optical properties

loss measurement

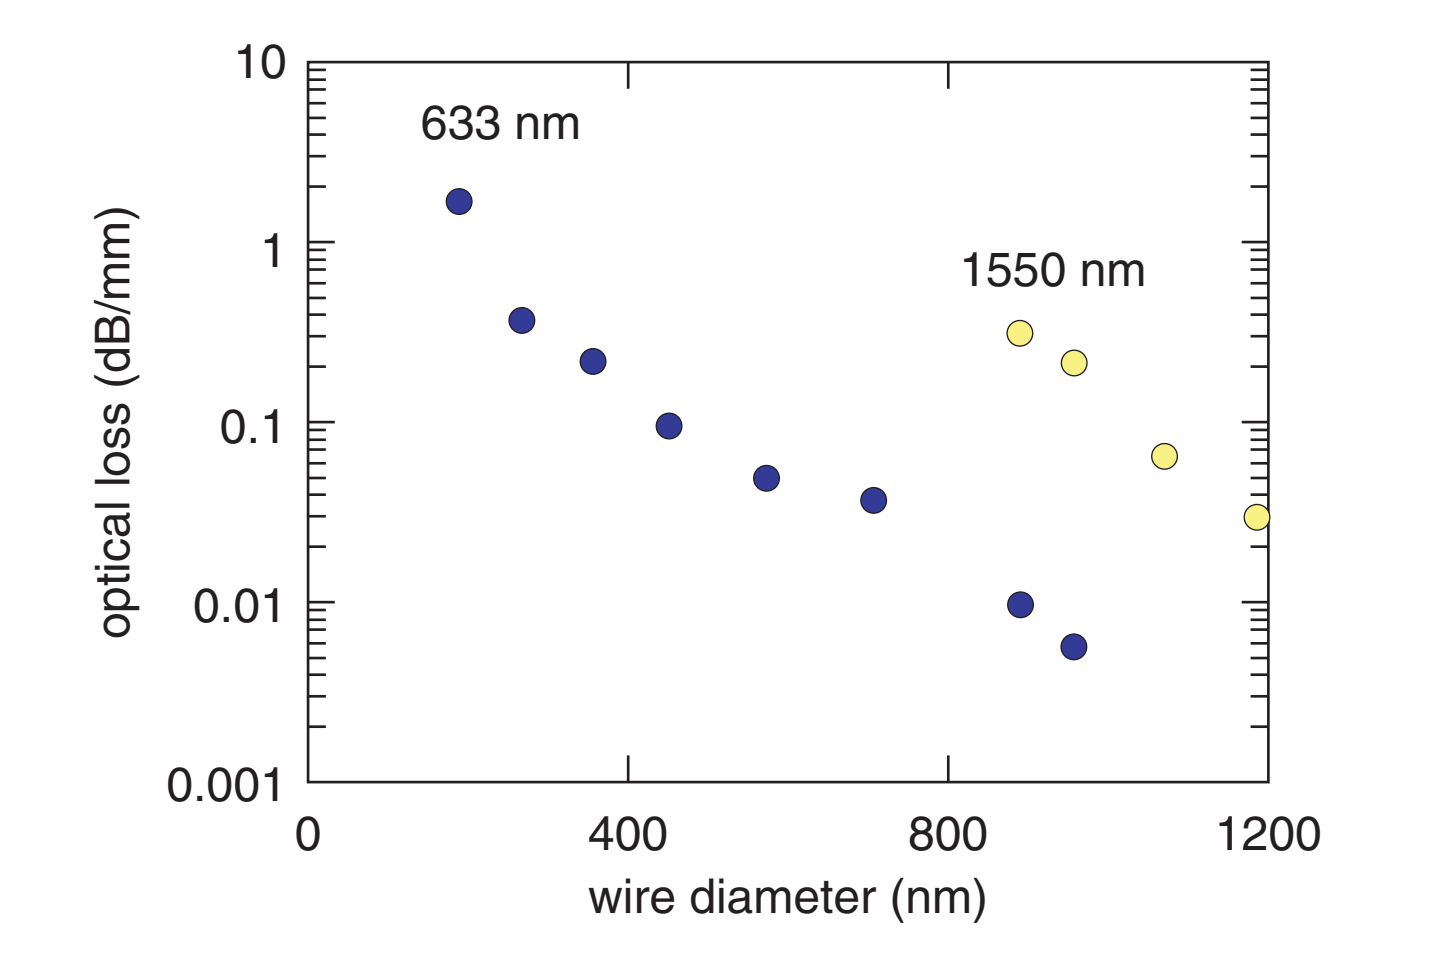

Nature, 426, 816 (2003)

Optical properties

loss a single-mode diameter < 0.1 dB/mm

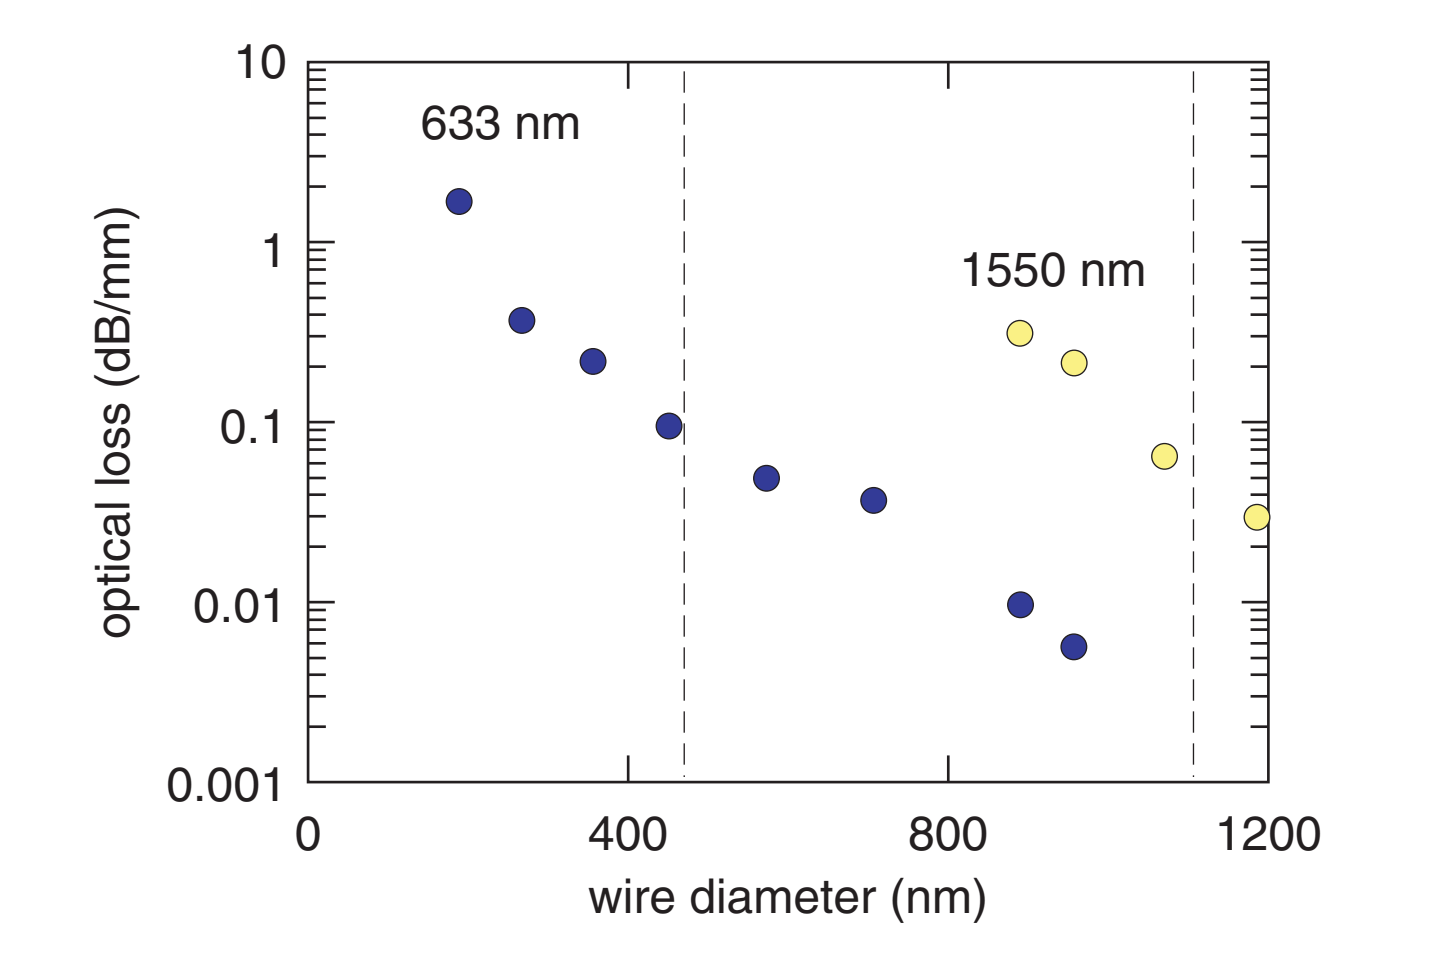

Nature, 426, 816 (2003)

Optical properties

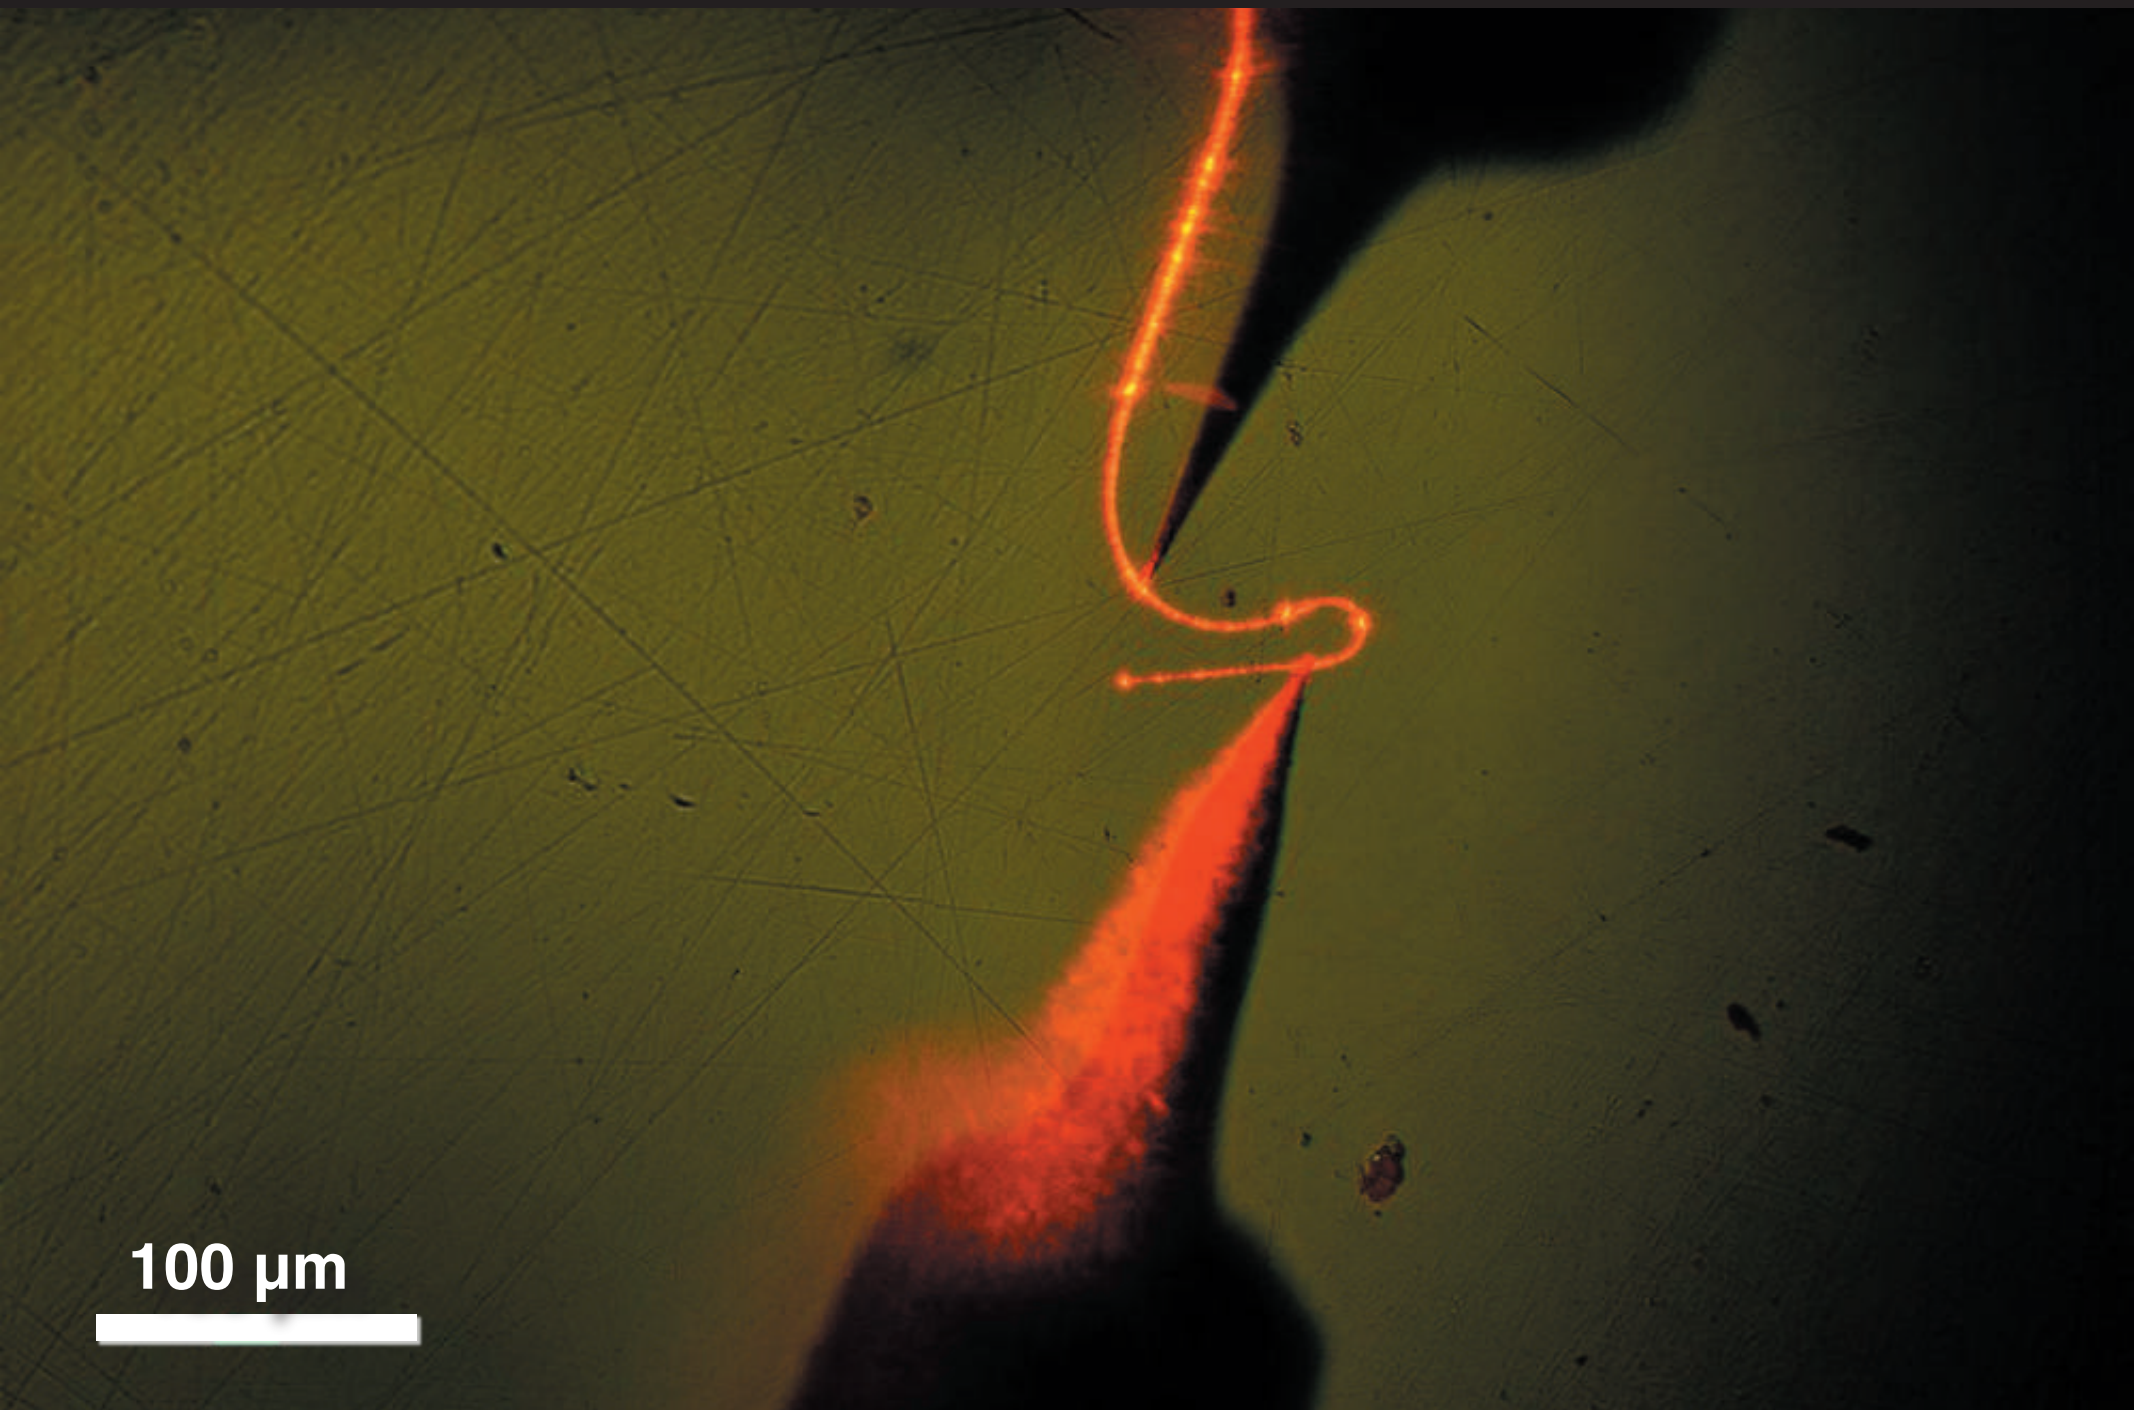

Optical properties

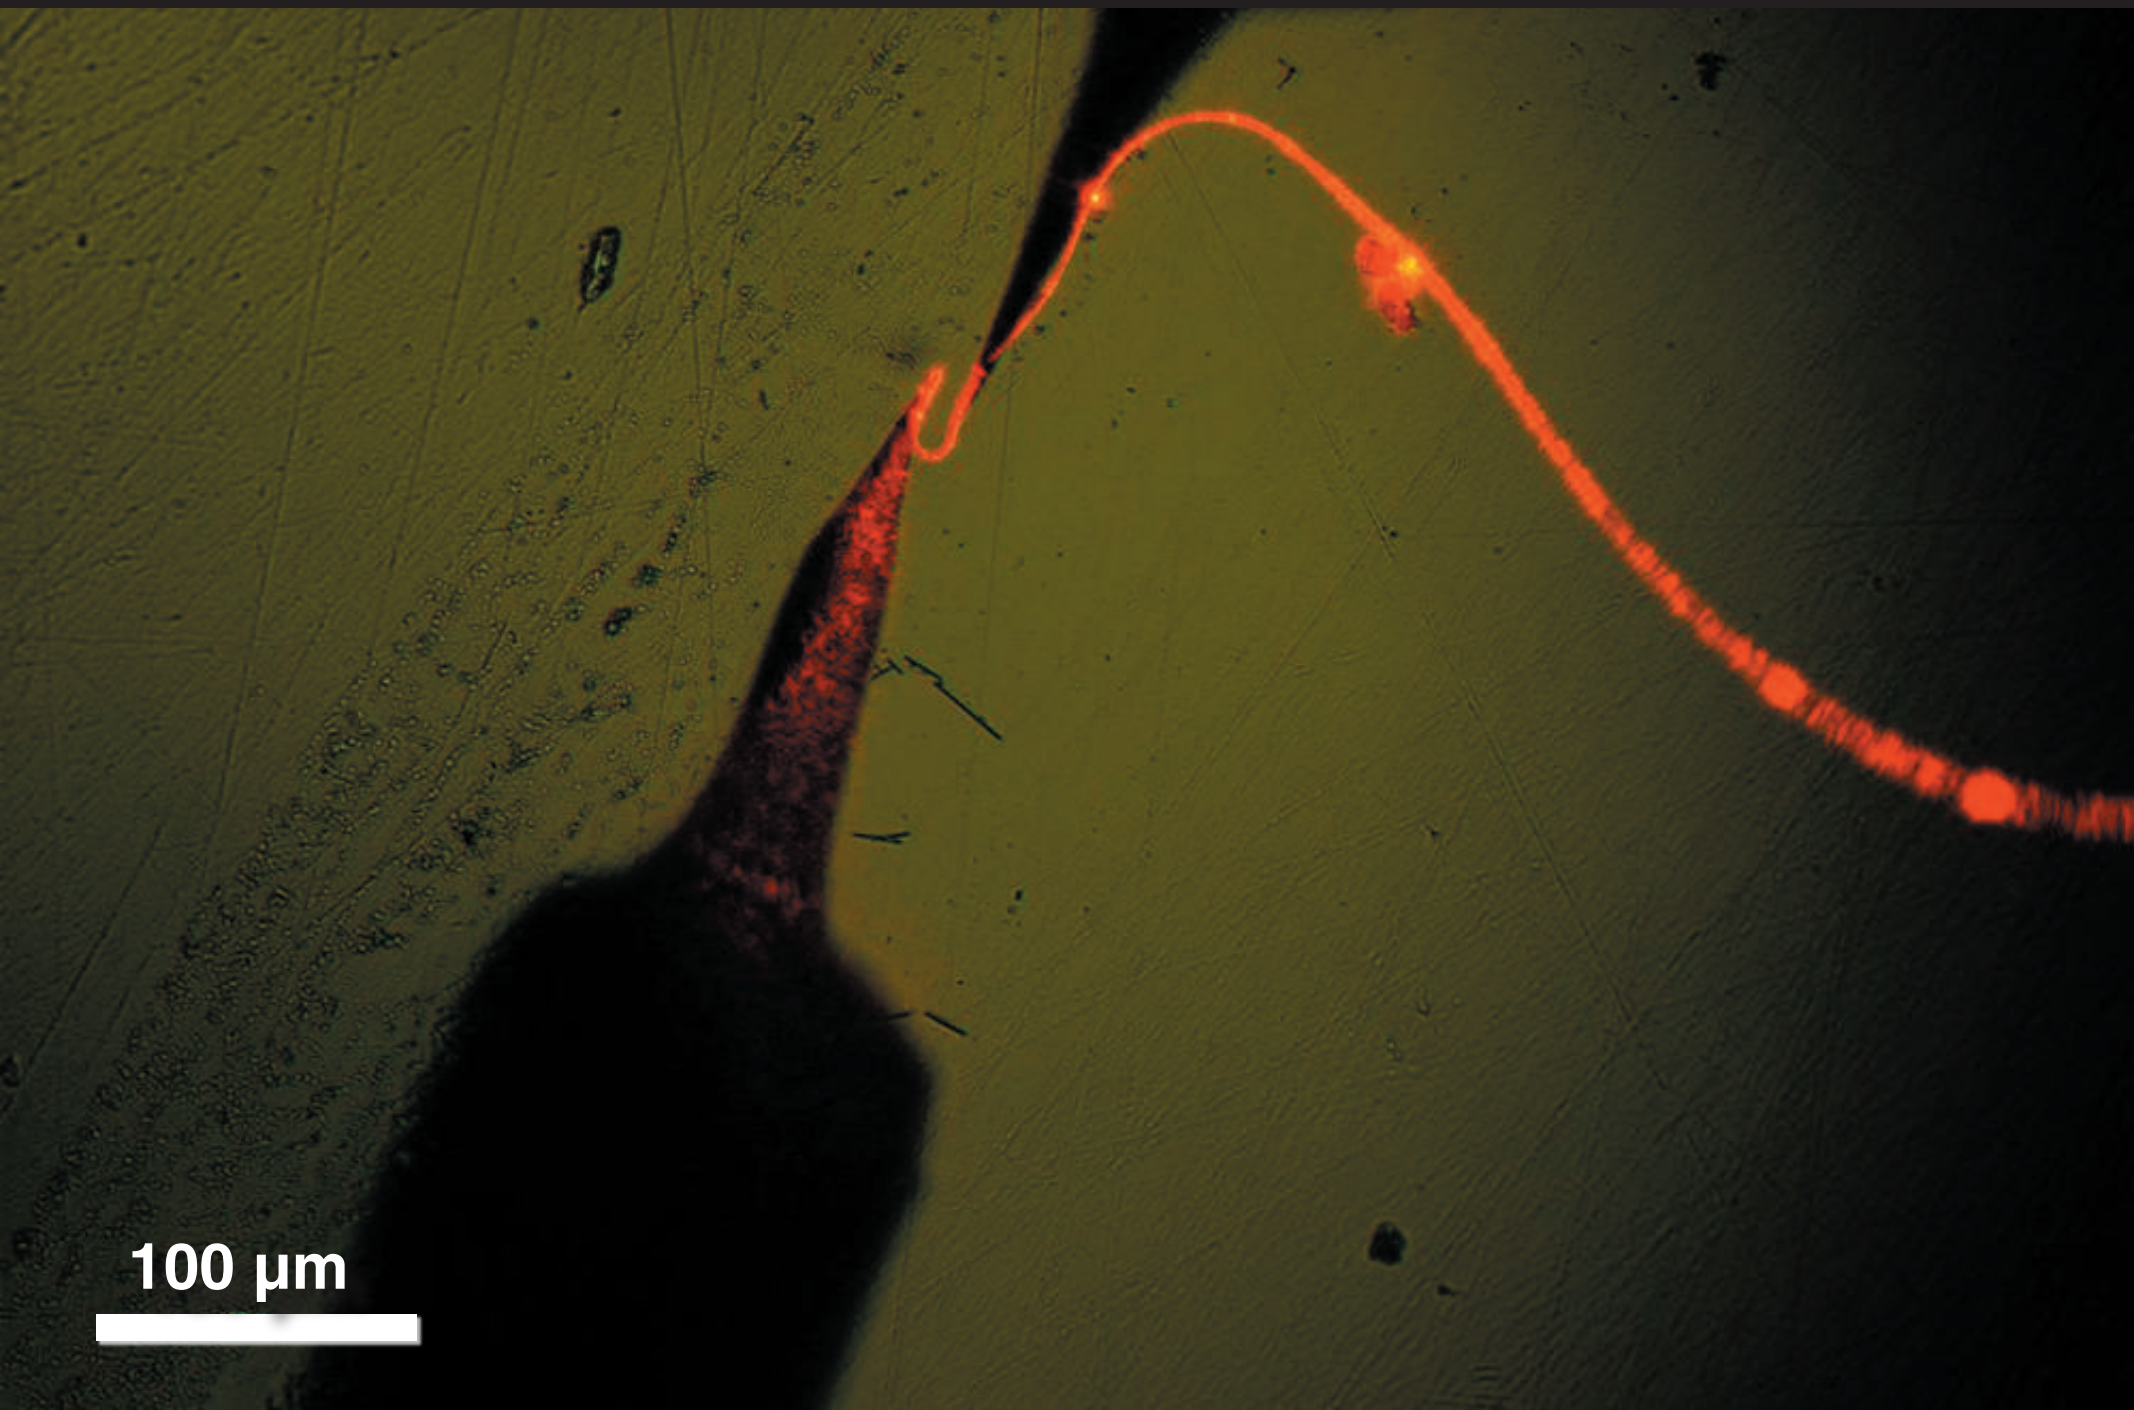

Optical properties

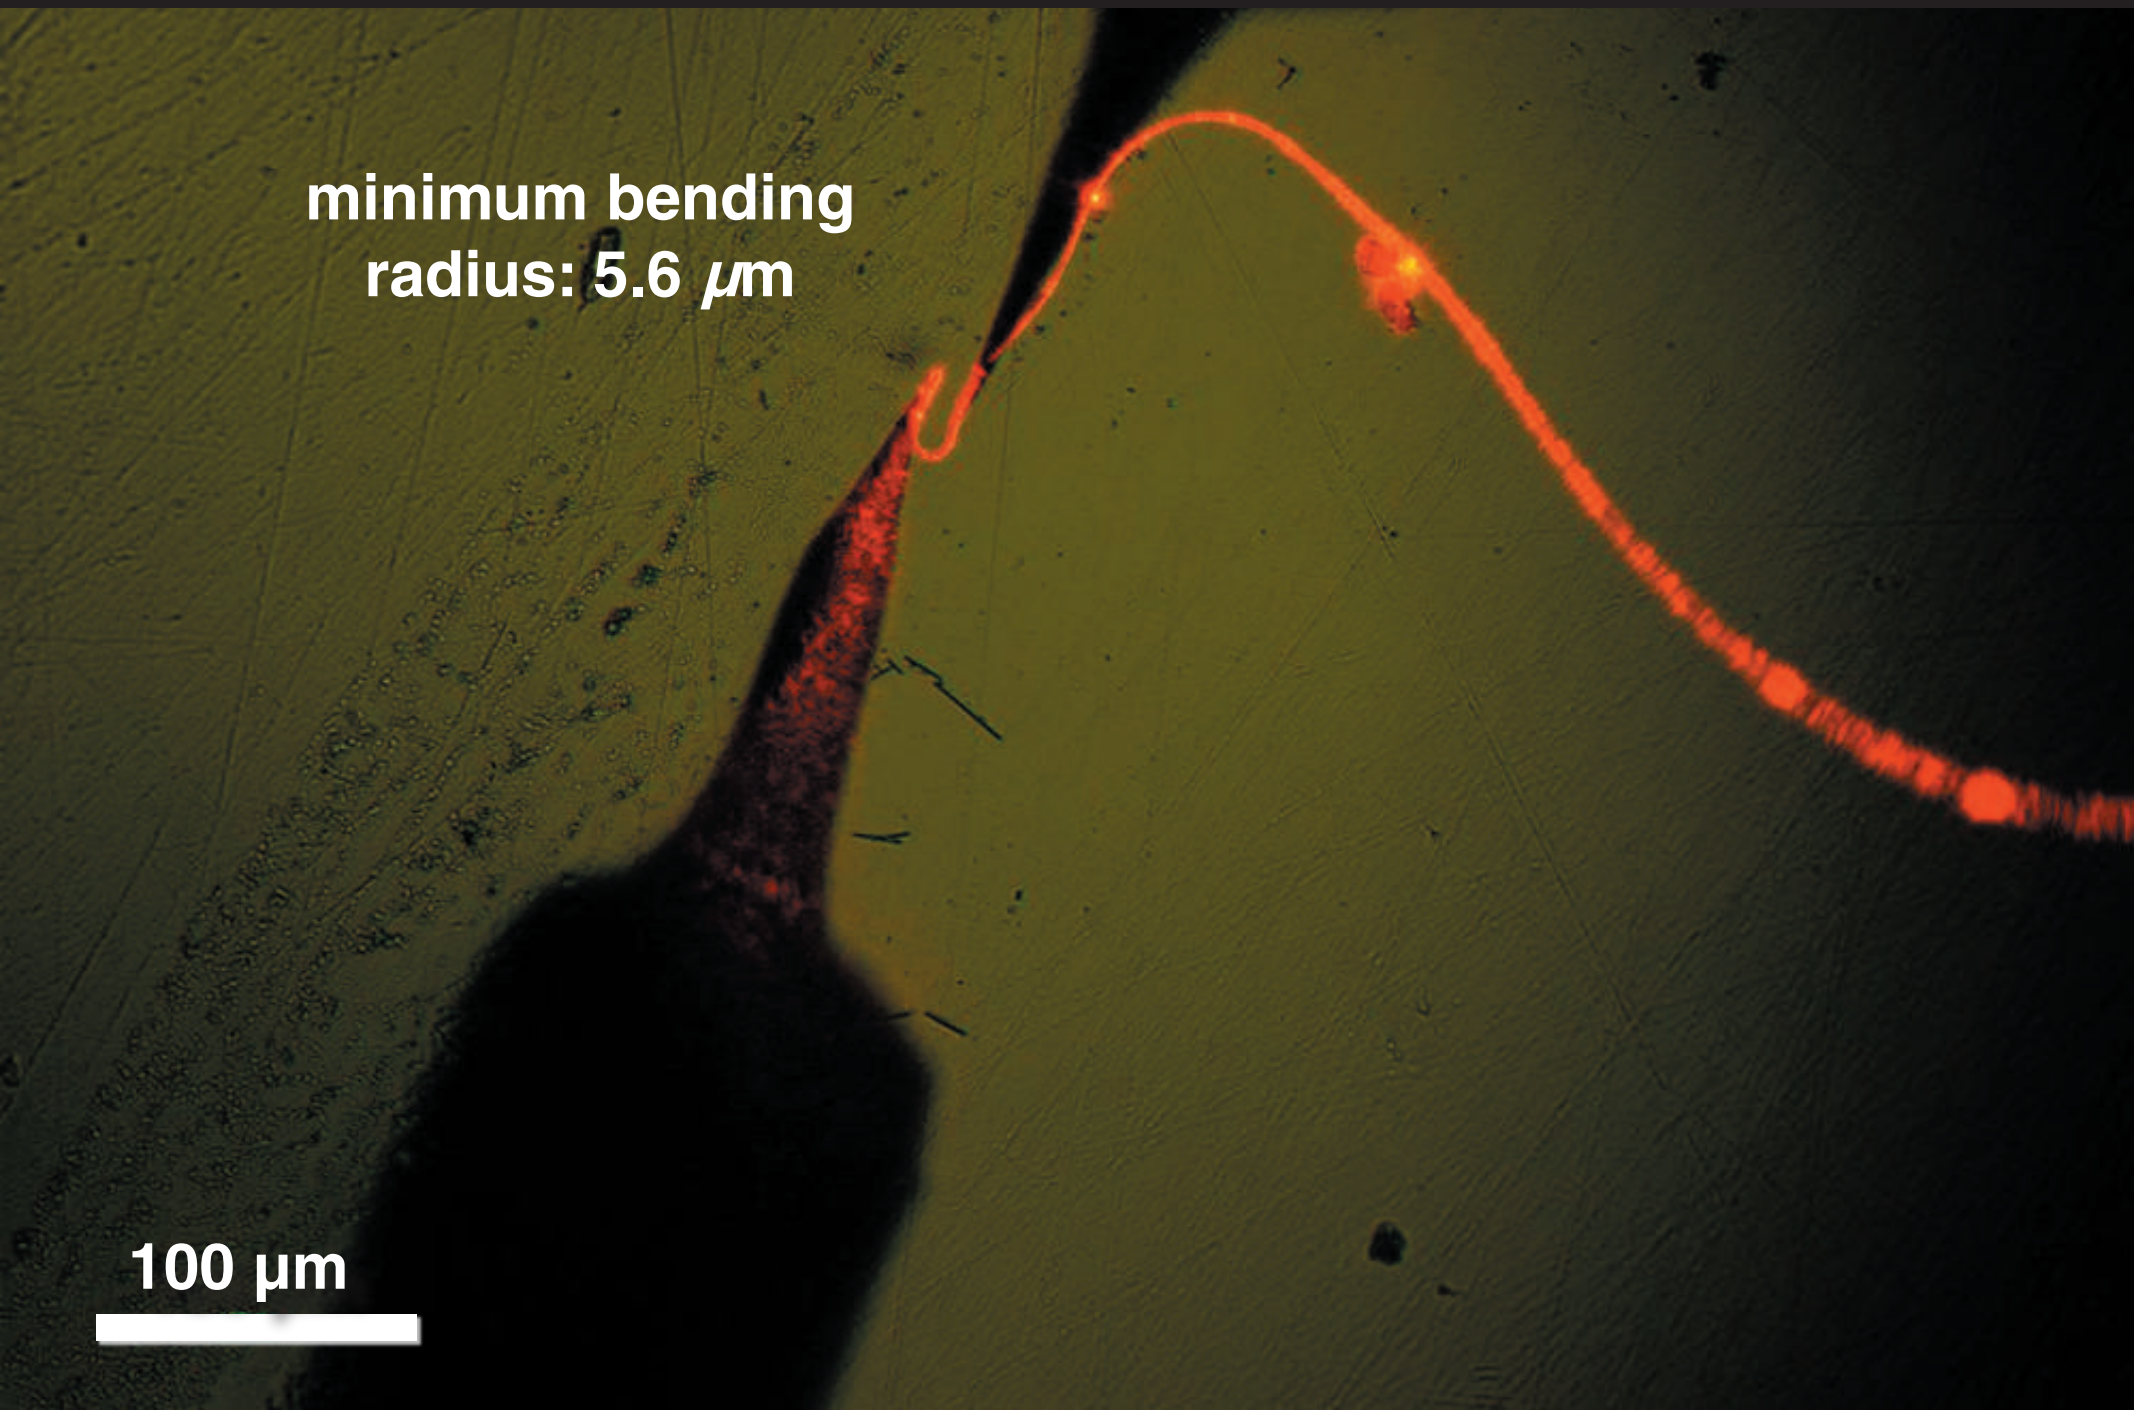

Optical properties

virtually no loss through 5 μm corner!

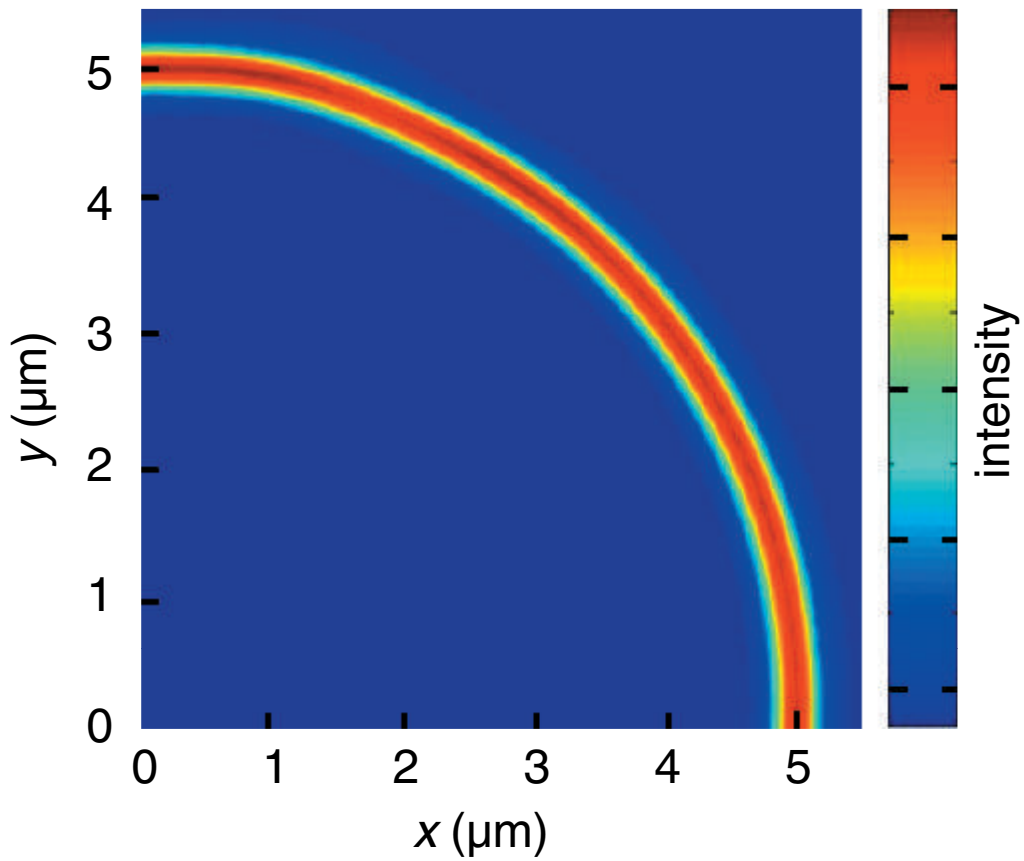

Optical properties

dispersion:

- modal dispersion
- material dispersion
- waveguide dispersion
- nonlinear dispersion

Optical properties

waveguide dispersion

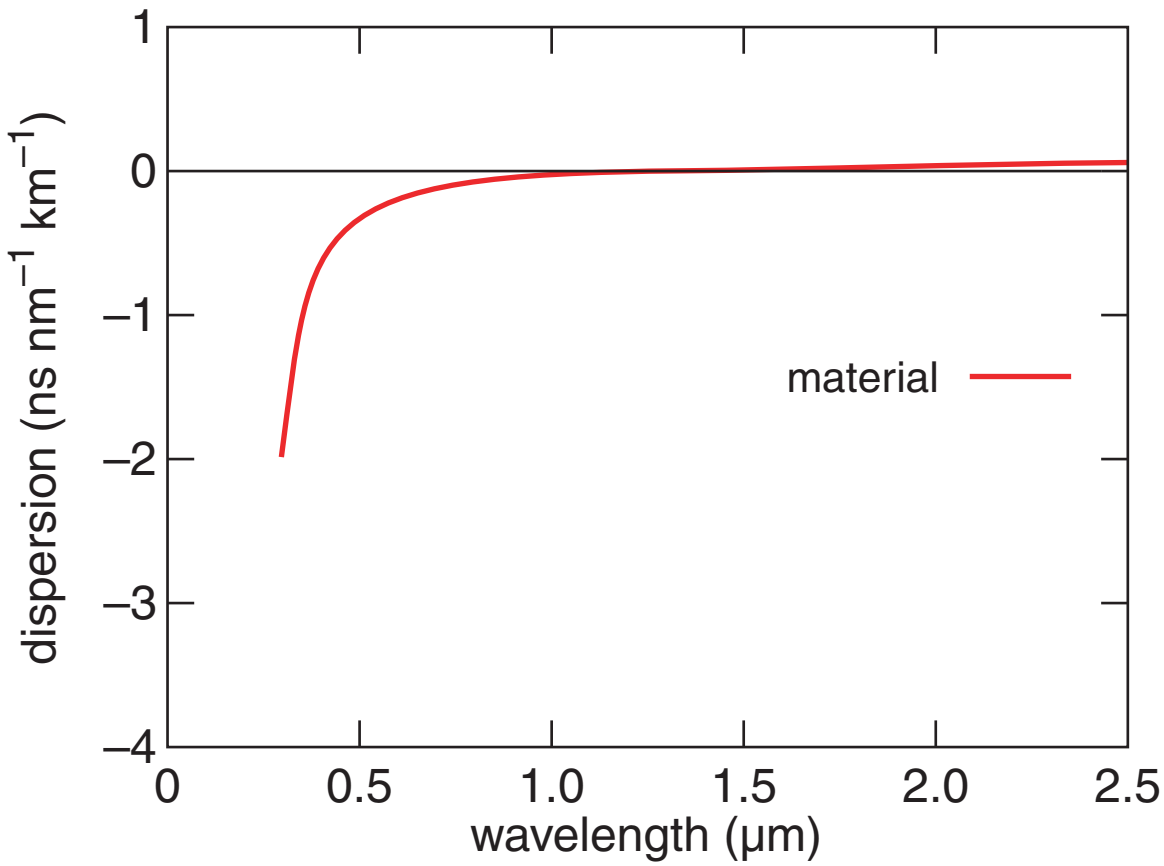

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

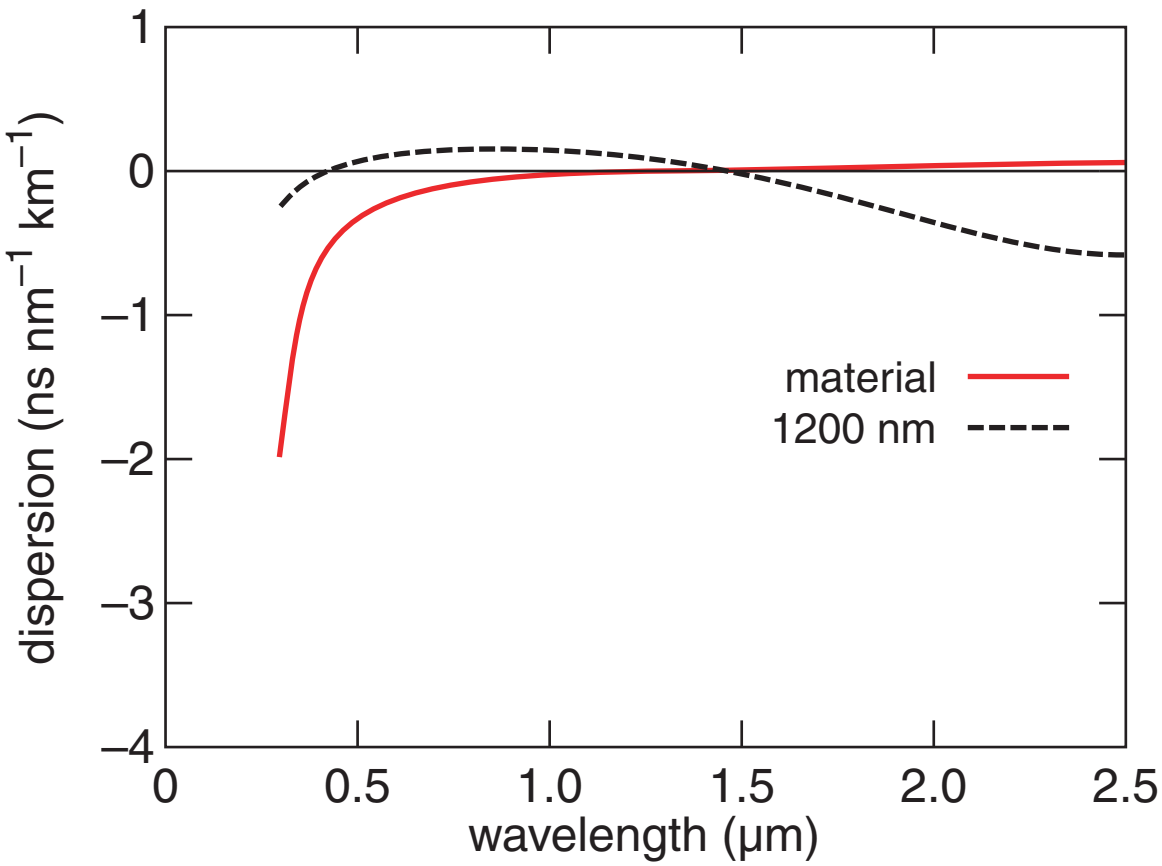

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

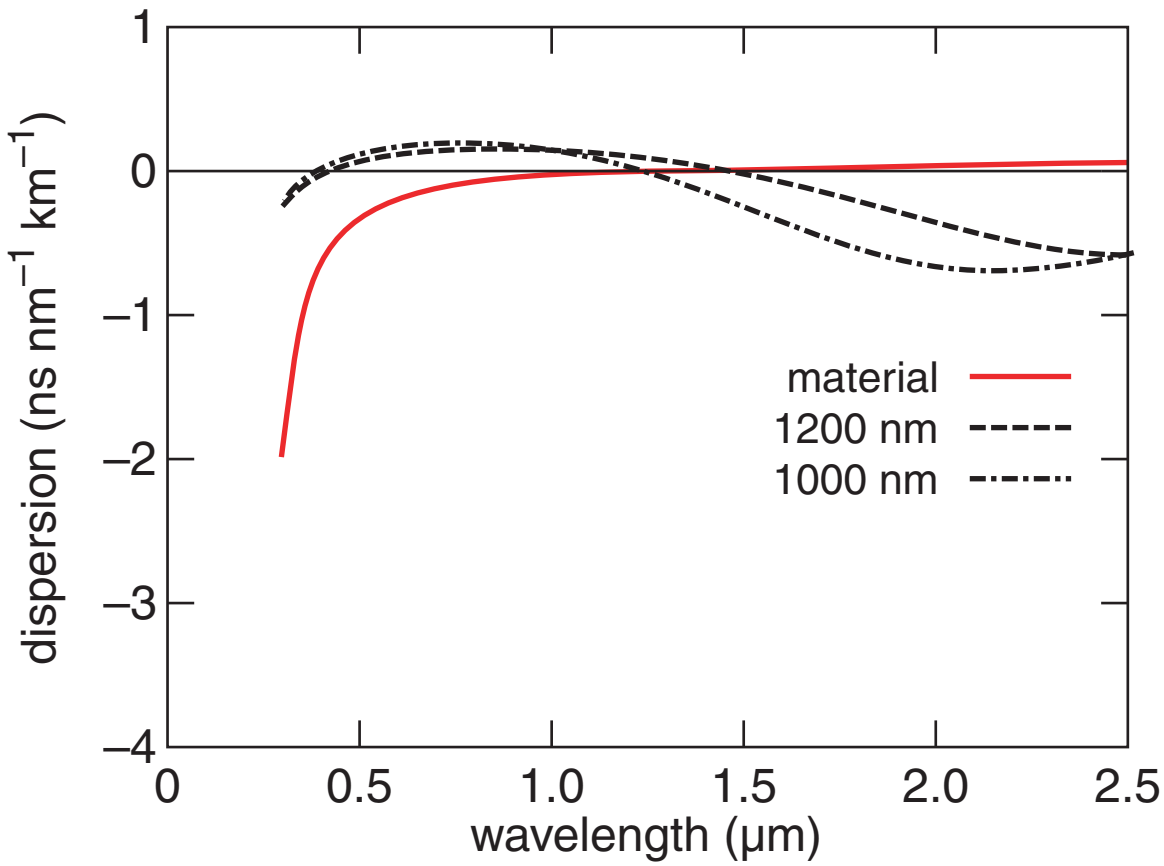

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

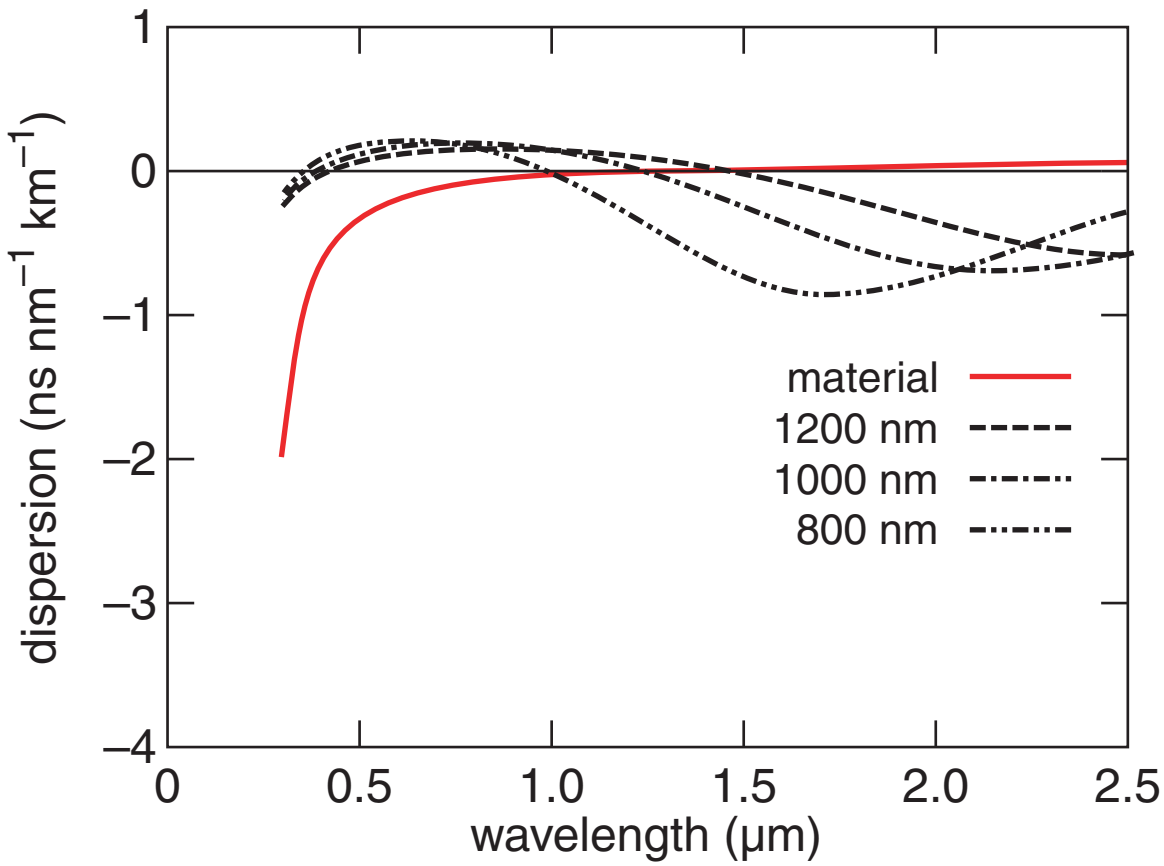

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

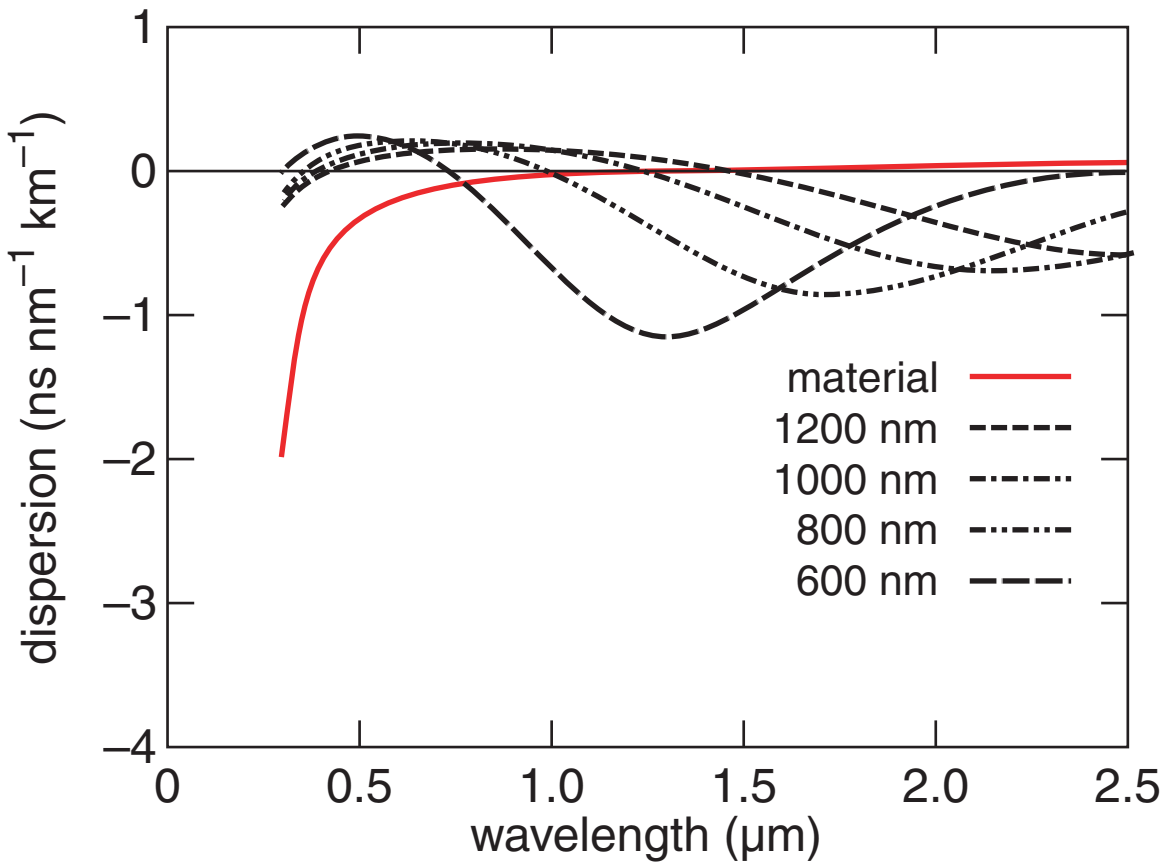

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

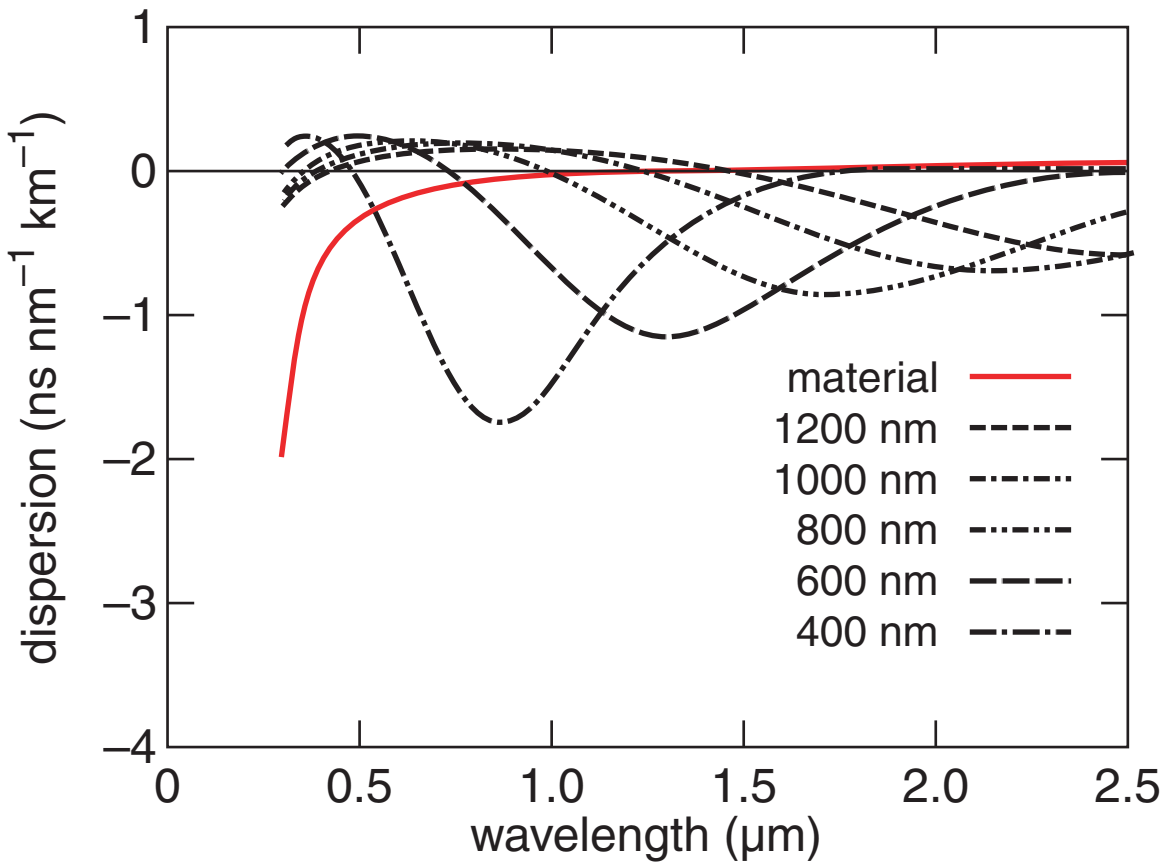

Optics Express, 12, 1025 (2004)

Optical properties

waveguide dispersion

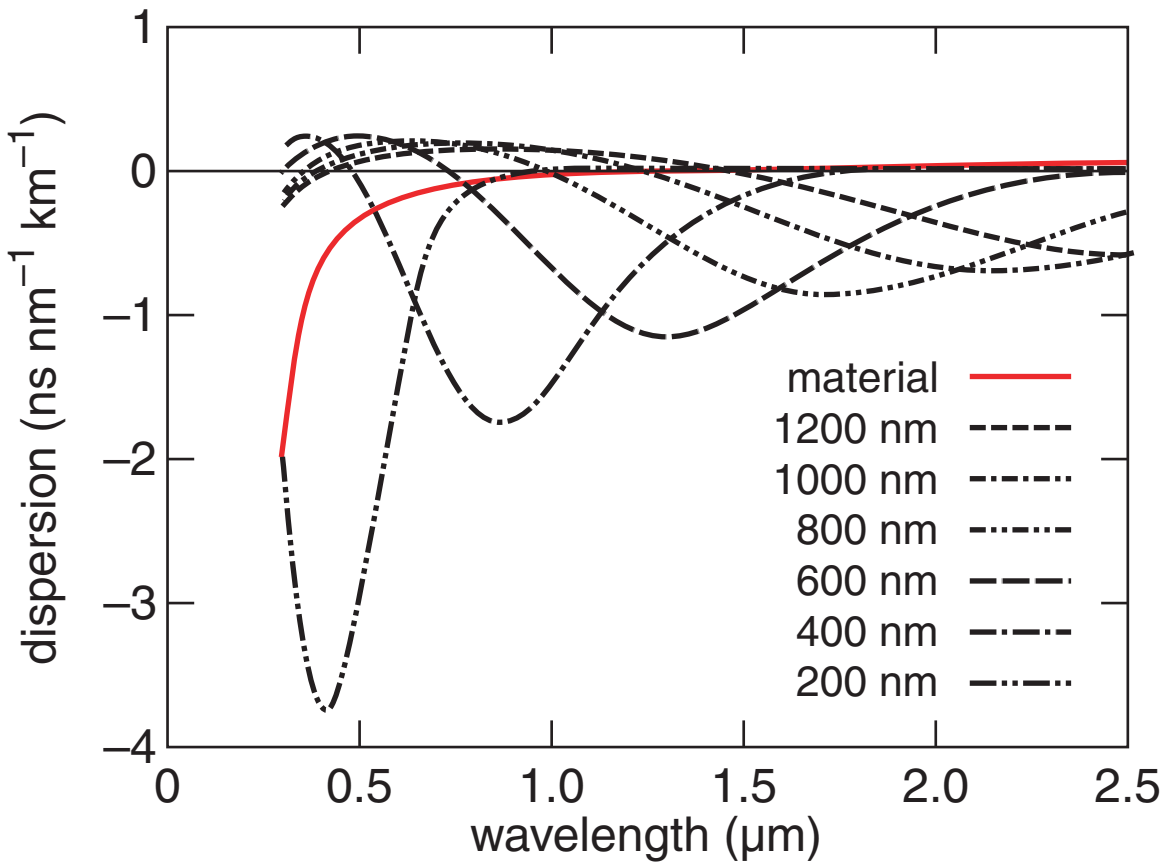

Optics Express, 12, 1025 (2004)

Optical properties

nonlinear dispersion: $n = n_o + n_2 I$

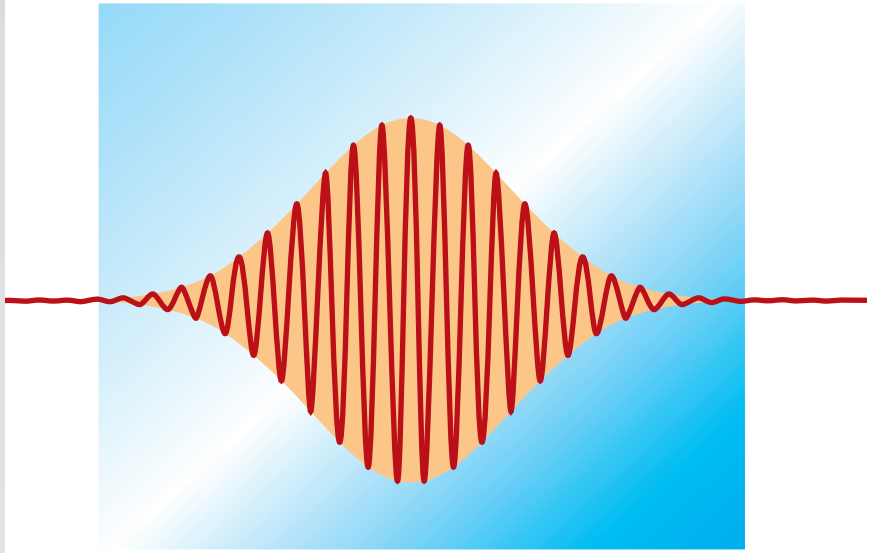

Optical properties

nonlinear dispersion: $n = n_o + n_2 I$

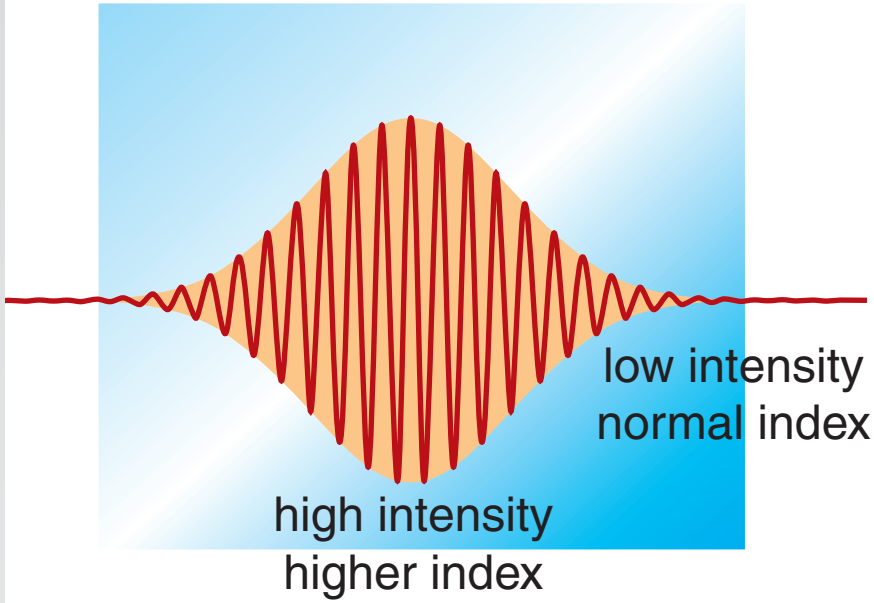

Optical properties

nonlinear dispersion: $n = n_o + n_2 I$

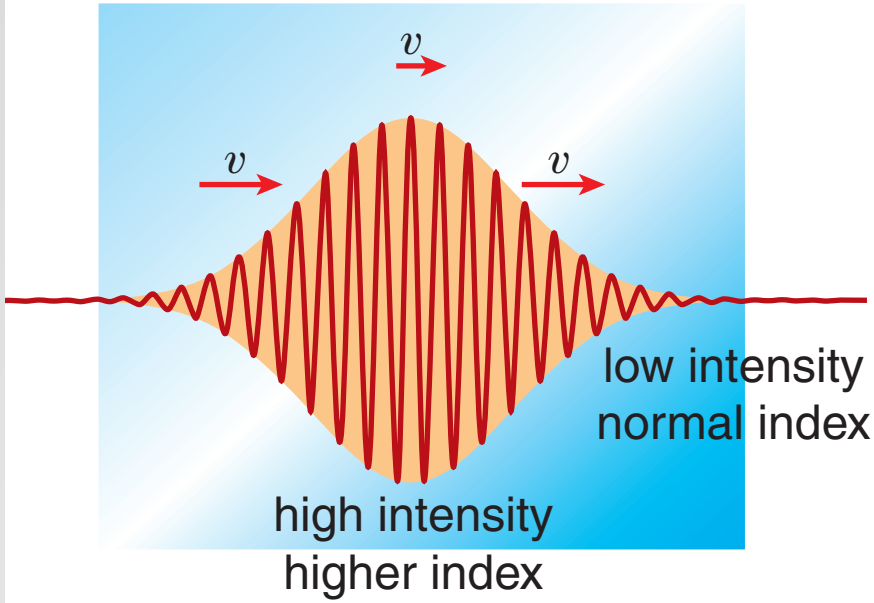

Optical properties

nonlinear dispersion: $n = n_o + n_2 I$

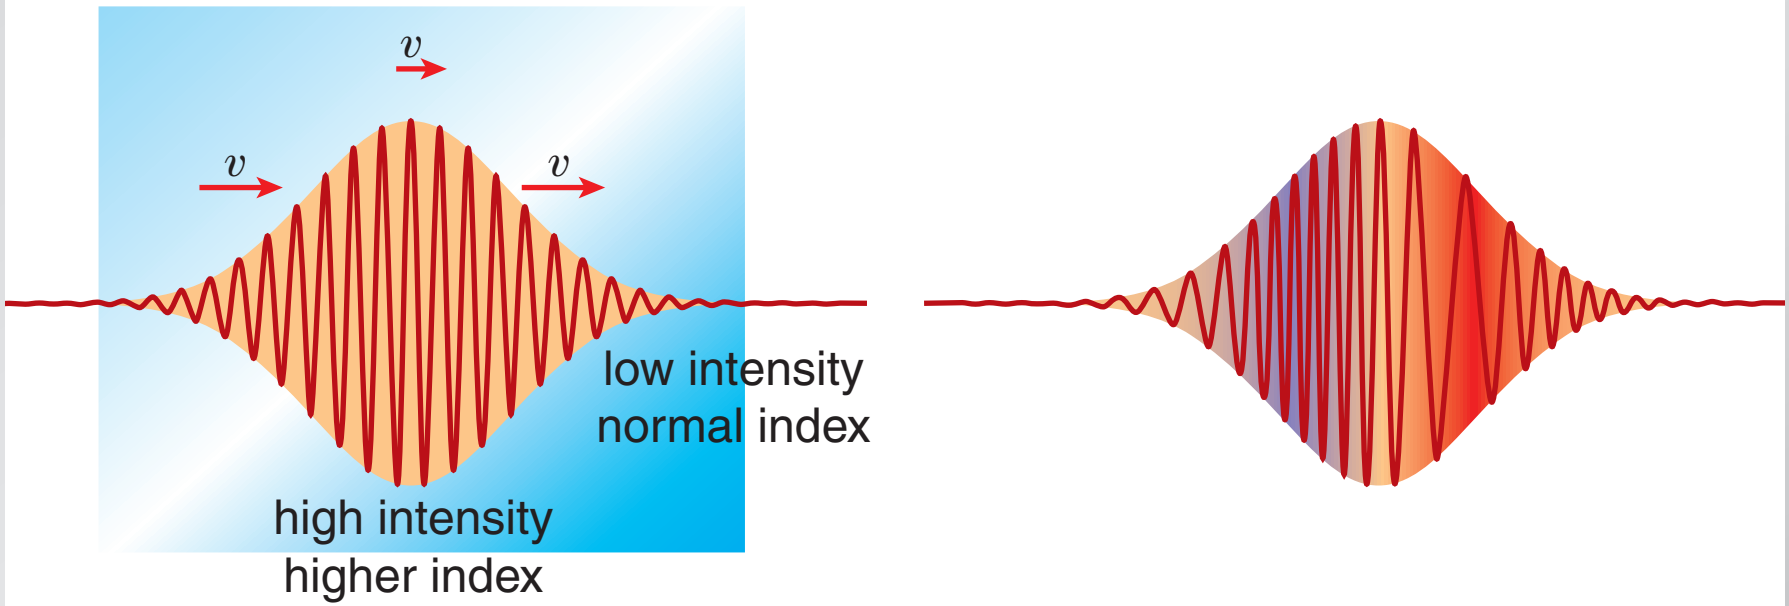

Optical properties

nonlinear dispersion: $n = n_o + n_2 I$

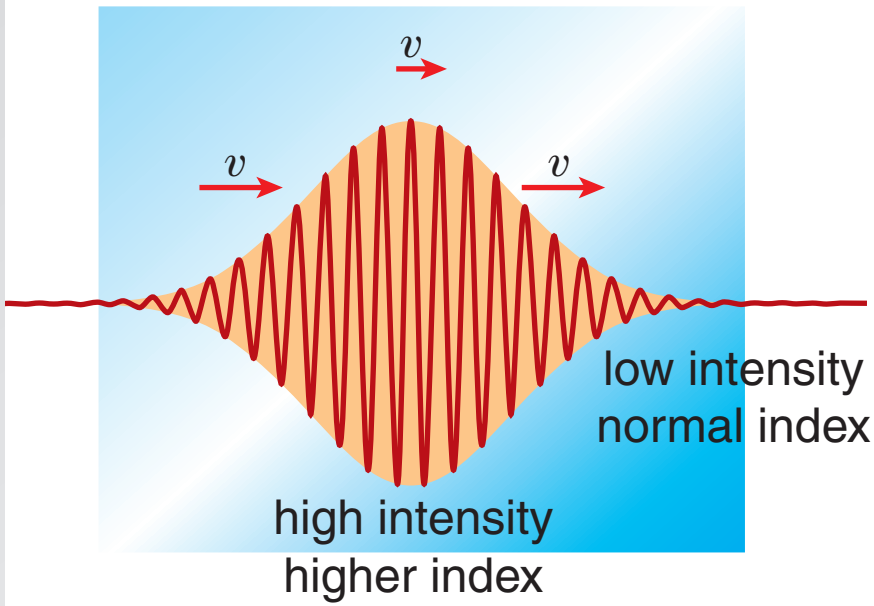

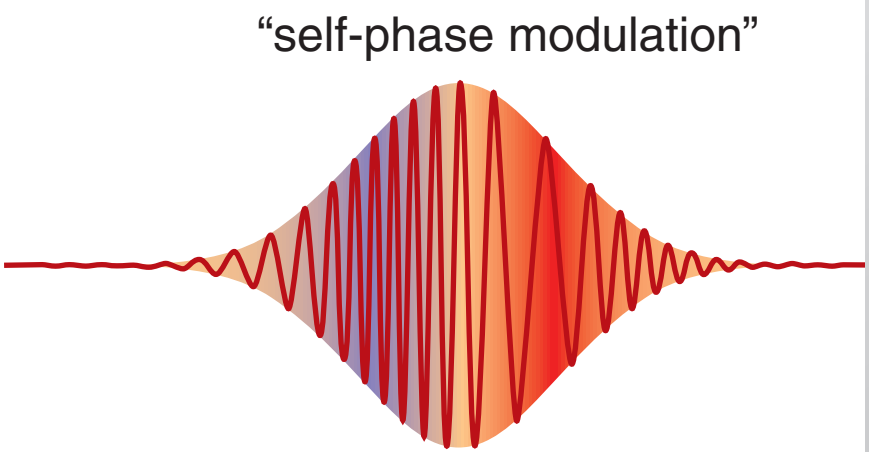

Optical properties

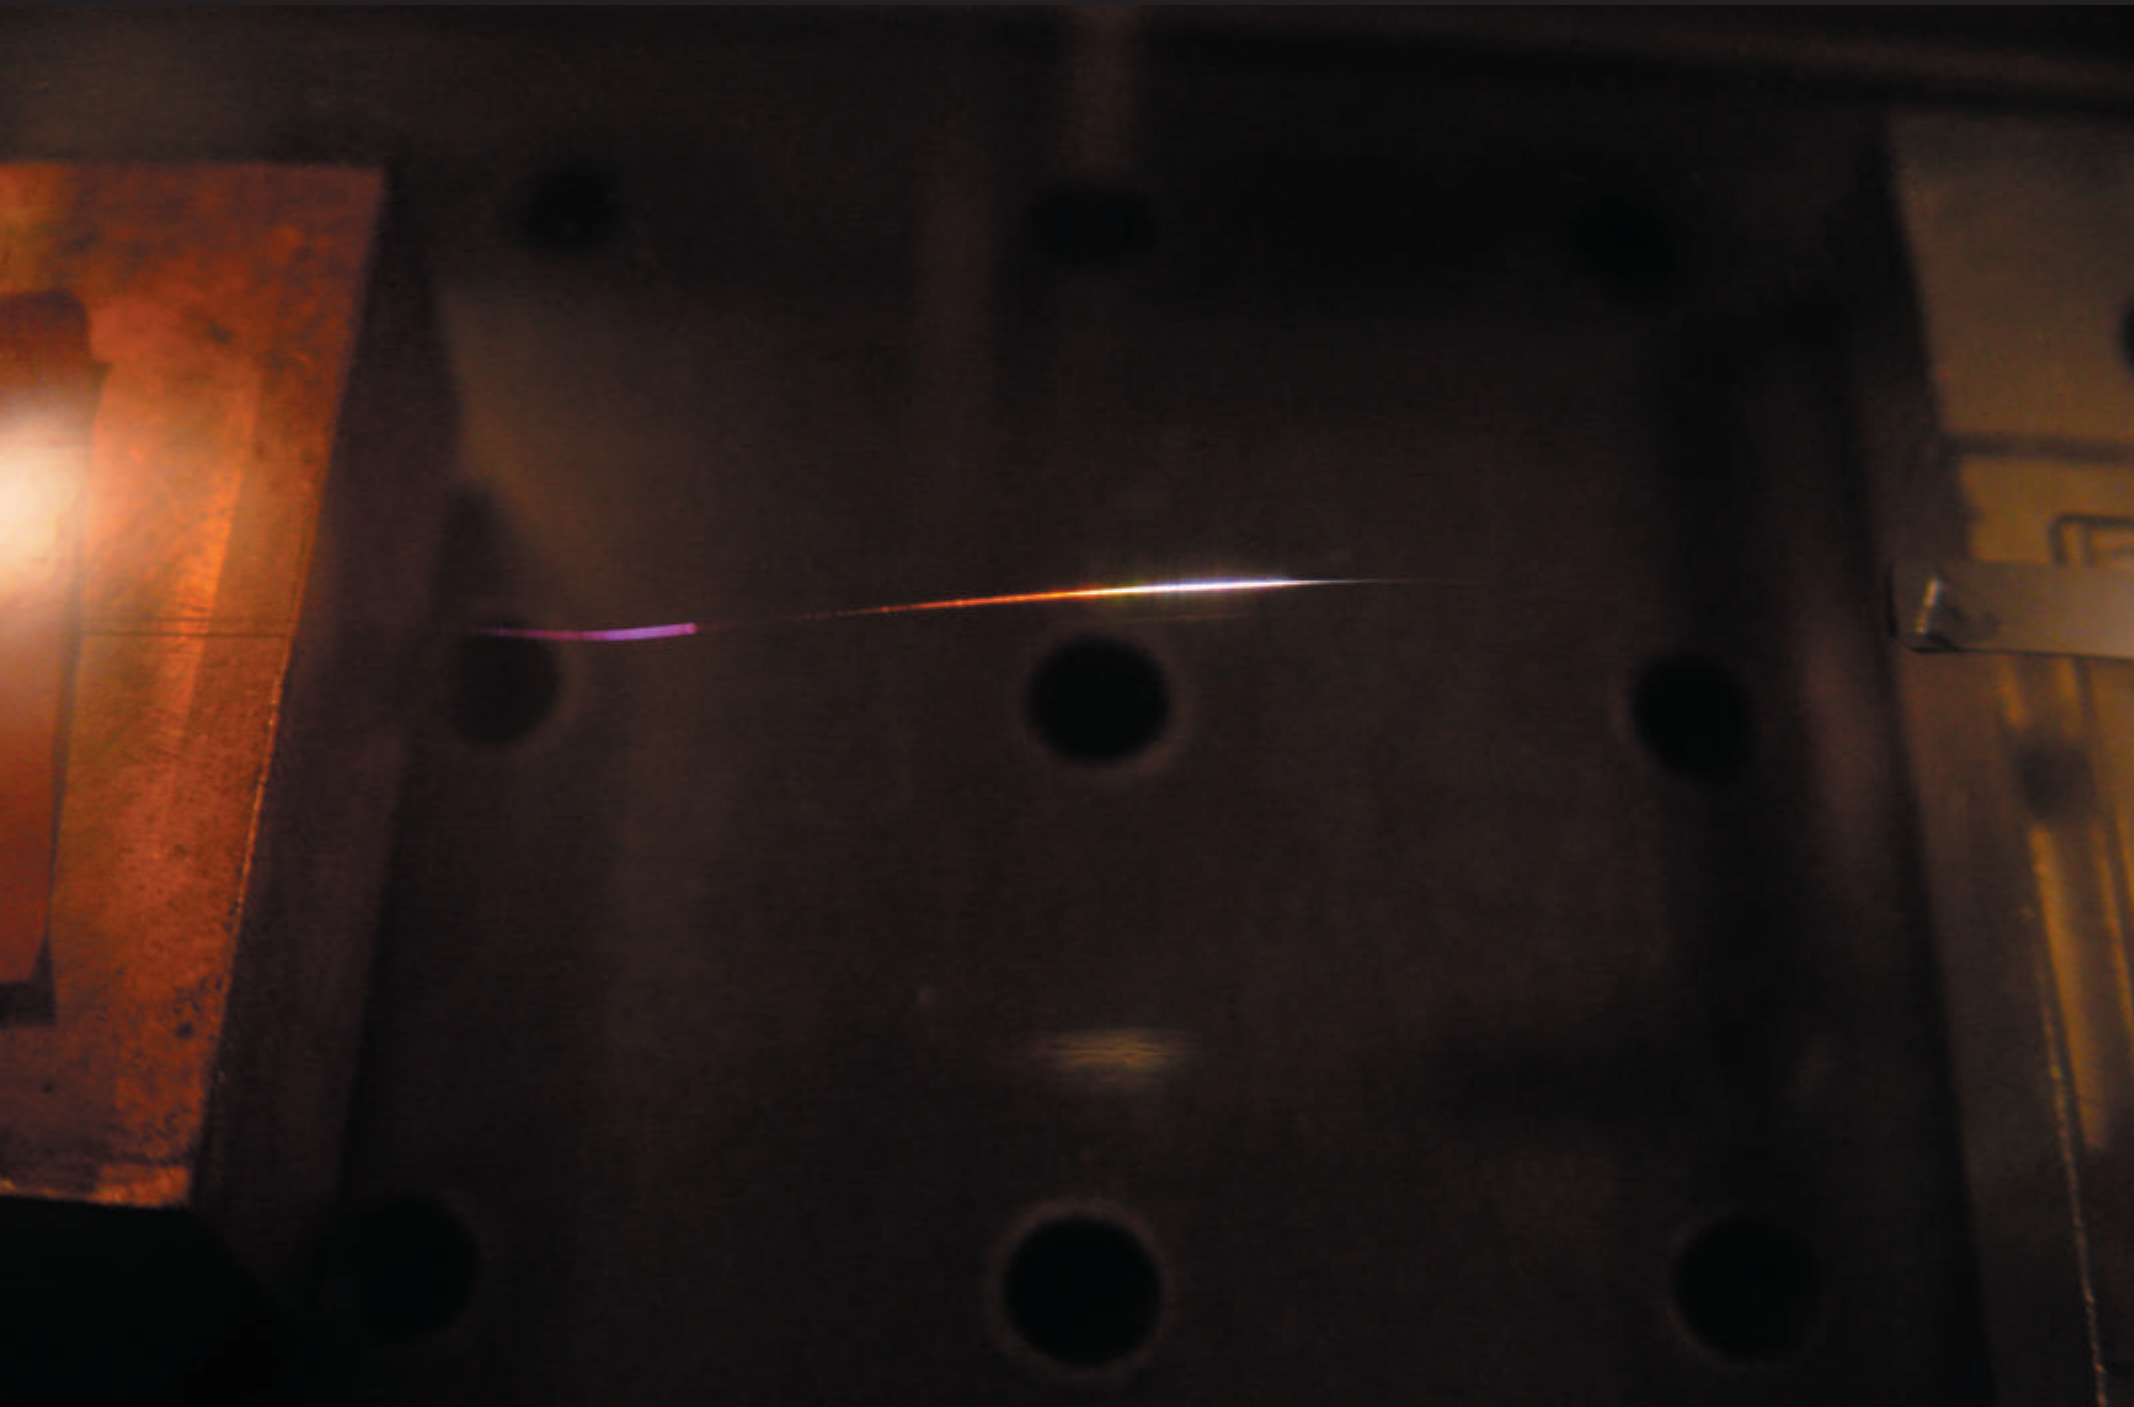

Optical properties

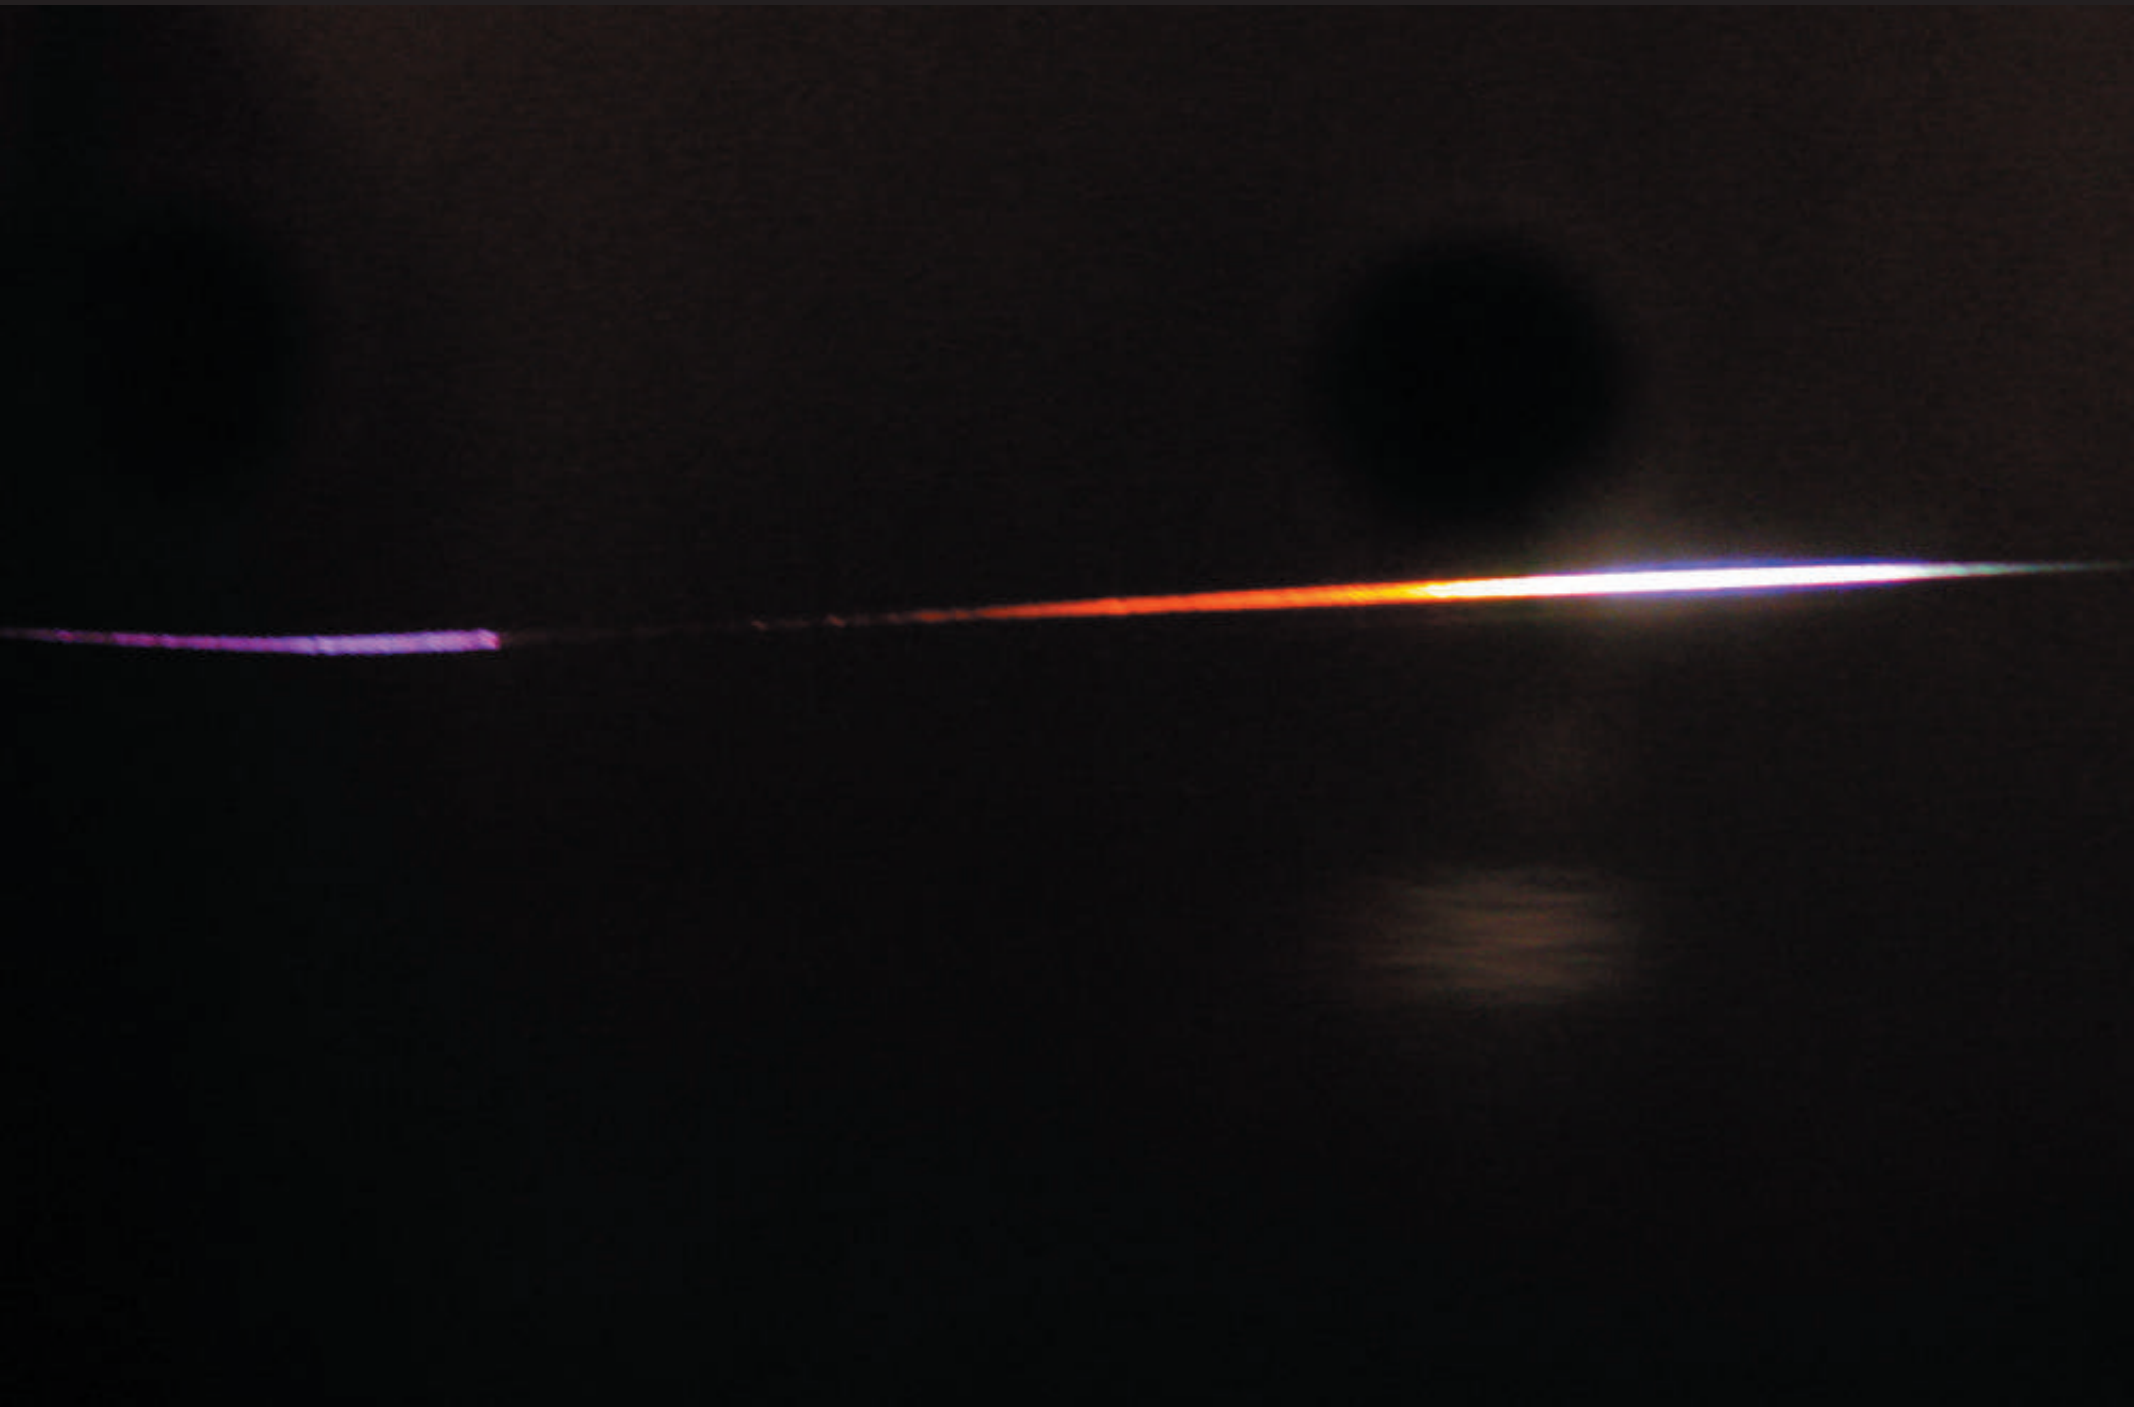

Summary

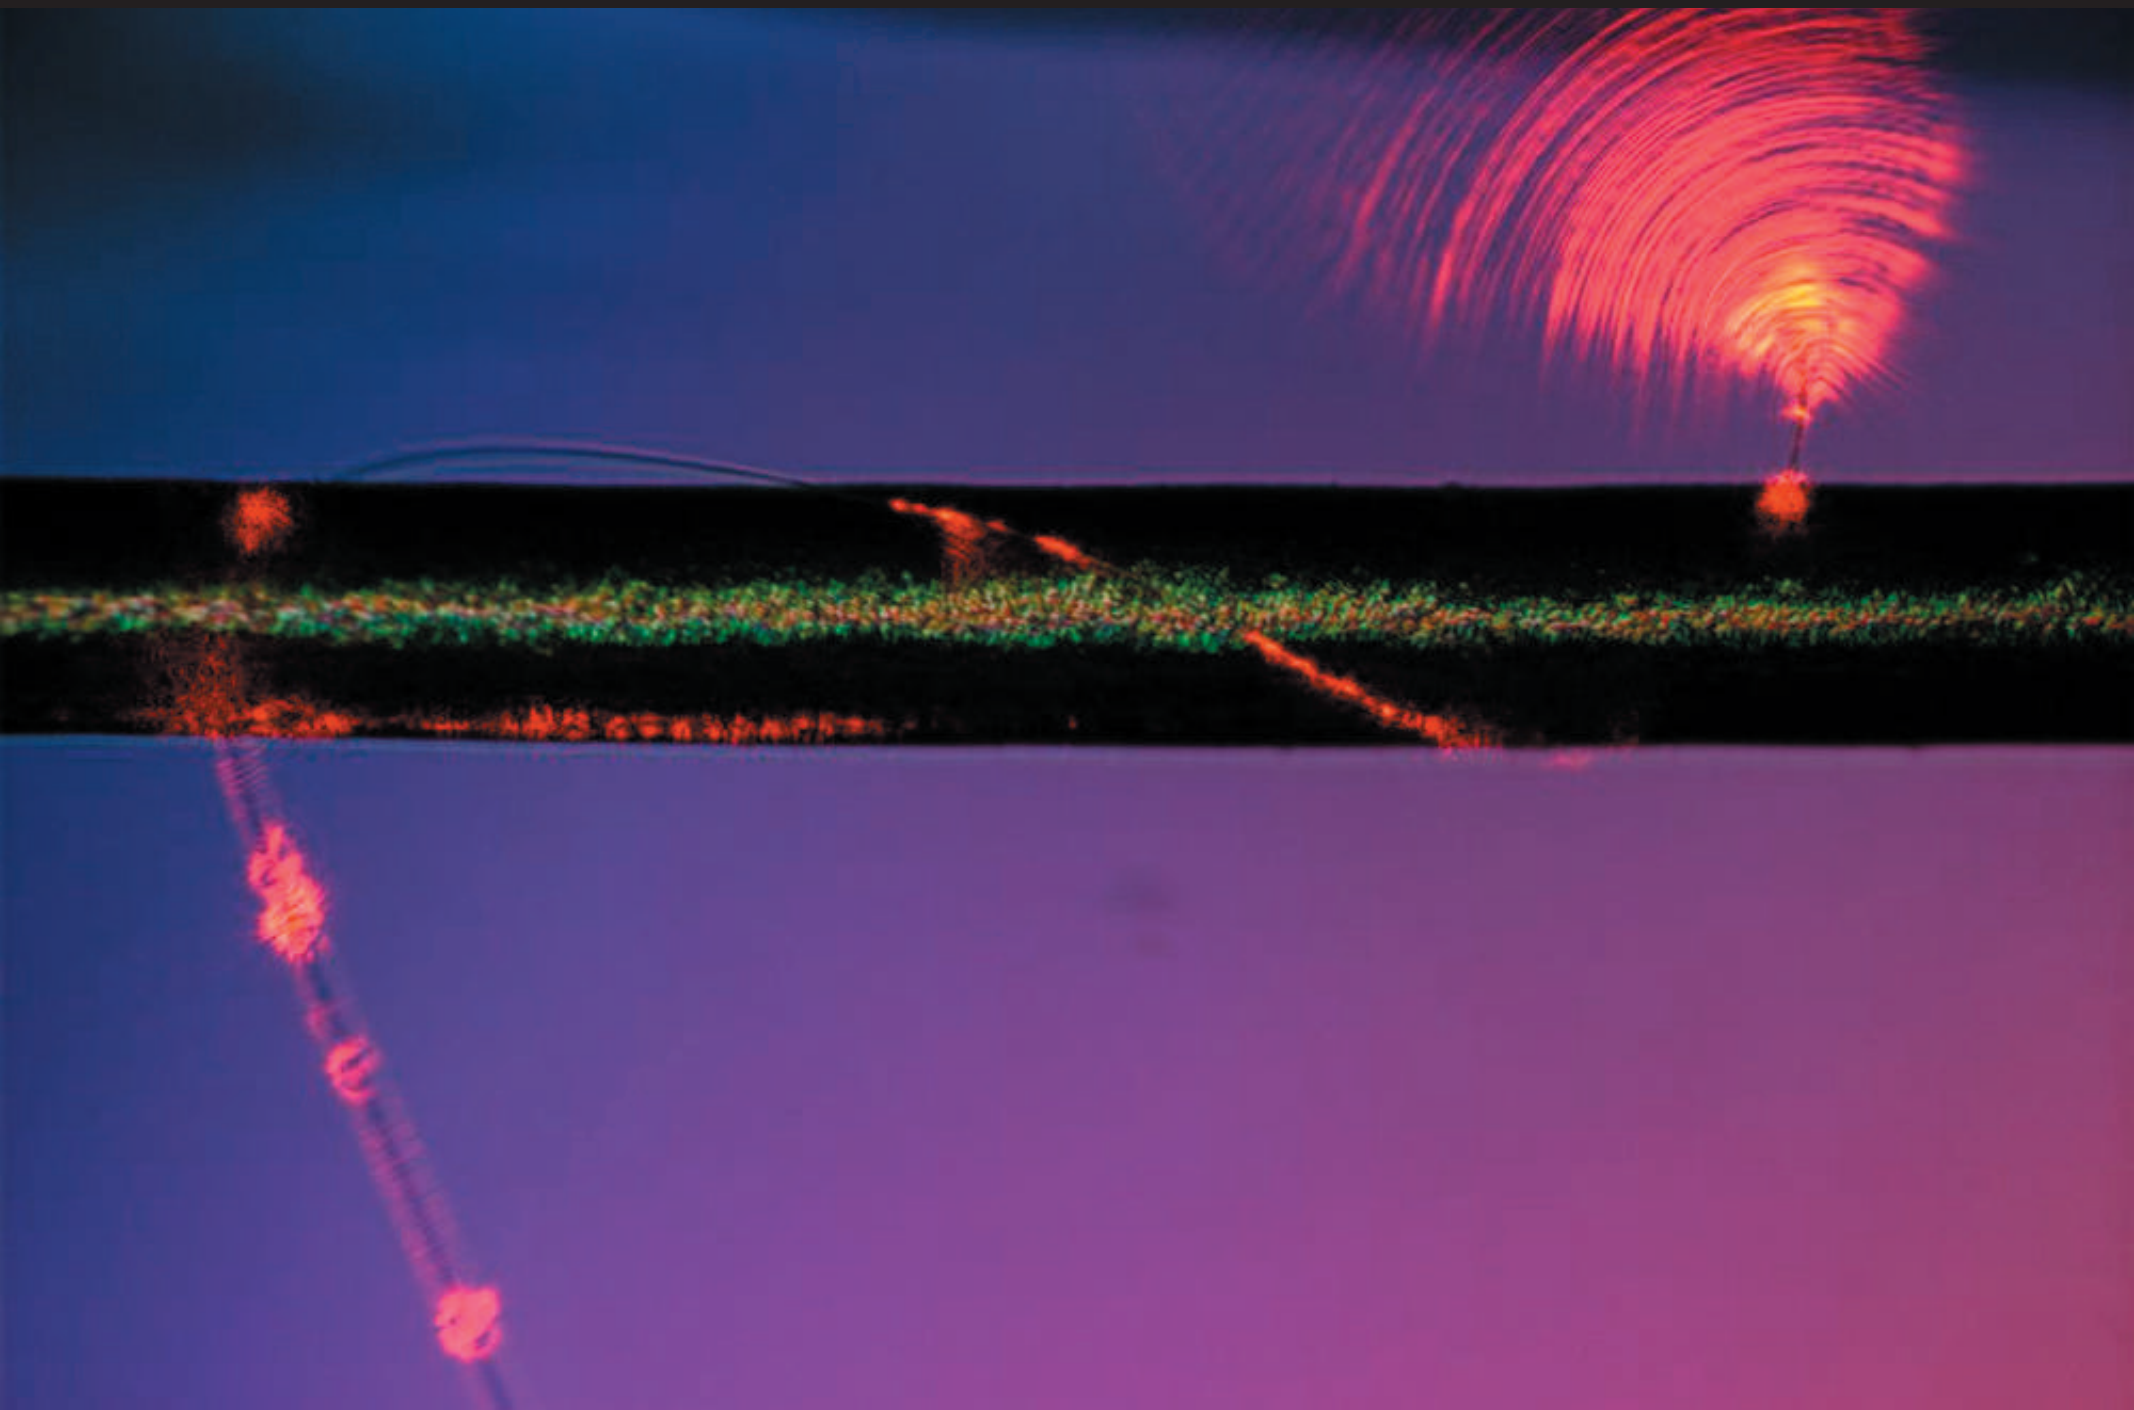

Summary

- strong confinement
- very tight bending
- large evanescent wave

Outlook

microphotonic components

Outlook

microphotonic components

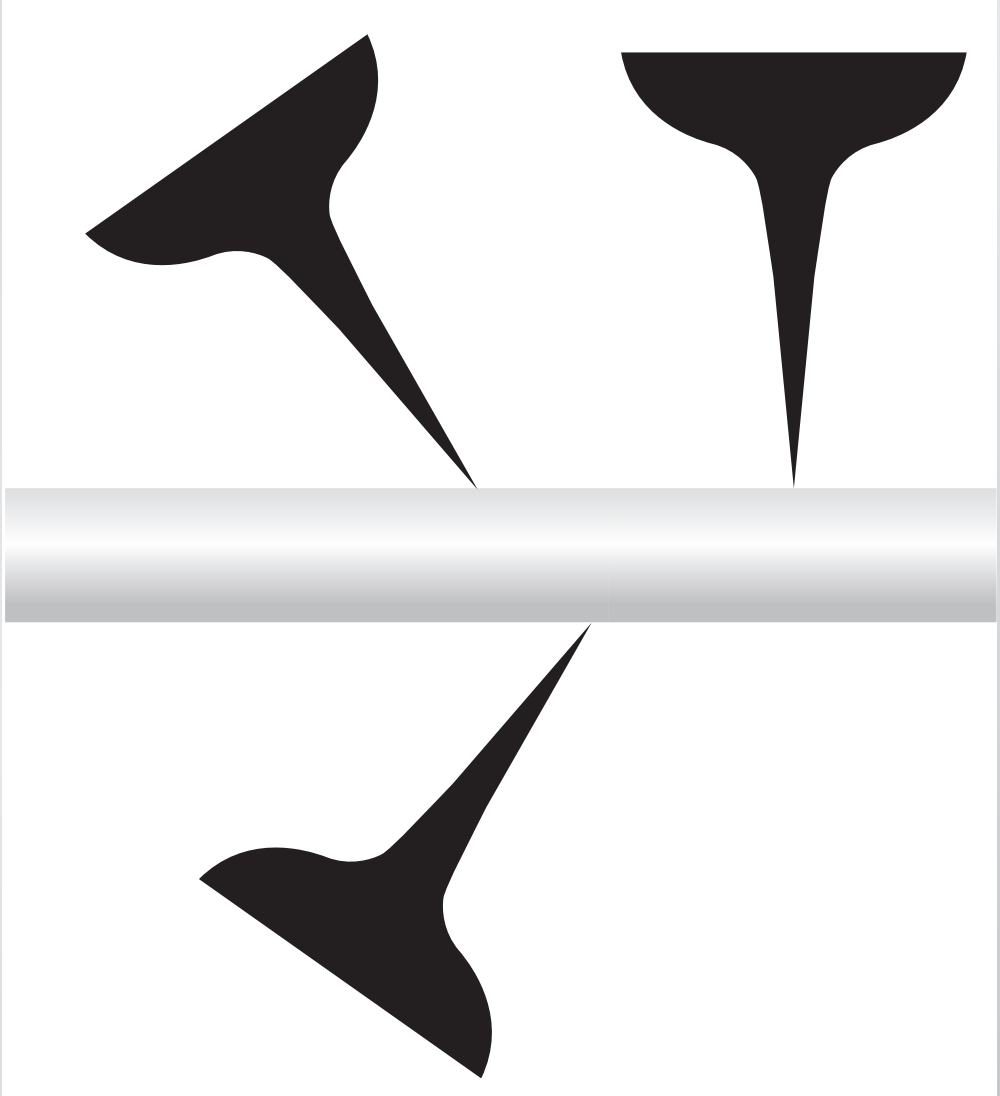

Outlook

microphotonic components

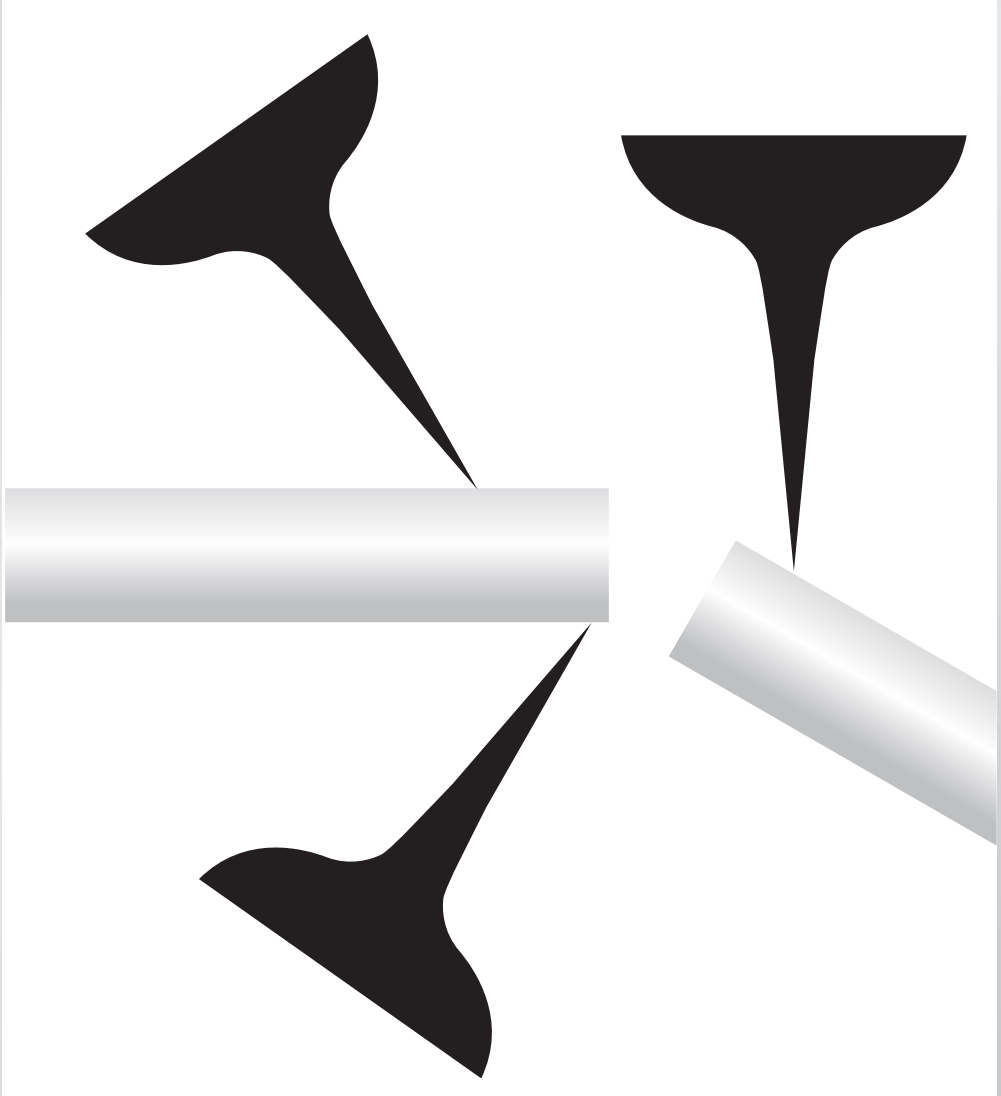

Outlook

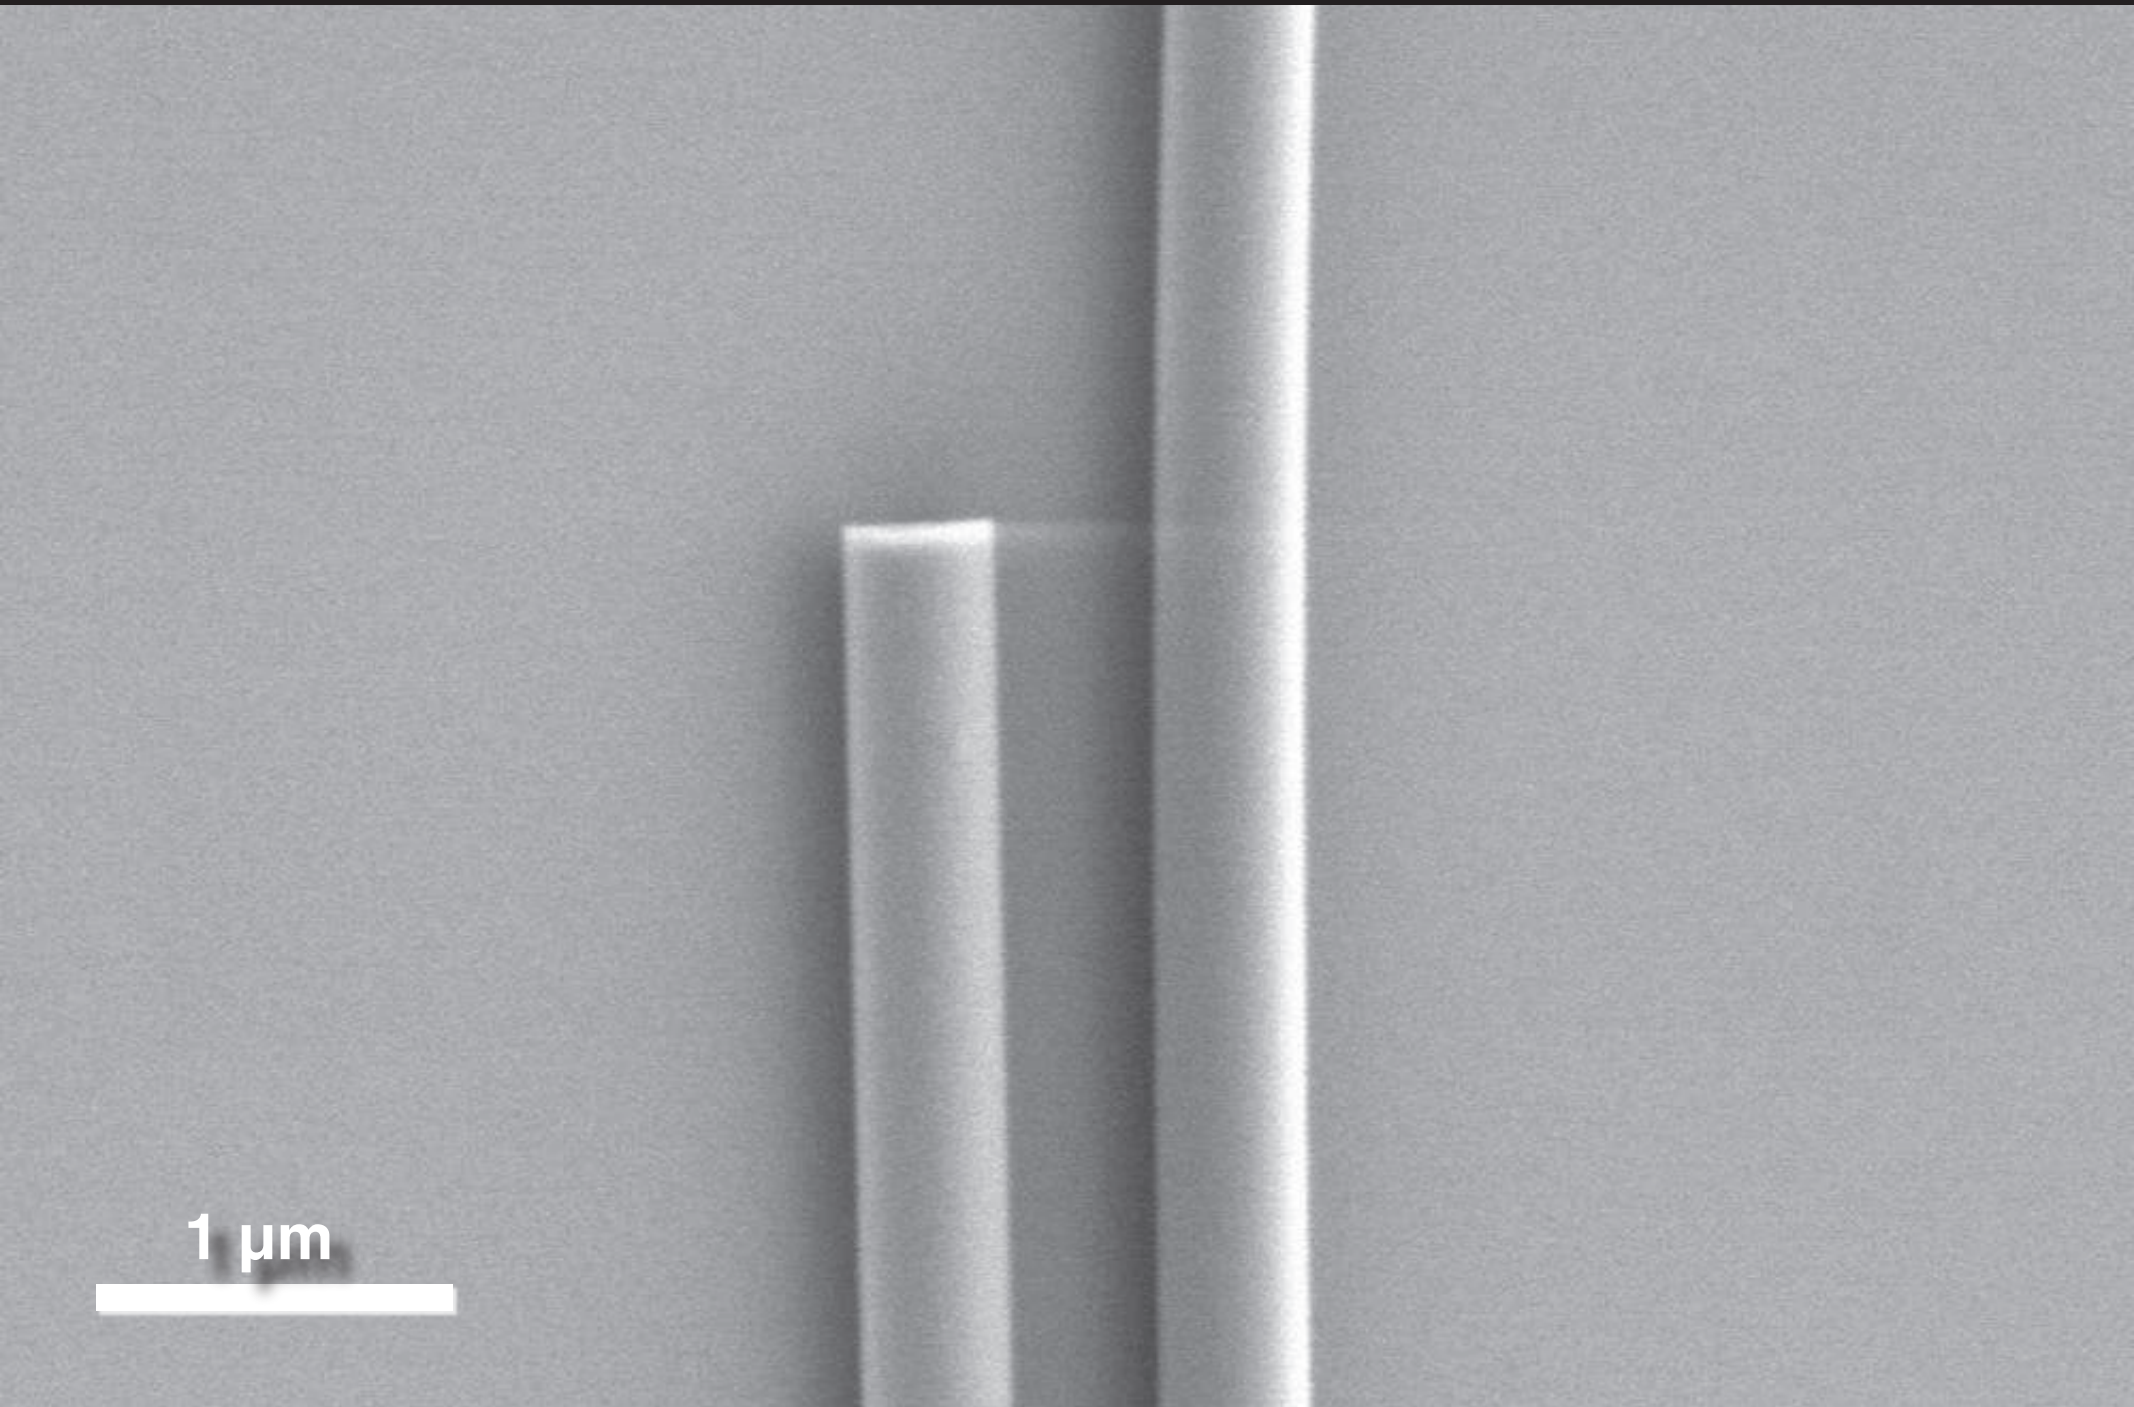

Outlook

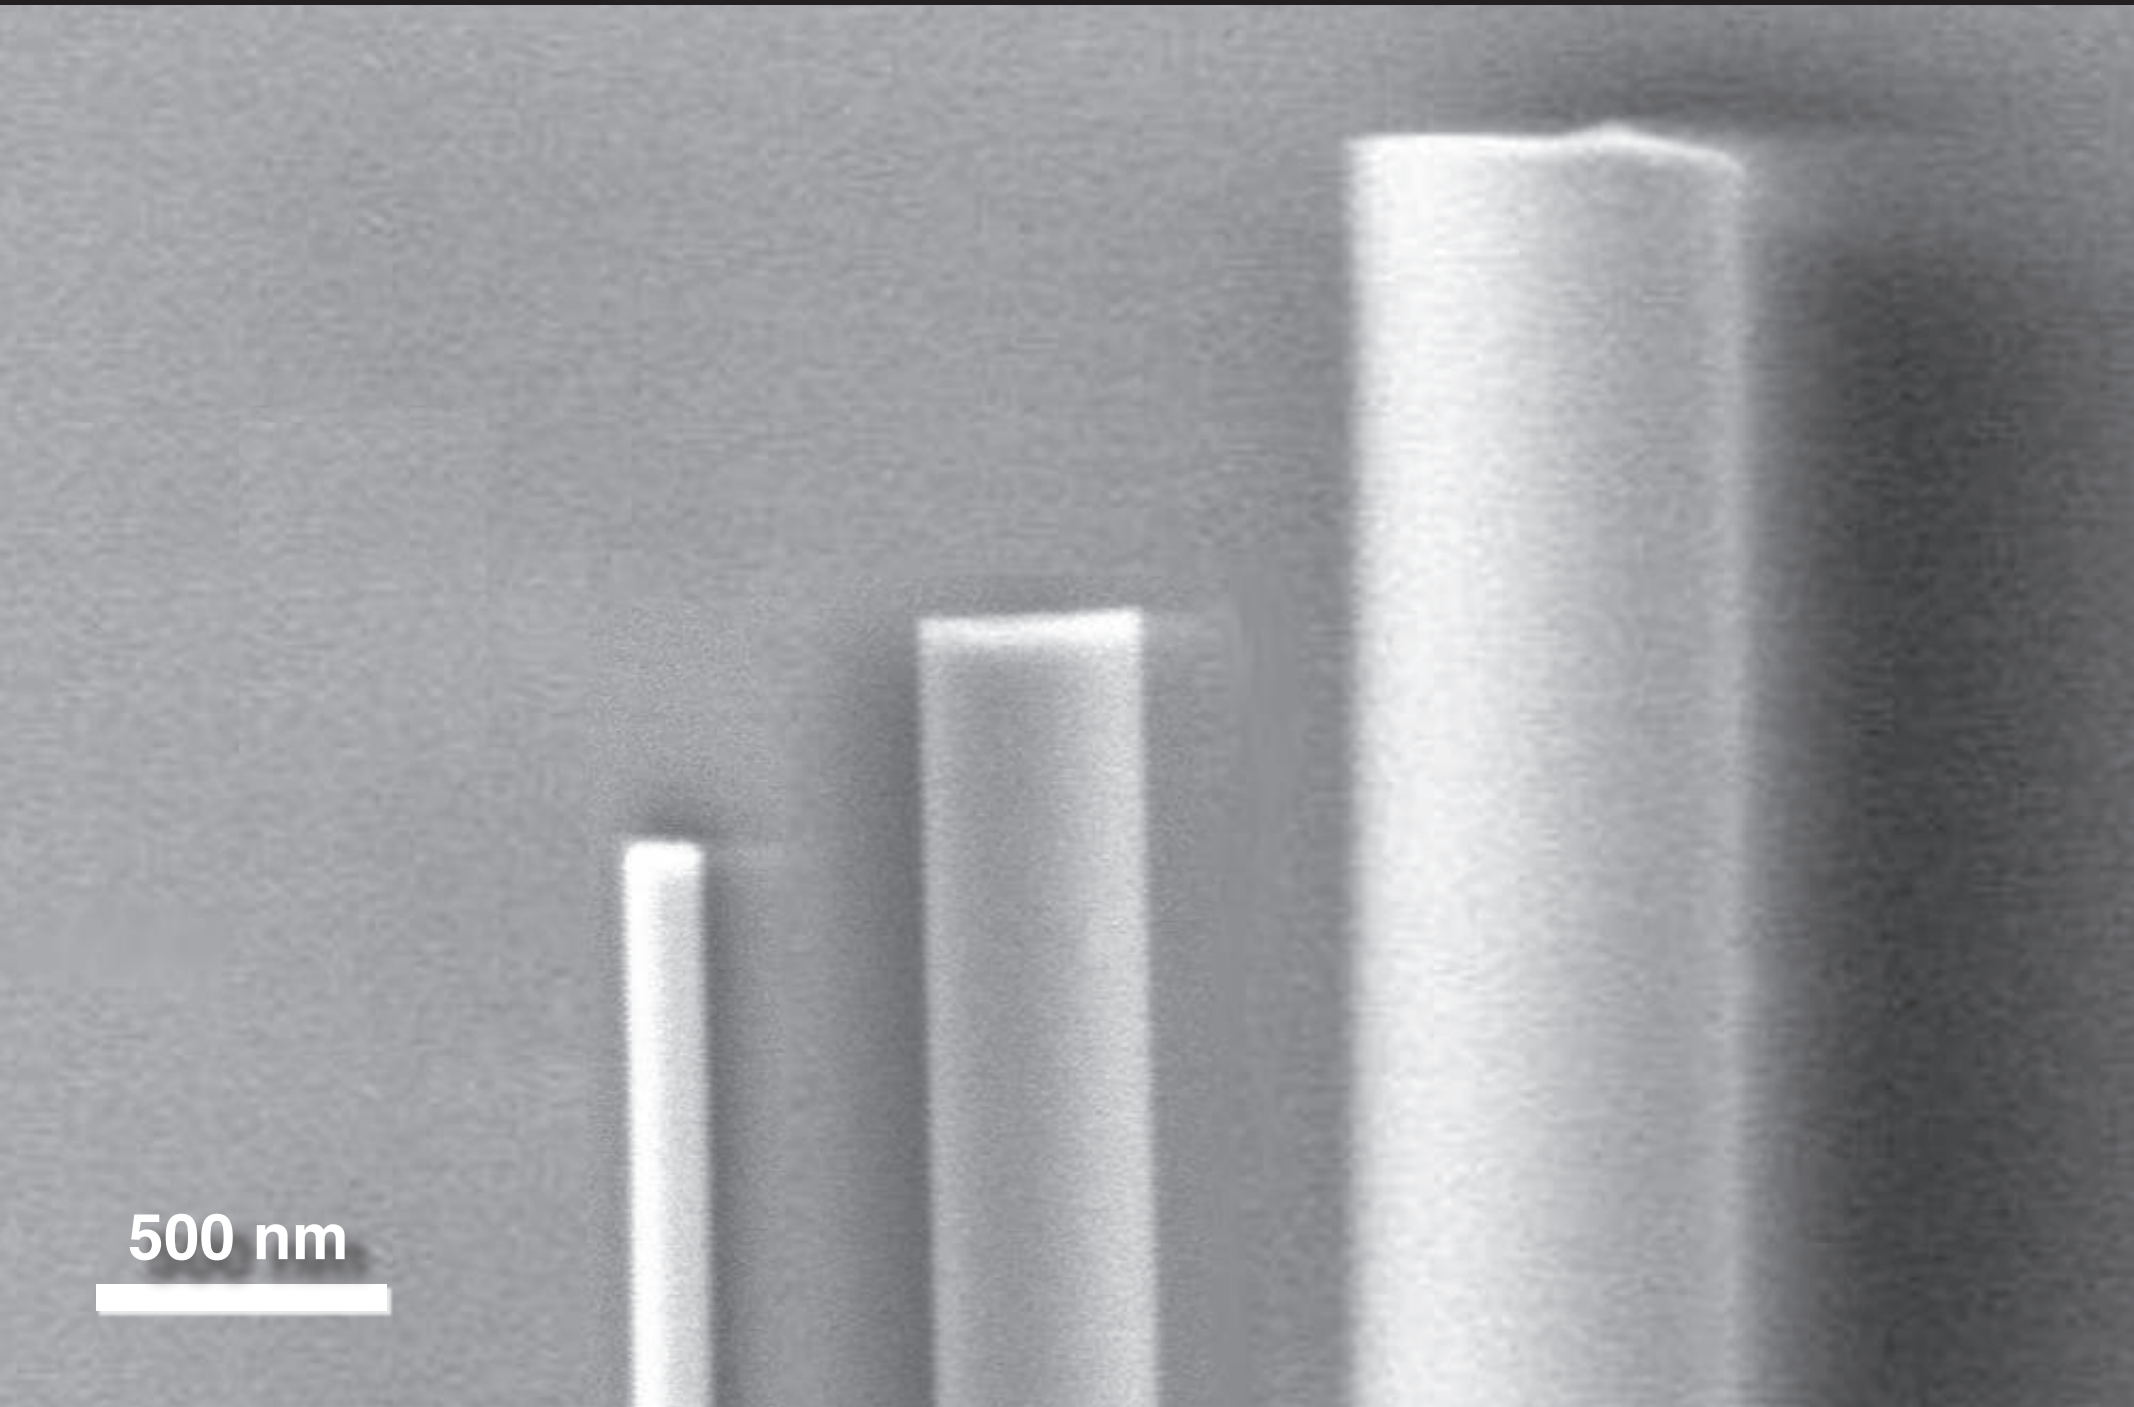

Outlook

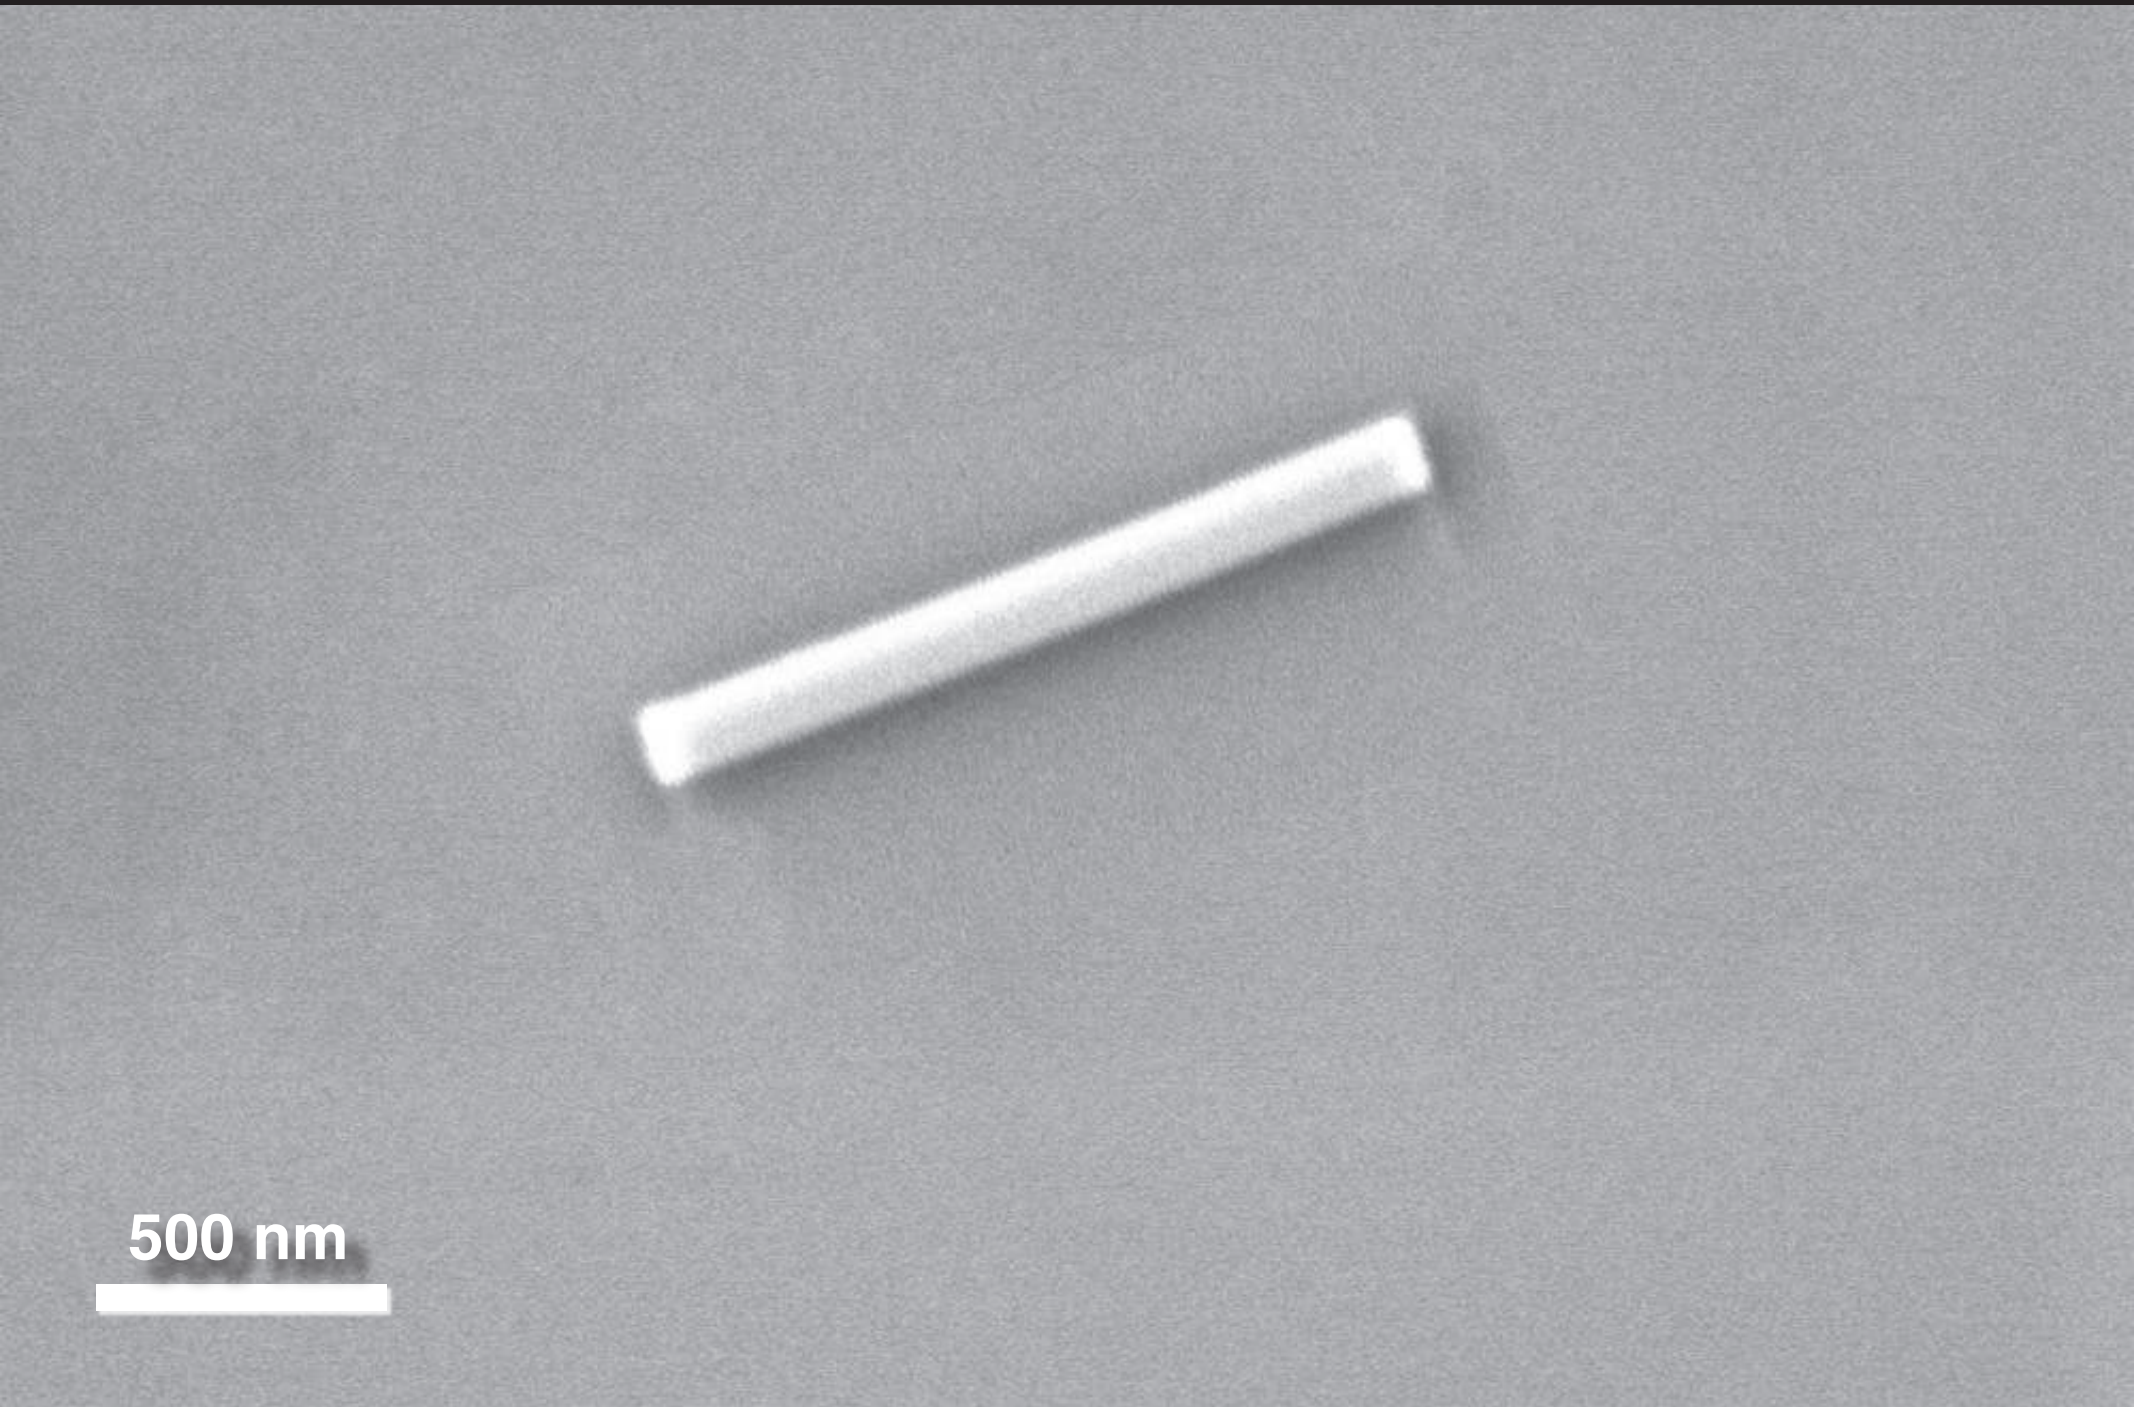

Outlook

Outlook

Aerogel

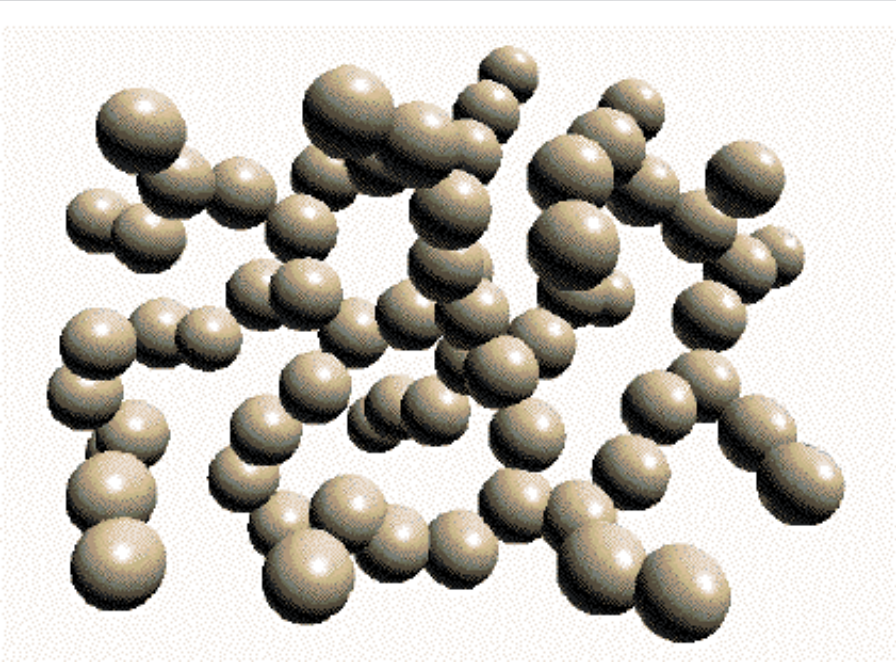

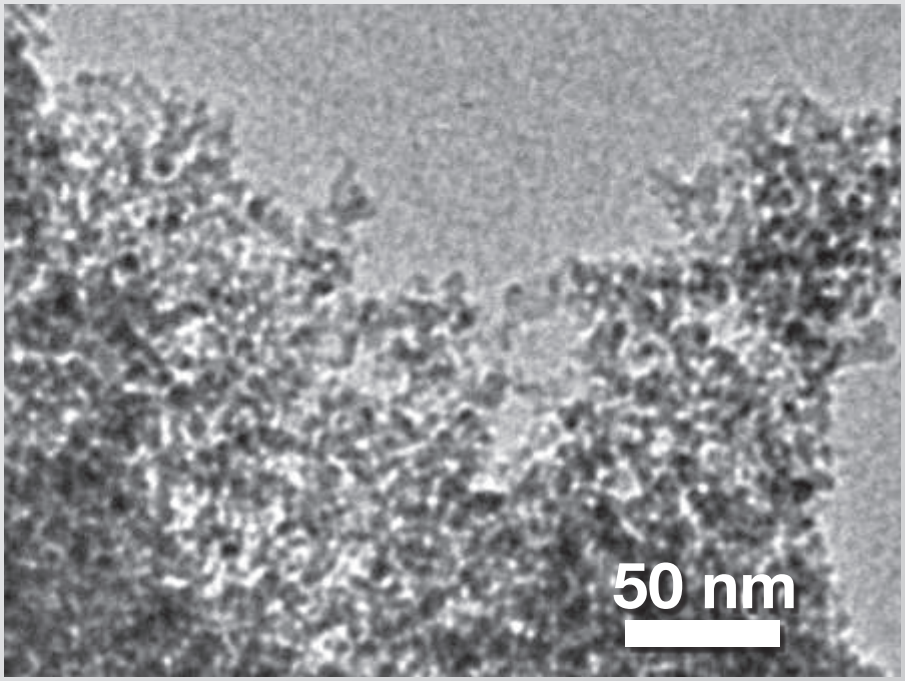

density: 1.9 kg/m^3

index of refraction: 1.03–1.08

Outlook

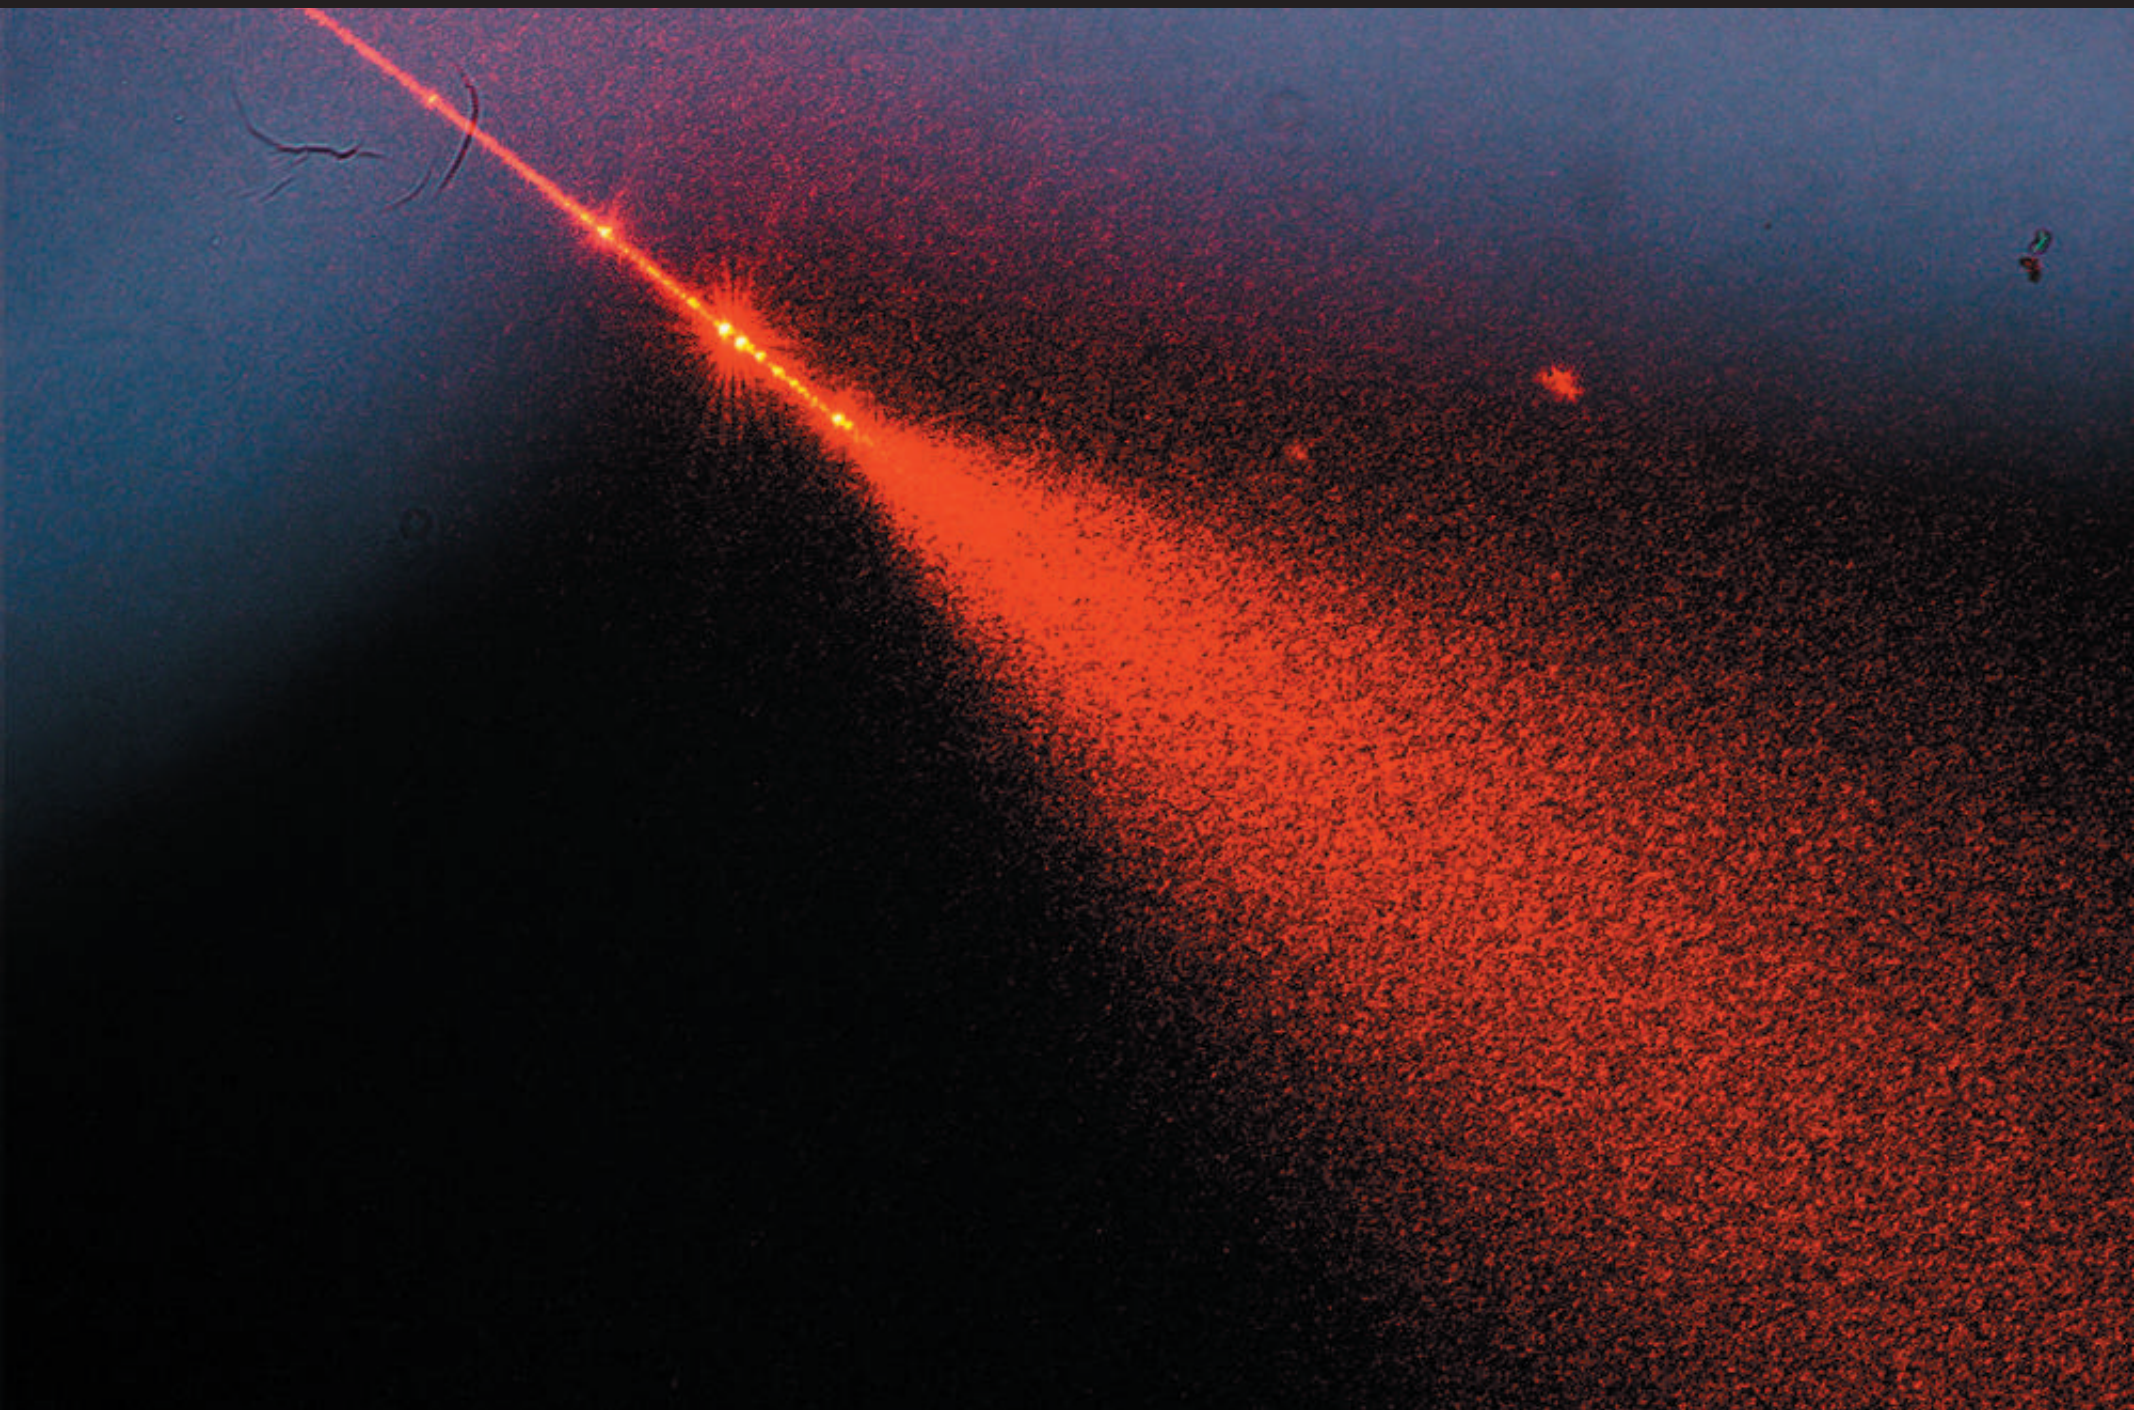

Outlook

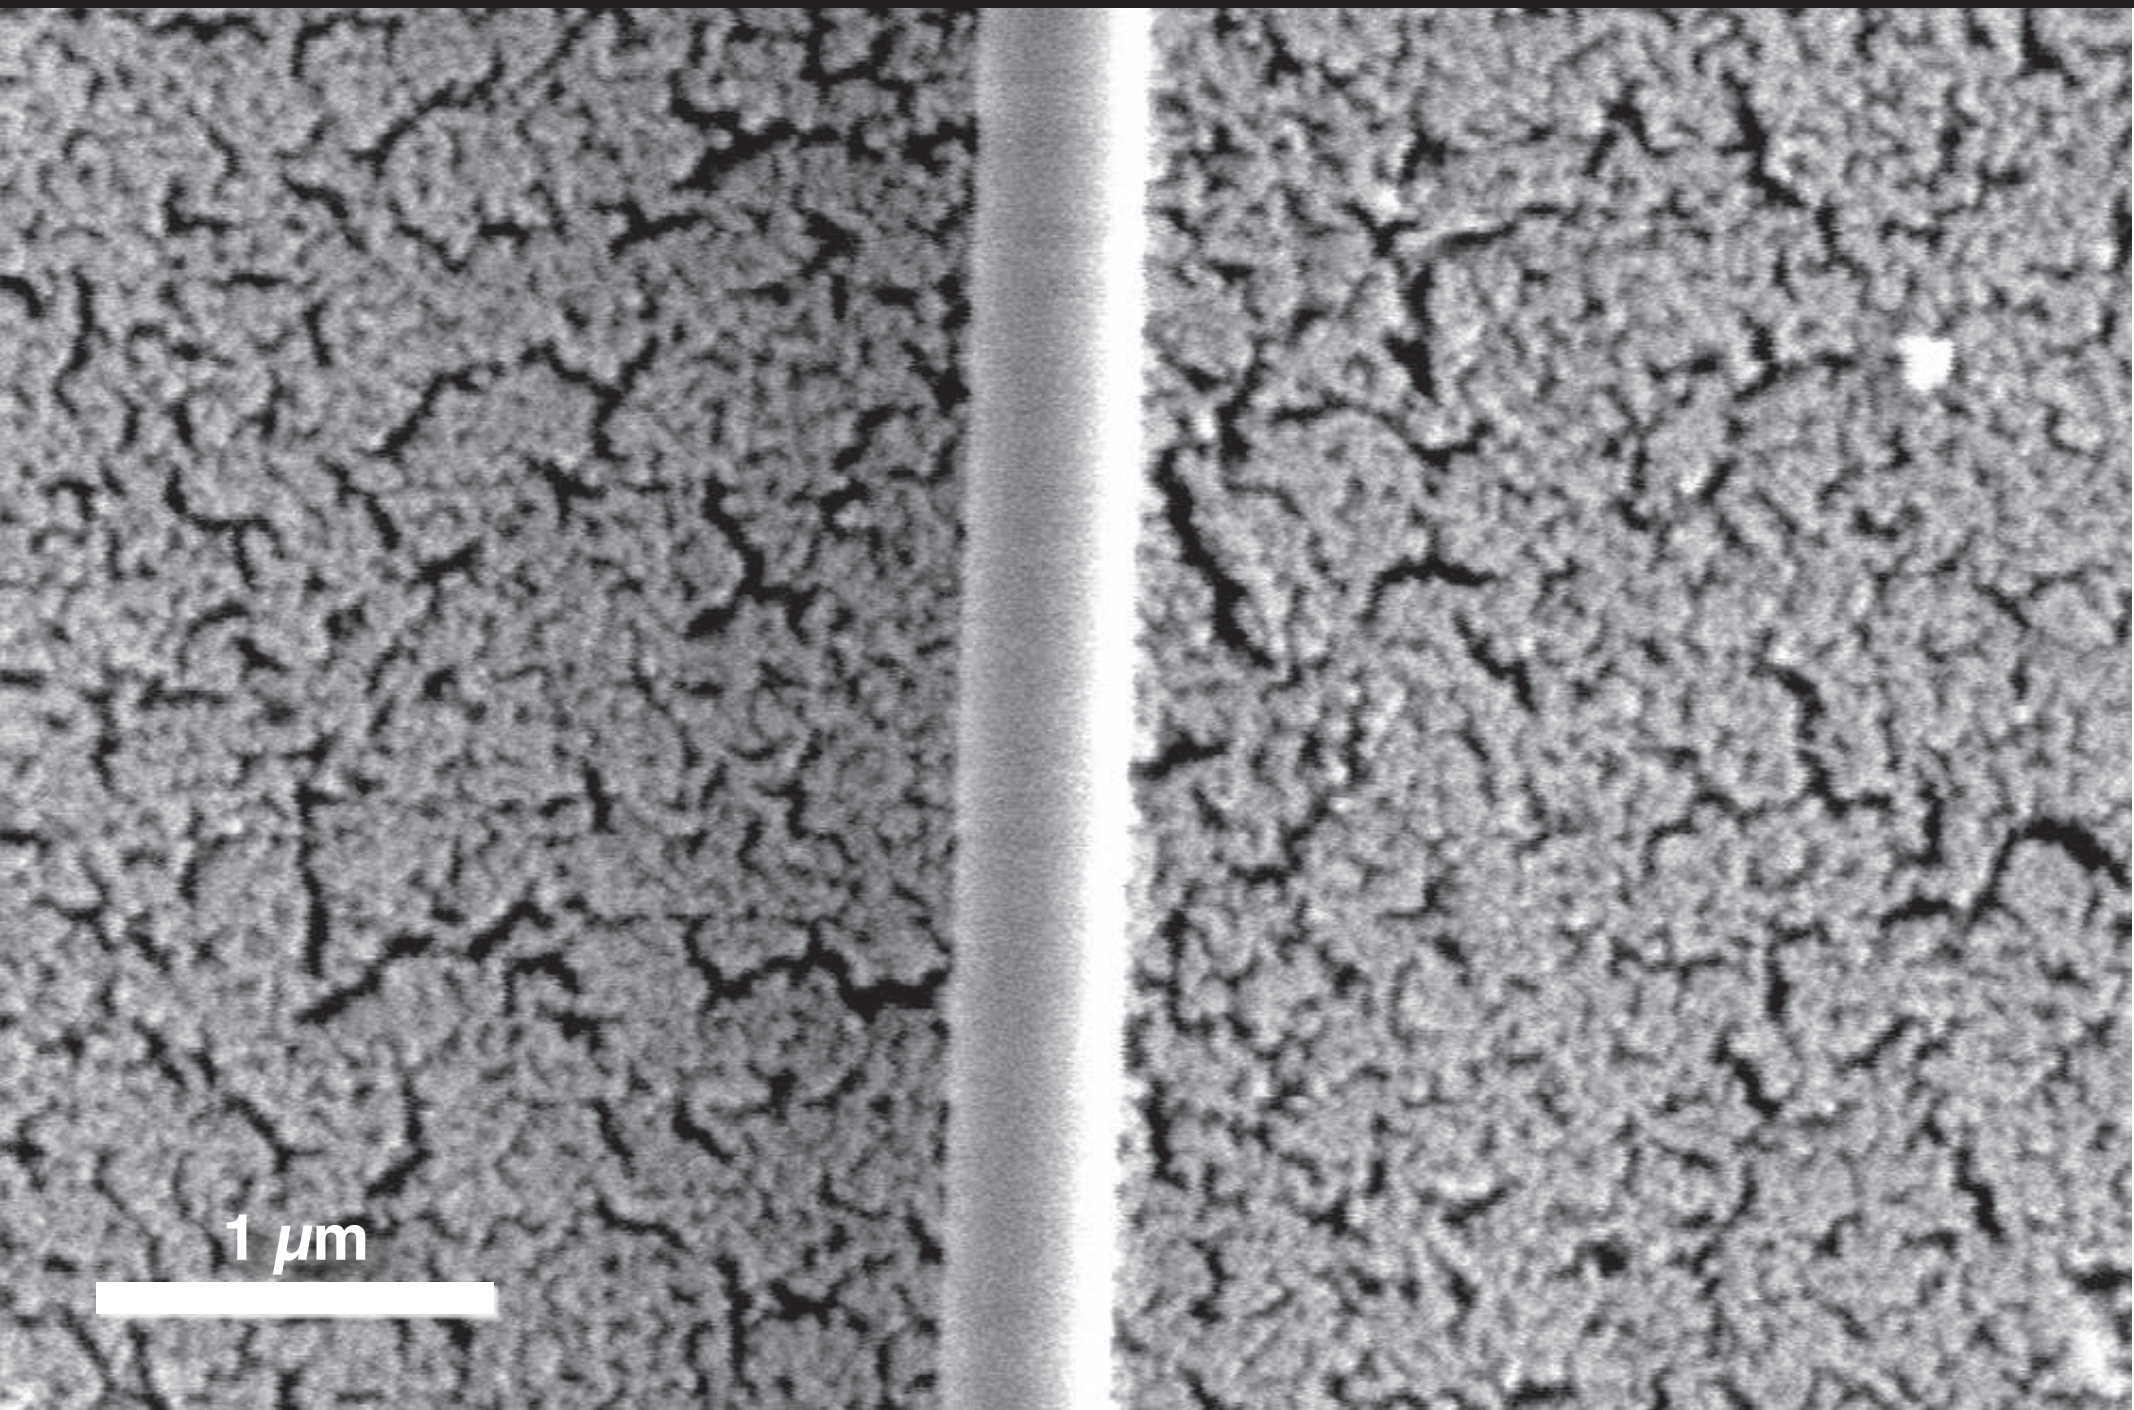

Outlook

loss measurement @ 633 nm

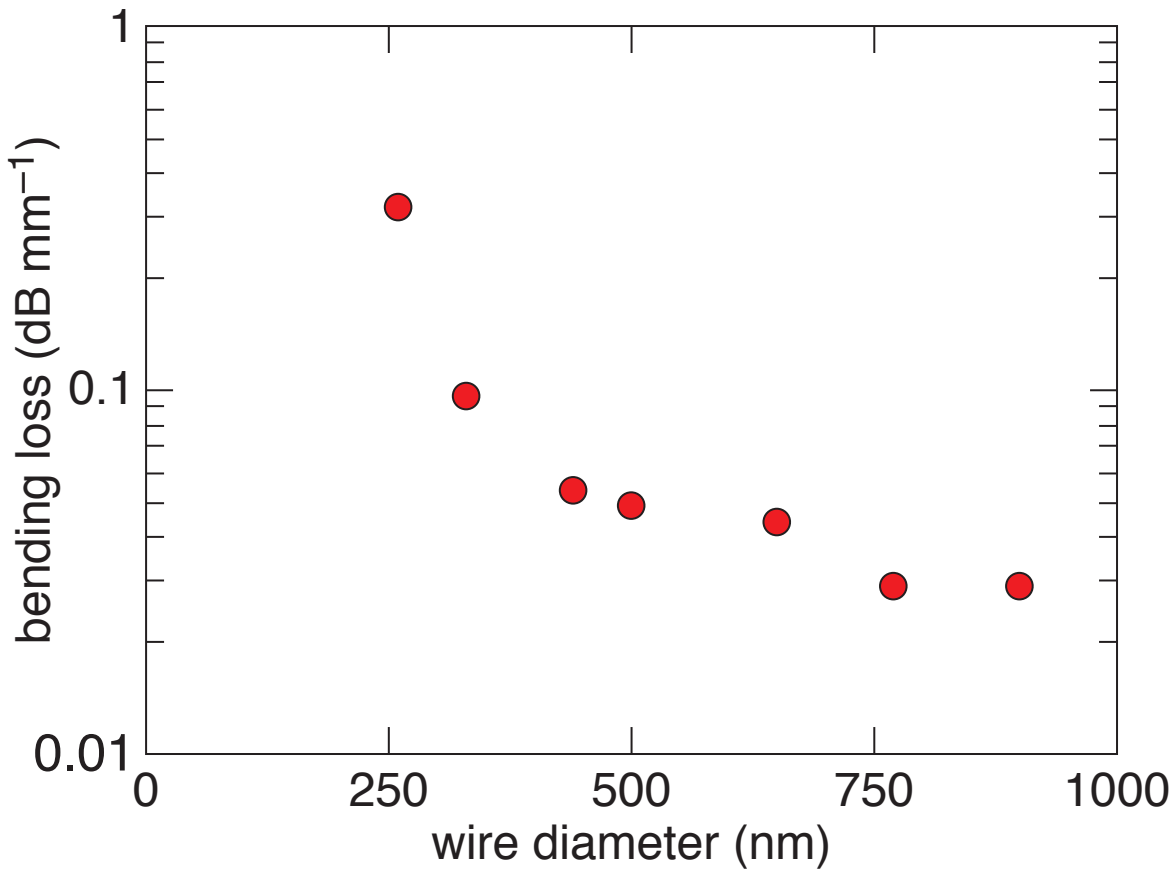

***Nanoletters*, in press (2005)**

Outlook

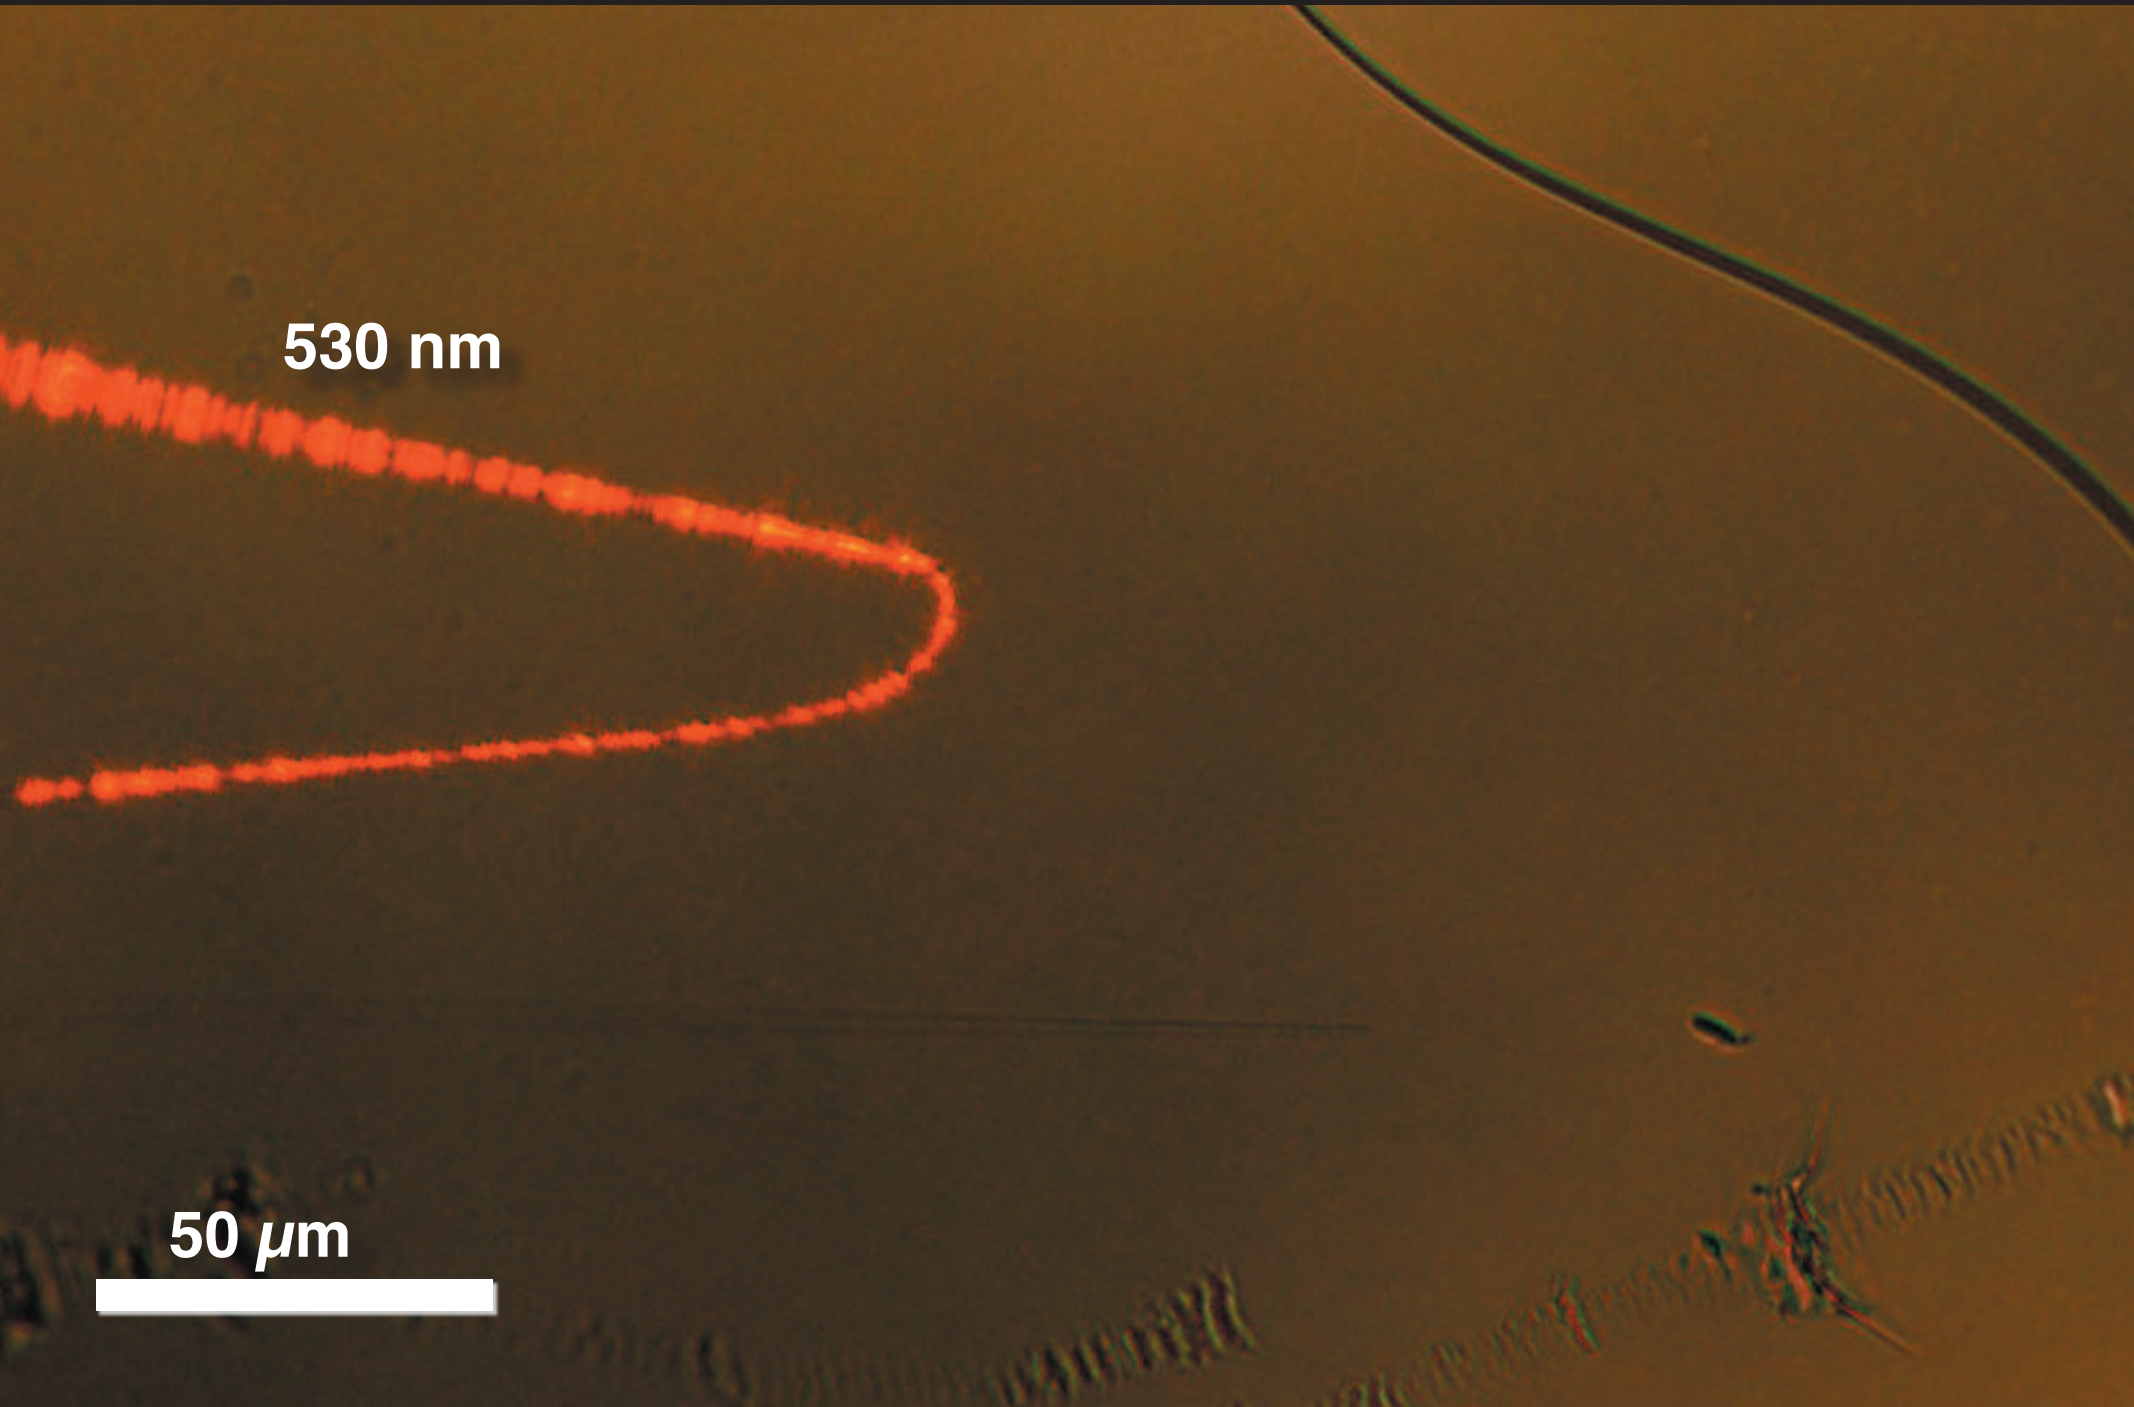

Outlook

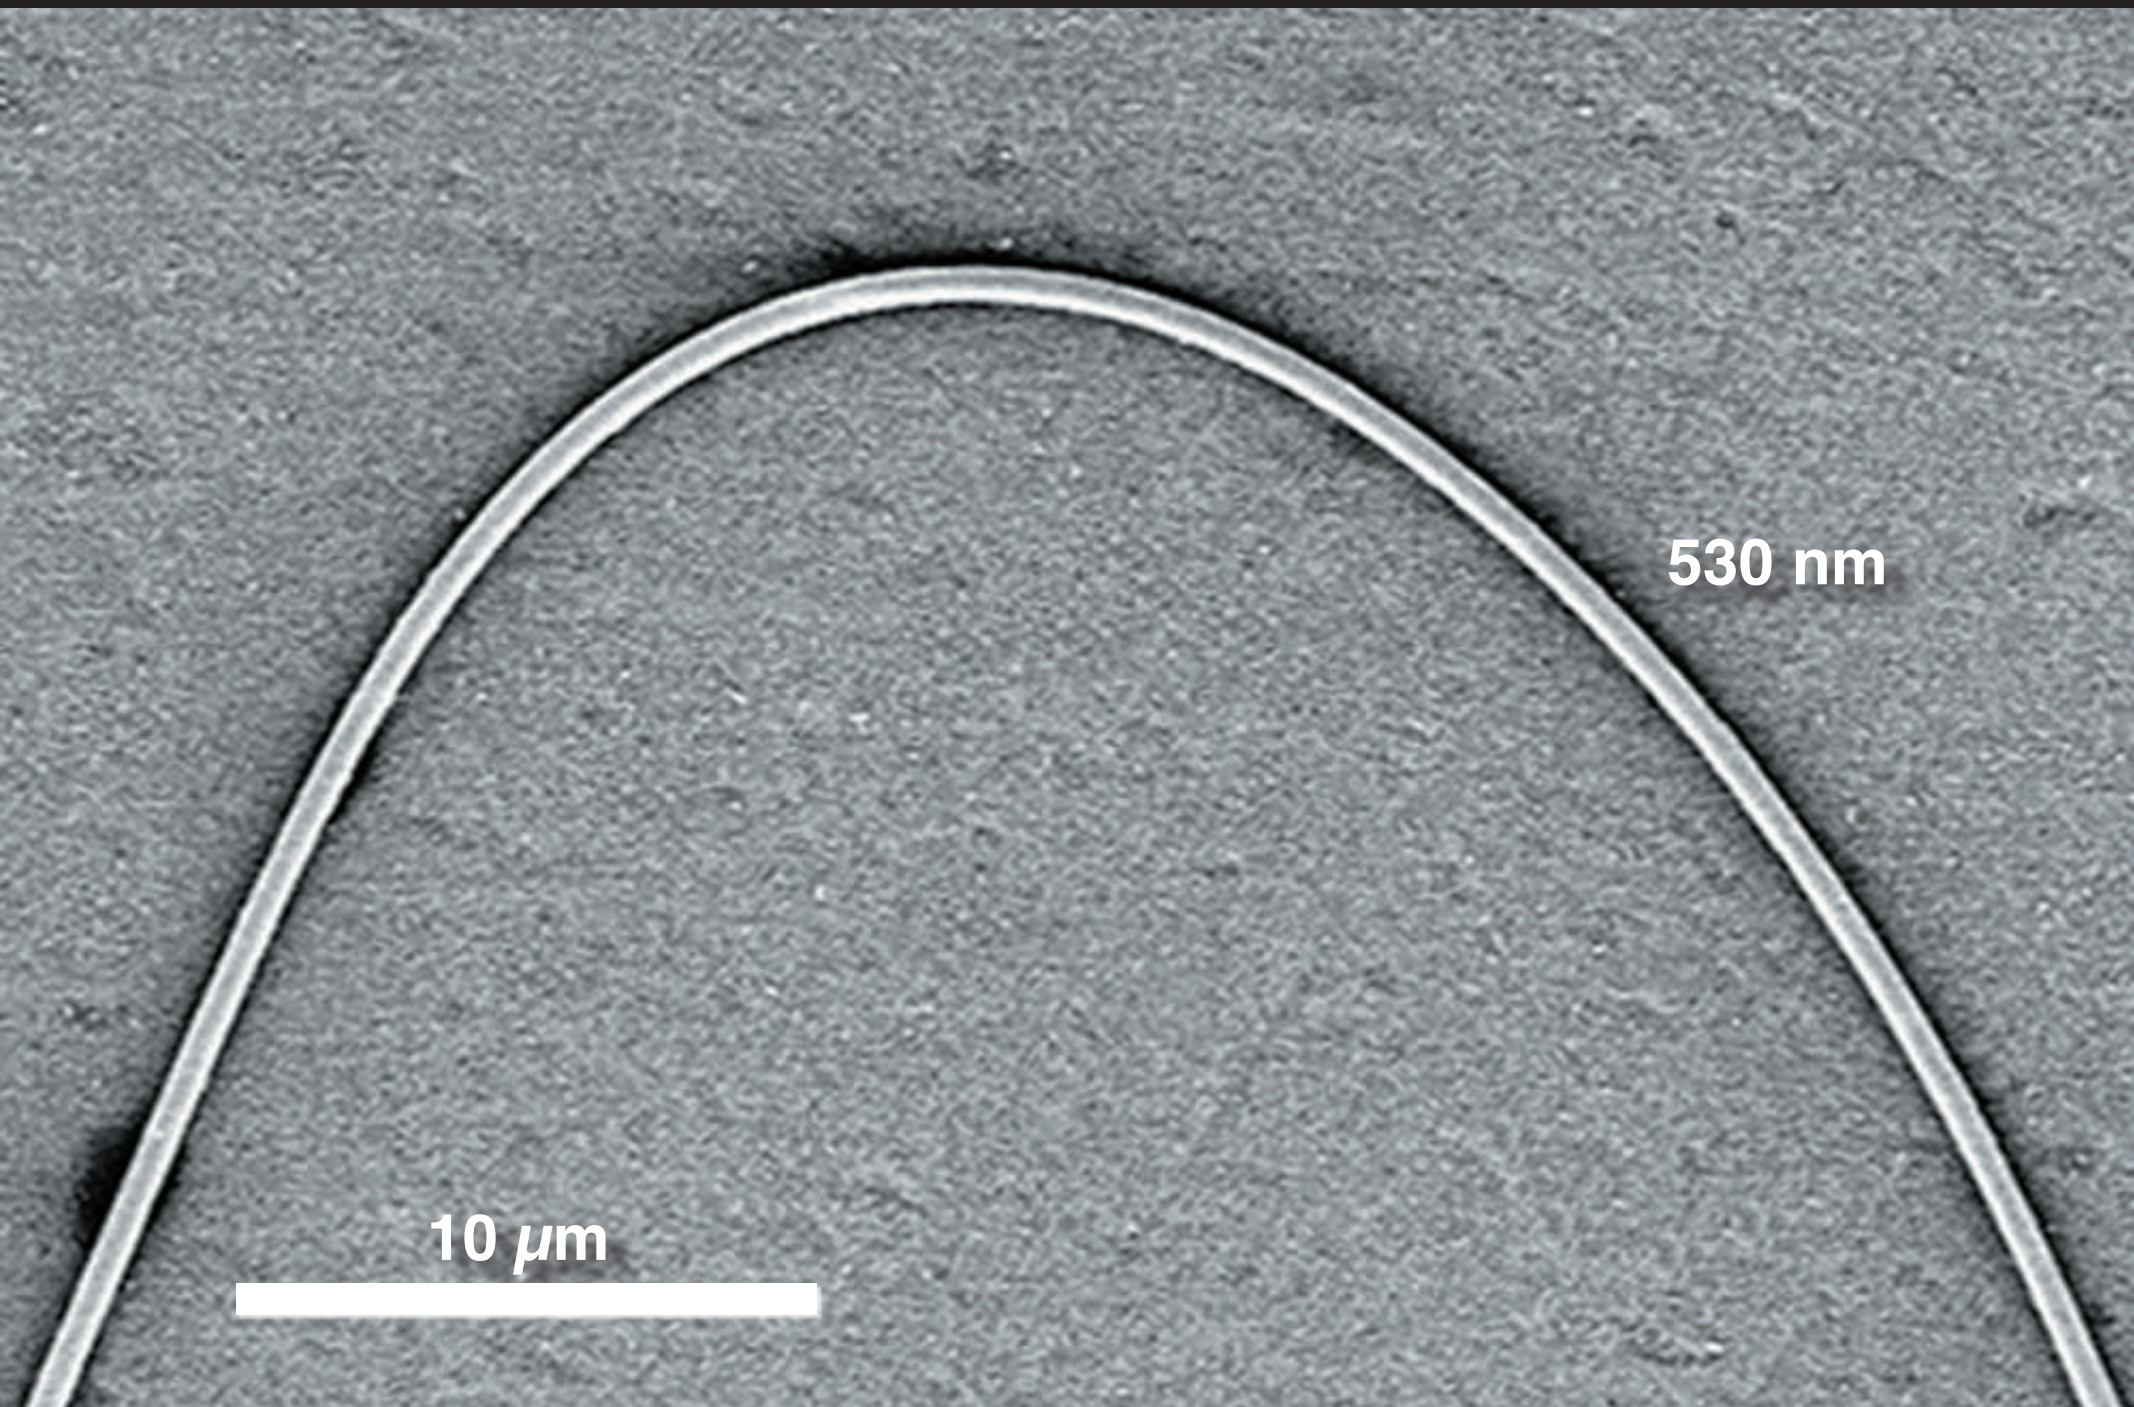

Outlook

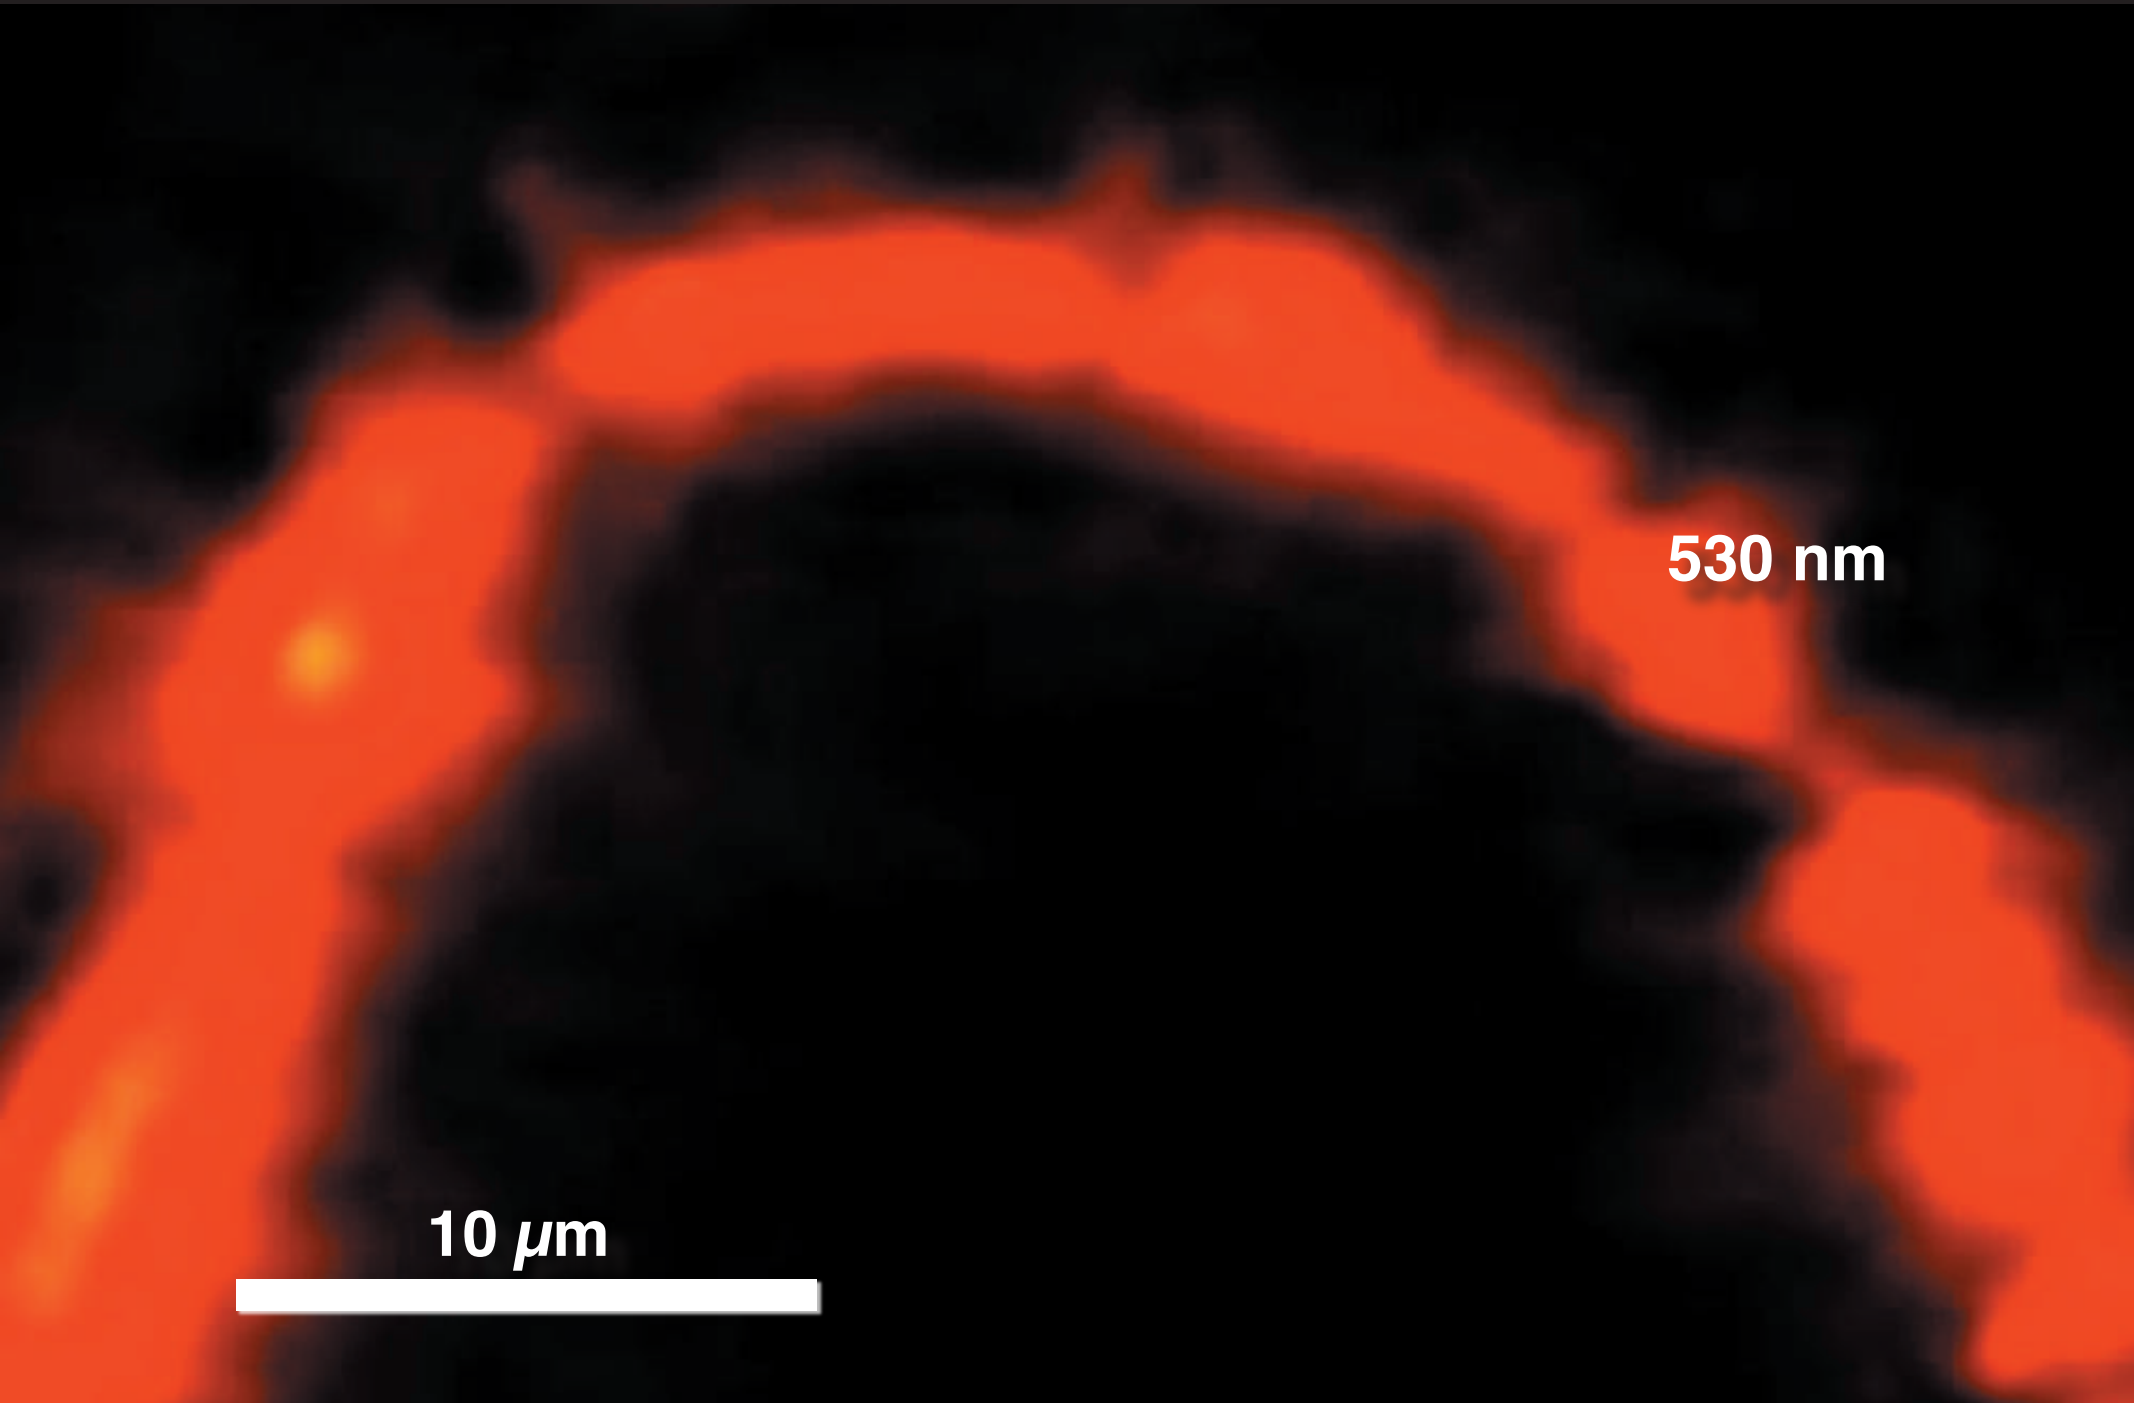

Outlook

bending loss @ 633 nm

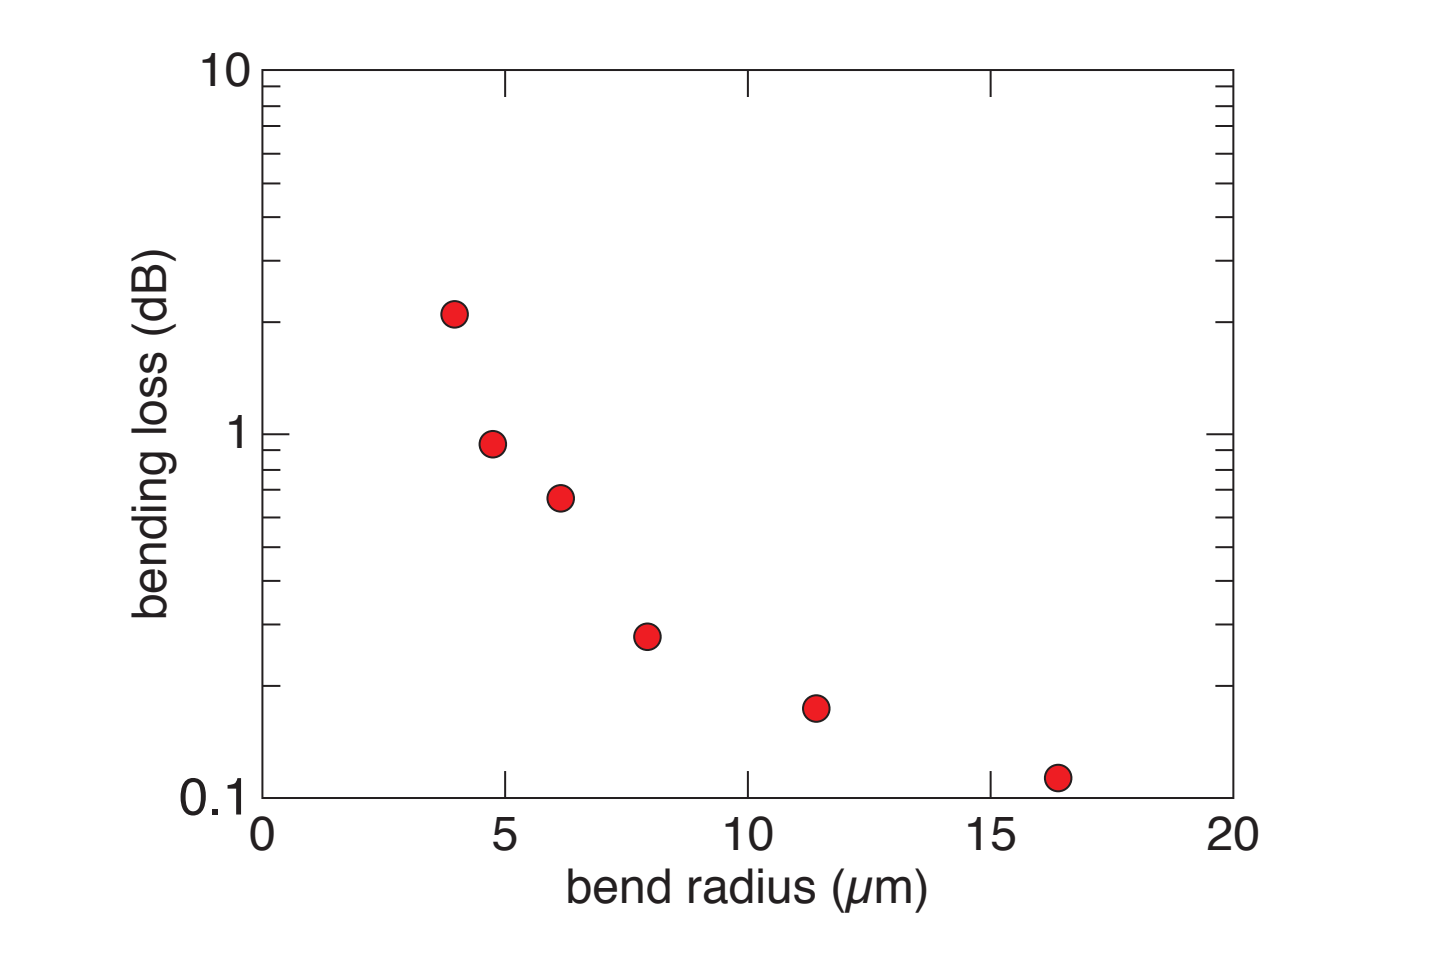

Nanoletters, in press (2005)

Outlook

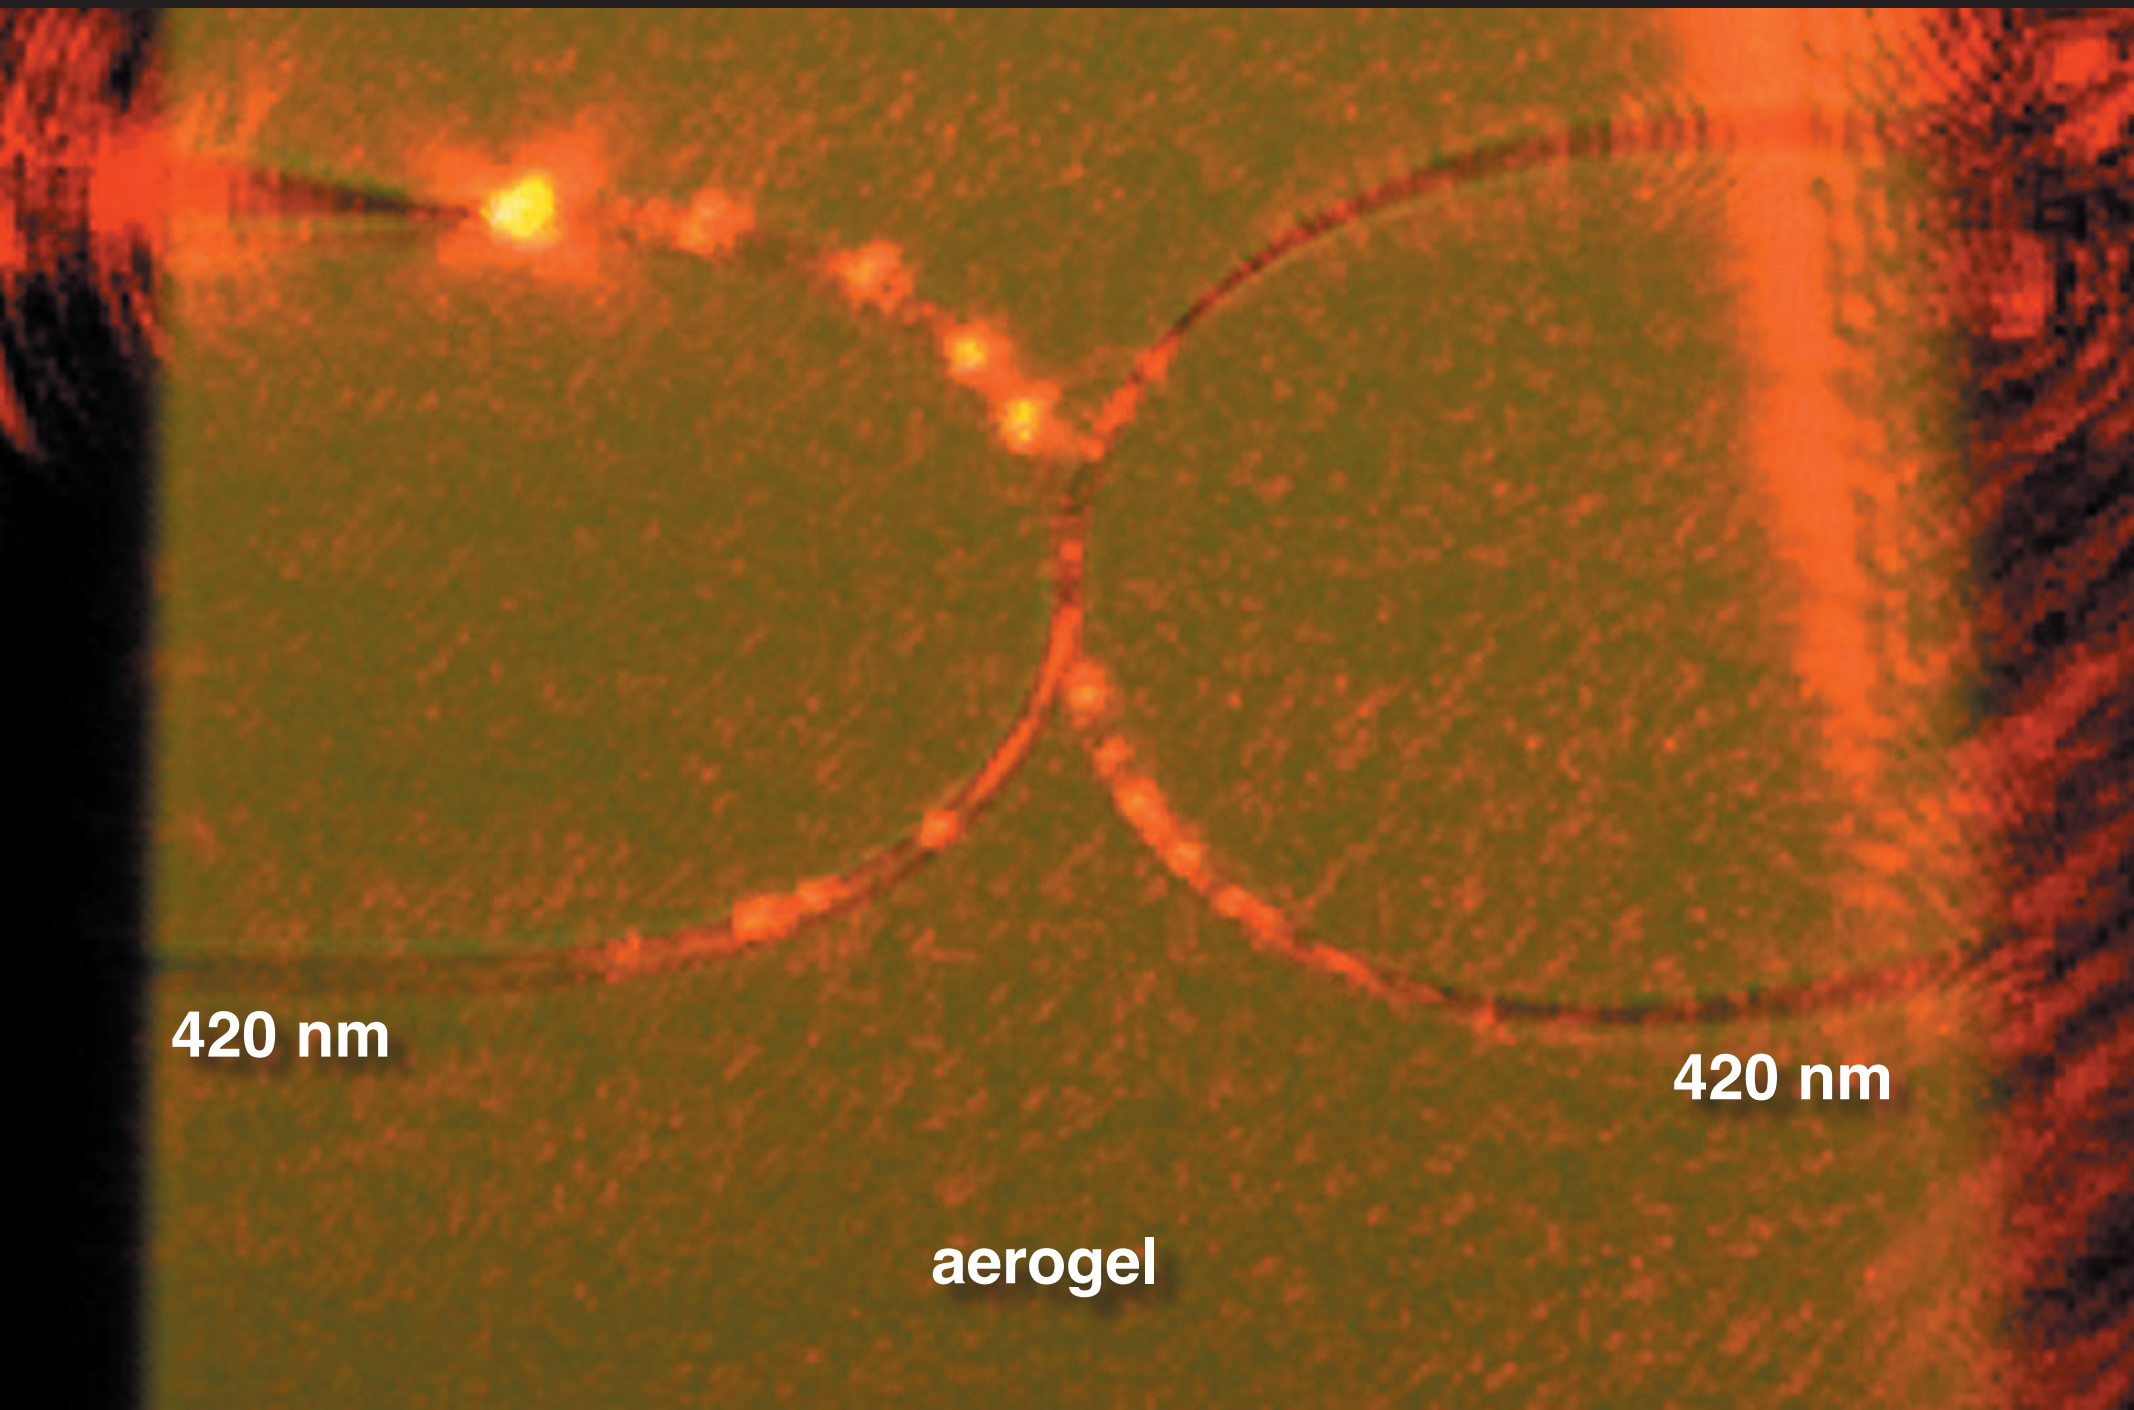

Outlook

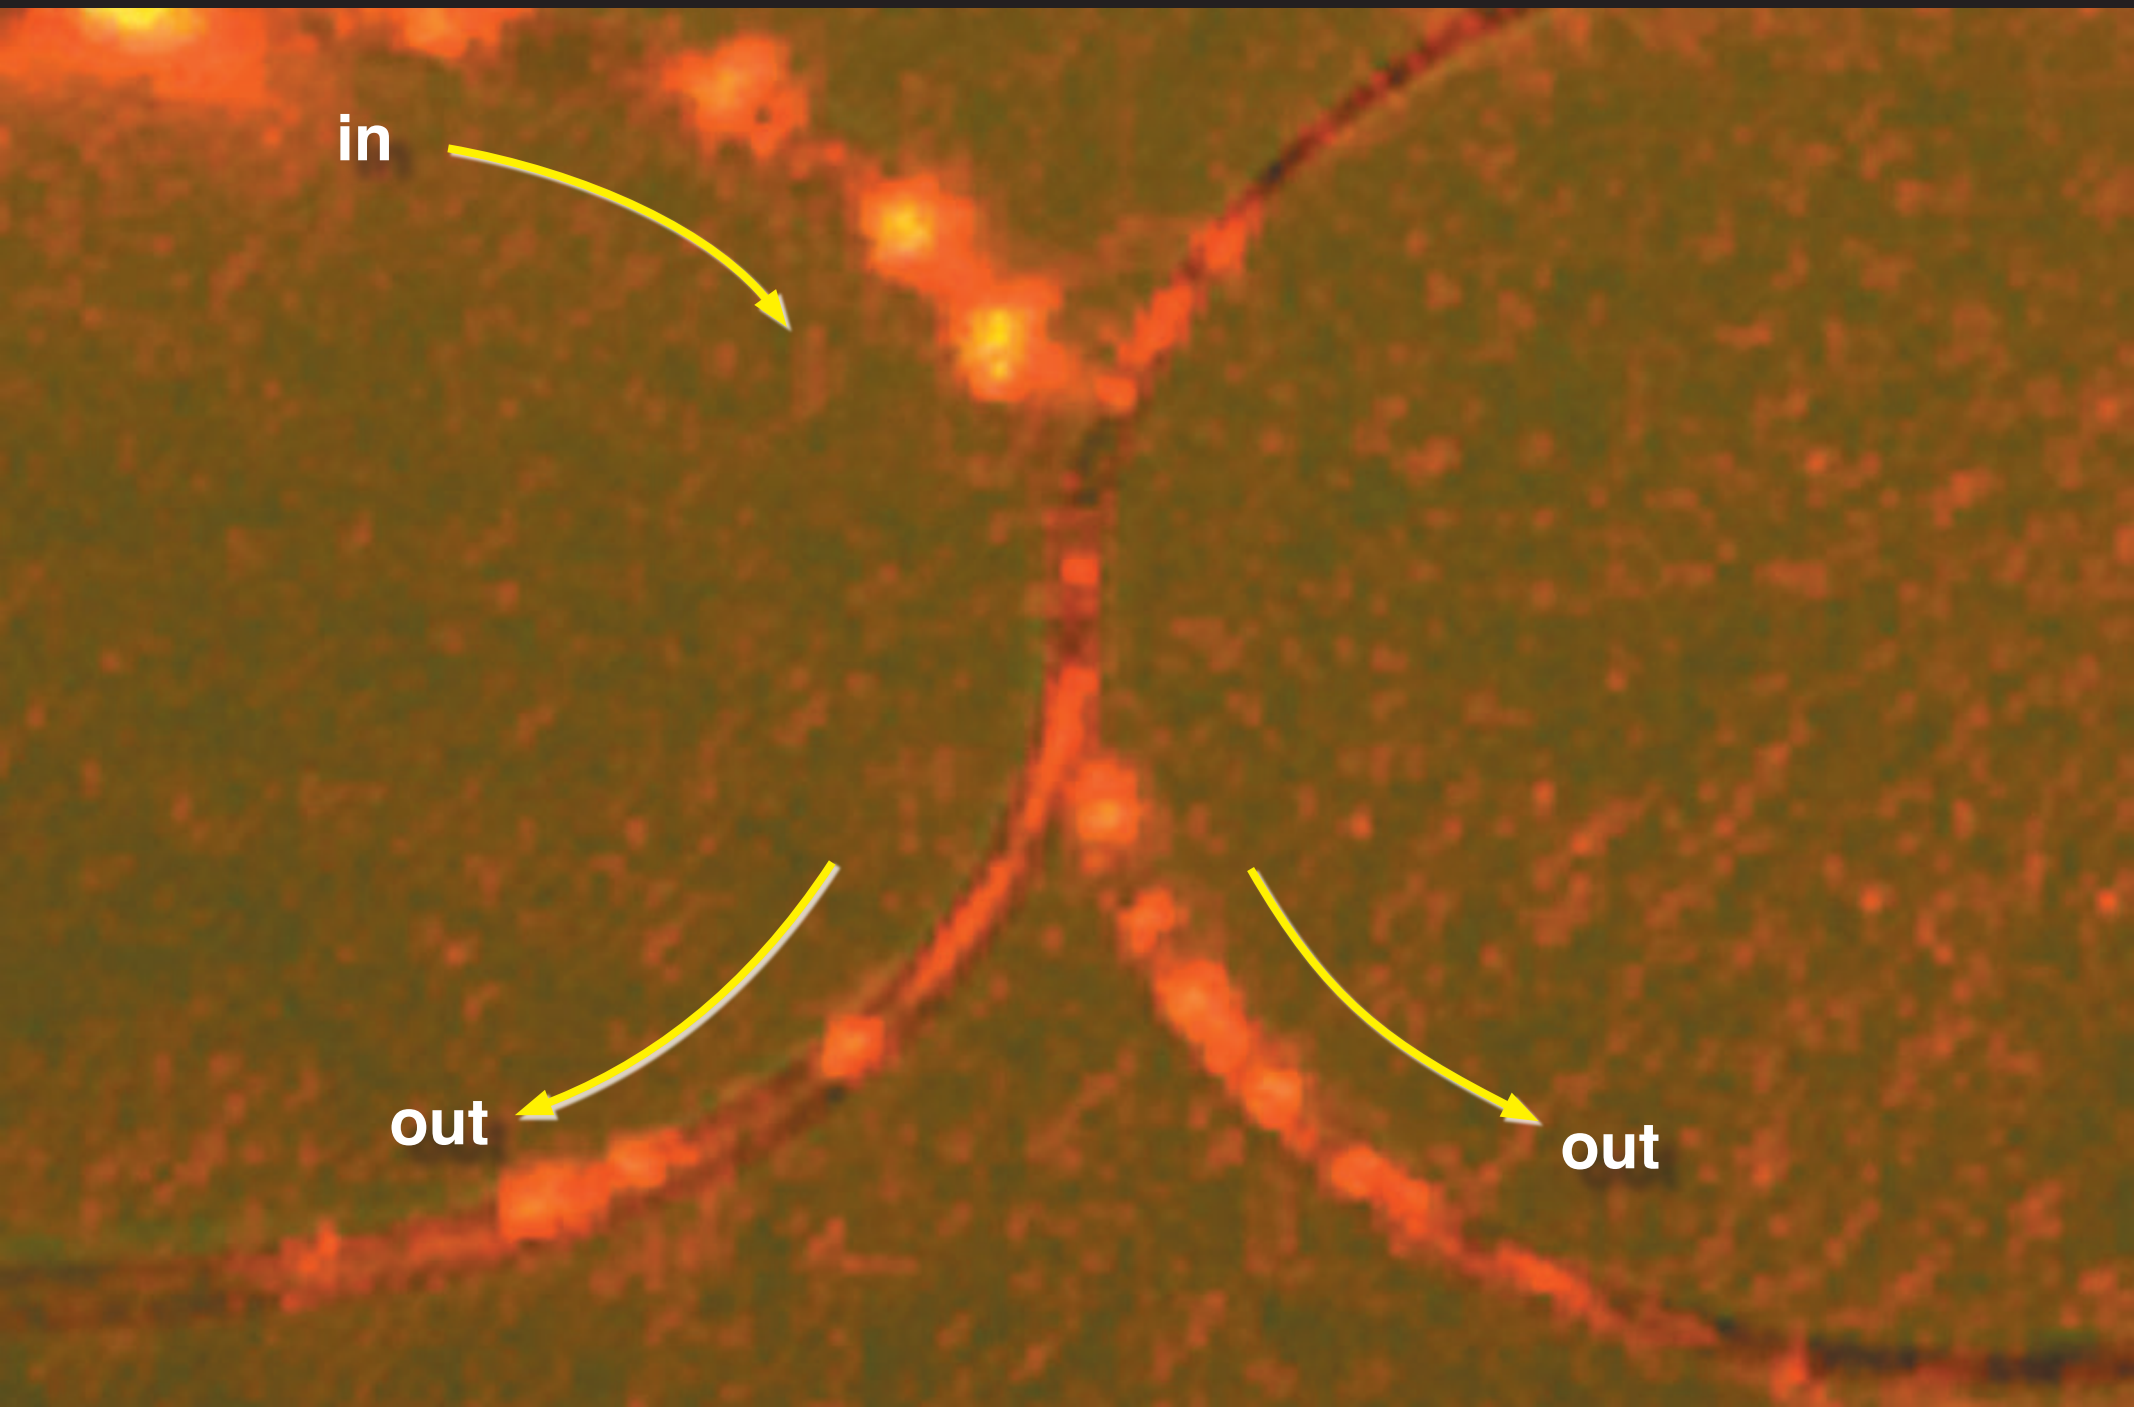

Outlook

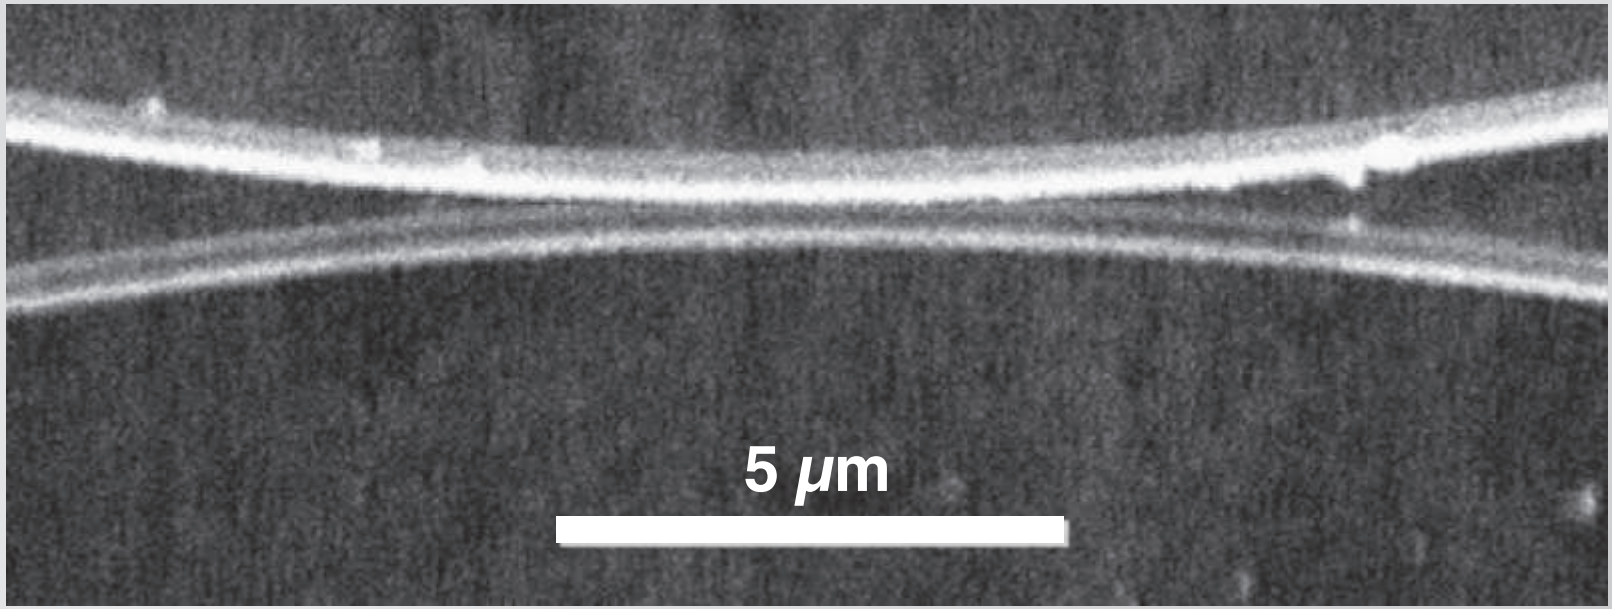

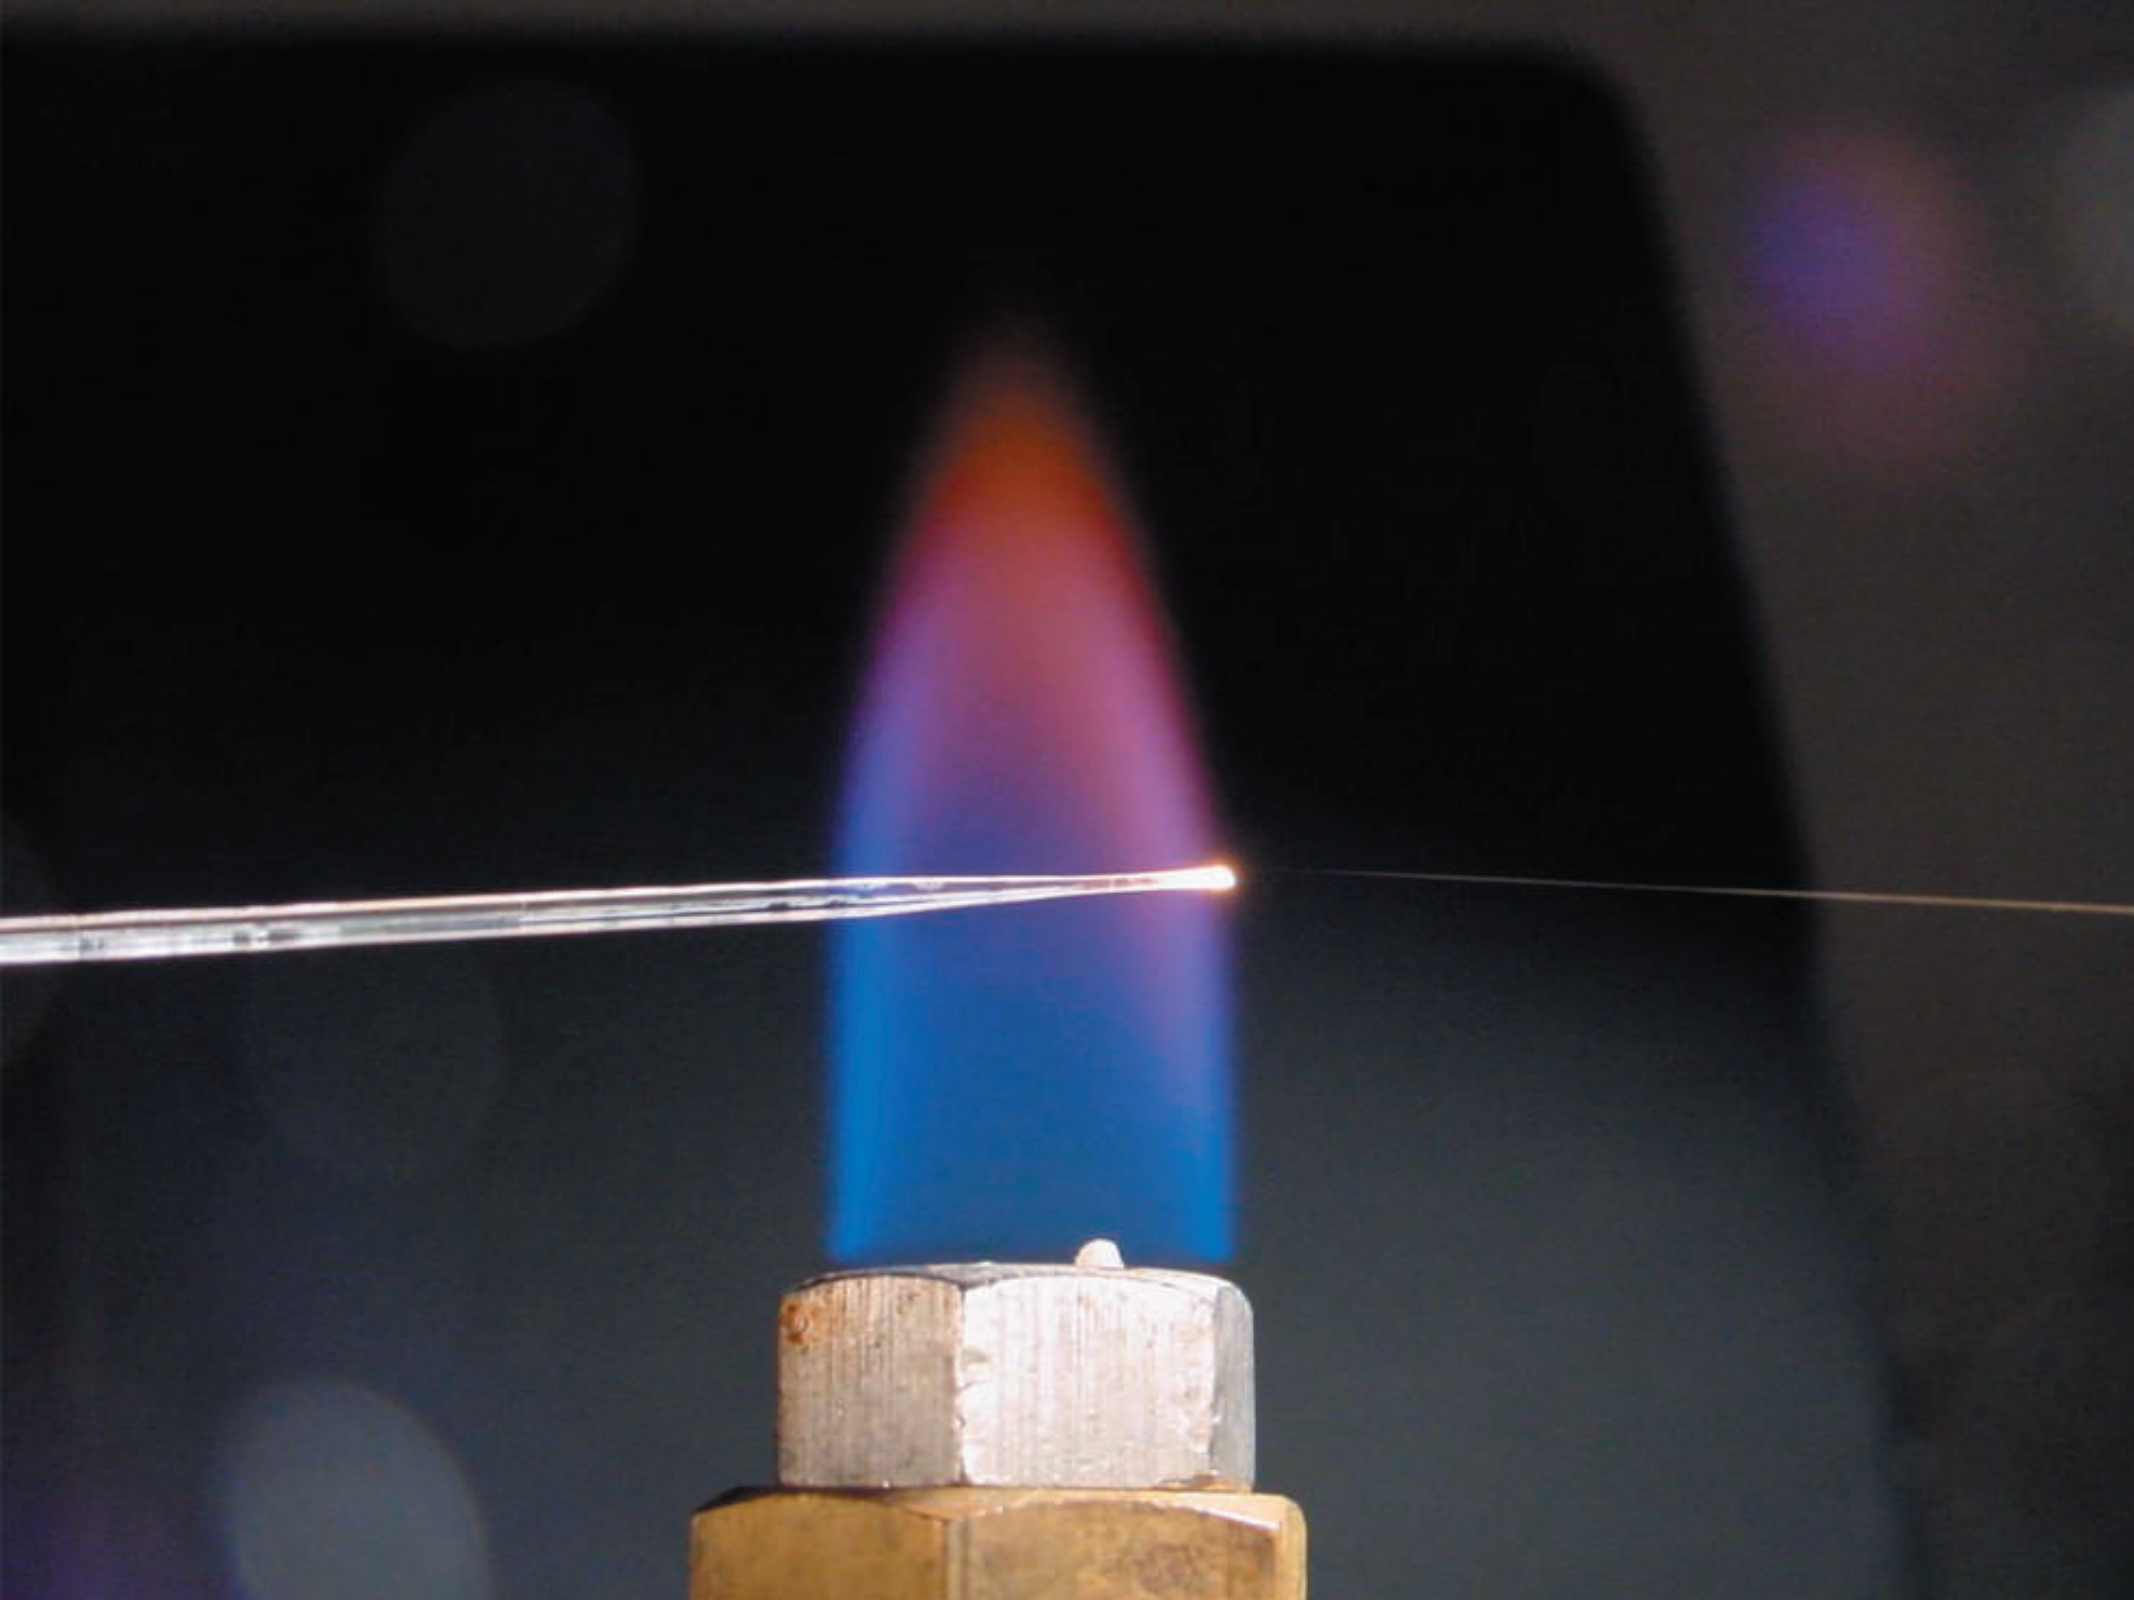

Funding:

Harvard Center for Imaging and Mesoscopic Structures
National Science Foundation
National Natural Science Foundation of China

for a copy of this presentation:

http://mazur-www.harvard.edu

Google™

Google Search I'm Feeling Lucky

Google™

mazur

Google Search | I'm Feeling Lucky

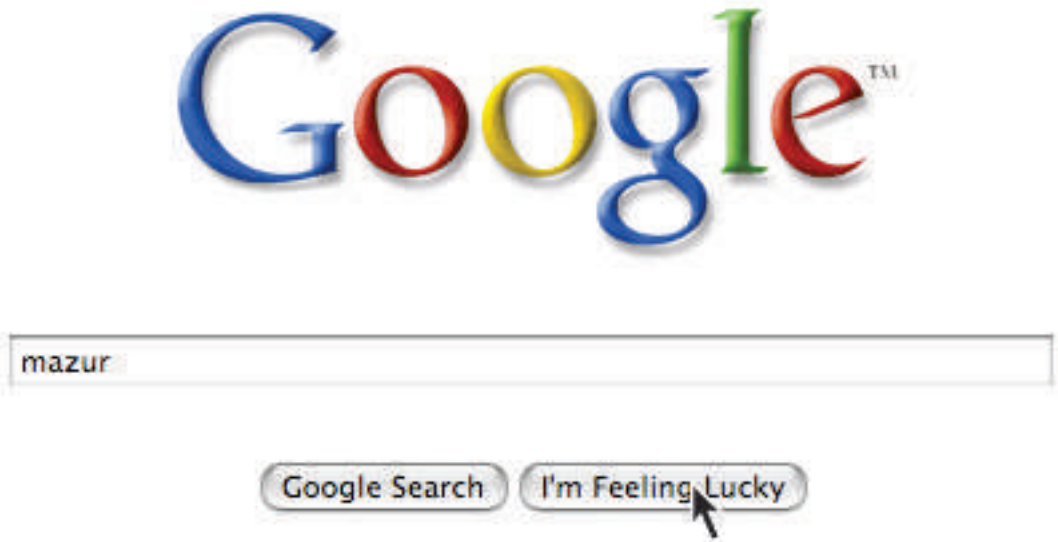
Google
mazur
Google Search
I'm Feeling Lucky

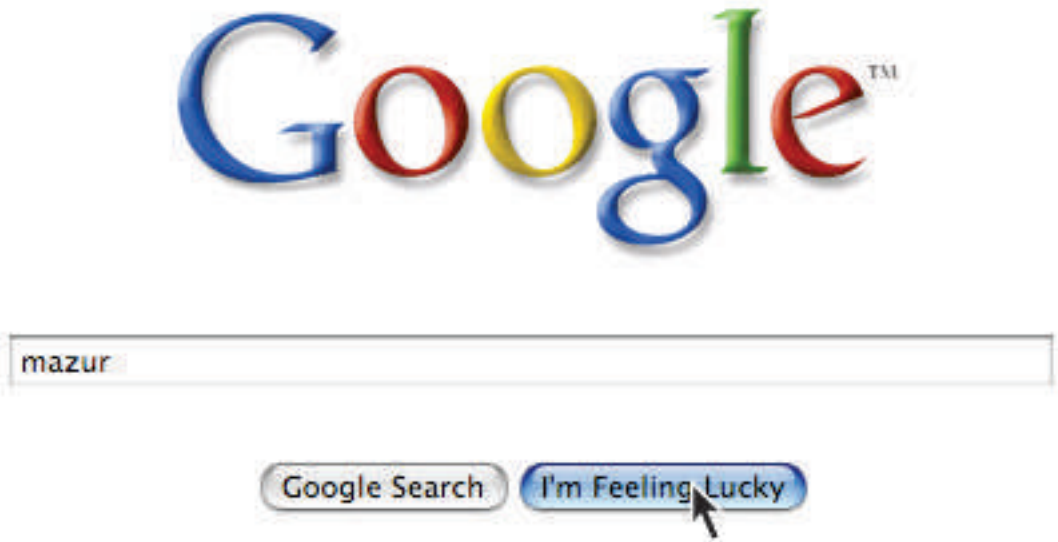
Google
mazur
Google Search
I'm Feeling Lucky

Funding:

Harvard Center for Imaging and Mesoscopic Structures
National Science Foundation
National Natural Science Foundation of China

for a copy of this presentation:

http://mazur-www.harvard.edu