Nonlinear optics at the nanoscale

ICL'08
Lyon, France, 7 Juillet 2008

Geoff Svacha

Rafael Gattass

Tobias Voss

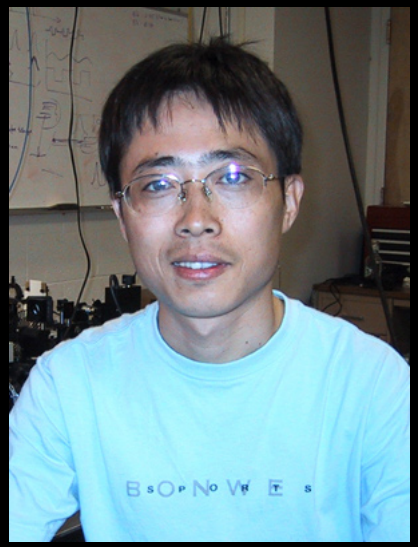

Limin Tong

and also....

Jonathan Aschom
Mengyan Shen
Iva Maxwell
James Carey
Brian Tull
Dr. Yuan Lu
Dr. Richard Schalek
Prof. Federico Capasso
Prof. Cynthia Friend

Xuewen Chen (Zhejiang)
Zhanghua Han (Zhejiang)
Dr. Sailing He (Zhejiang)
Liu Liu (Zhejiang)
Dr. Jingyi Lou (Zhejiang)
Dr. Ray Mariella (LLNL)
Prof. Frank Marlow (MPI Mühlheim)
Prof. Sven Müller (Göttingen)
Prof. Carsten Ronning (Göttingen)

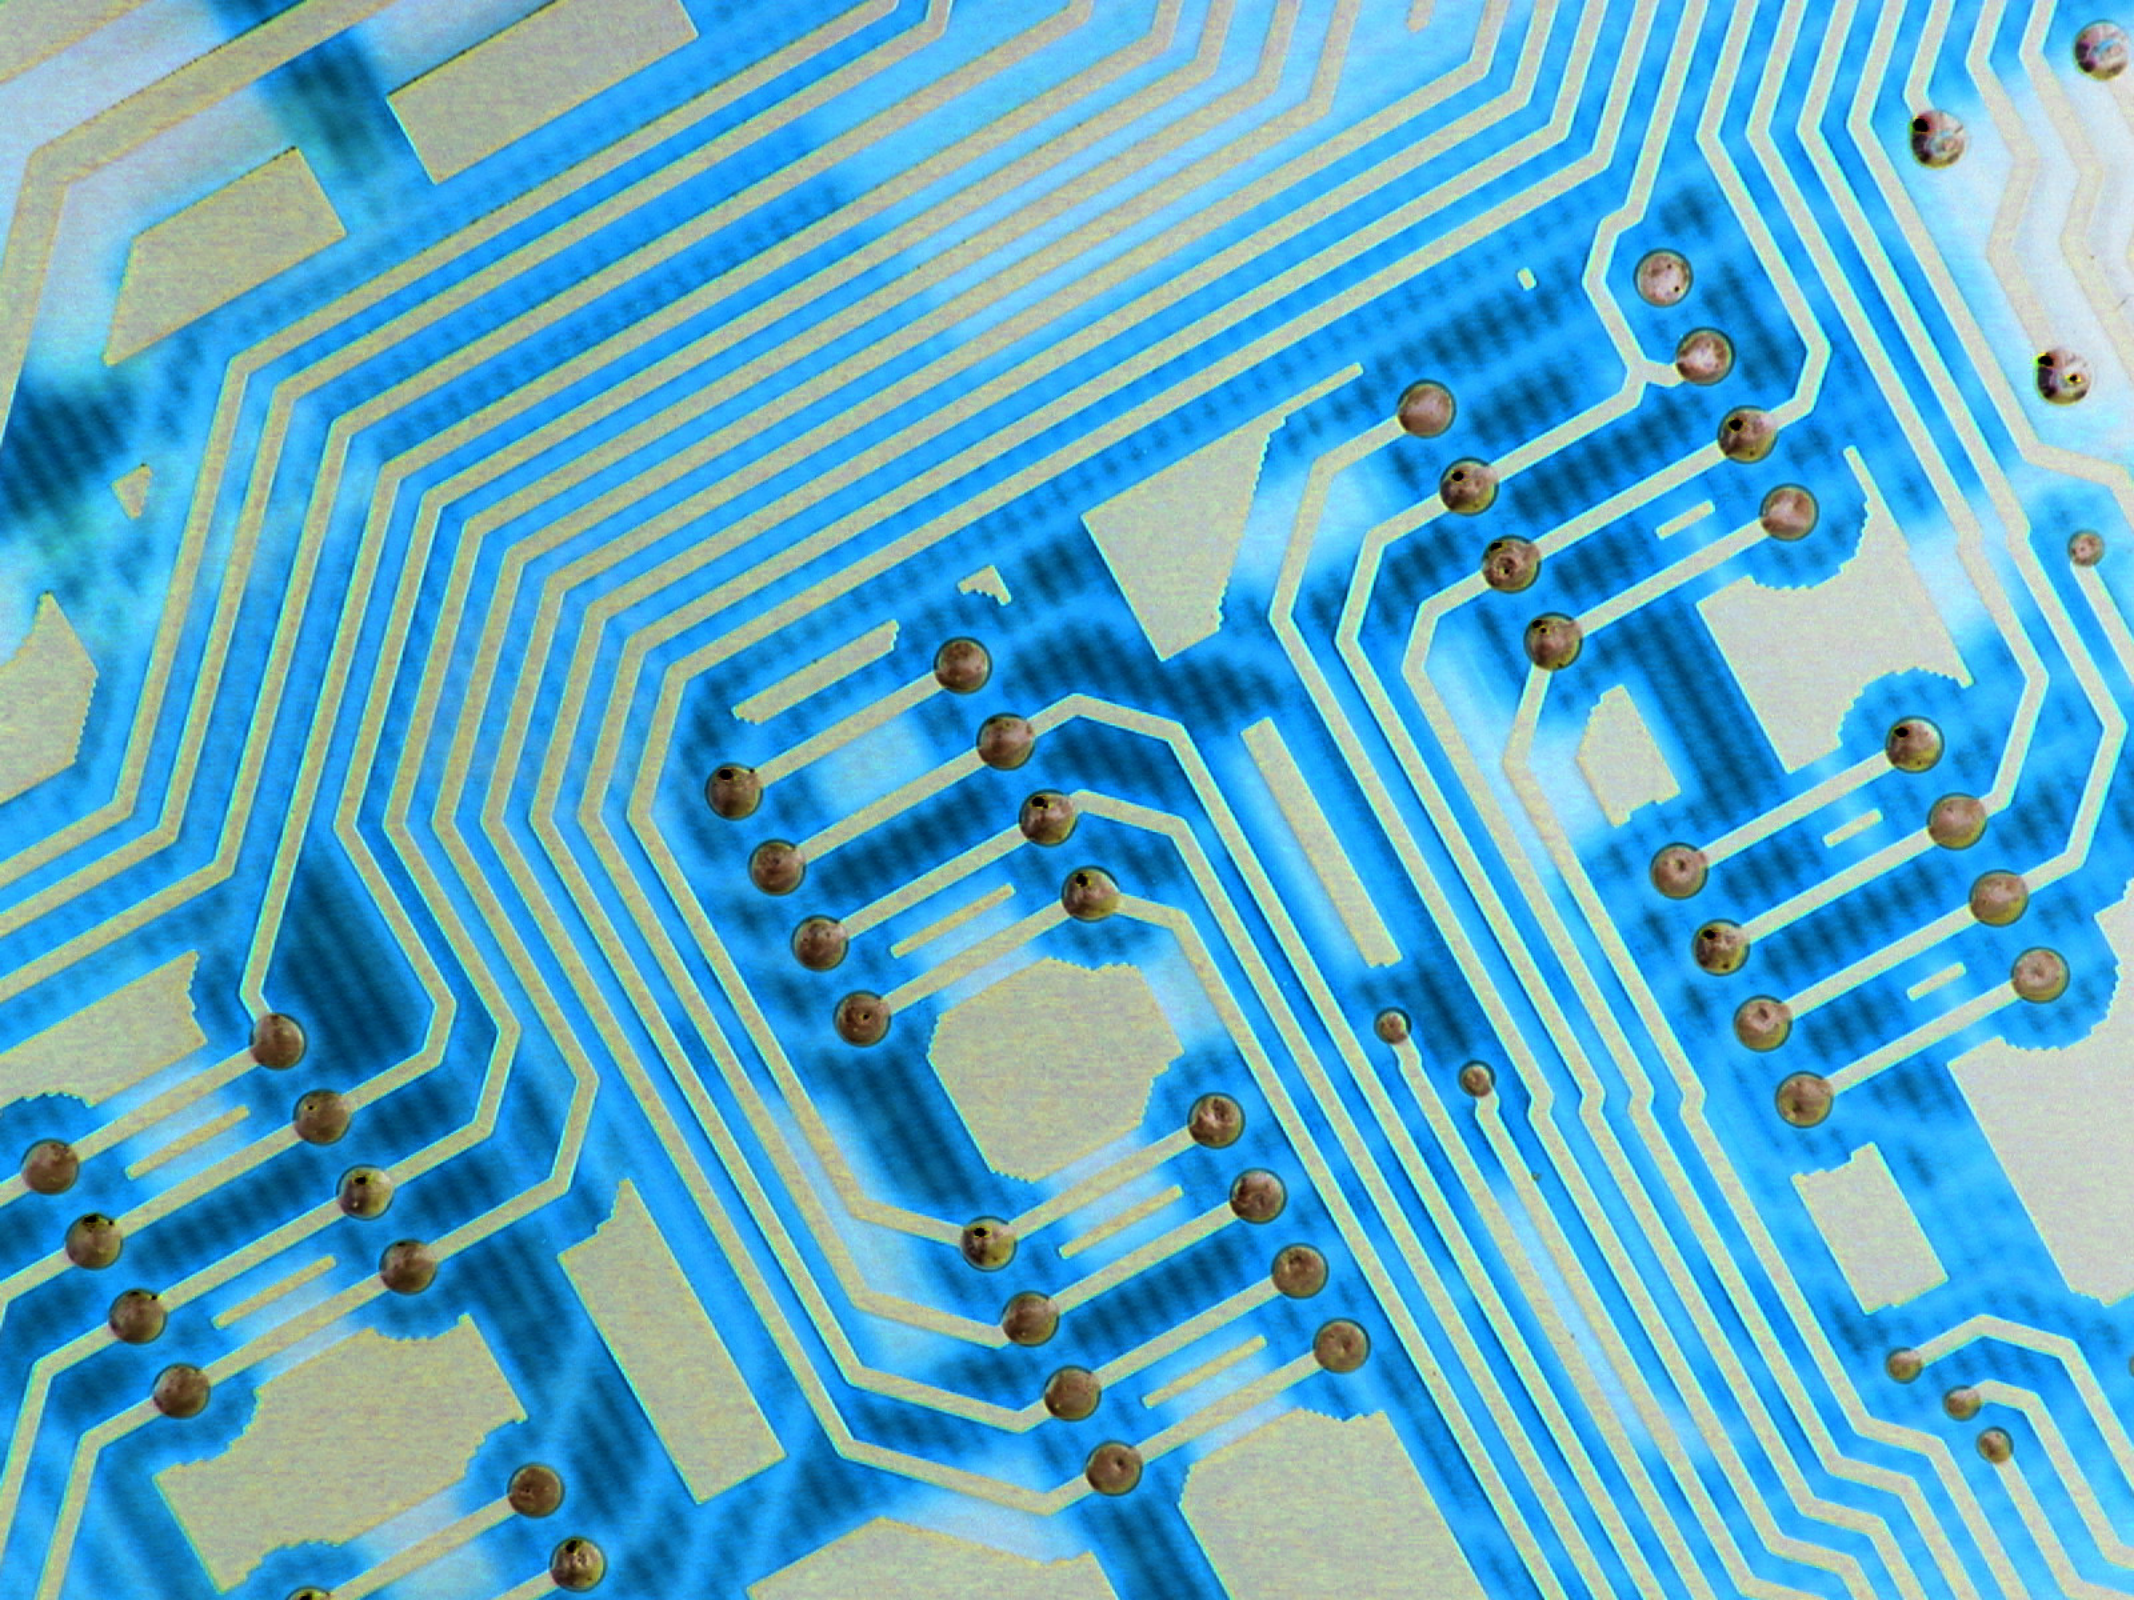

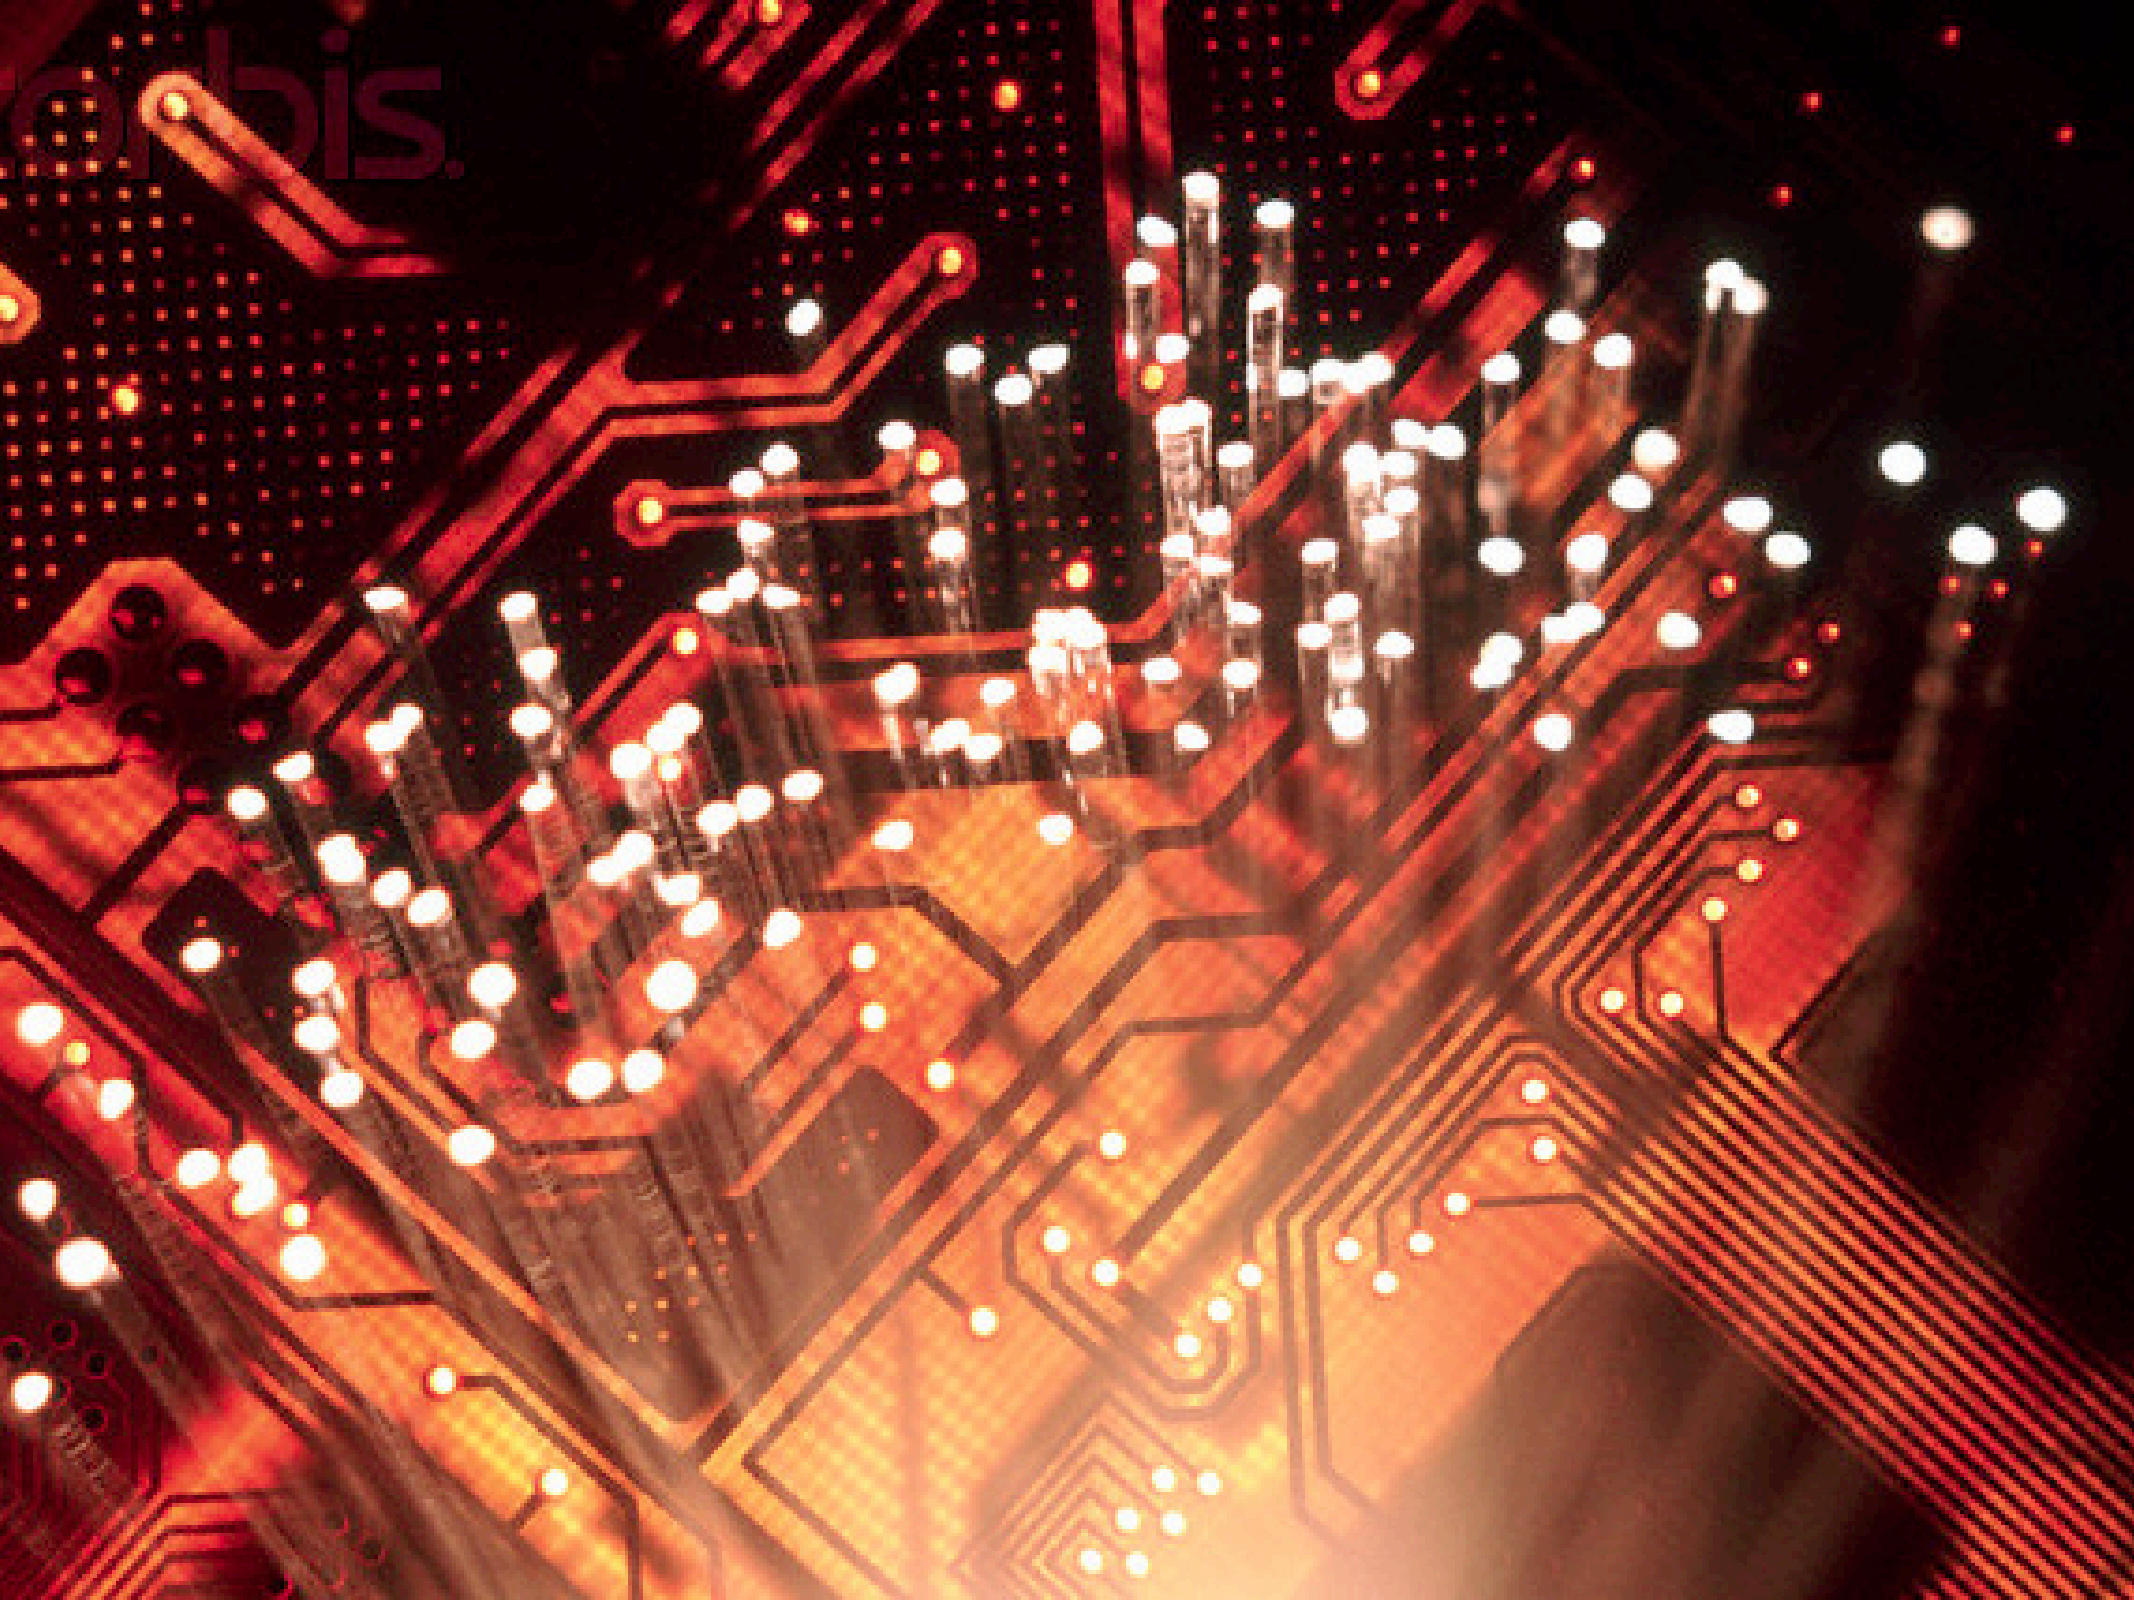

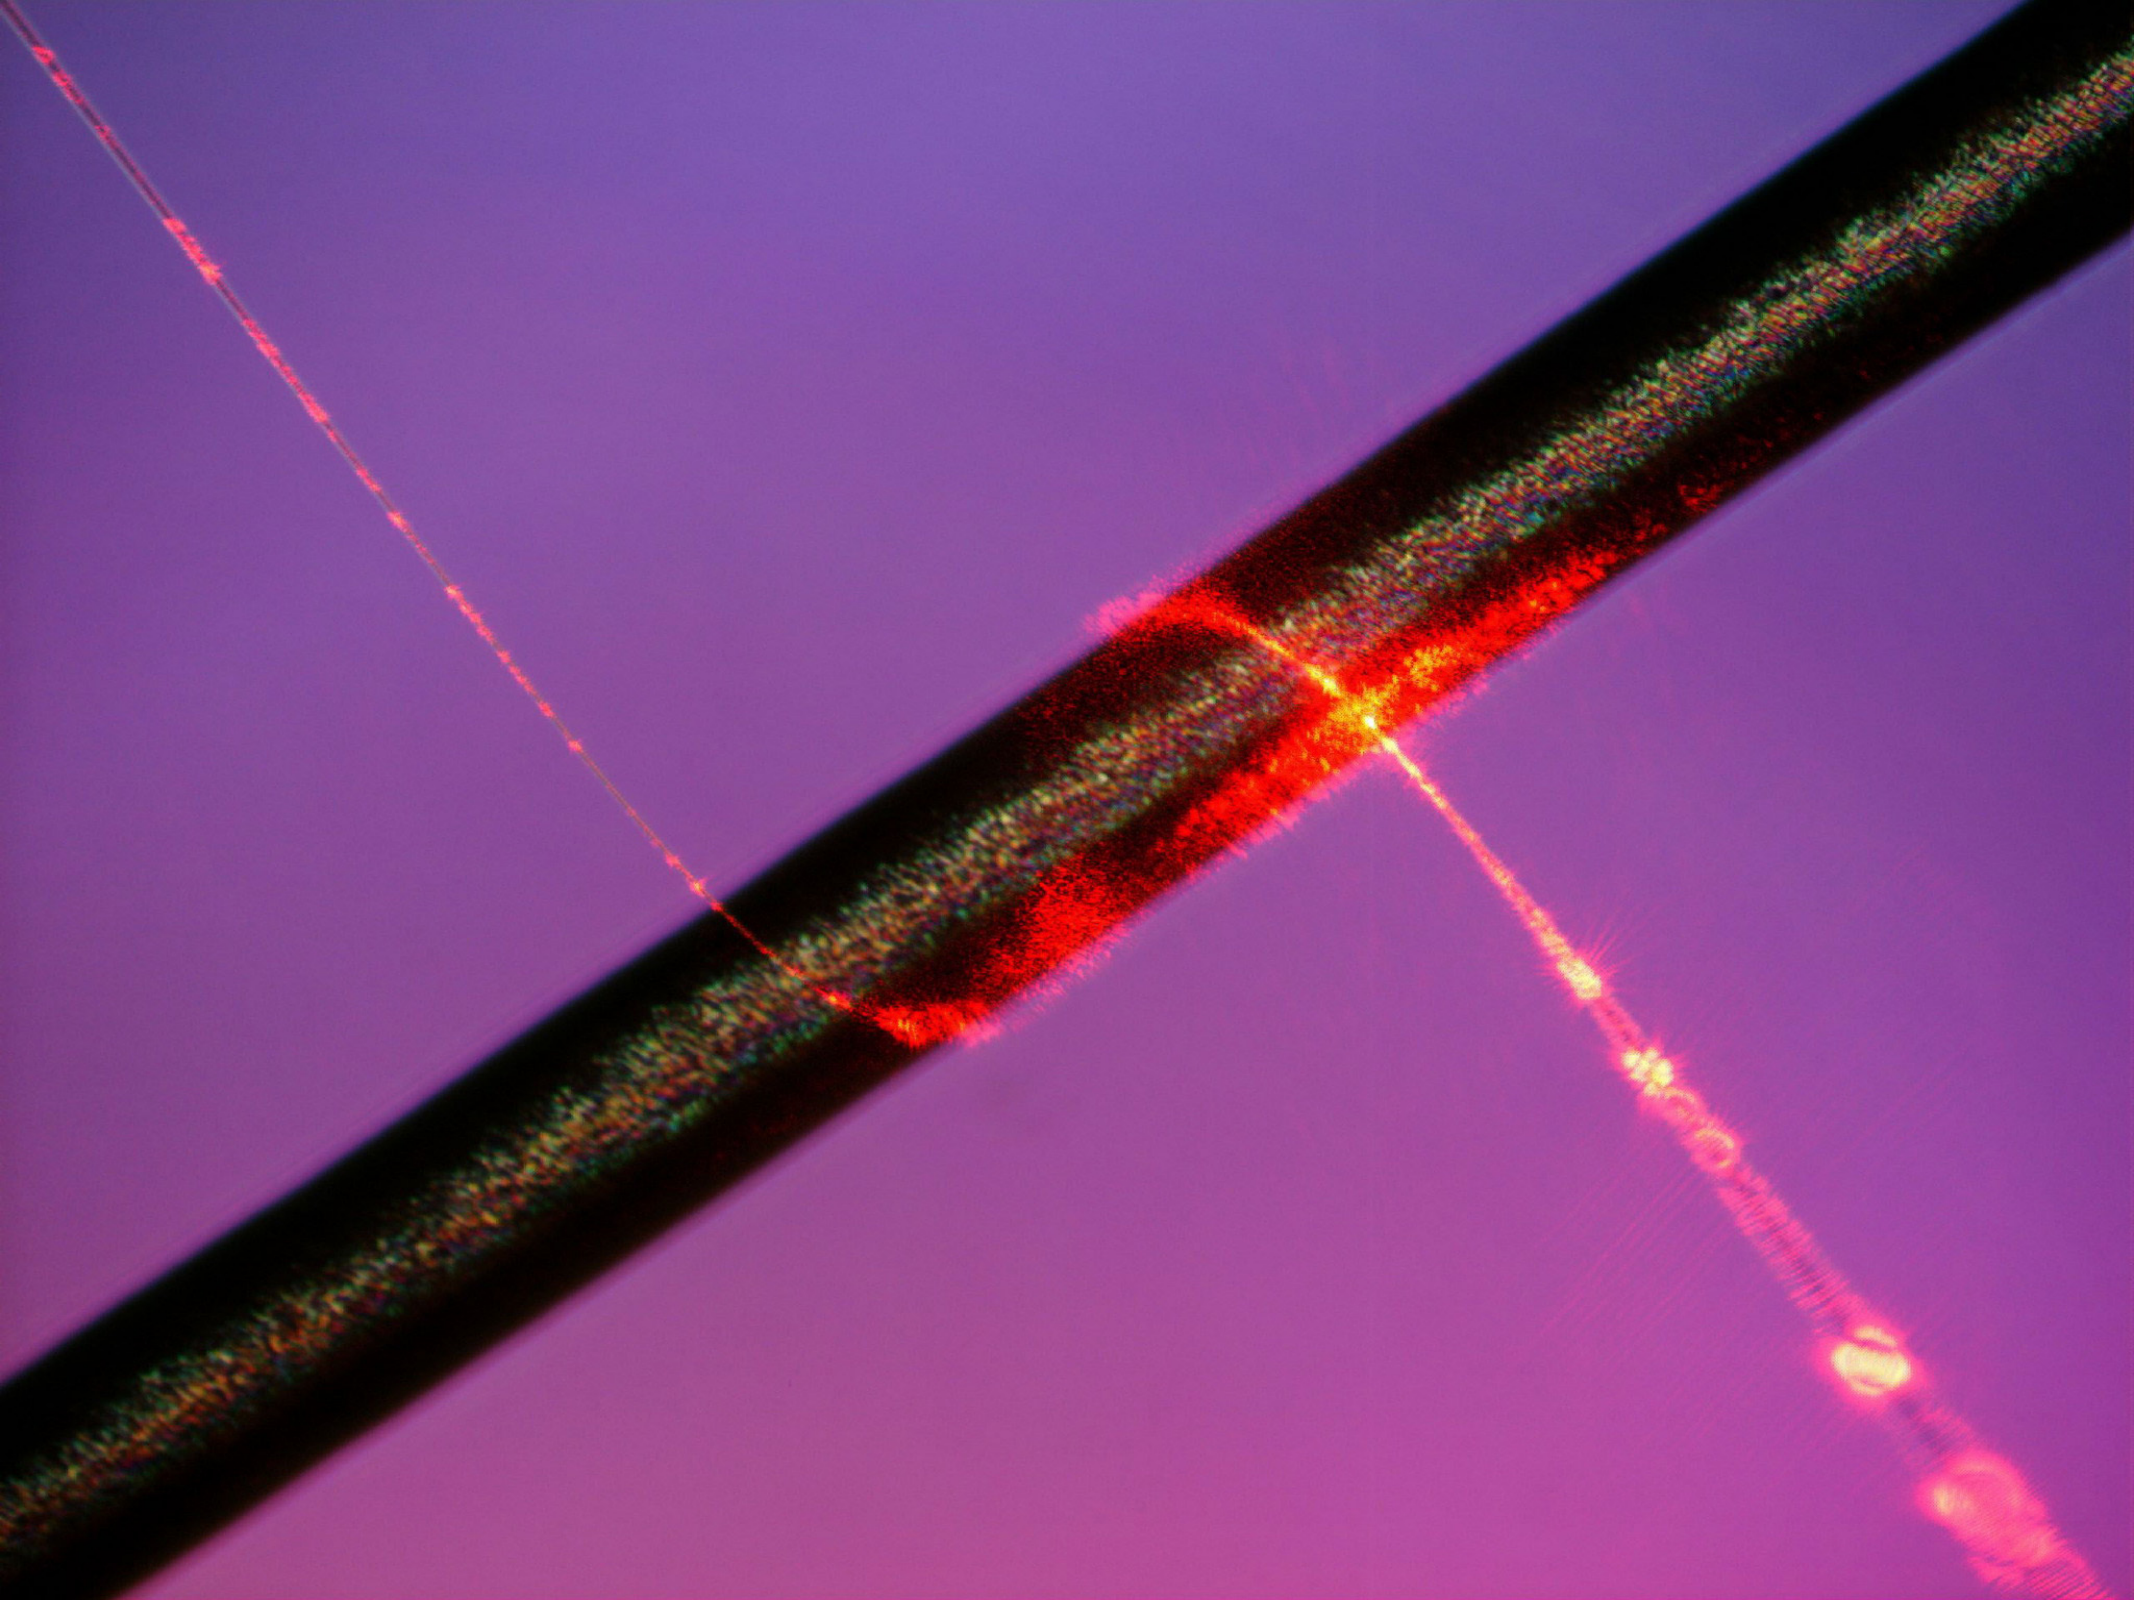

Outline

Outline

- manipulating light at the nanoscale
- supercontinuum generation
- optical logic gates

Manipulating light at the nanoscale

Nature, 426, 816 (2003)

Manipulating light at the nanoscale

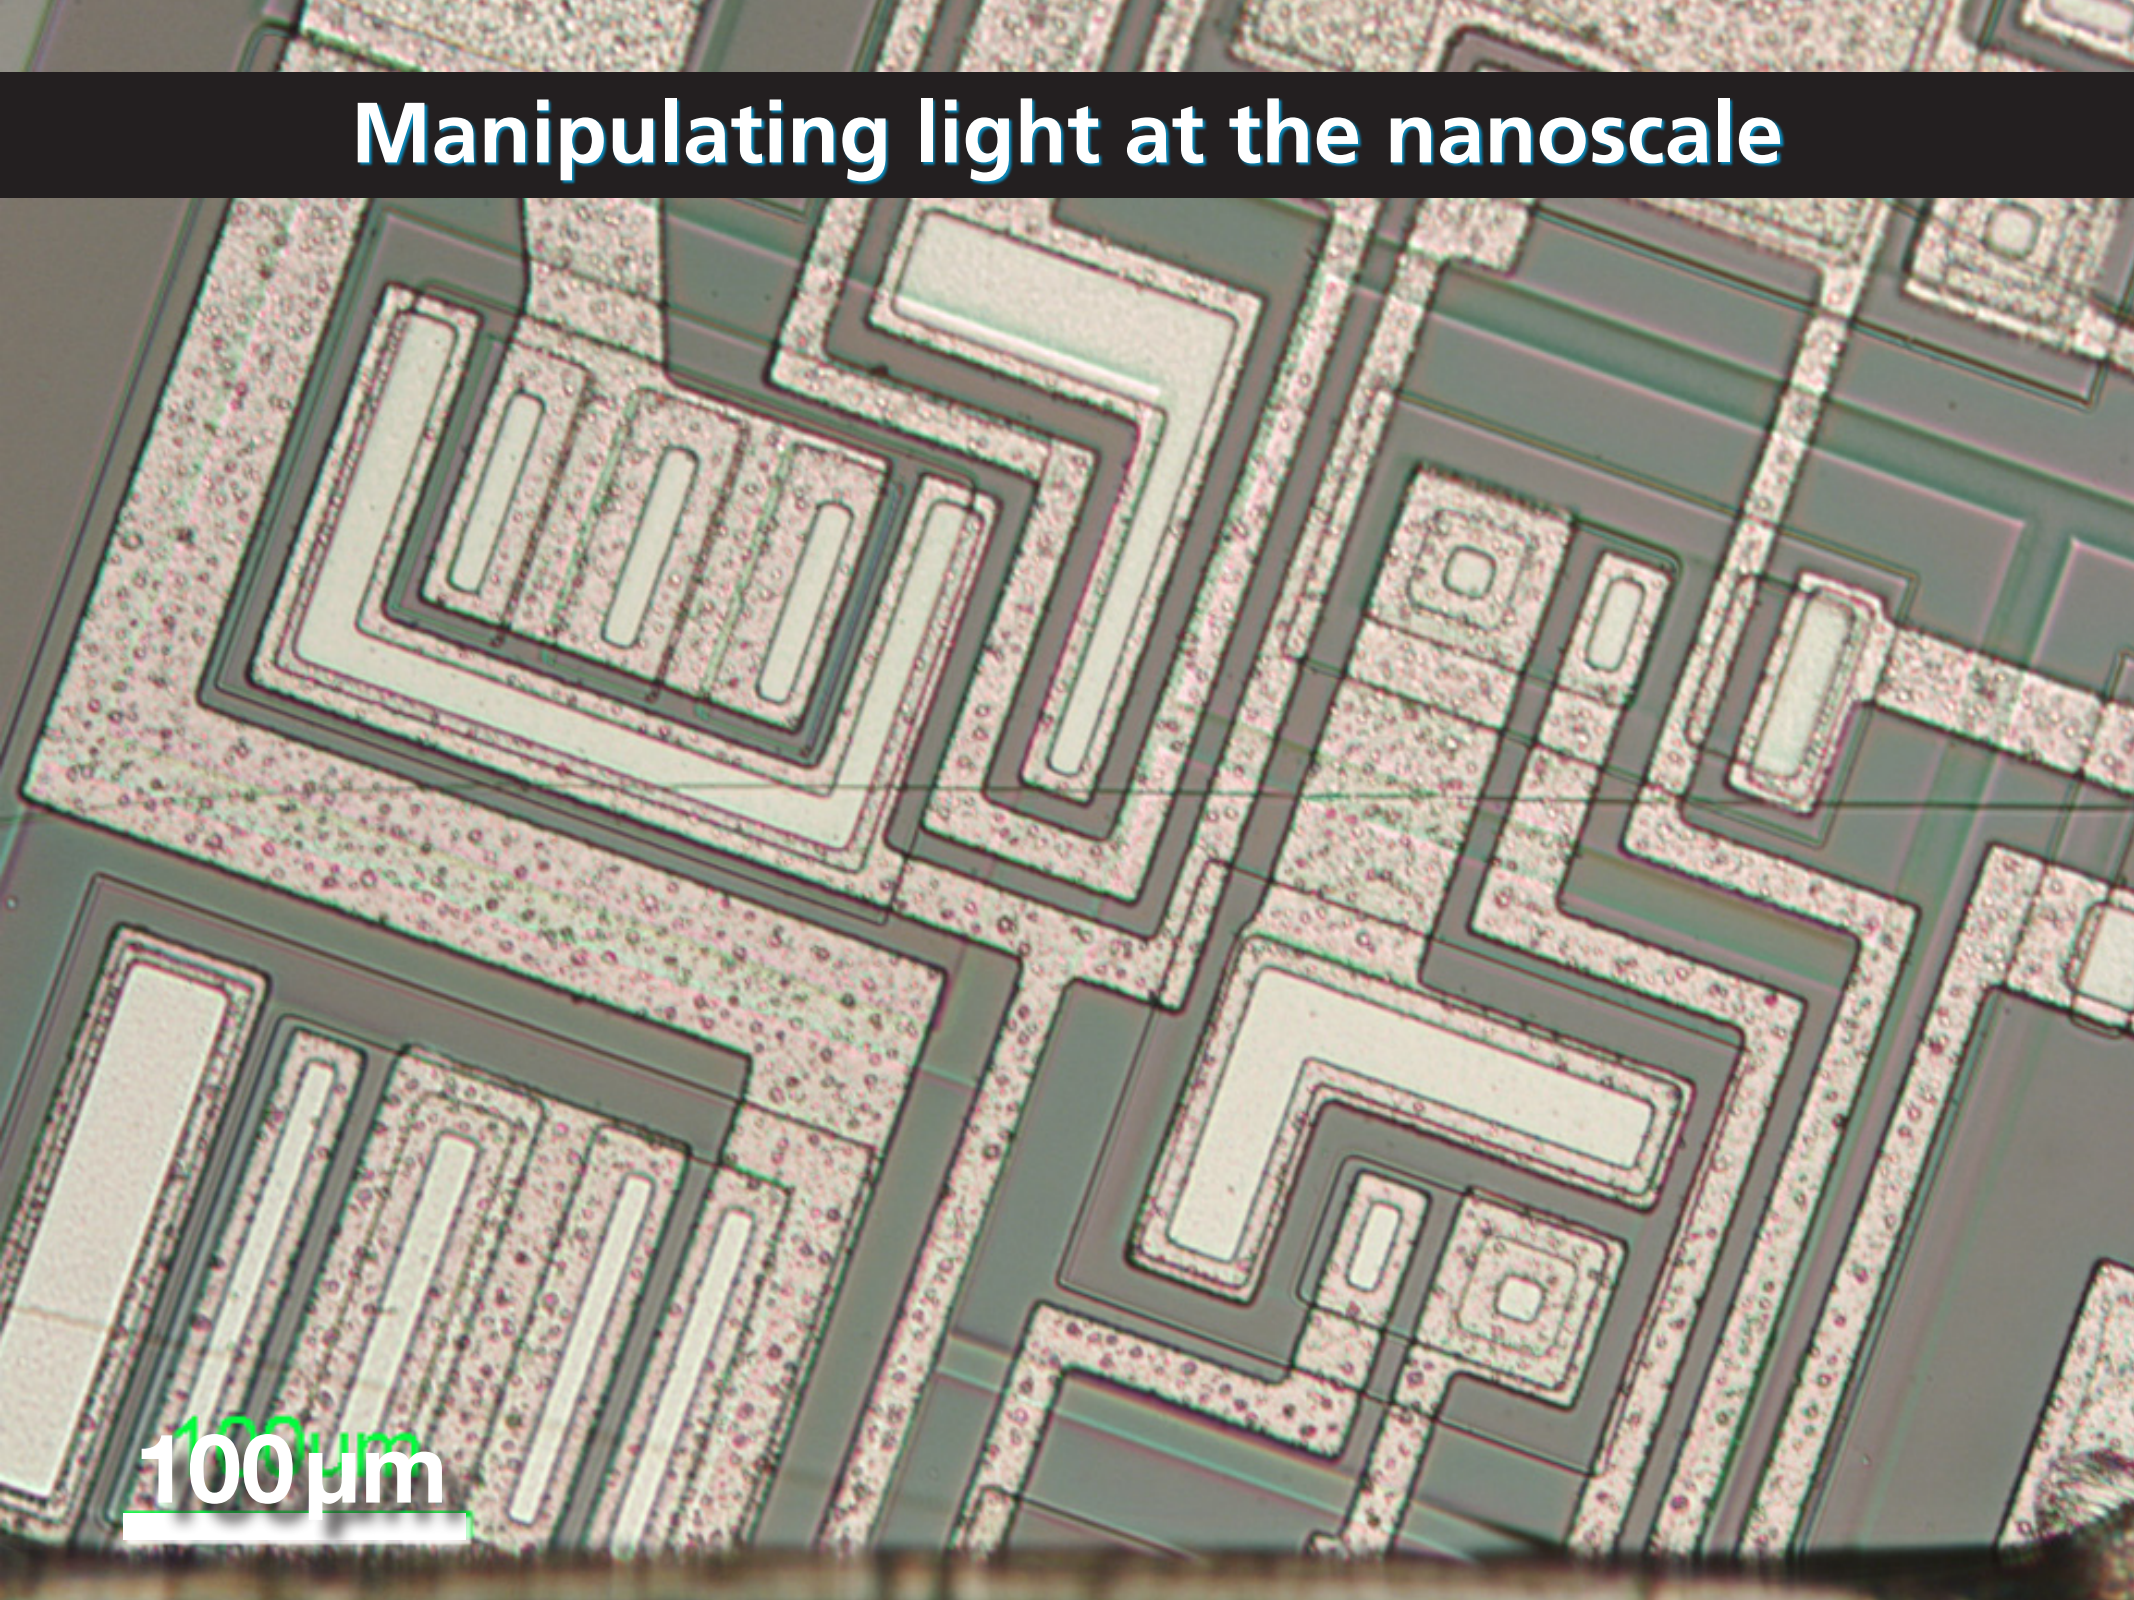

Manipulating light at the nanoscale

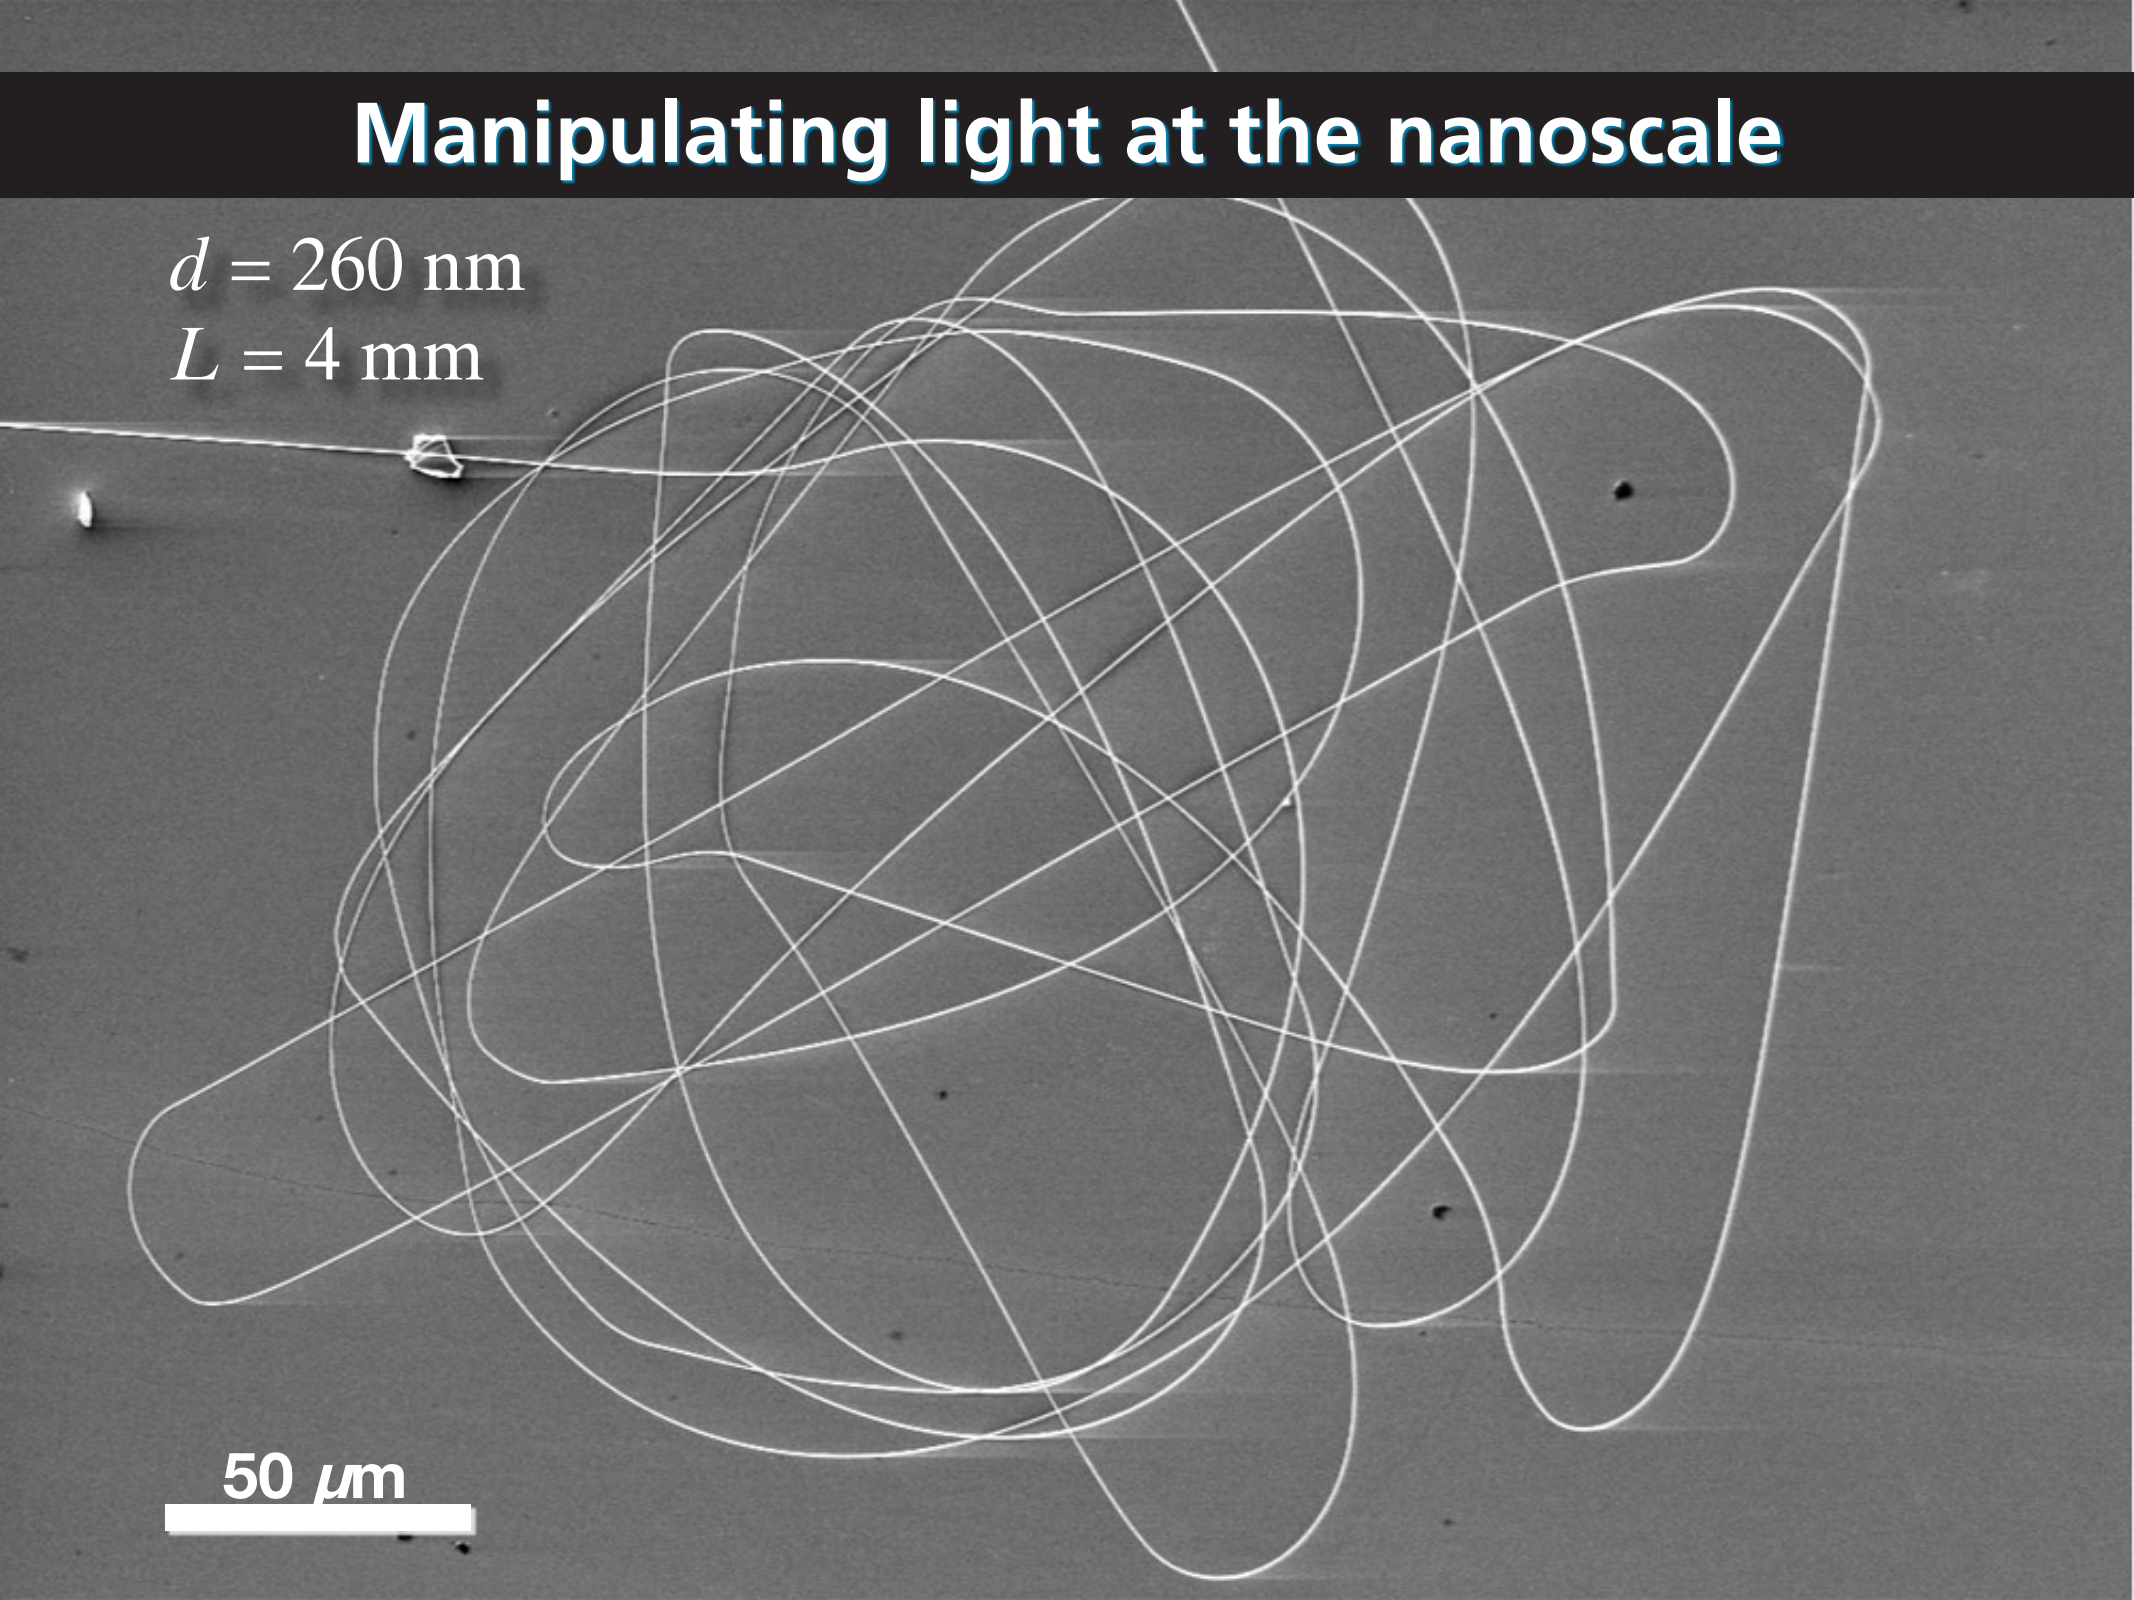

Manipulating light at the nanoscale

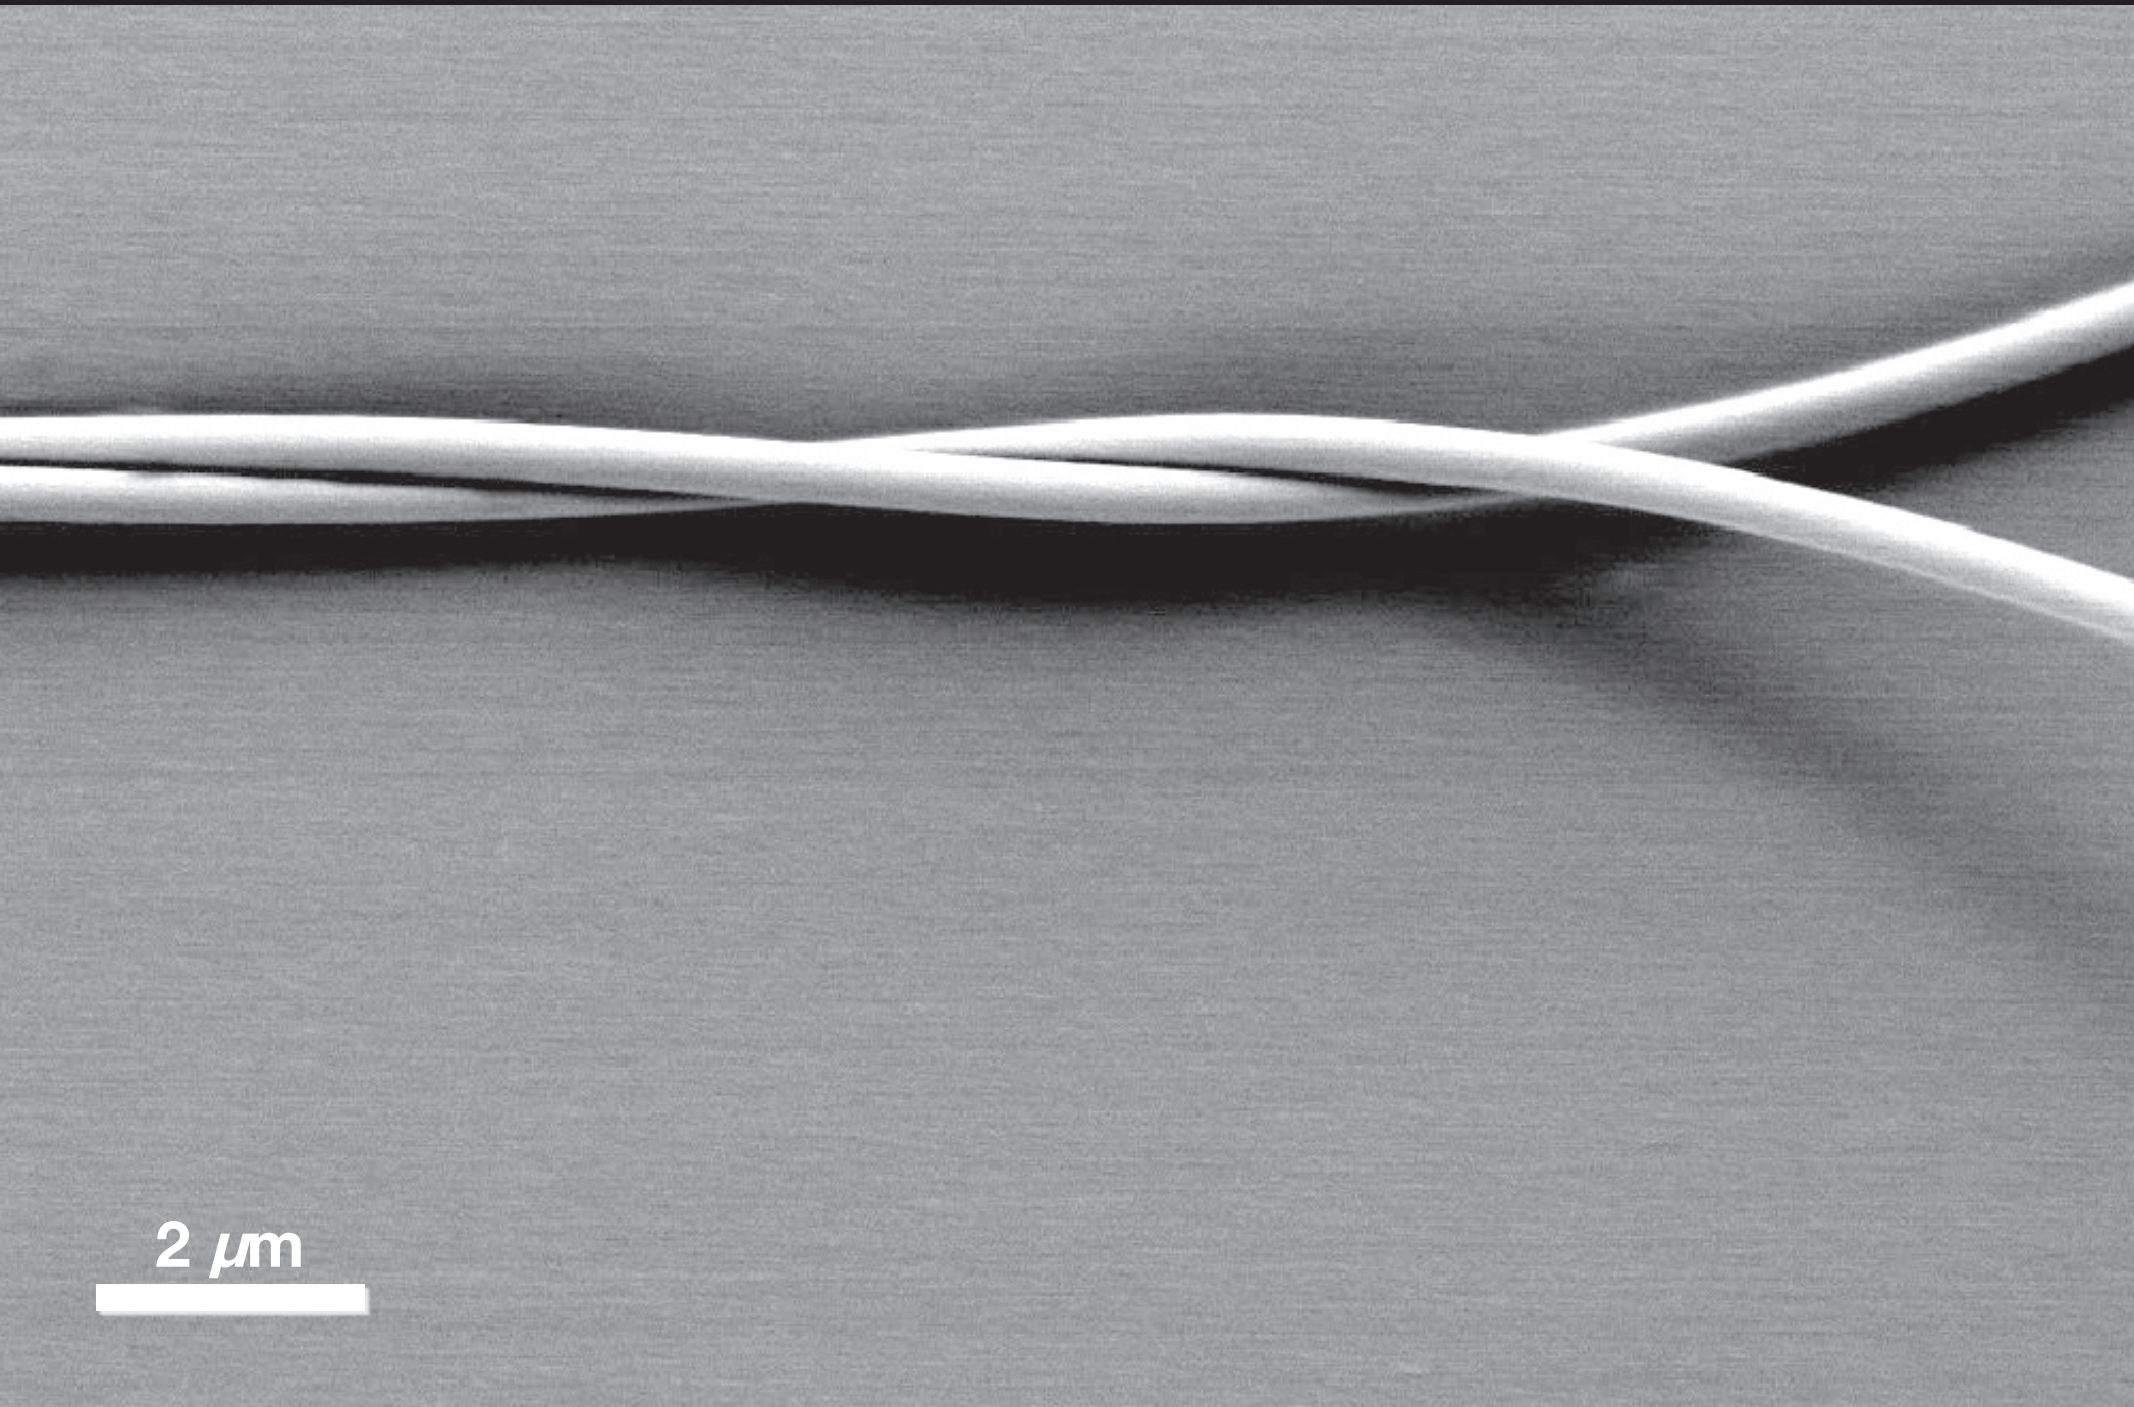

Manipulating light at the nanoscale

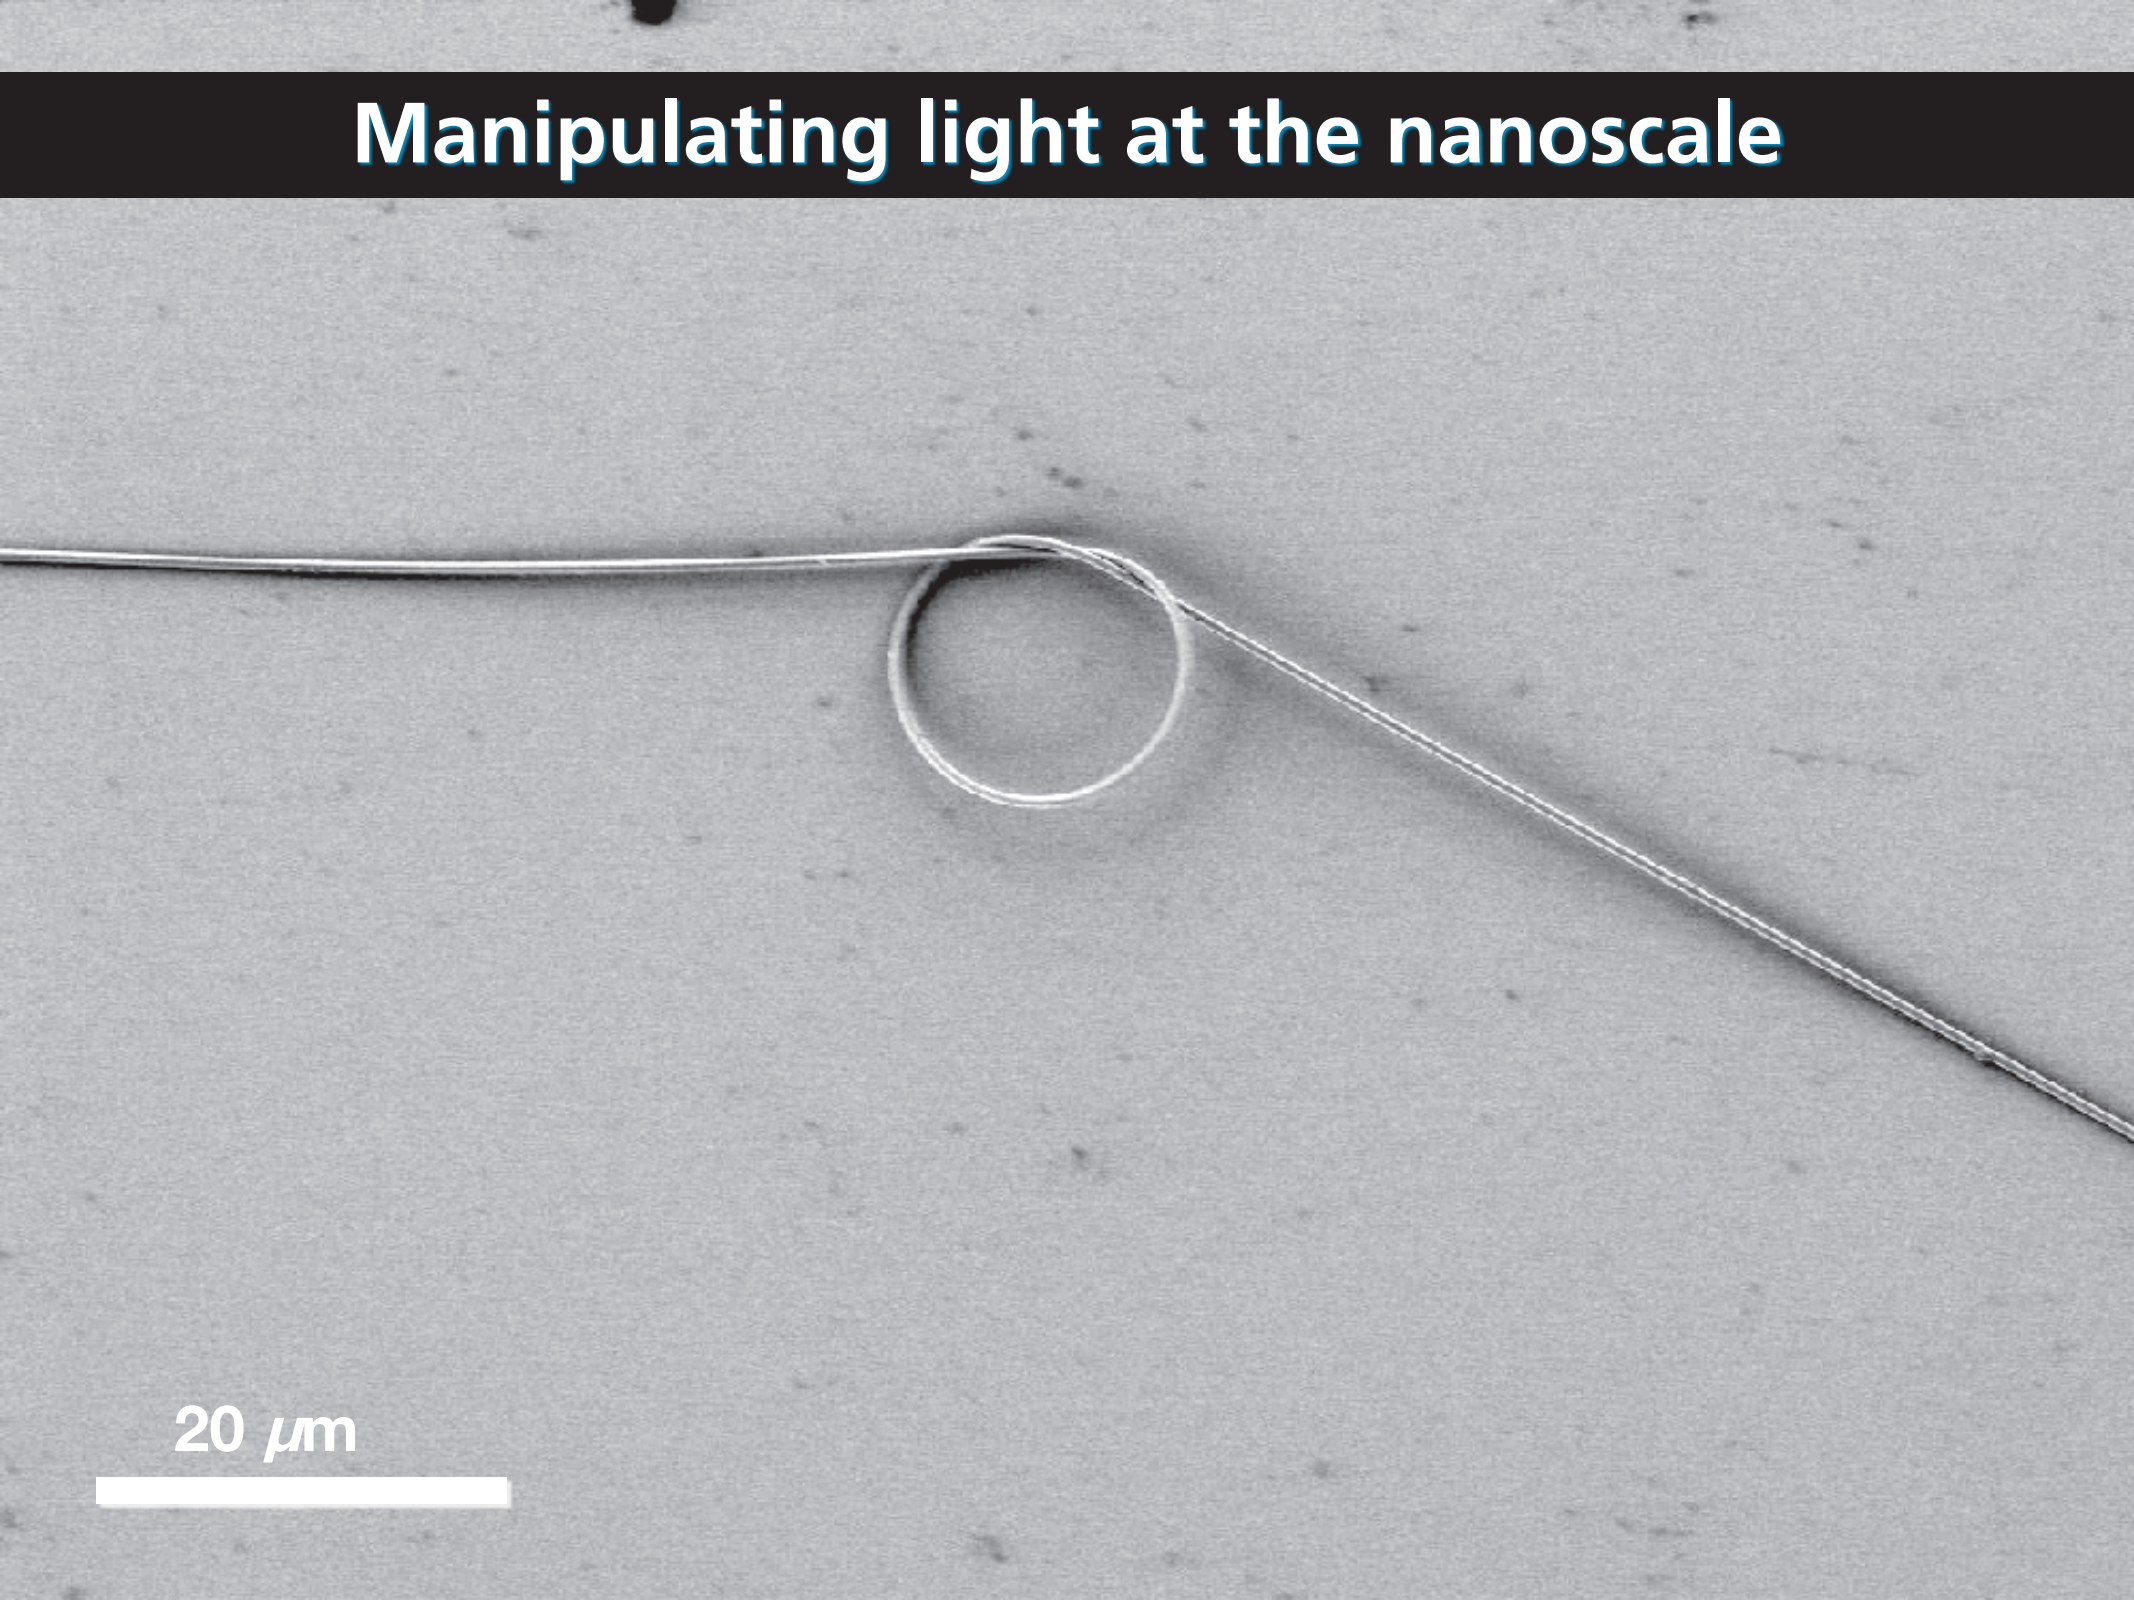

Manipulating light at the nanoscale

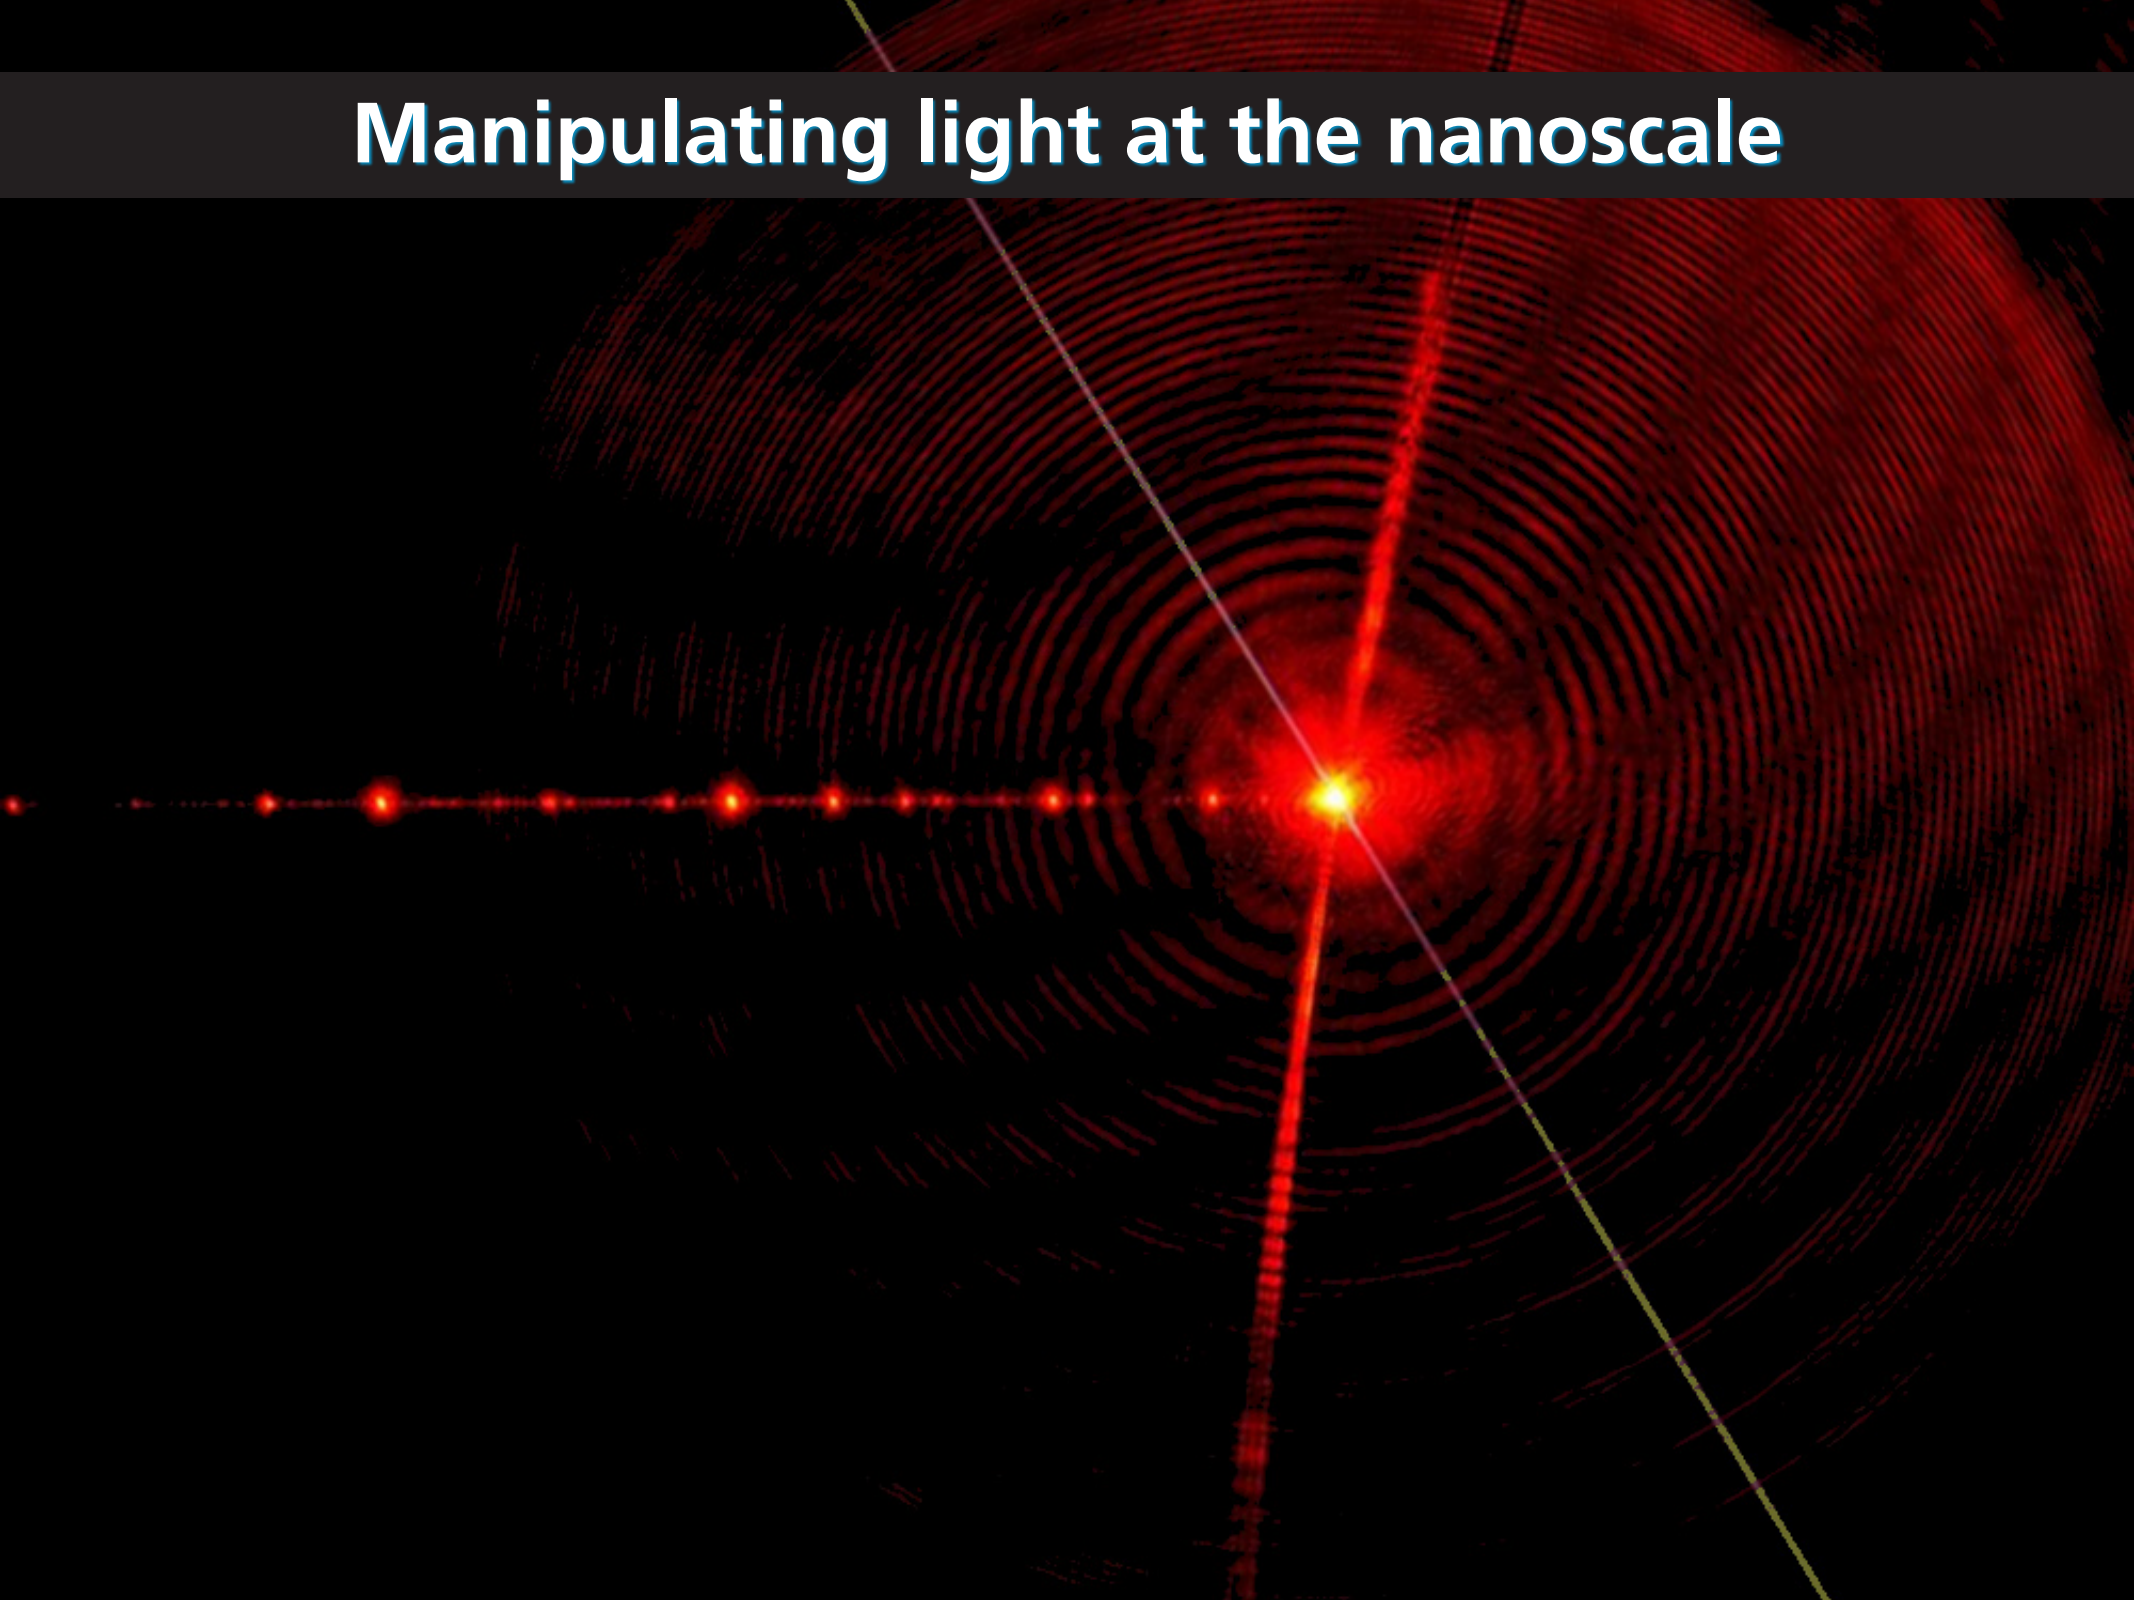

Manipulating light at the nanoscale

Poynting vector profile for 200-nm nanowire

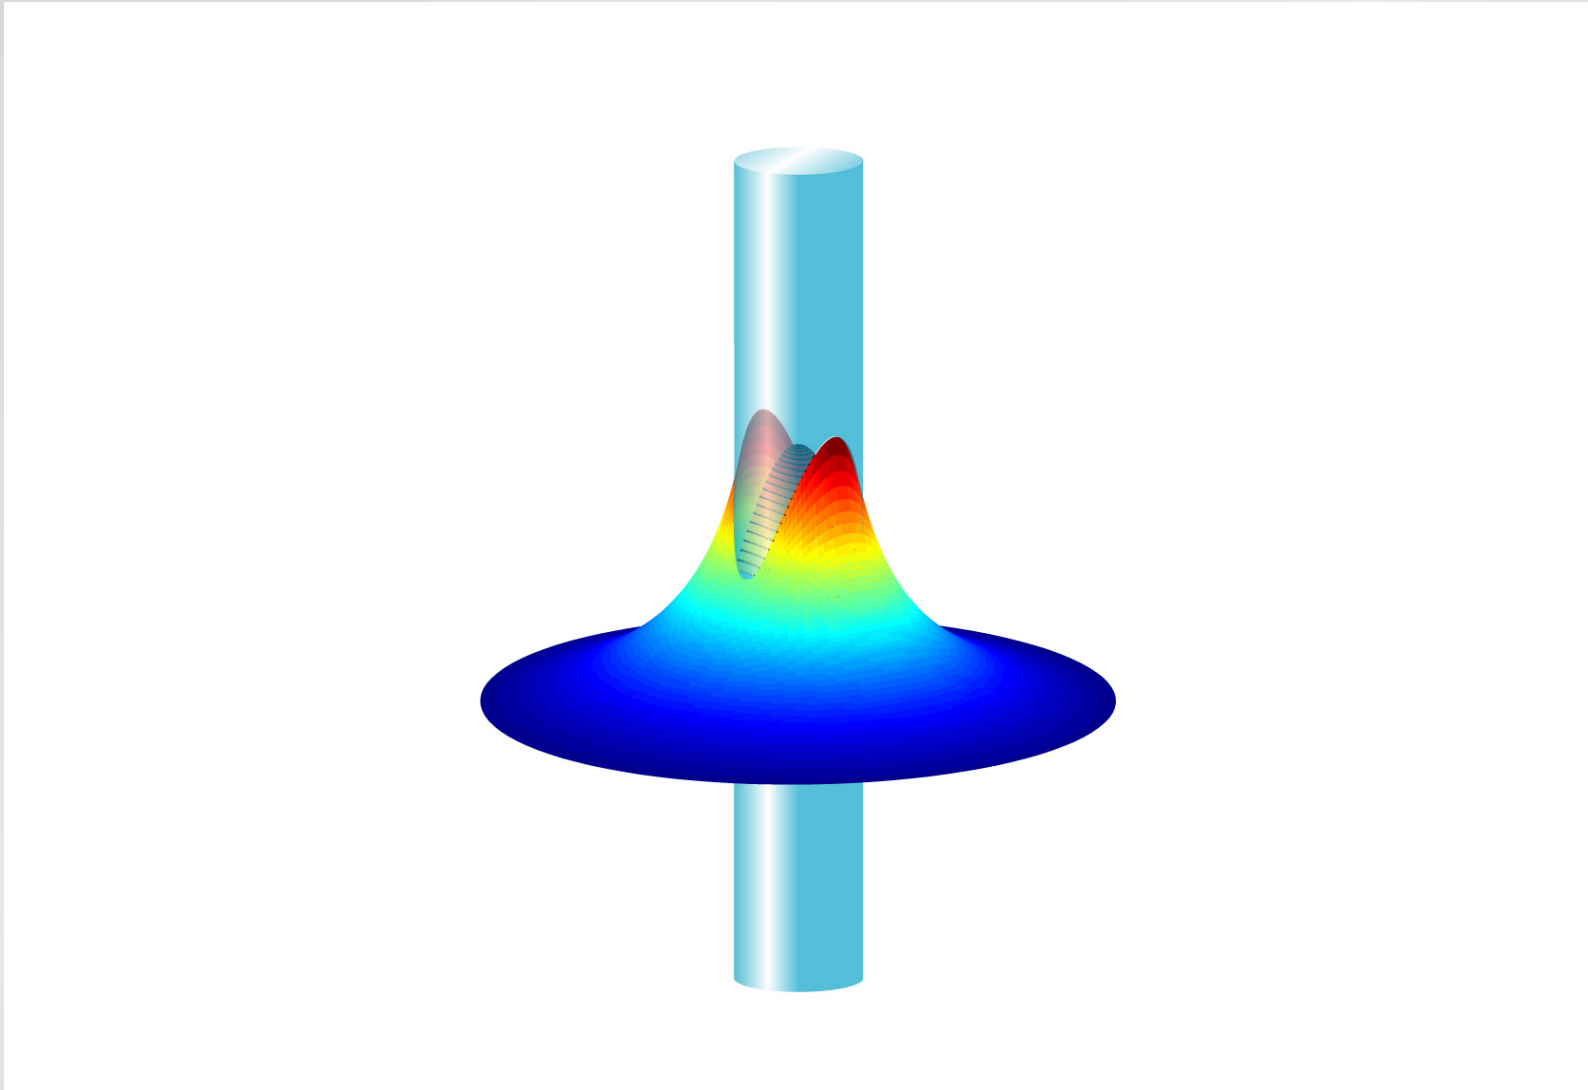

Manipulating light at the nanoscale

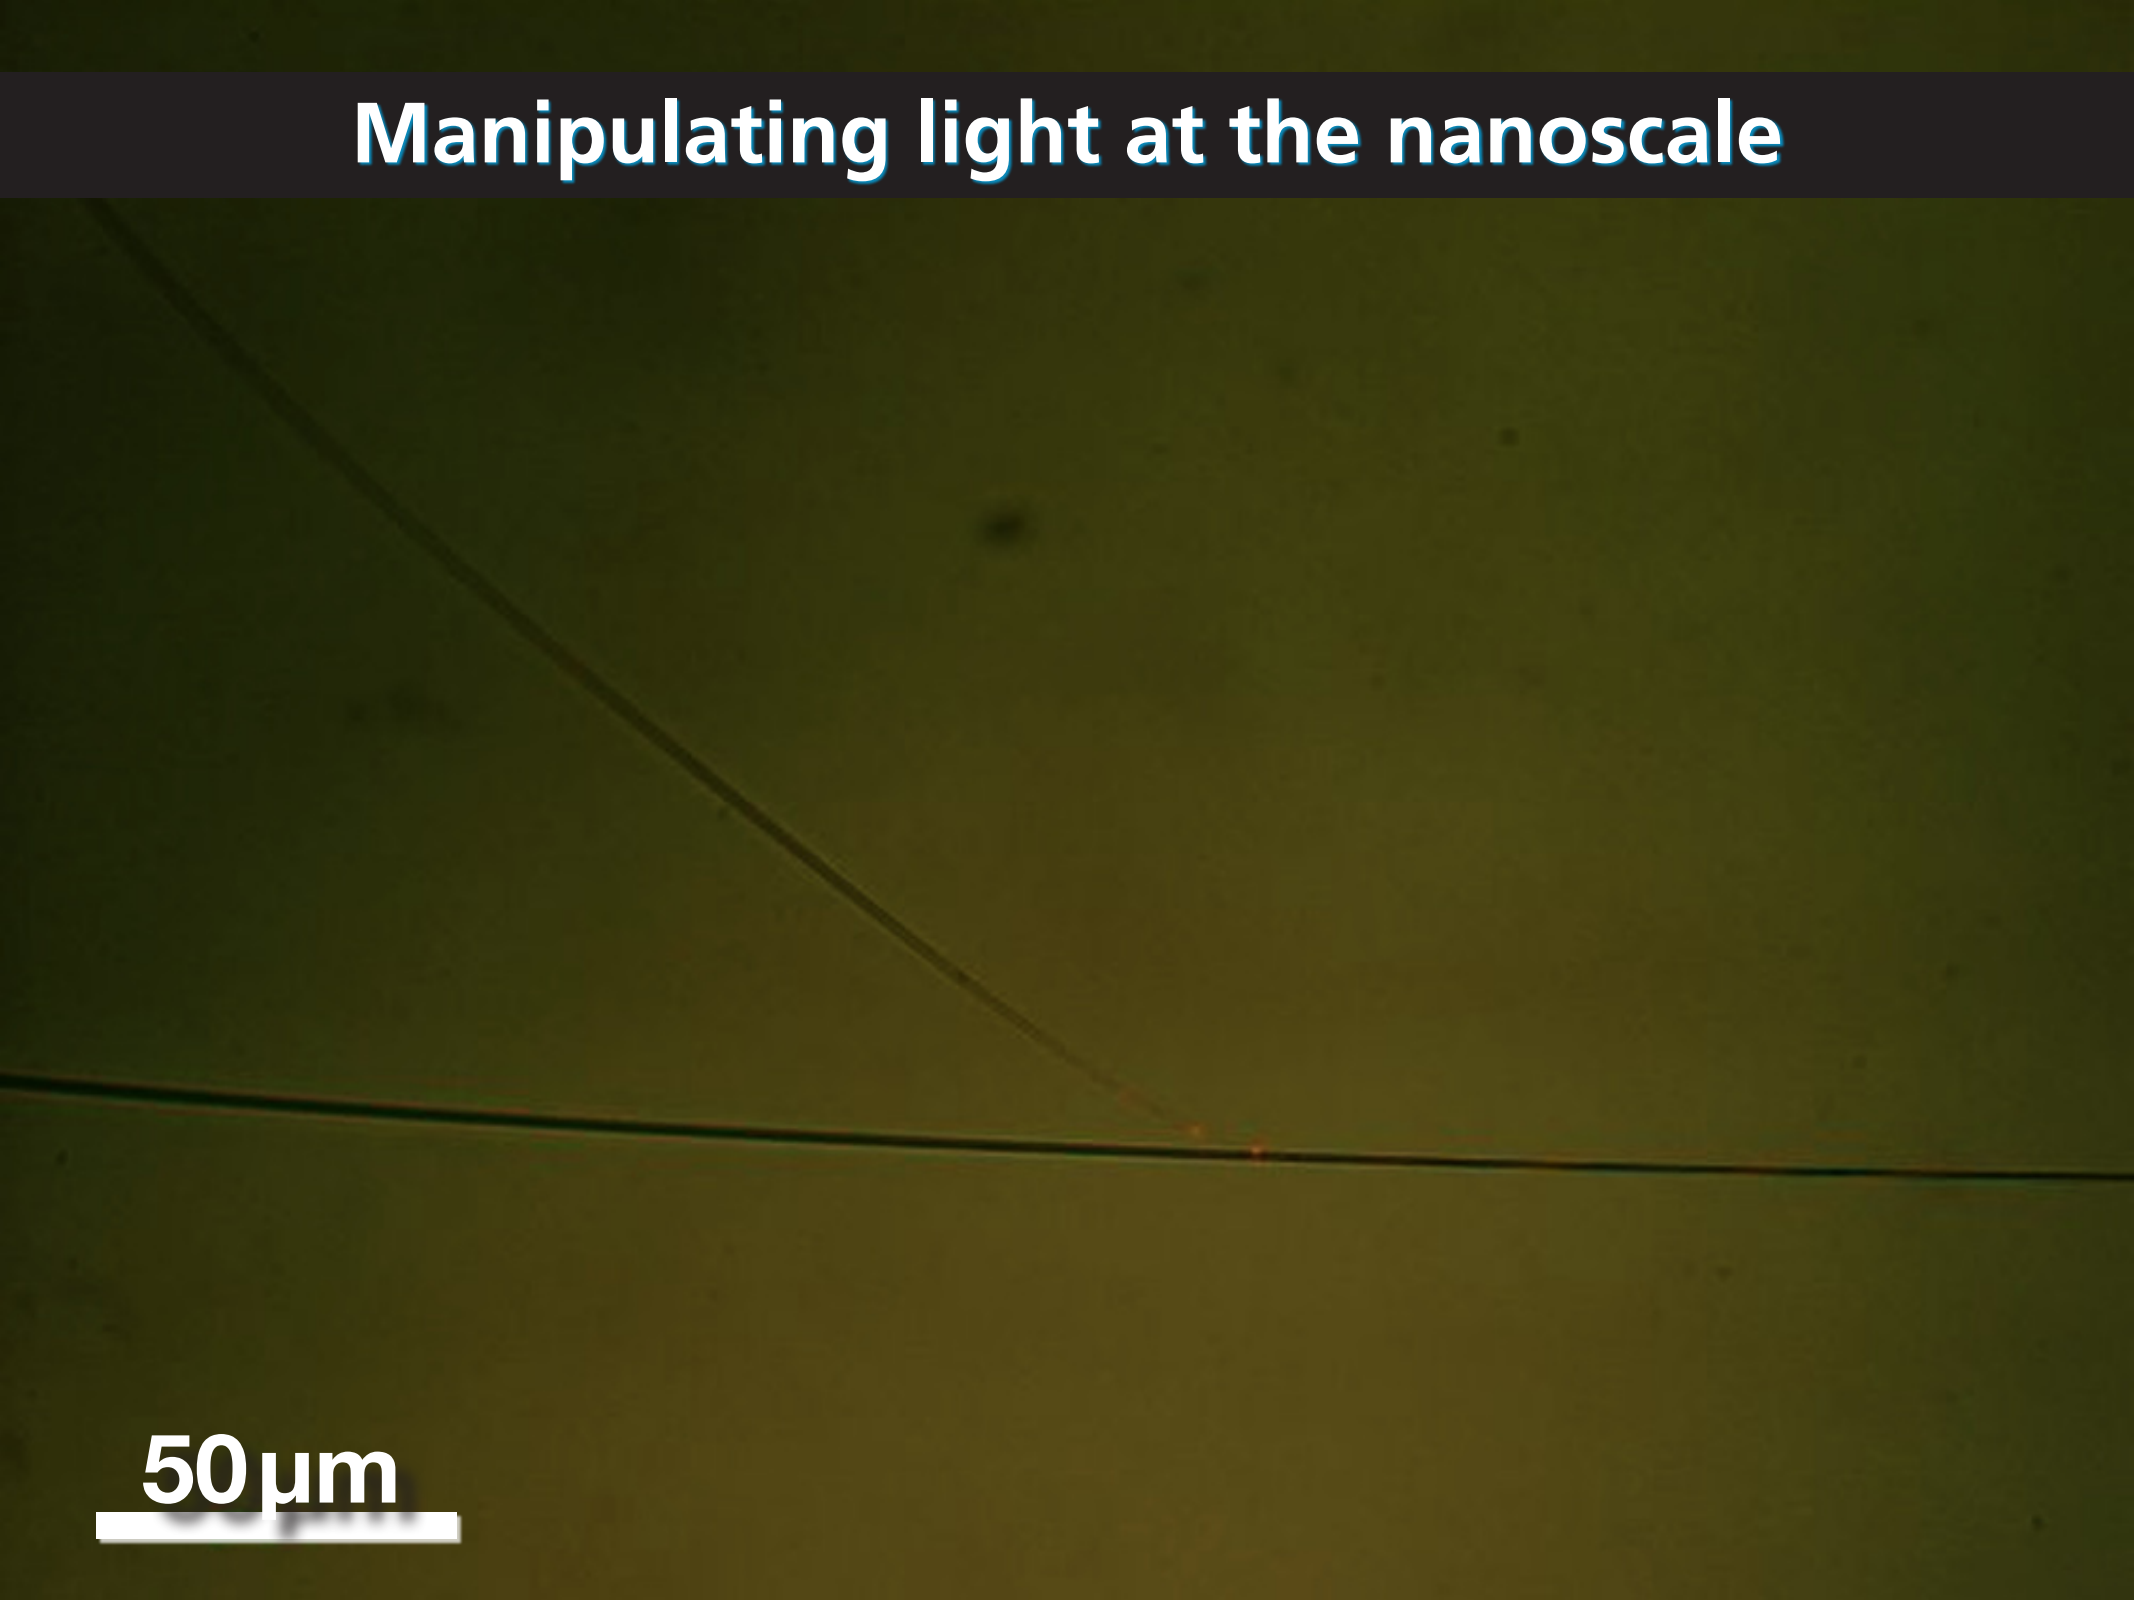

Manipulating light at the nanoscale

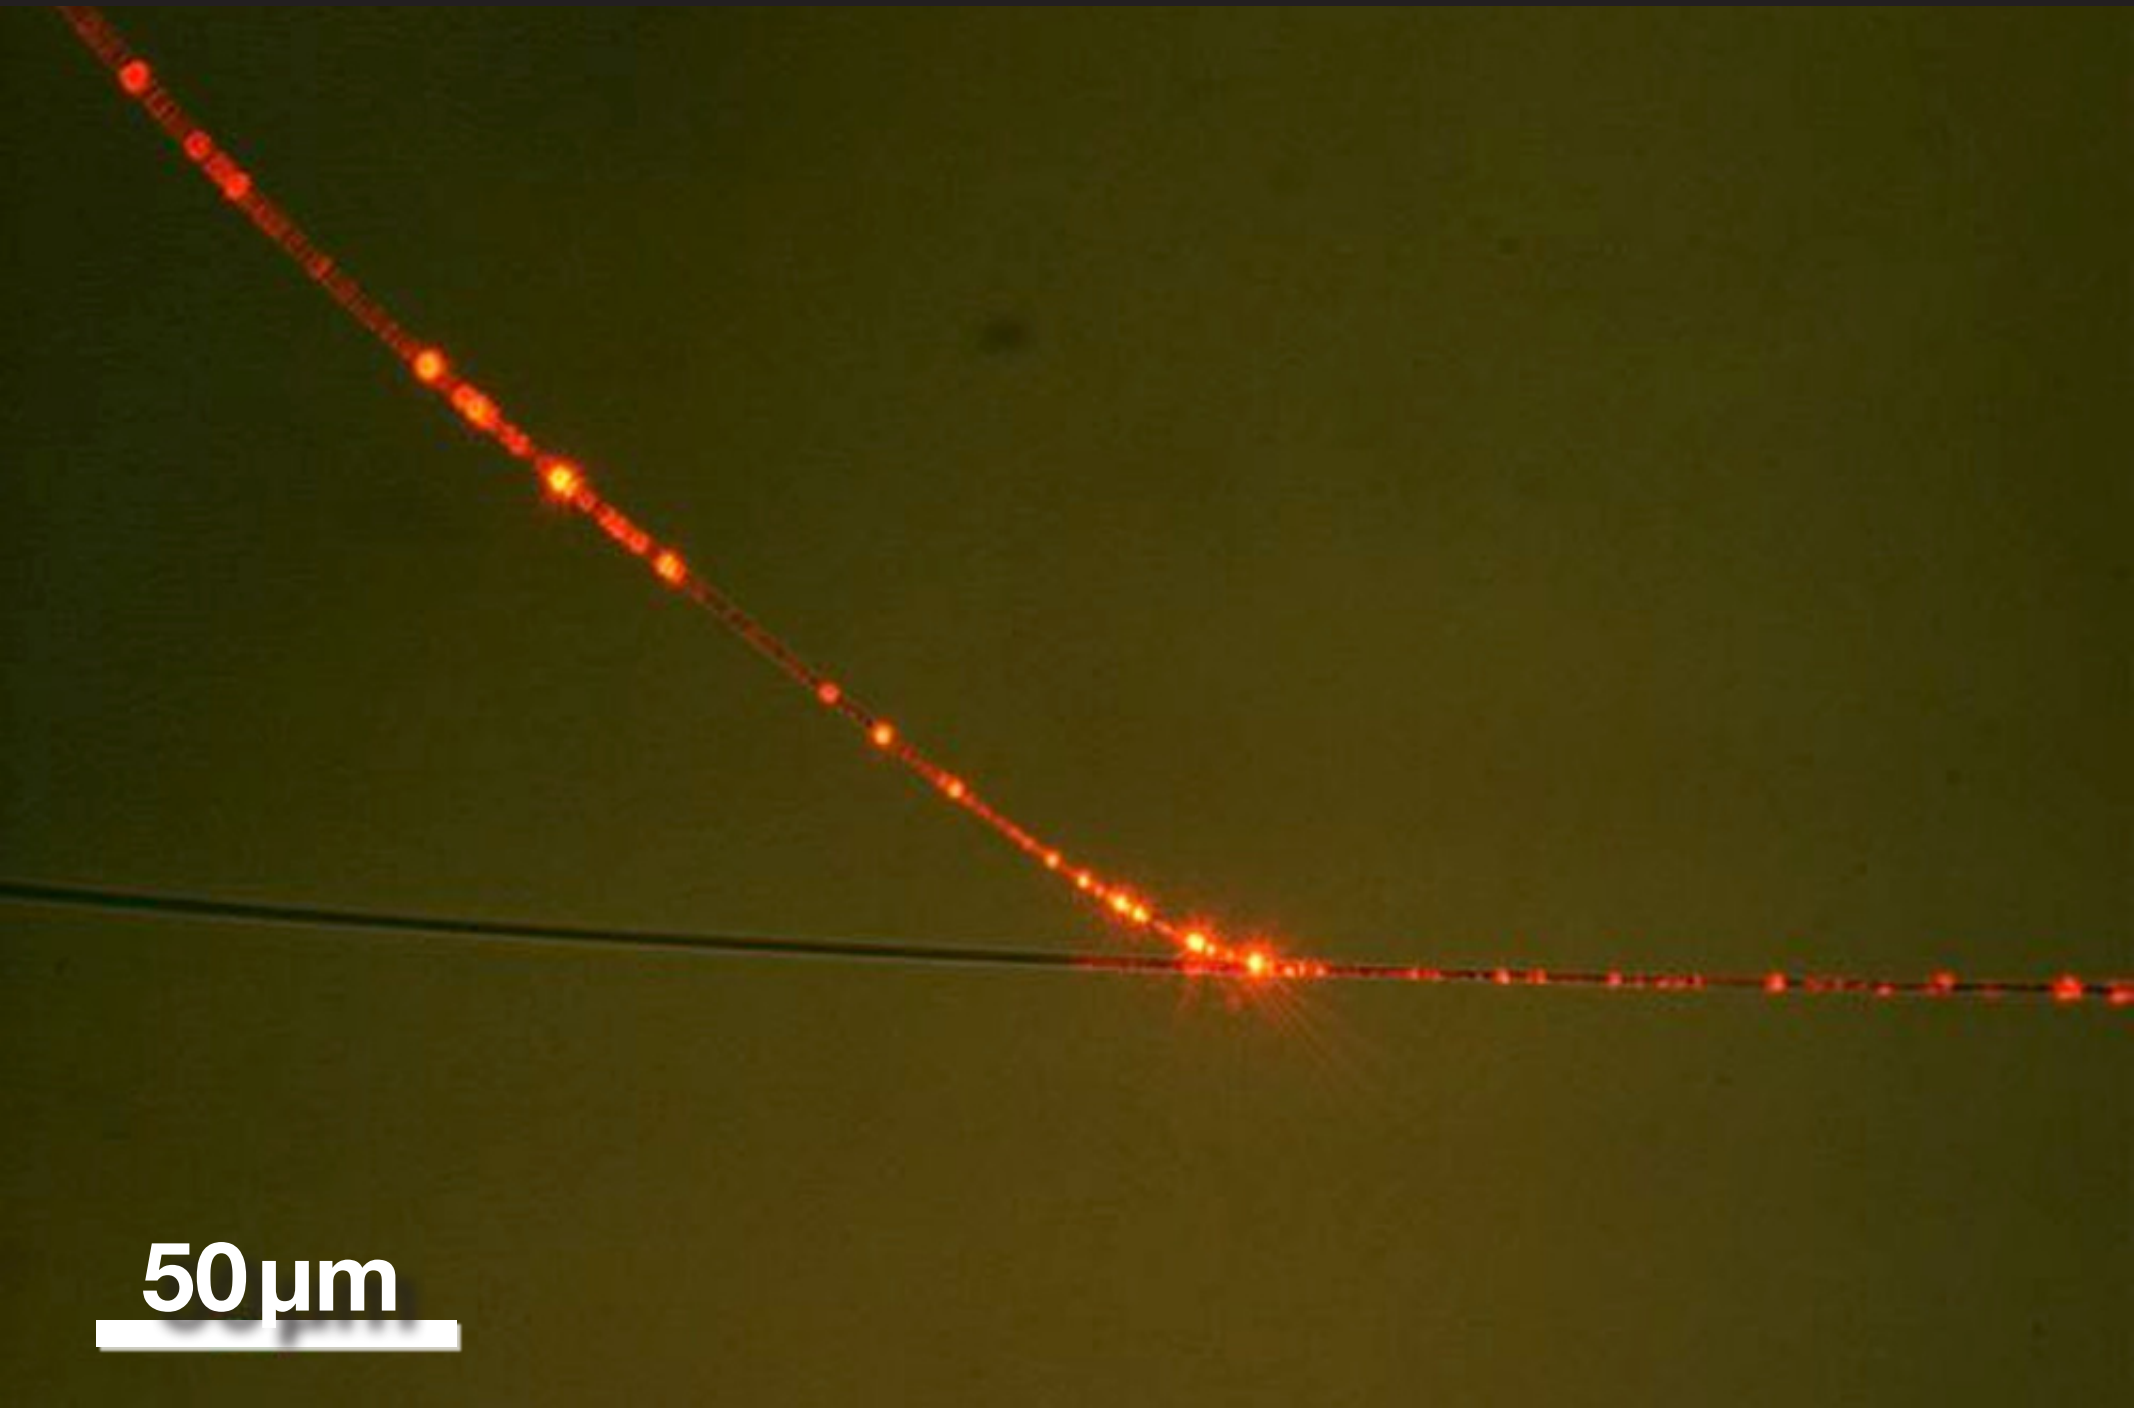

Manipulating light at the nanoscale

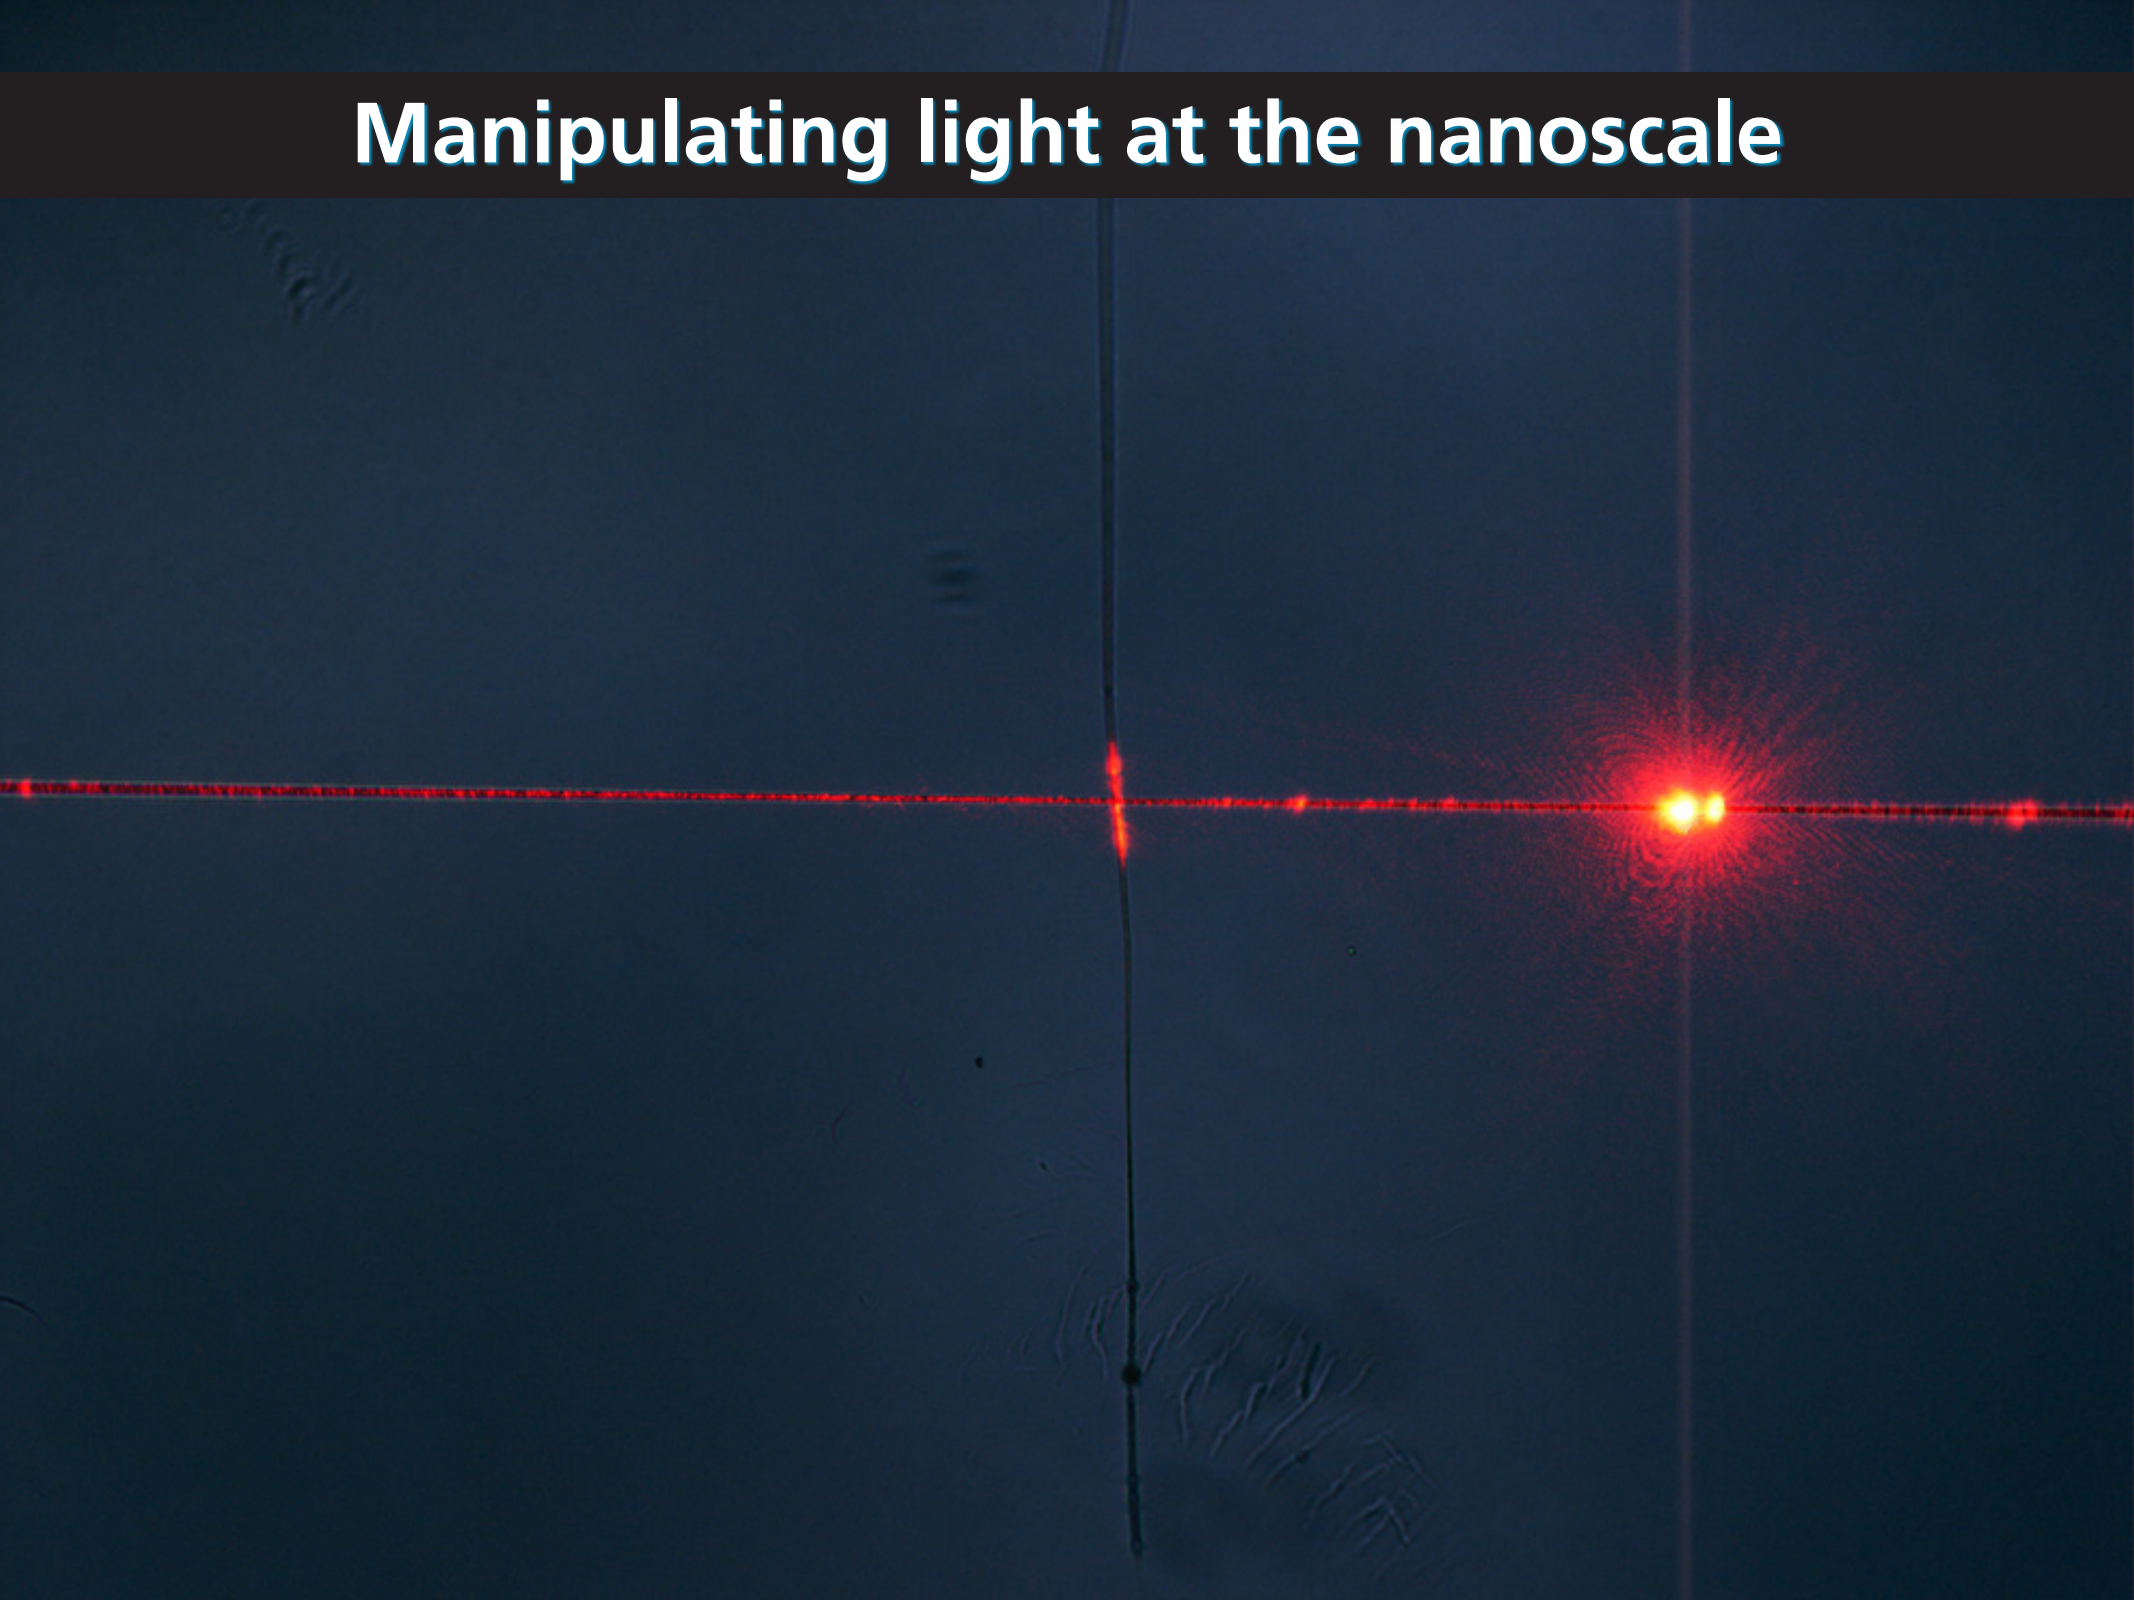

Manipulating light at the nanoscale

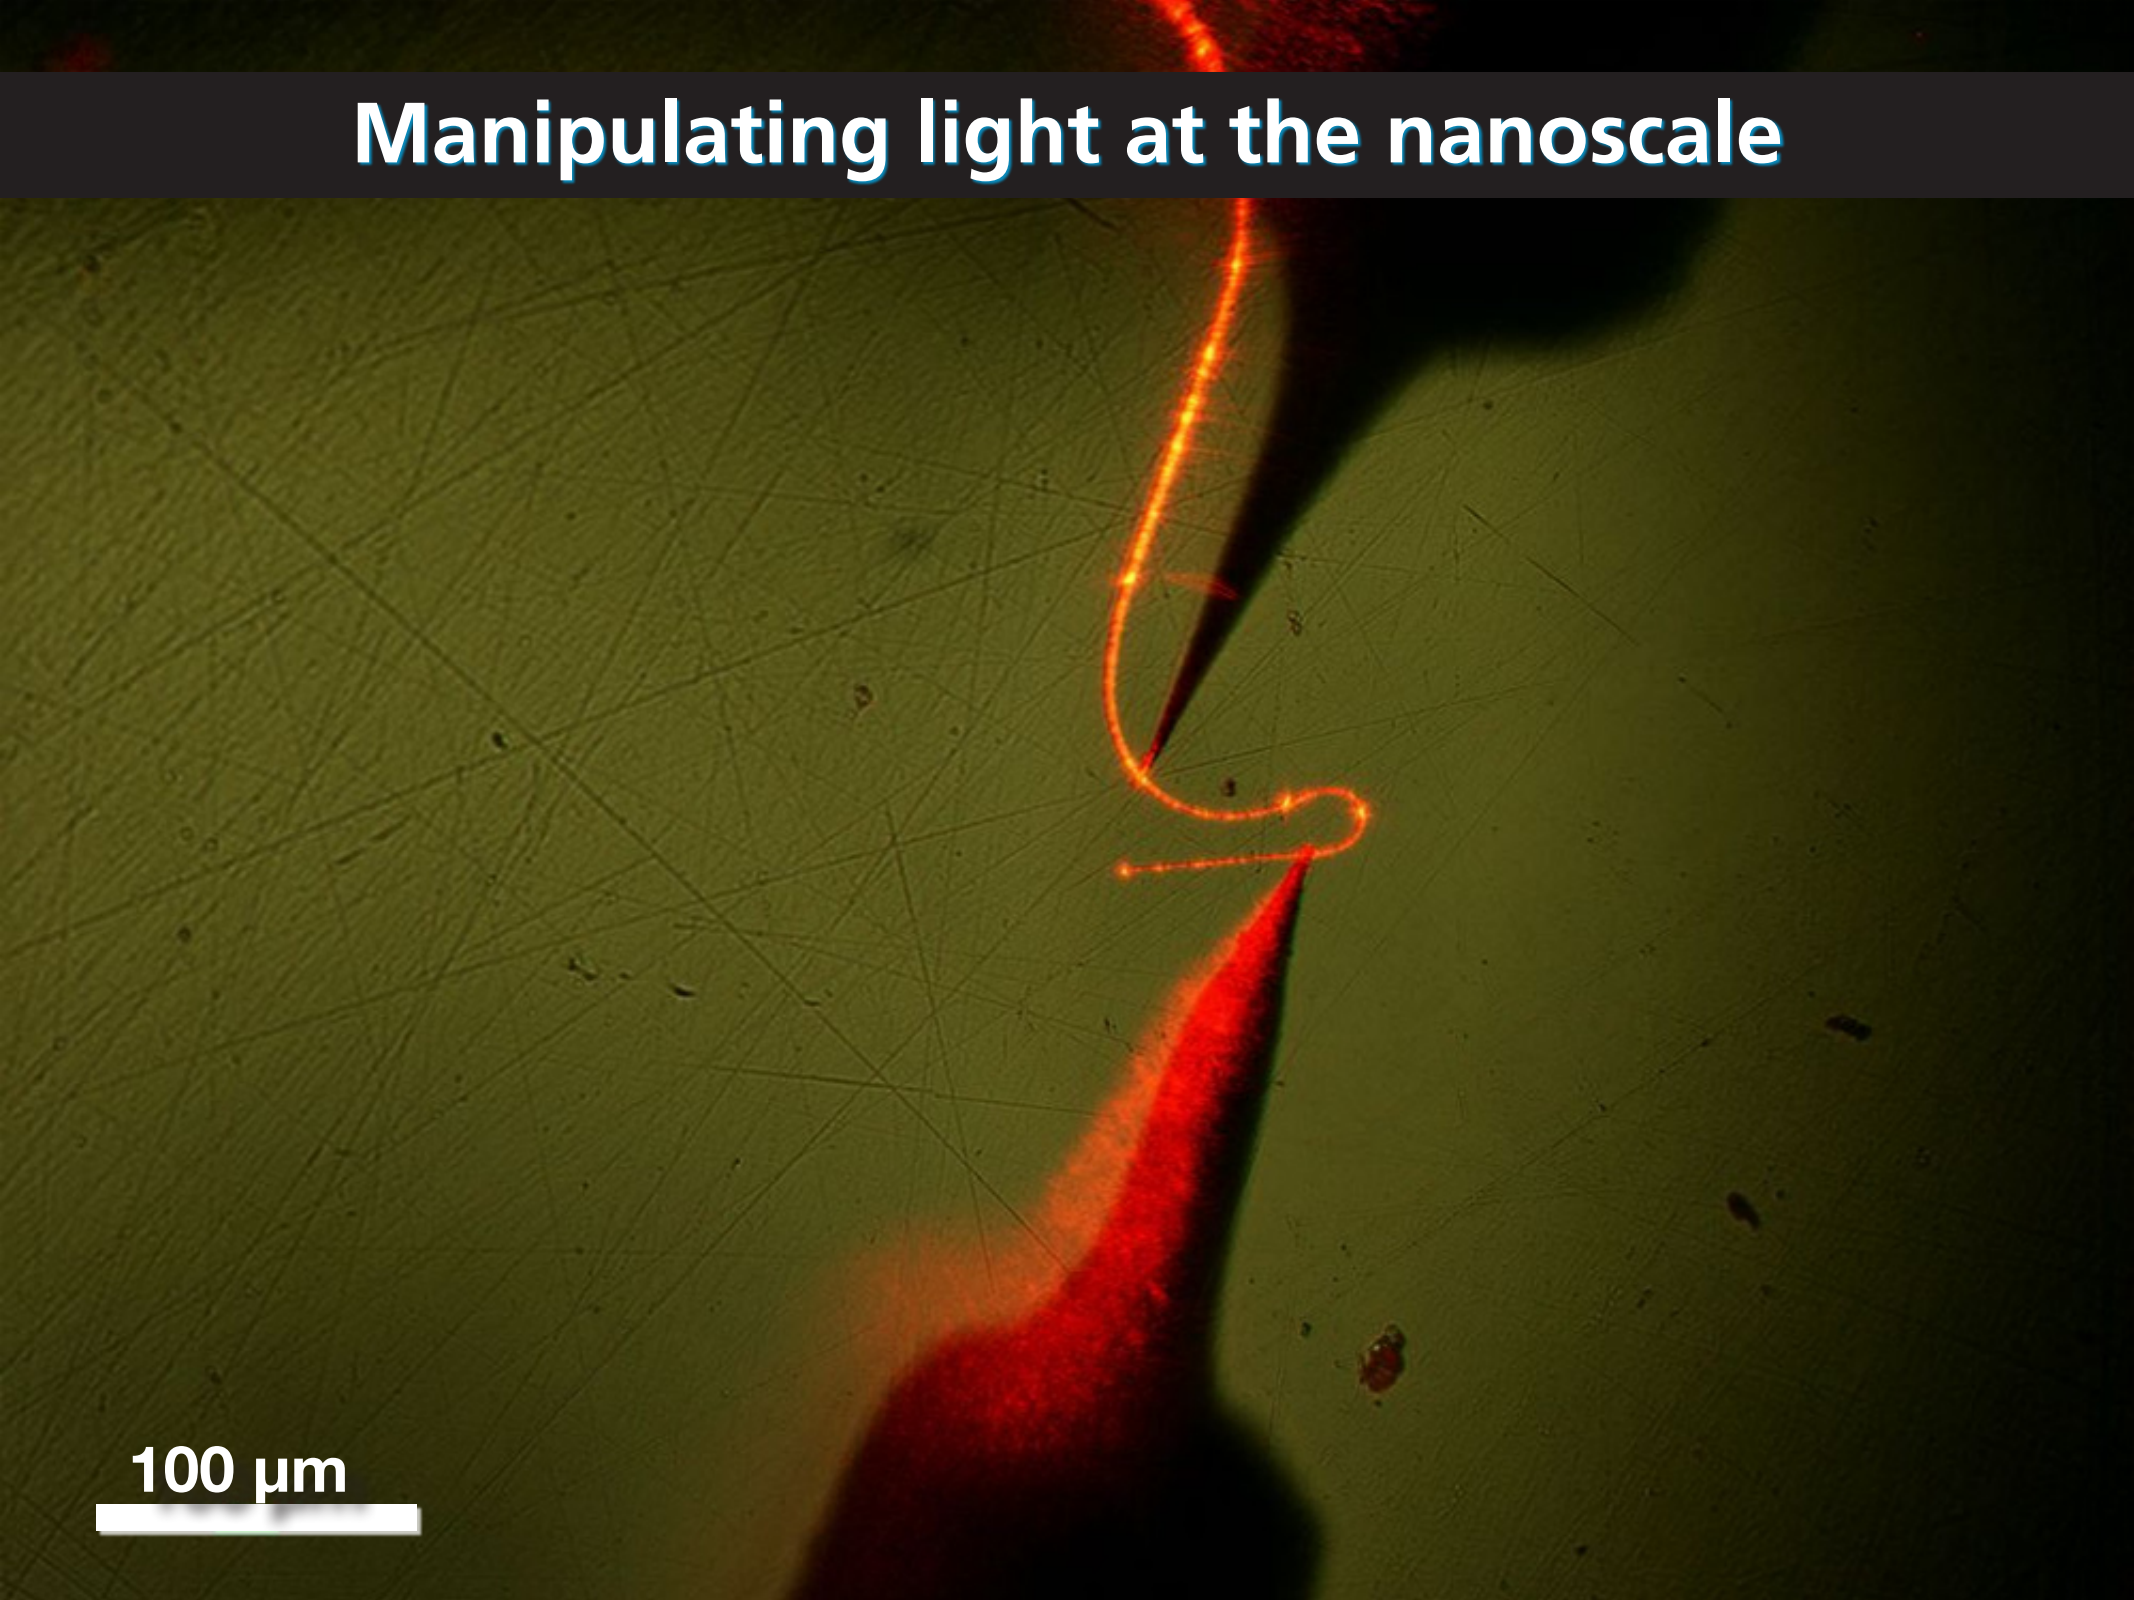

Manipulating light at the nanoscale

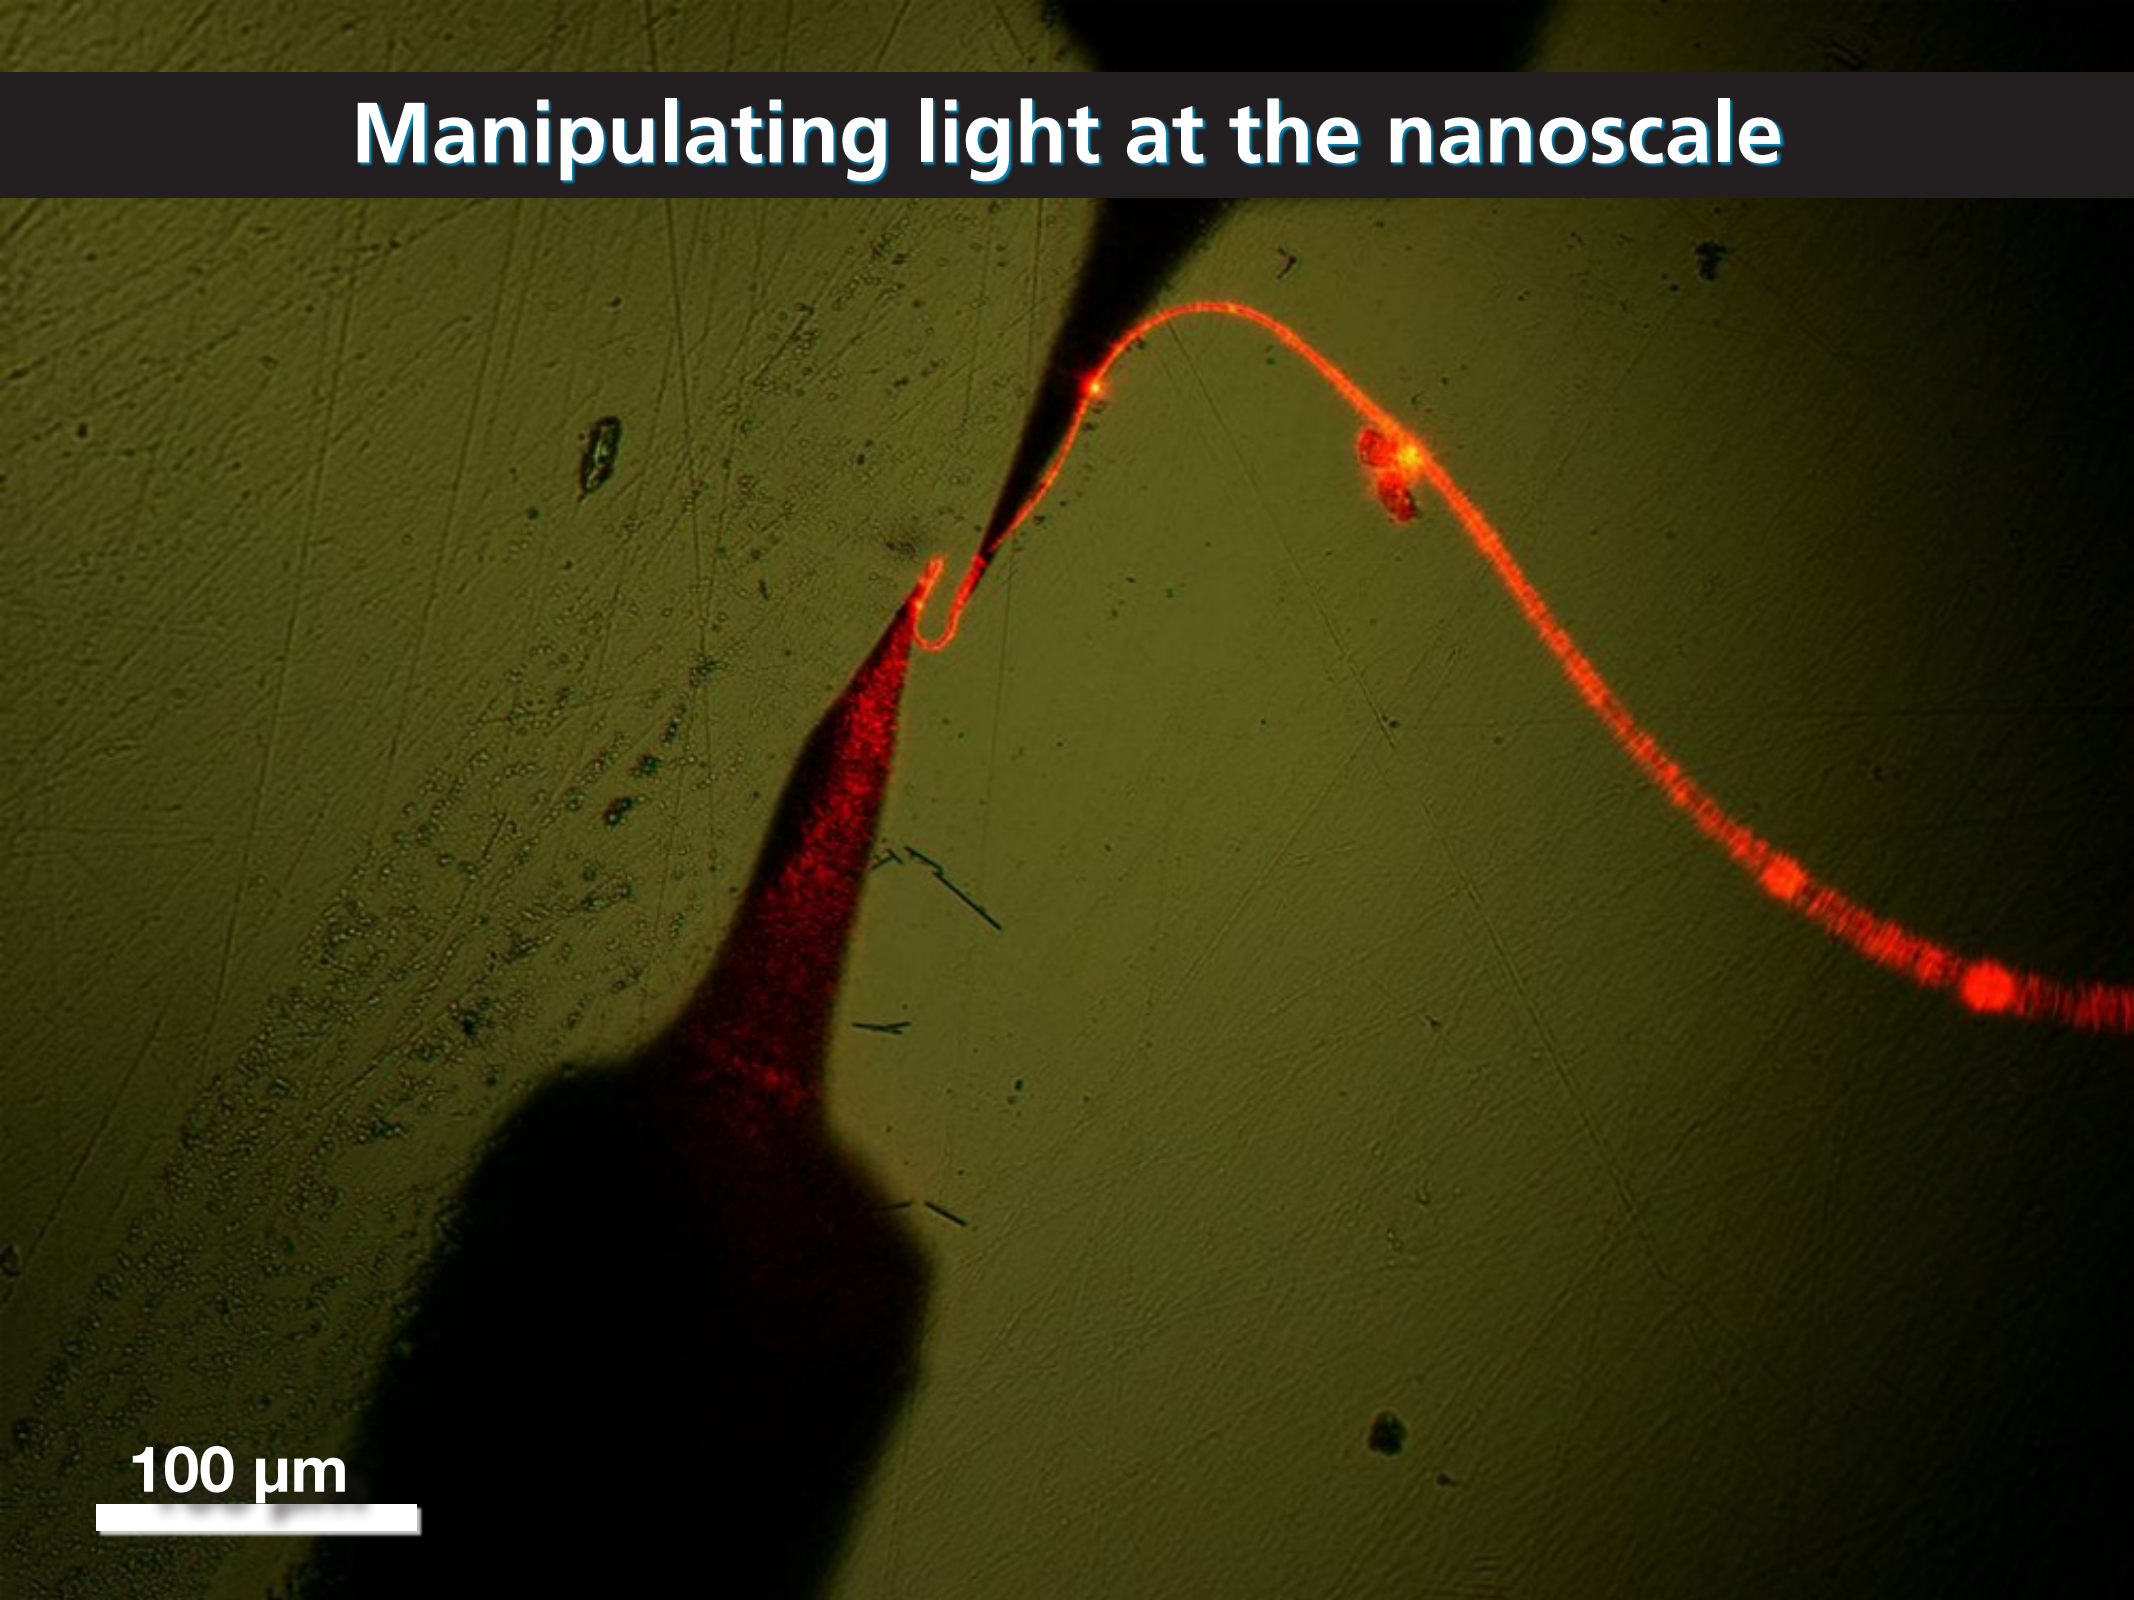

Manipulating light at the nanoscale

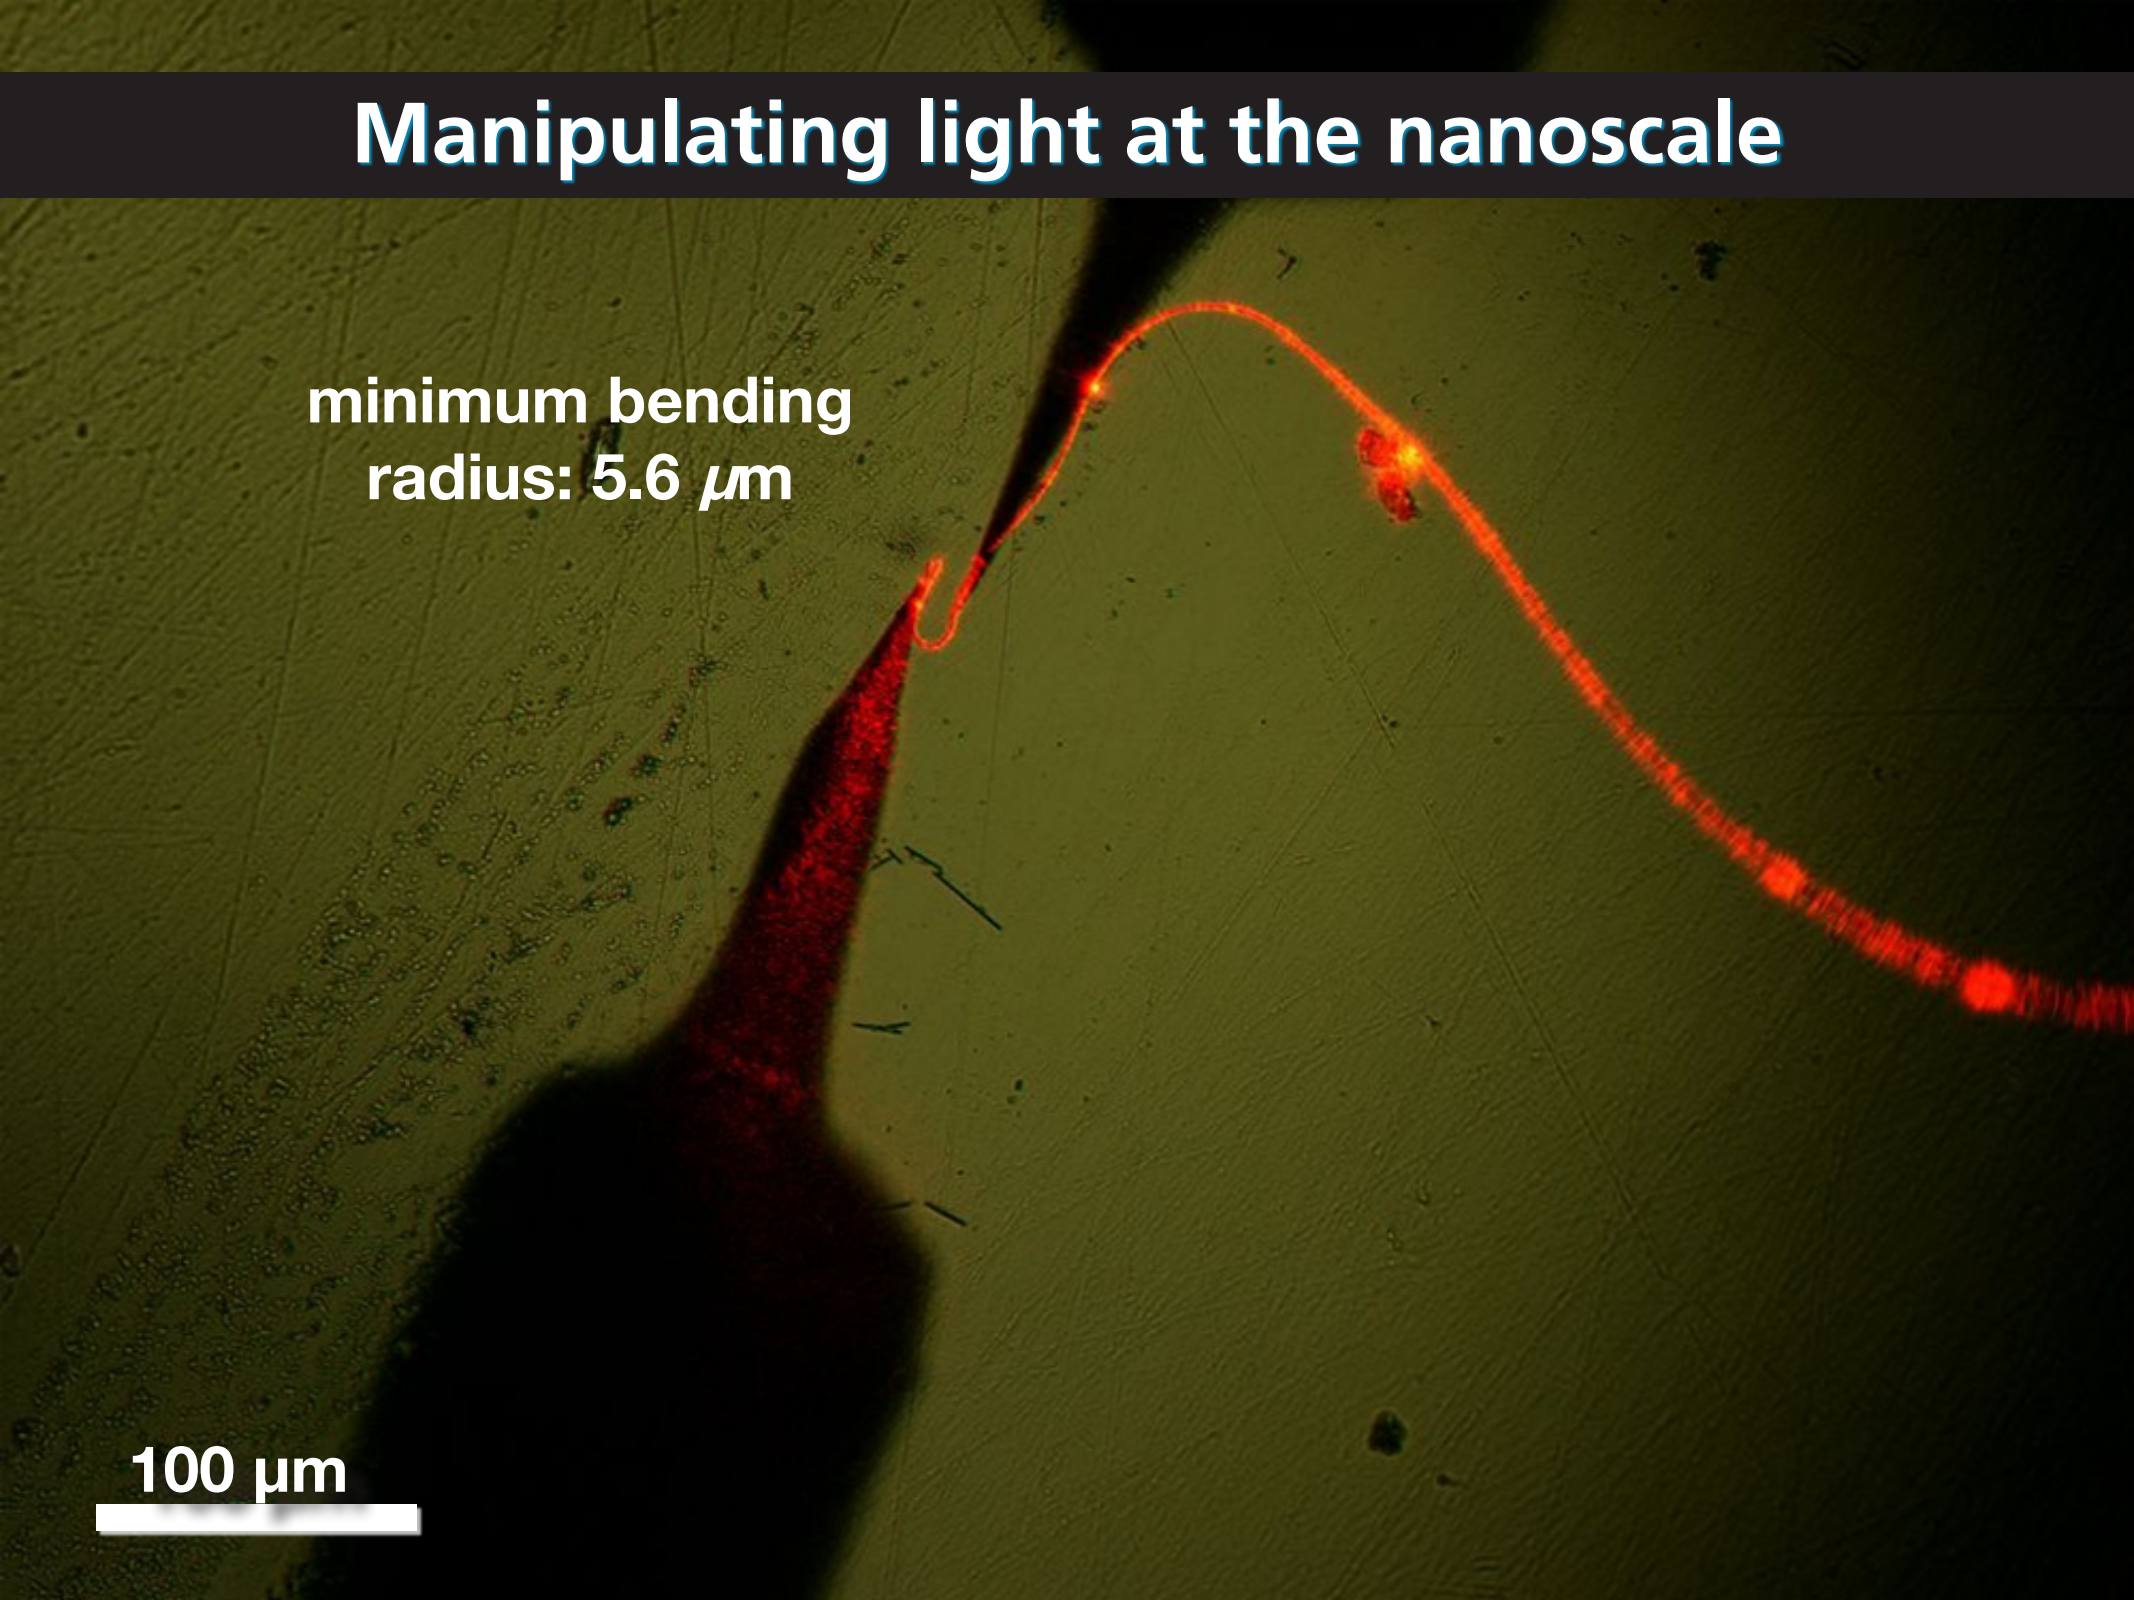

Manipulating light at the nanoscale

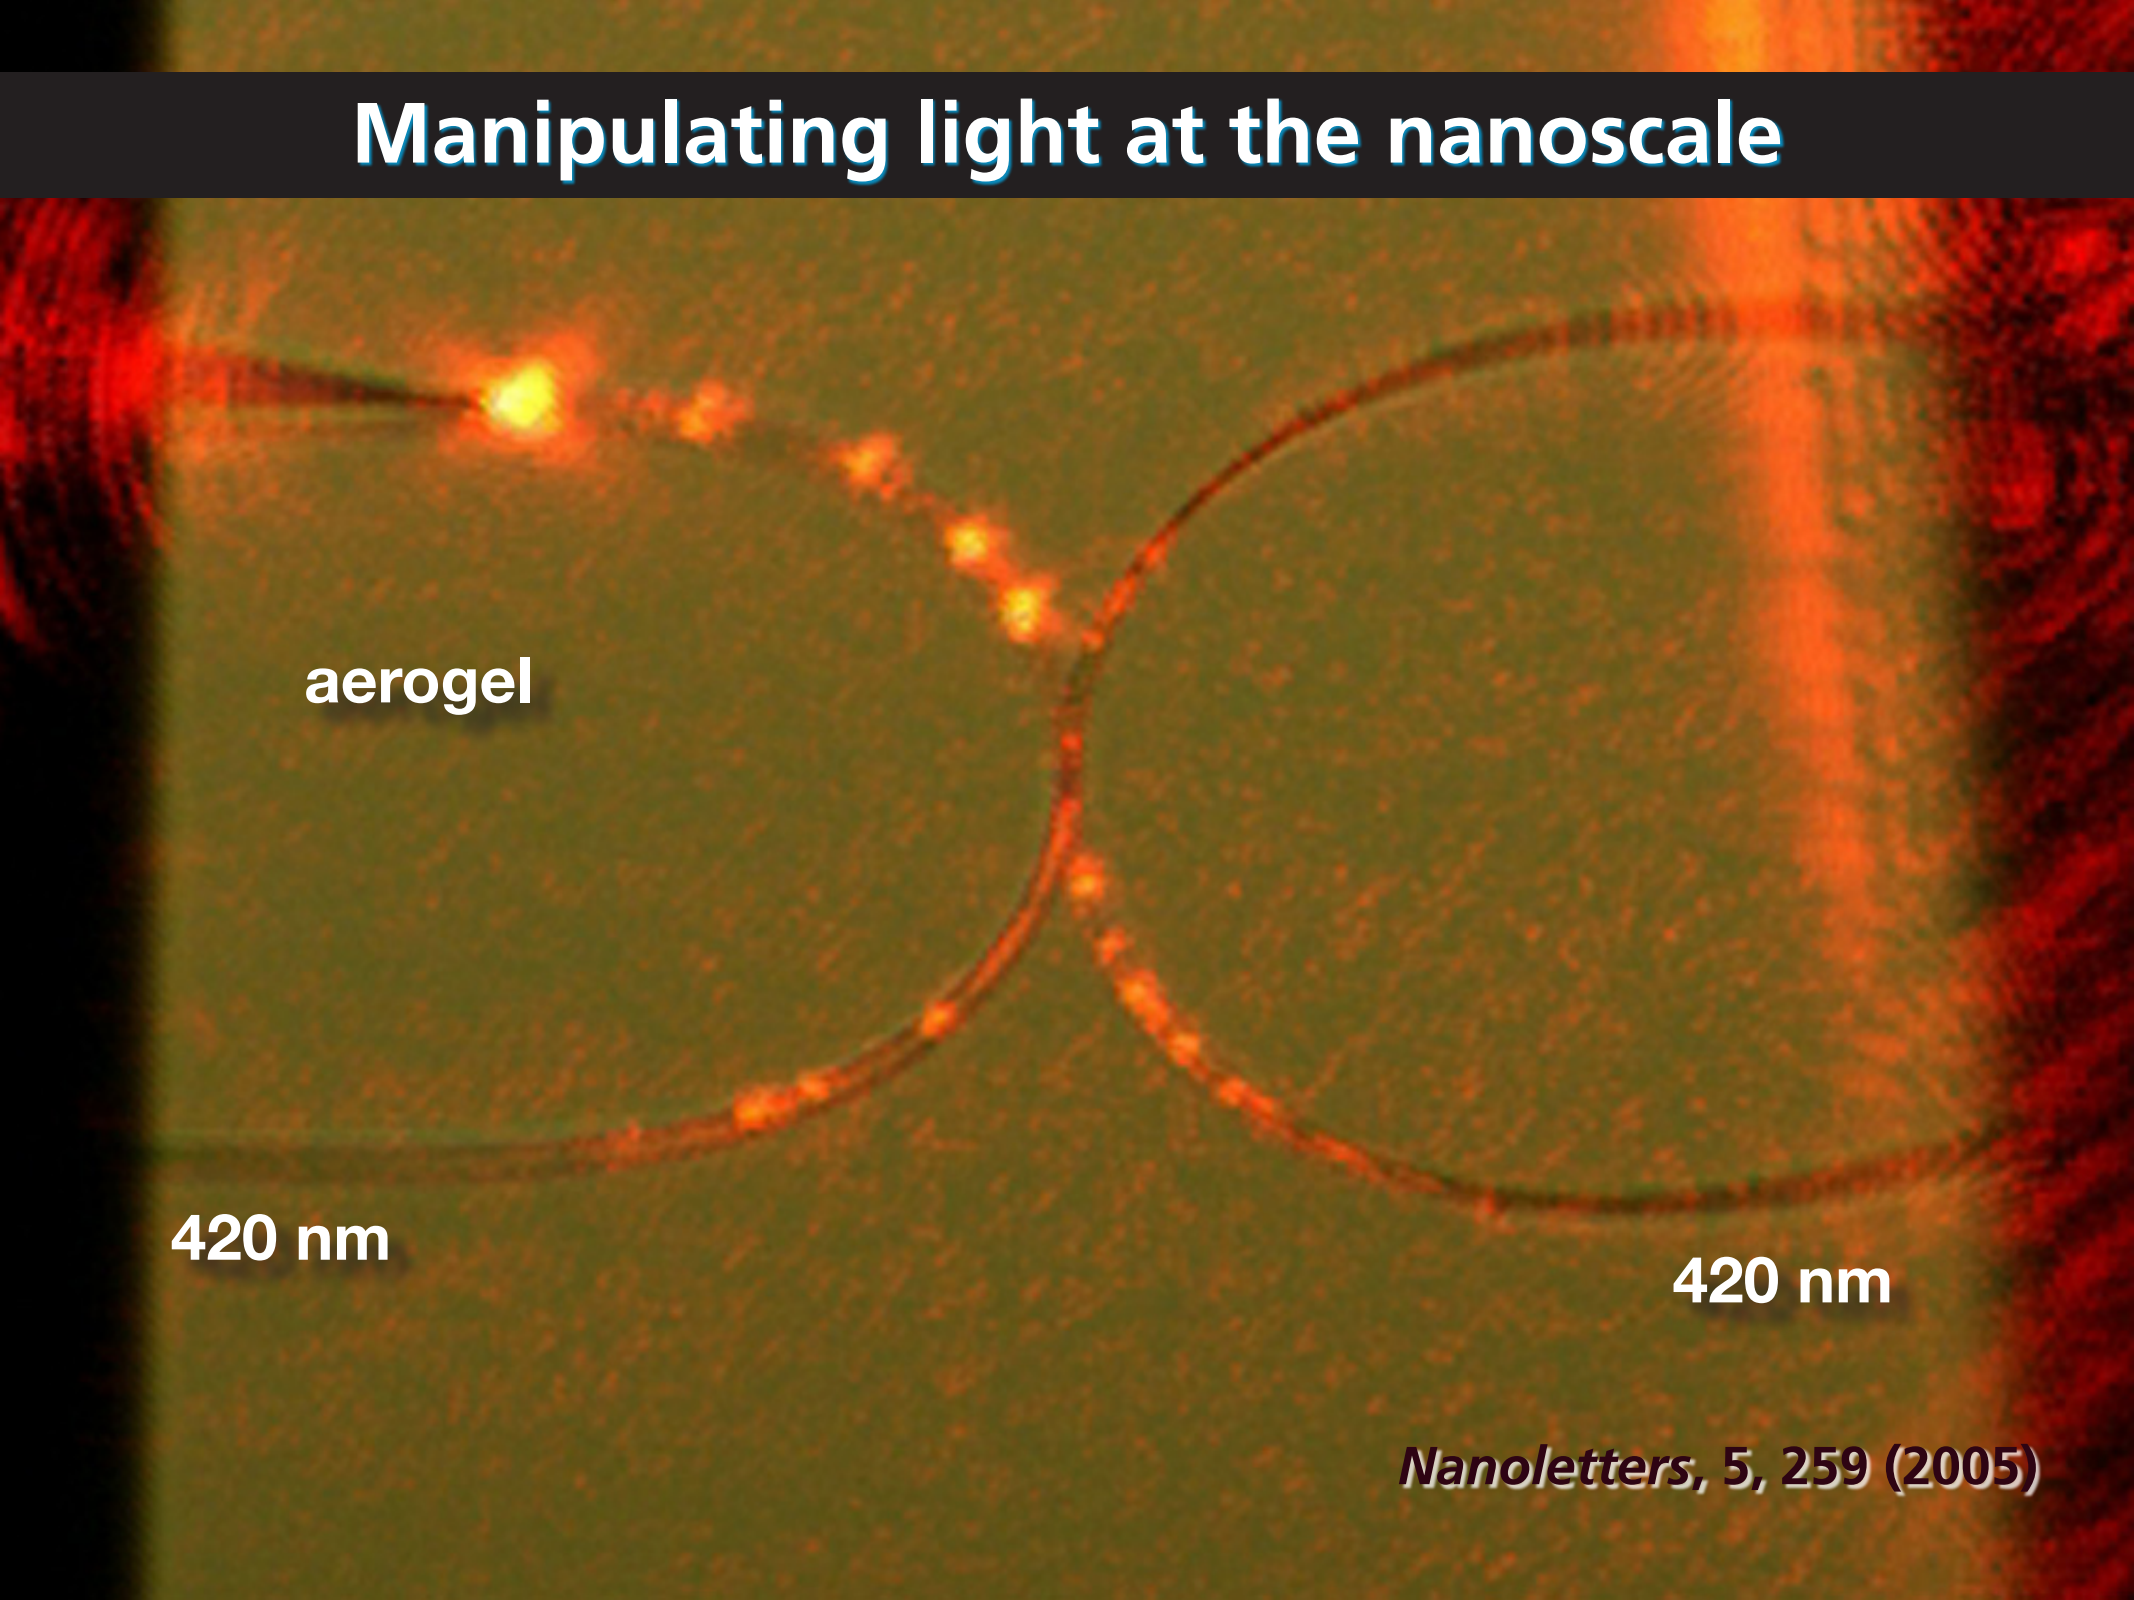

Nanoletters, 5, 259 (2005)

Manipulating light at the nanoscale

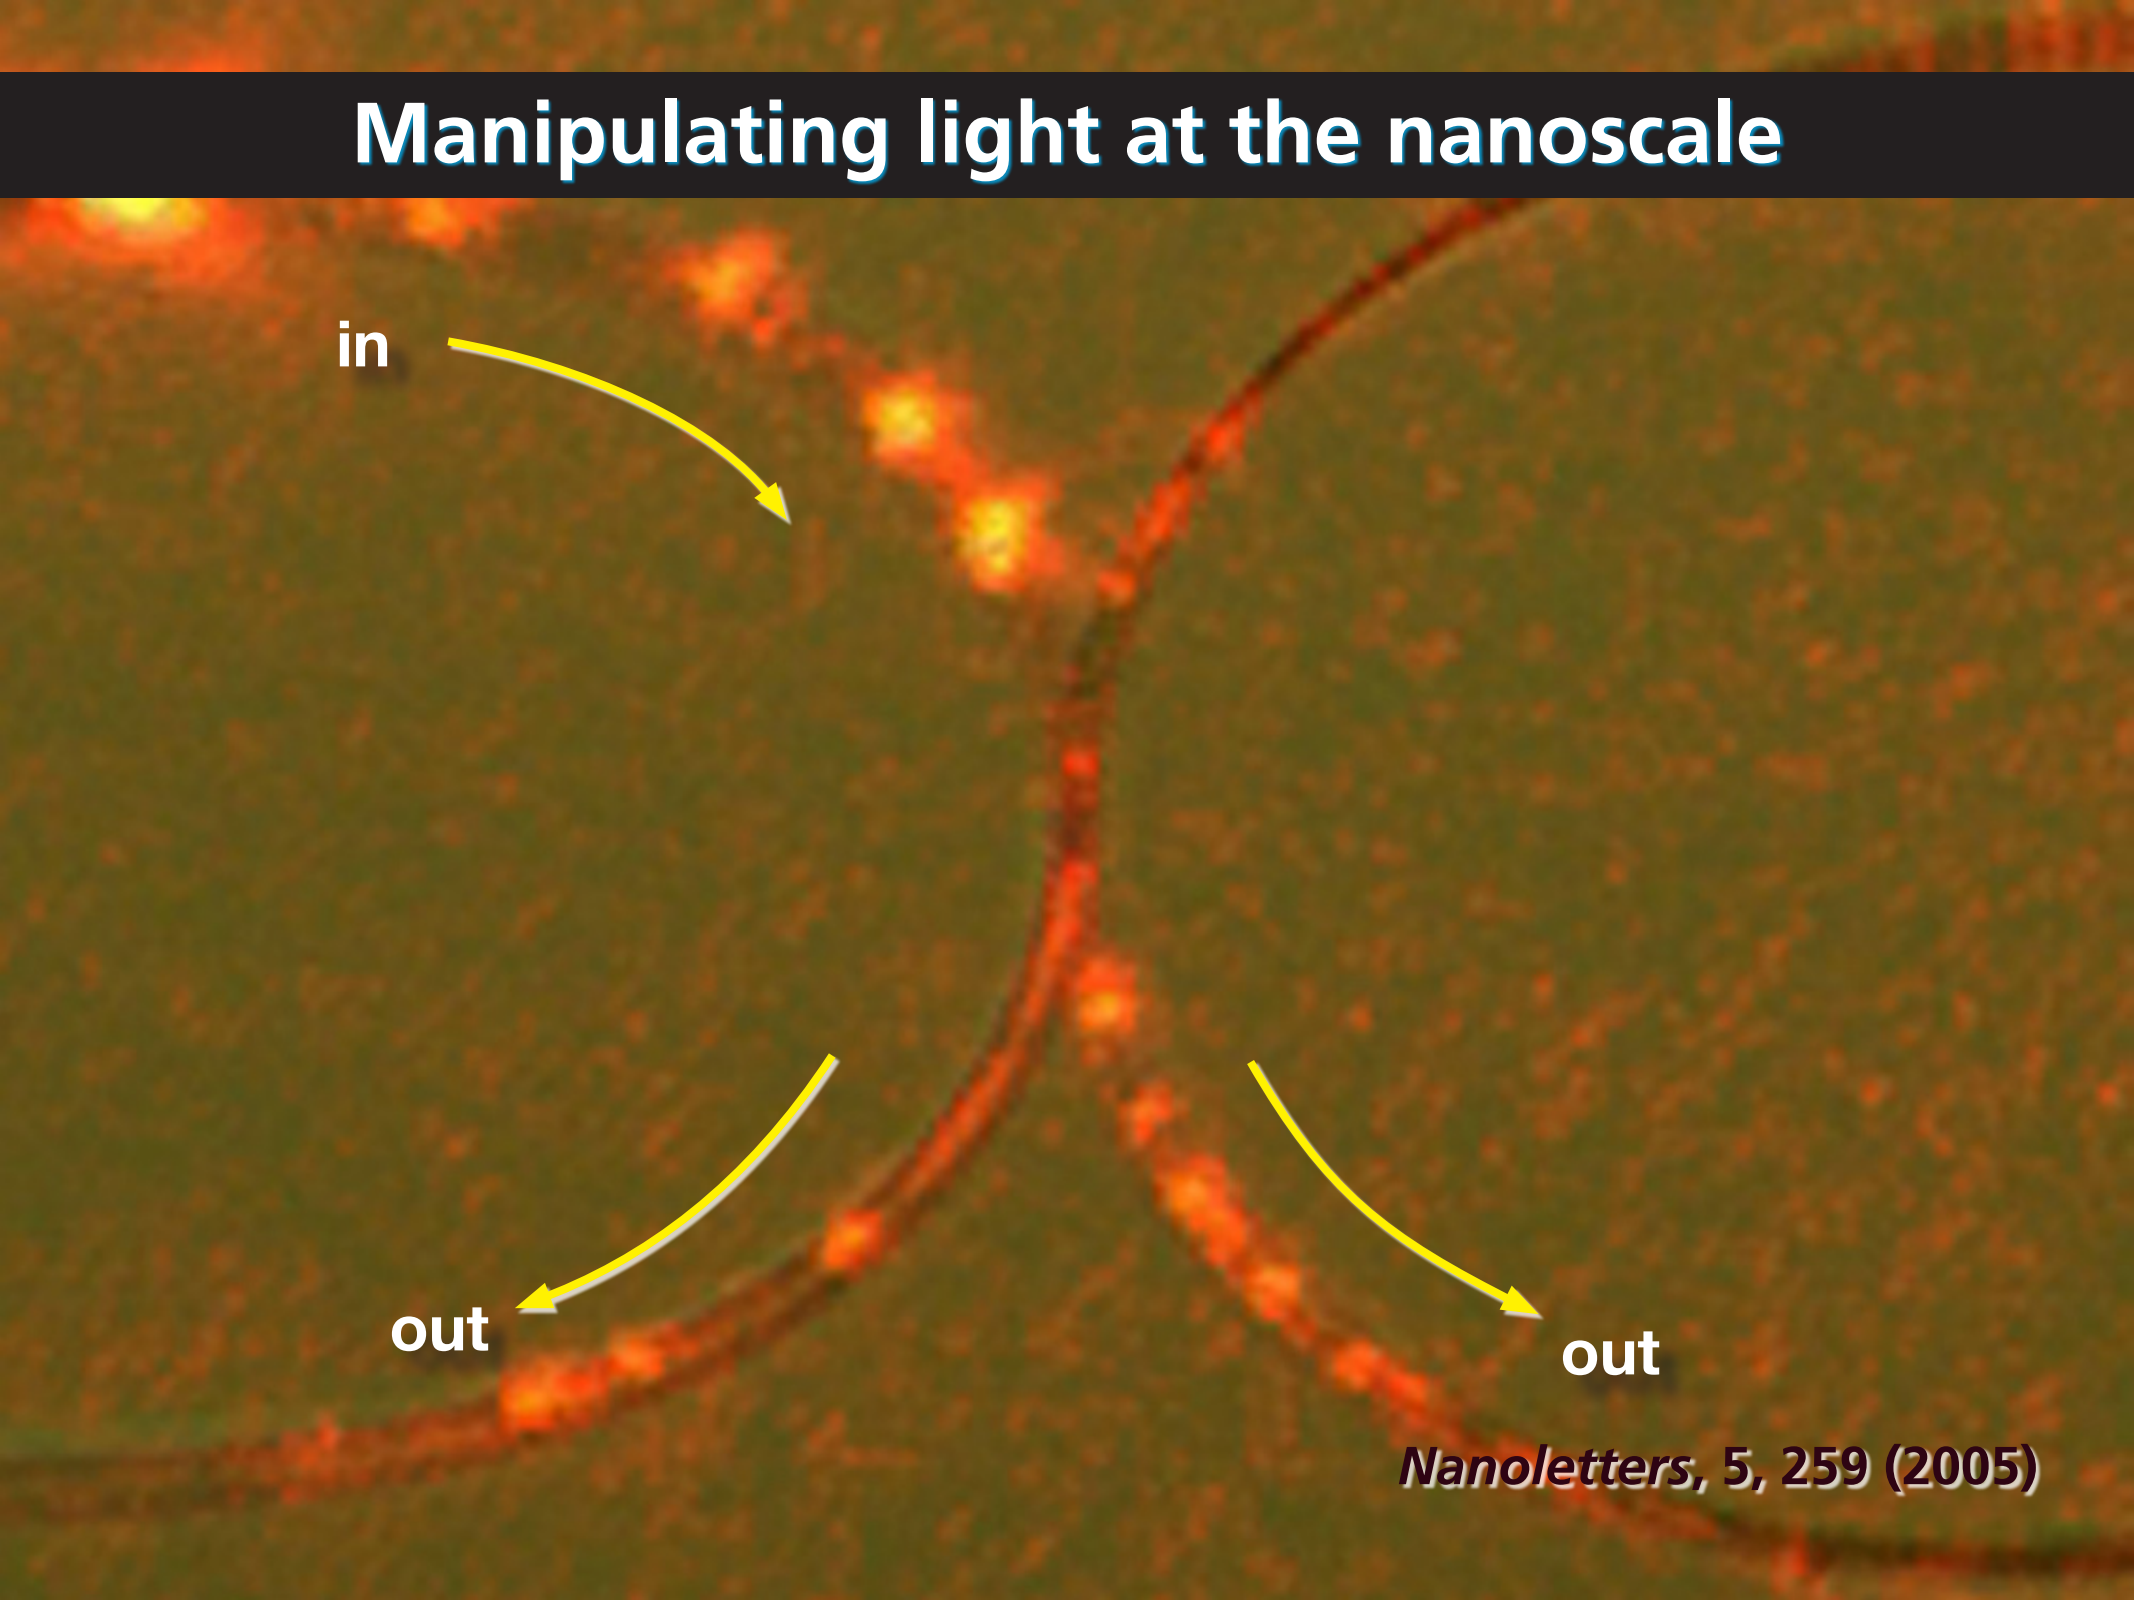

Nanoletters, 5, 259 (2005)

Manipulating light at the nanoscale

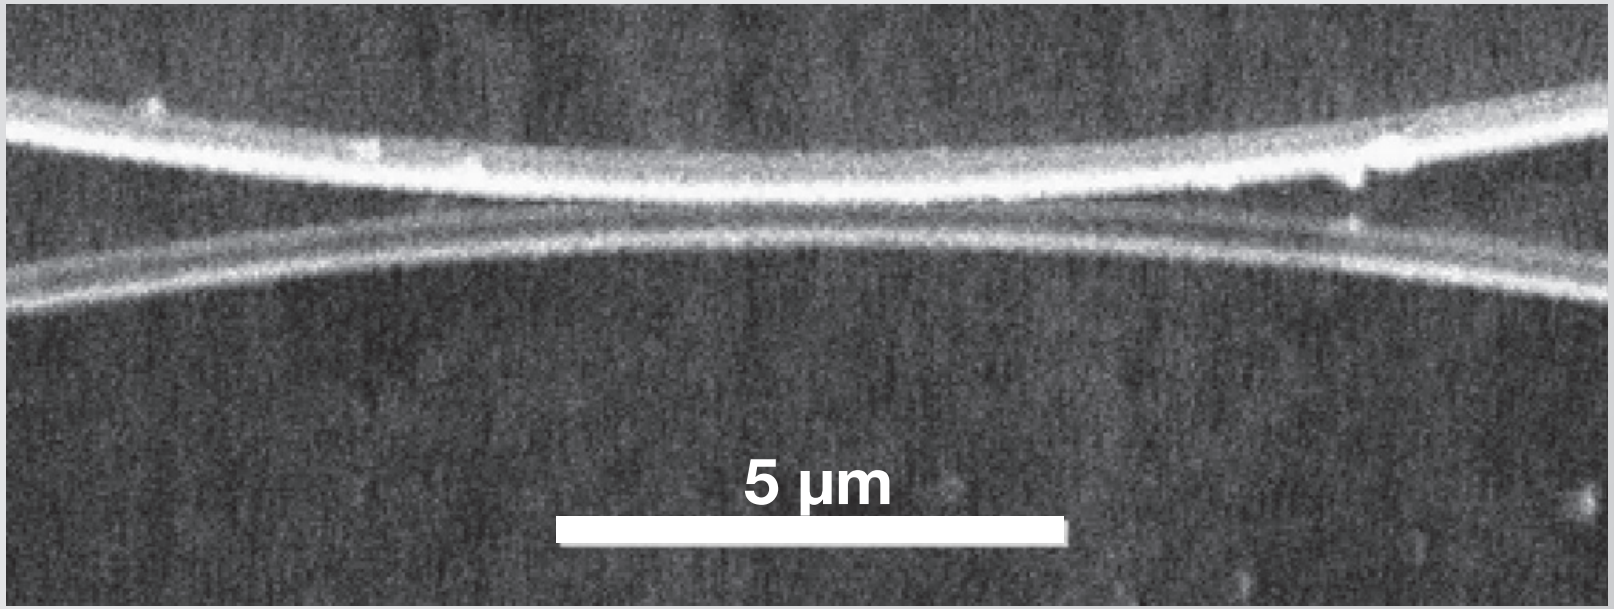

Nanoletters, 5, 259 (2005)

Manipulating light at the nanoscale

use tapered fibers to couple light to nanoscale objects

Manipulating light at the nanoscale

Manipulating light at the nanoscale

vapor transport grown ZnO nanowires

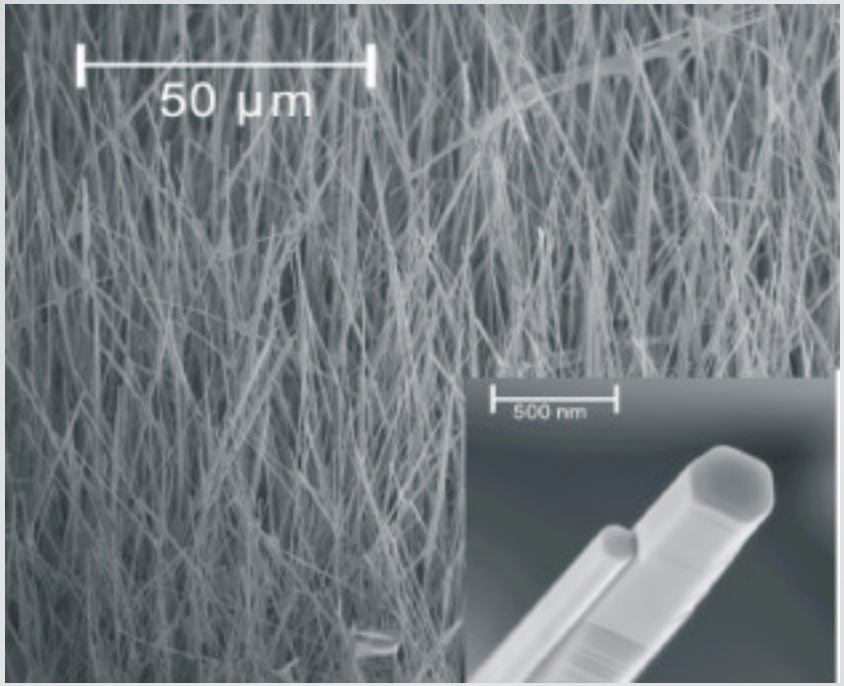

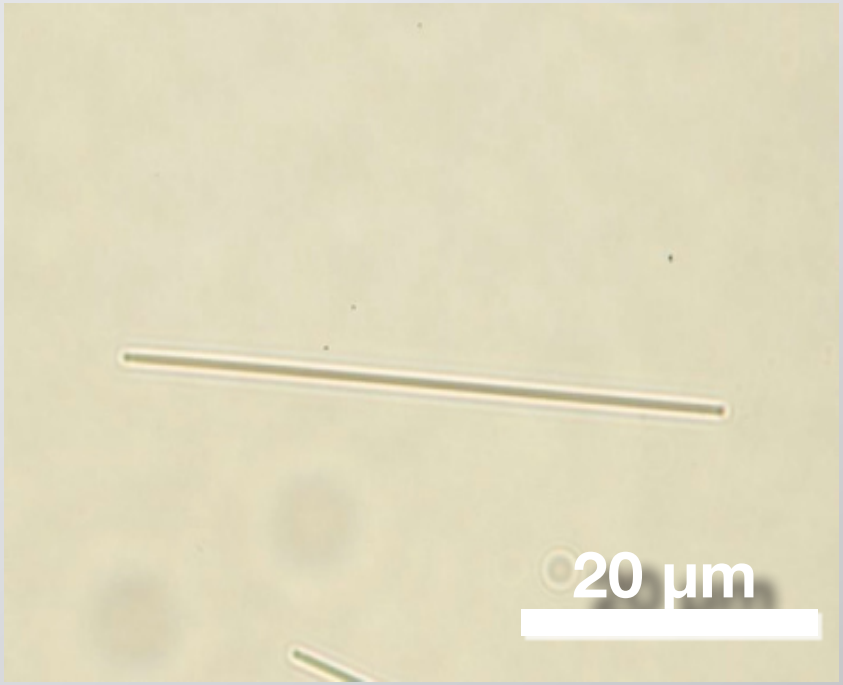

80–400 nm diameter, up to 80 µm long

Manipulating light at the nanoscale

best of both worlds

ZnO	silica
bottom-up	top-down
semiconductor	glass
active photonic devices	passive waveguides
electrical operation	link to macroworld

Manipulating light at the nanoscale

coupling to ZnO nanowires

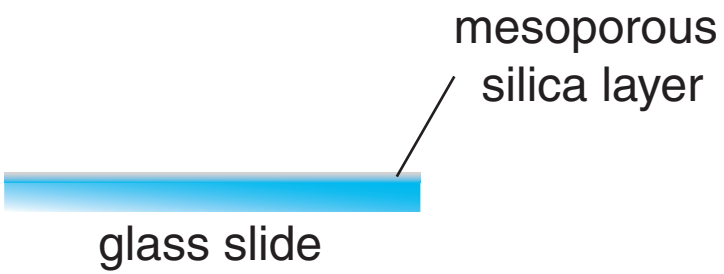

Manipulating light at the nanoscale

coupling to ZnO nanowires

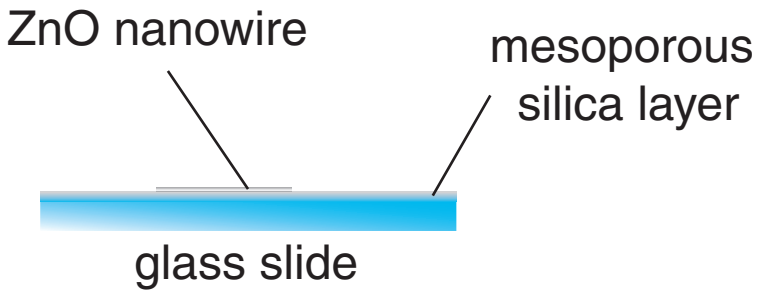

Manipulating light at the nanoscale

coupling to ZnO nanowires

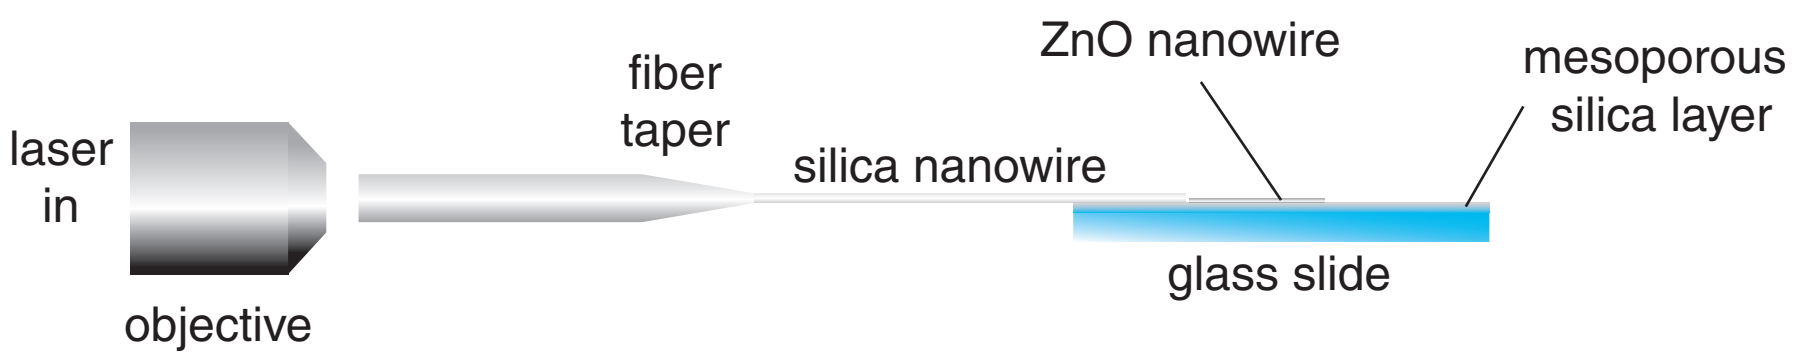

Manipulating light at the nanoscale

coupling to ZnO nanowires

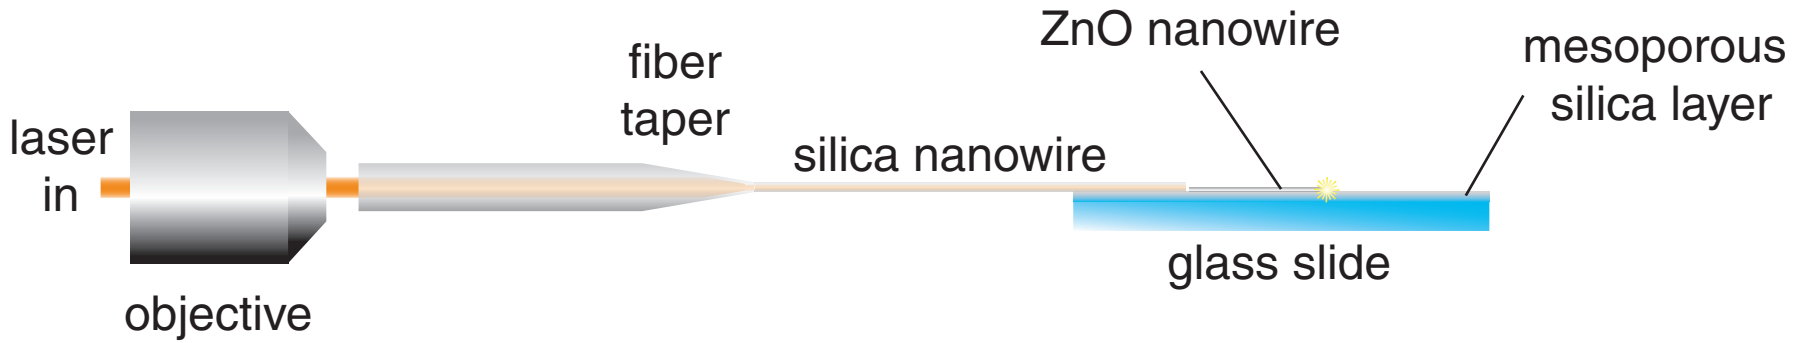

Manipulating light at the nanoscale

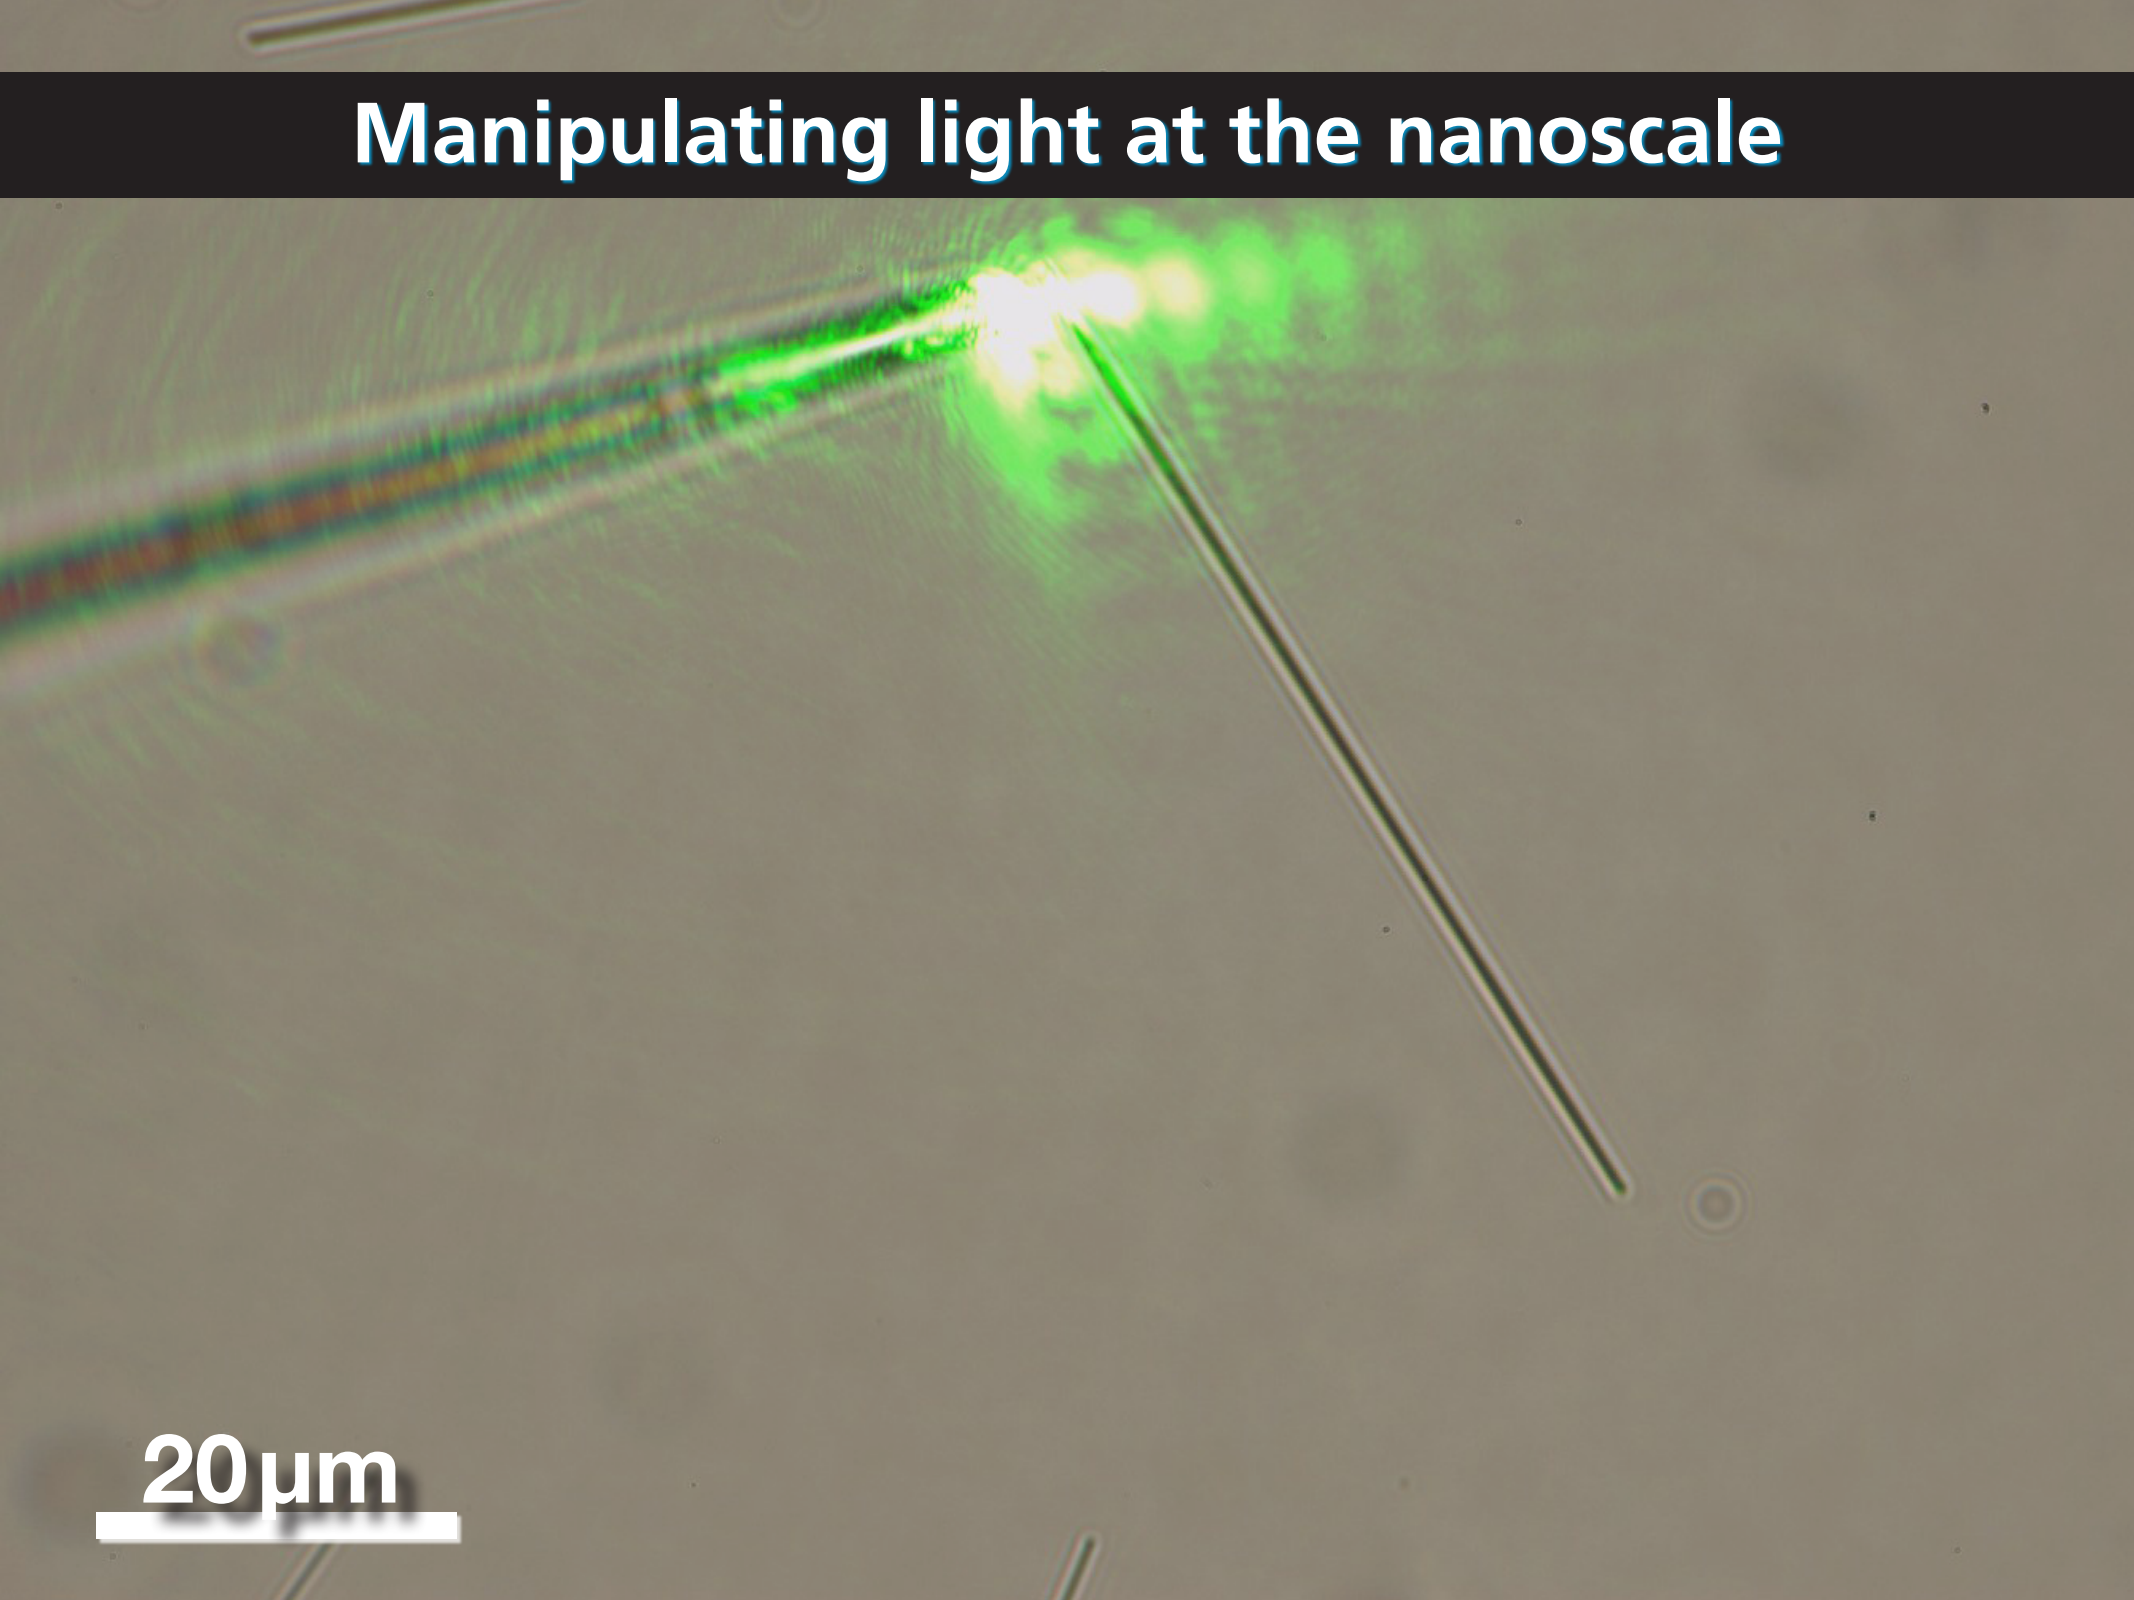

Manipulating light at the nanoscale

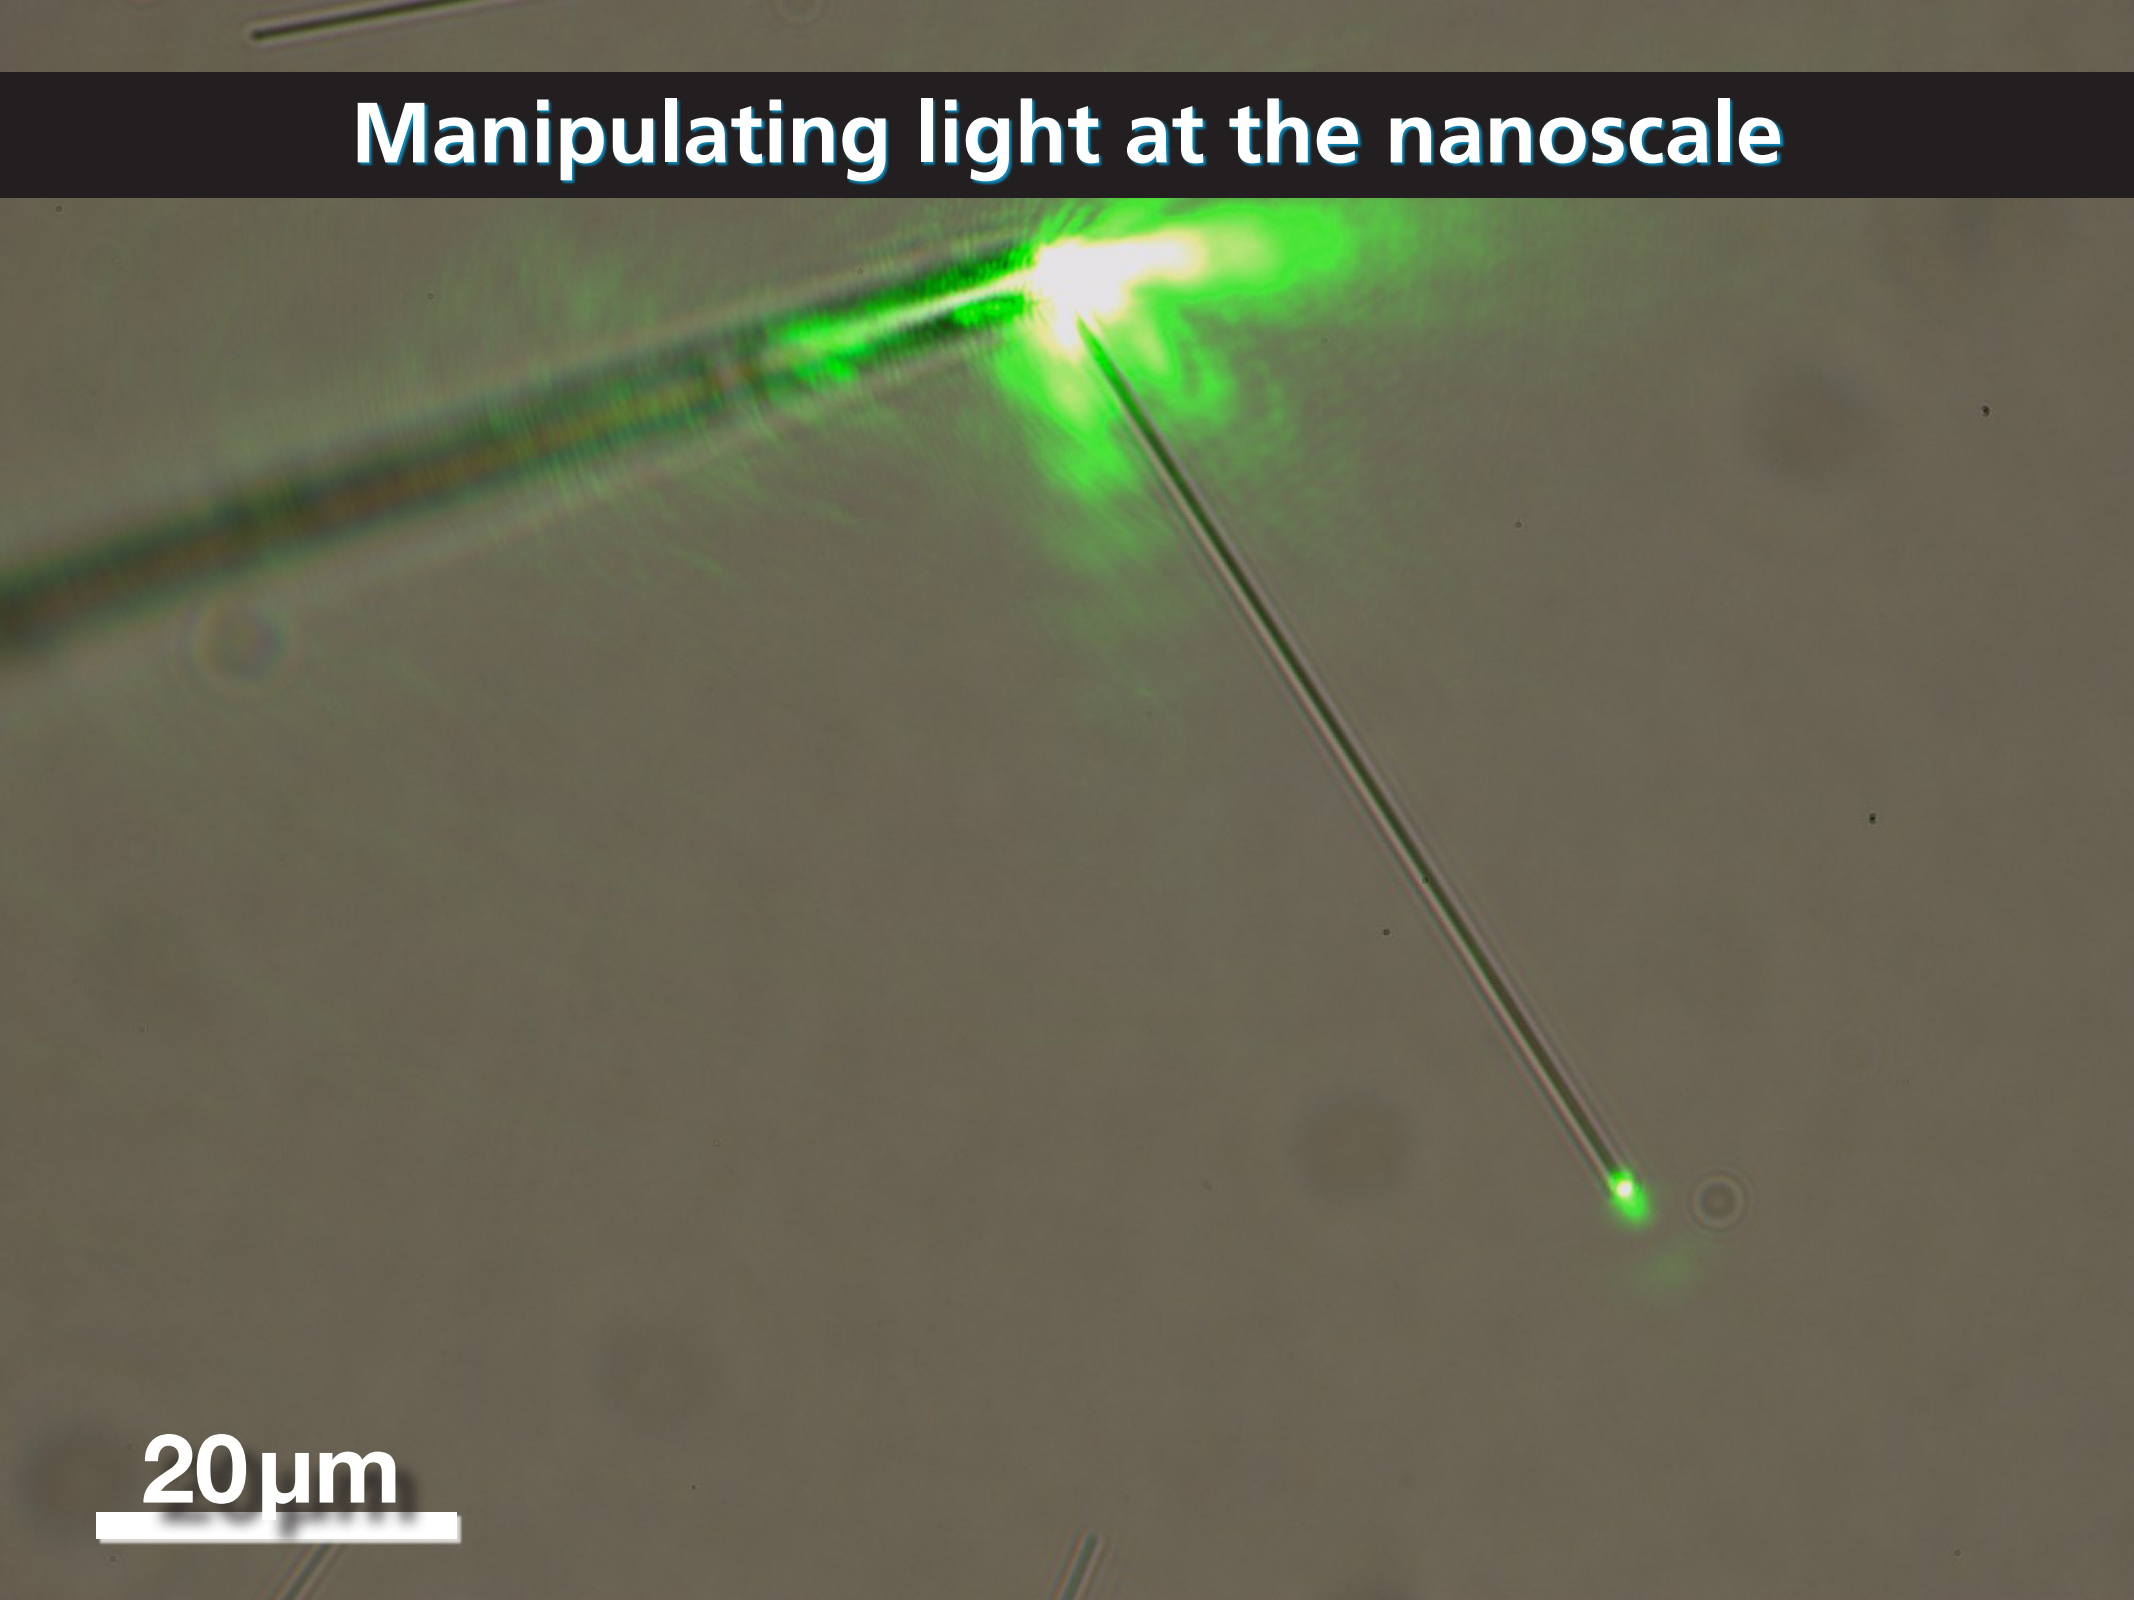

Manipulating light at the nanoscale

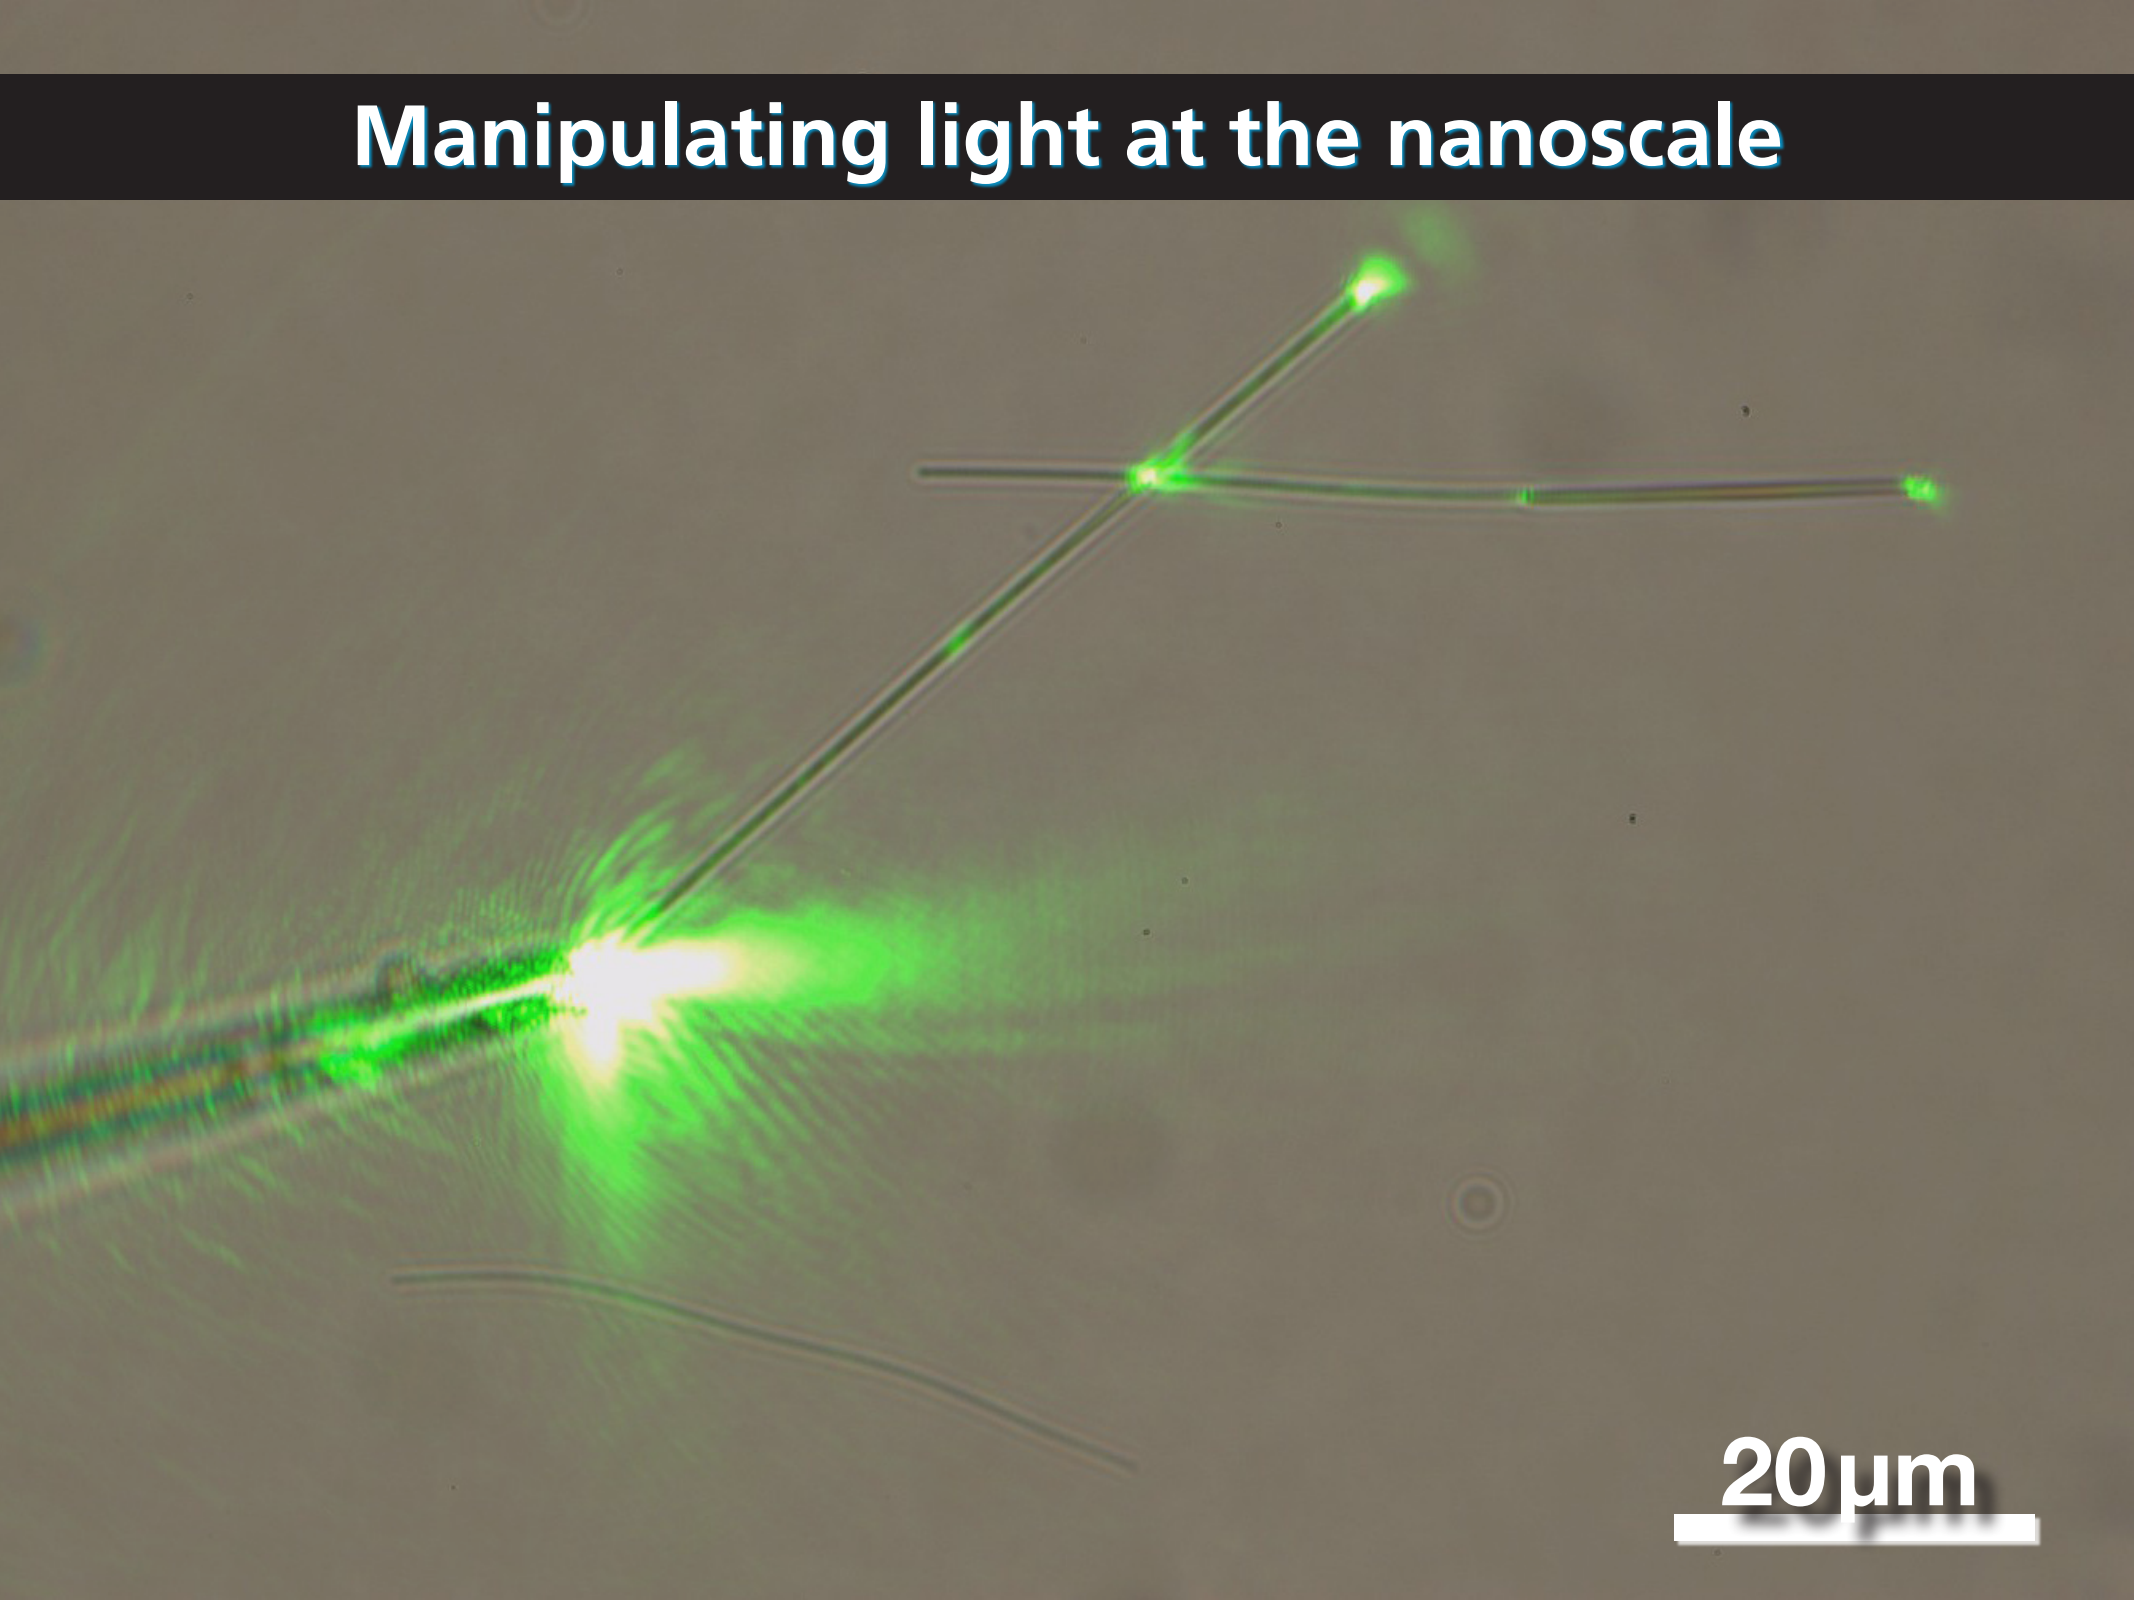

Manipulating light at the nanoscale

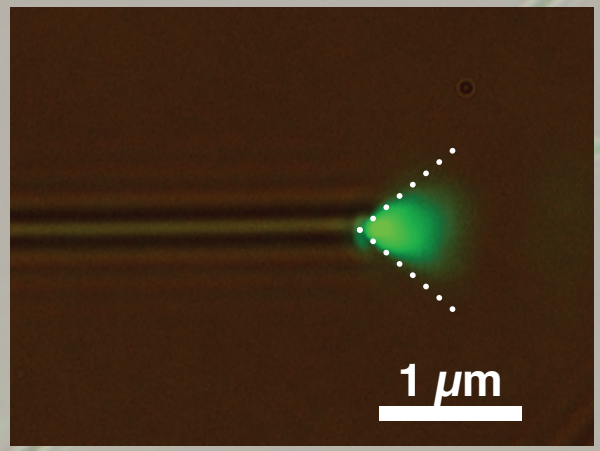

Nano Lett., 7, 3675 (2007)

Manipulating light at the nanoscale

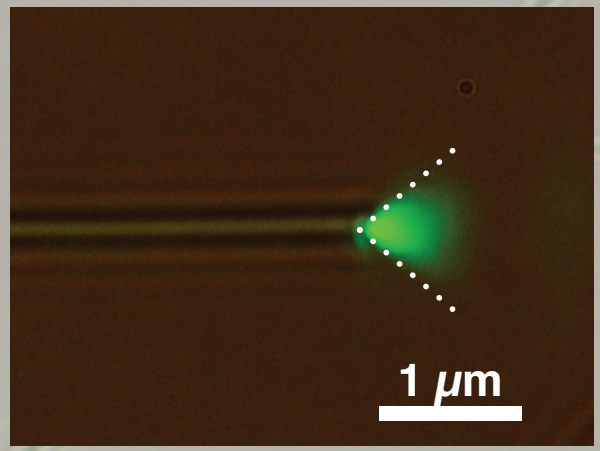

FDTD simulation

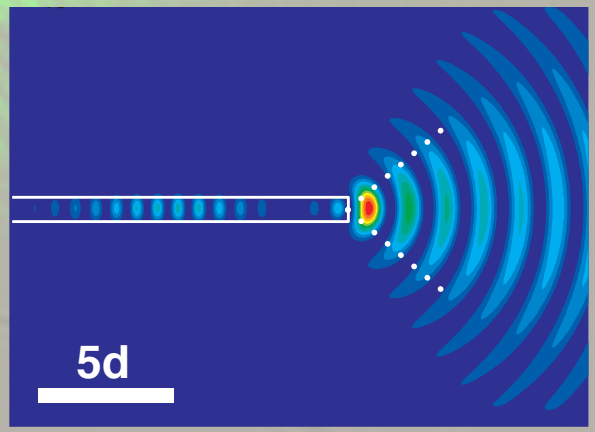

ab-initio.mit.edu/wiki/index/Meep

Manipulating light at the nanoscale

Points to keep in mind:

- low-loss guiding
- convenient evanescent coupling
- attached to ordinary fiber

Outline

- manipulating light at the nanoscale
- supercontinuum generation
- optical logic gates

Supercontinuum generation

nonlinear dispersion: $n = n_o + n_2 I$

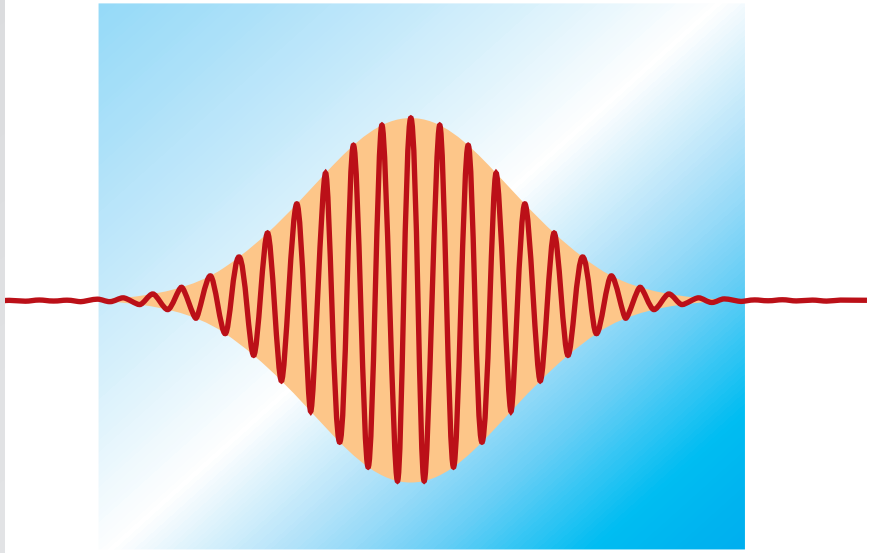

Supercontinuum generation

nonlinear dispersion: $n = n_o + n_2 I$

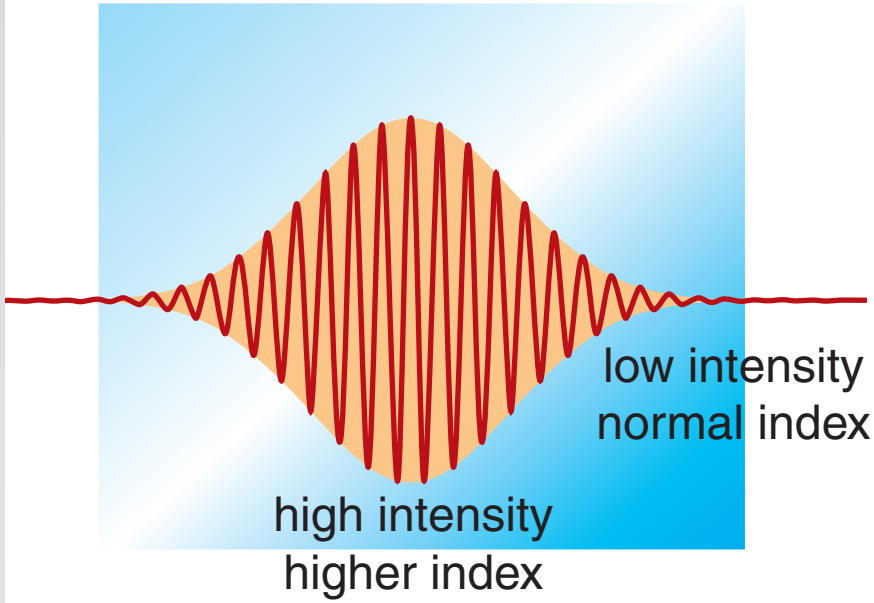

Supercontinuum generation

nonlinear dispersion: $n = n_o + n_2 I$

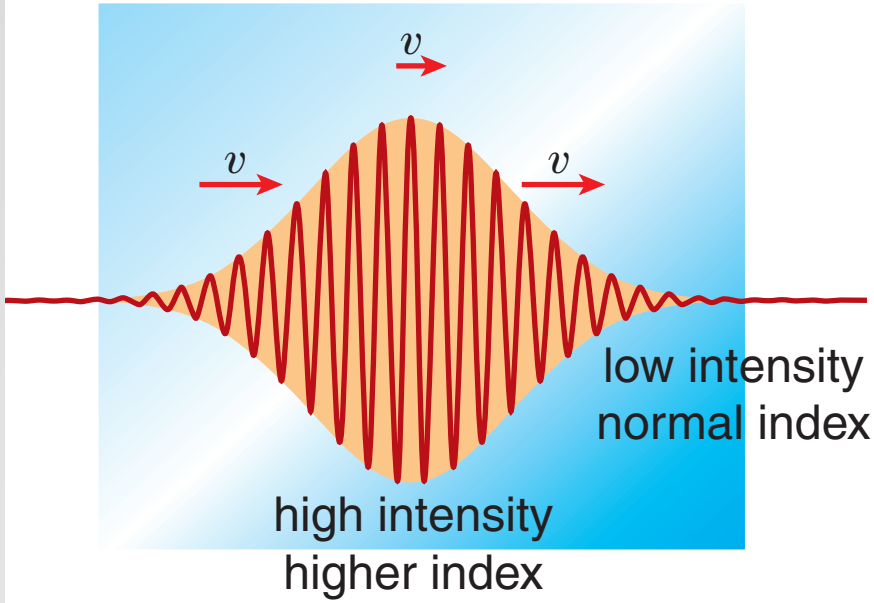

Supercontinuum generation

nonlinear dispersion: $n = n_o + n_2 I$

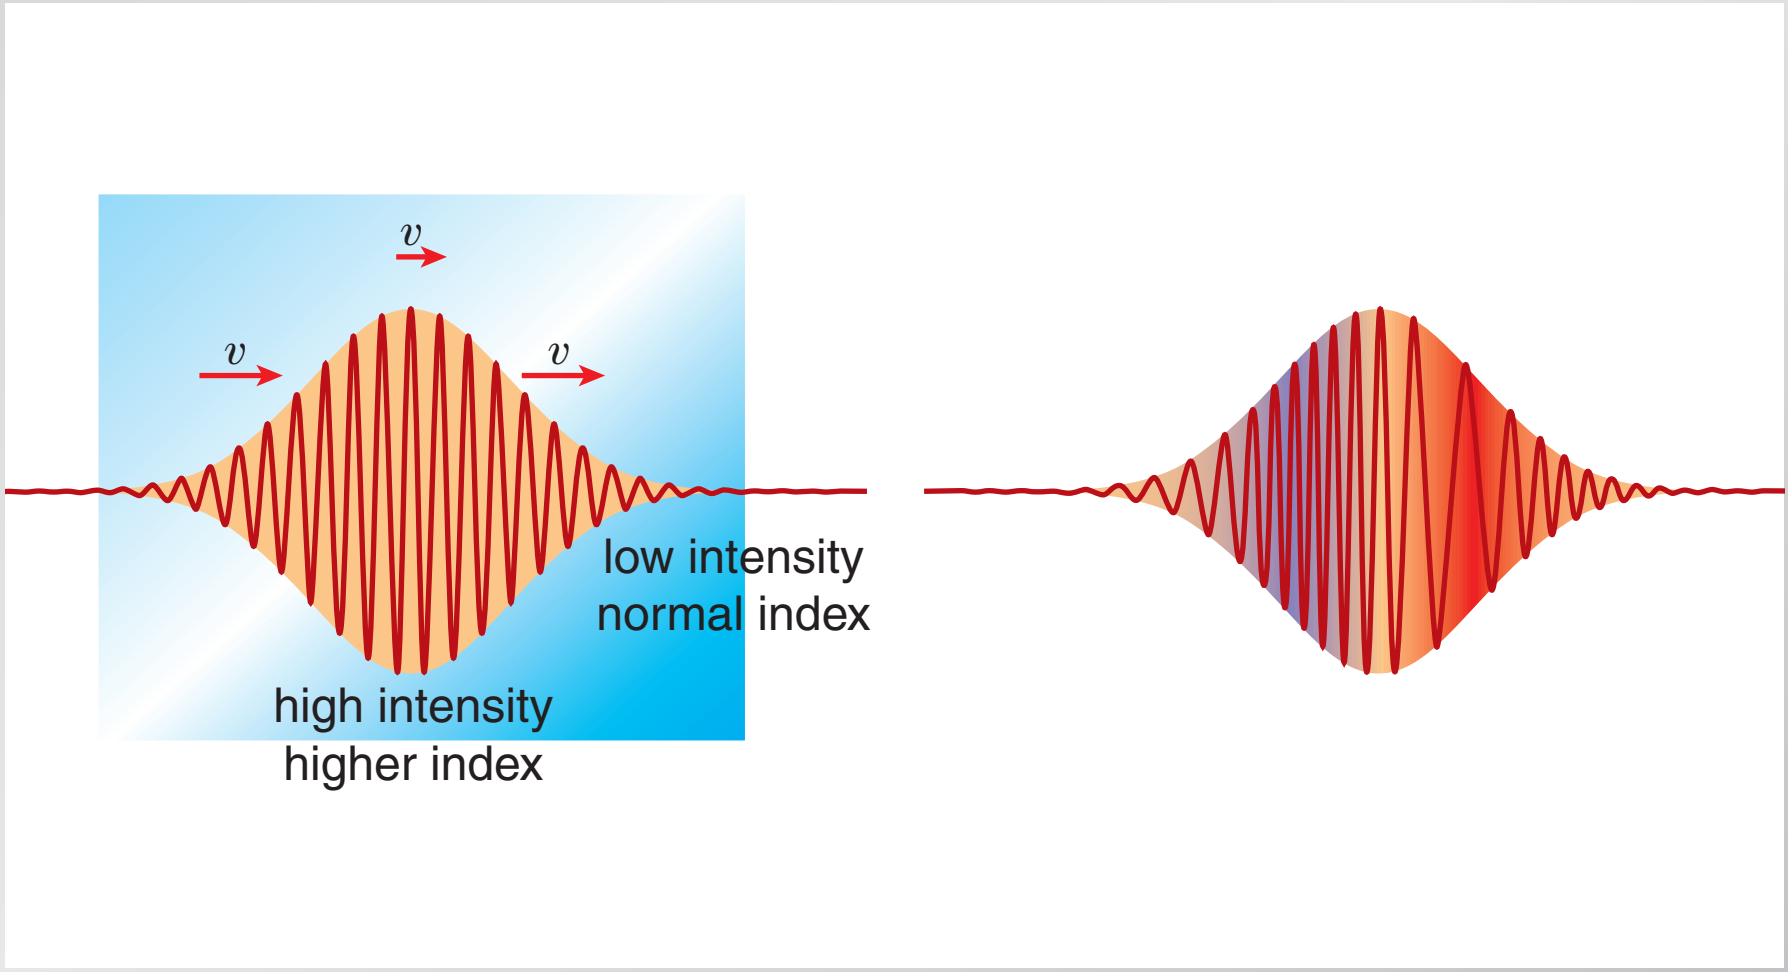

Supercontinuum generation

nonlinear dispersion: $n = n_o + n_2 I$

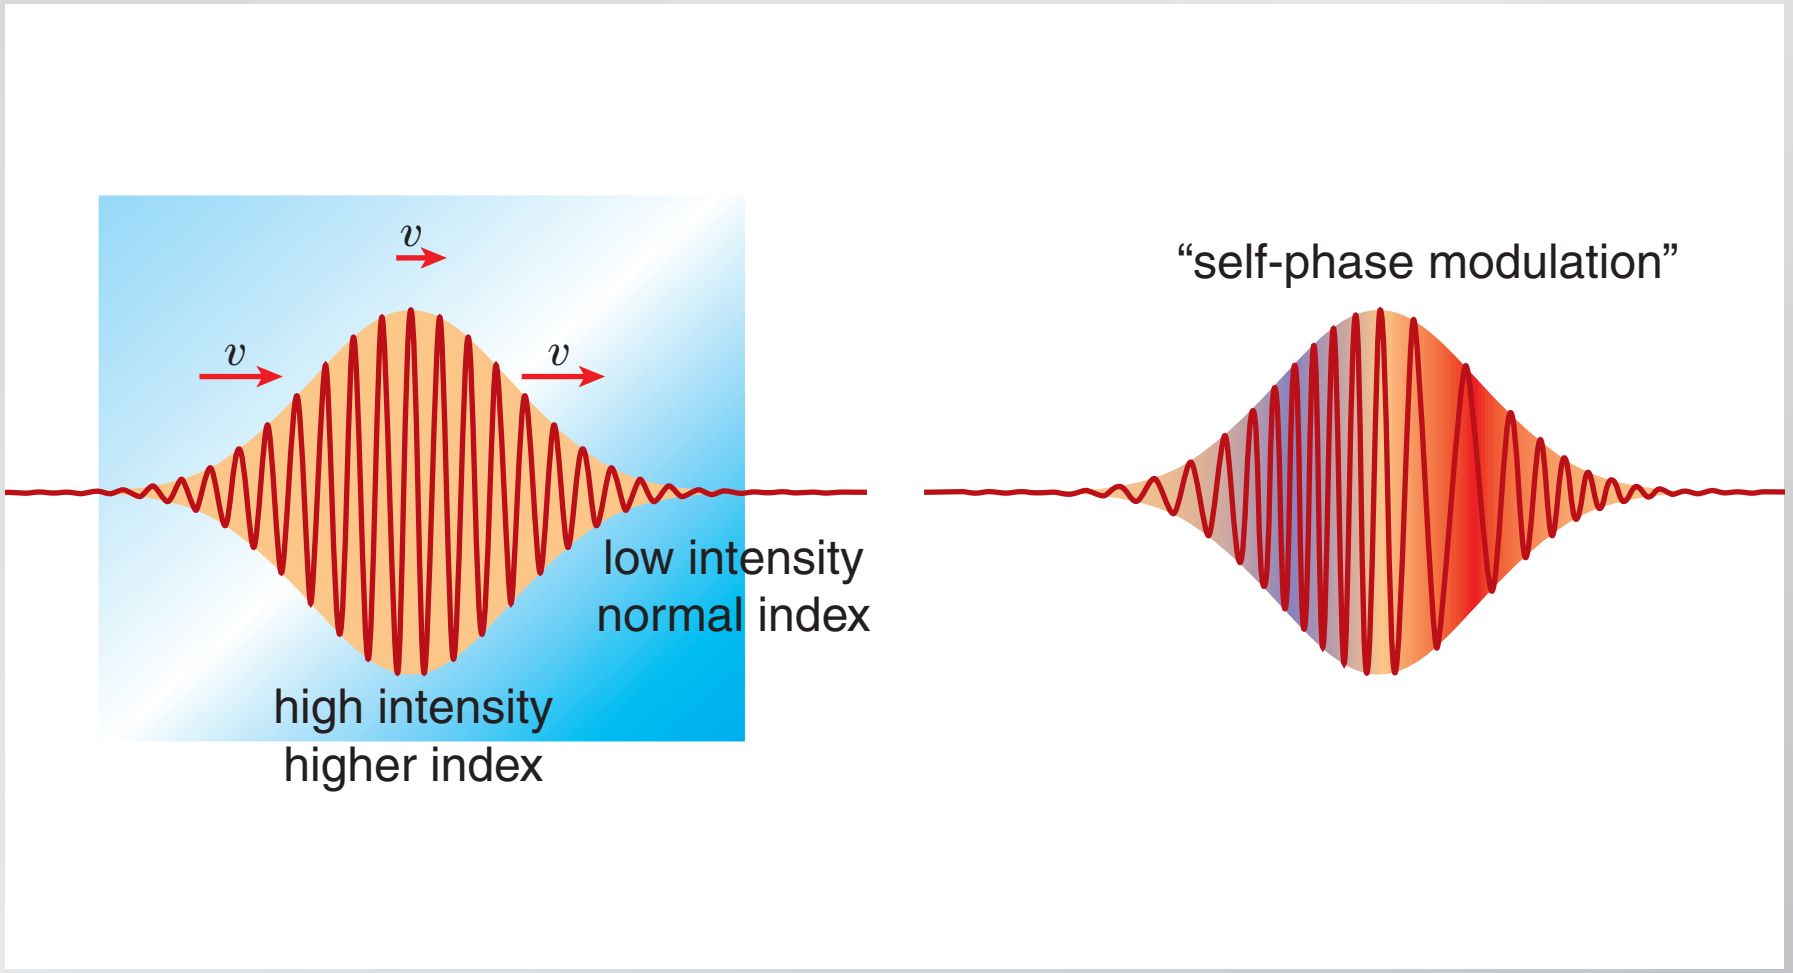

Supercontinuum generation

strong confinement $\longrightarrow$ high intensity

Supercontinuum generation

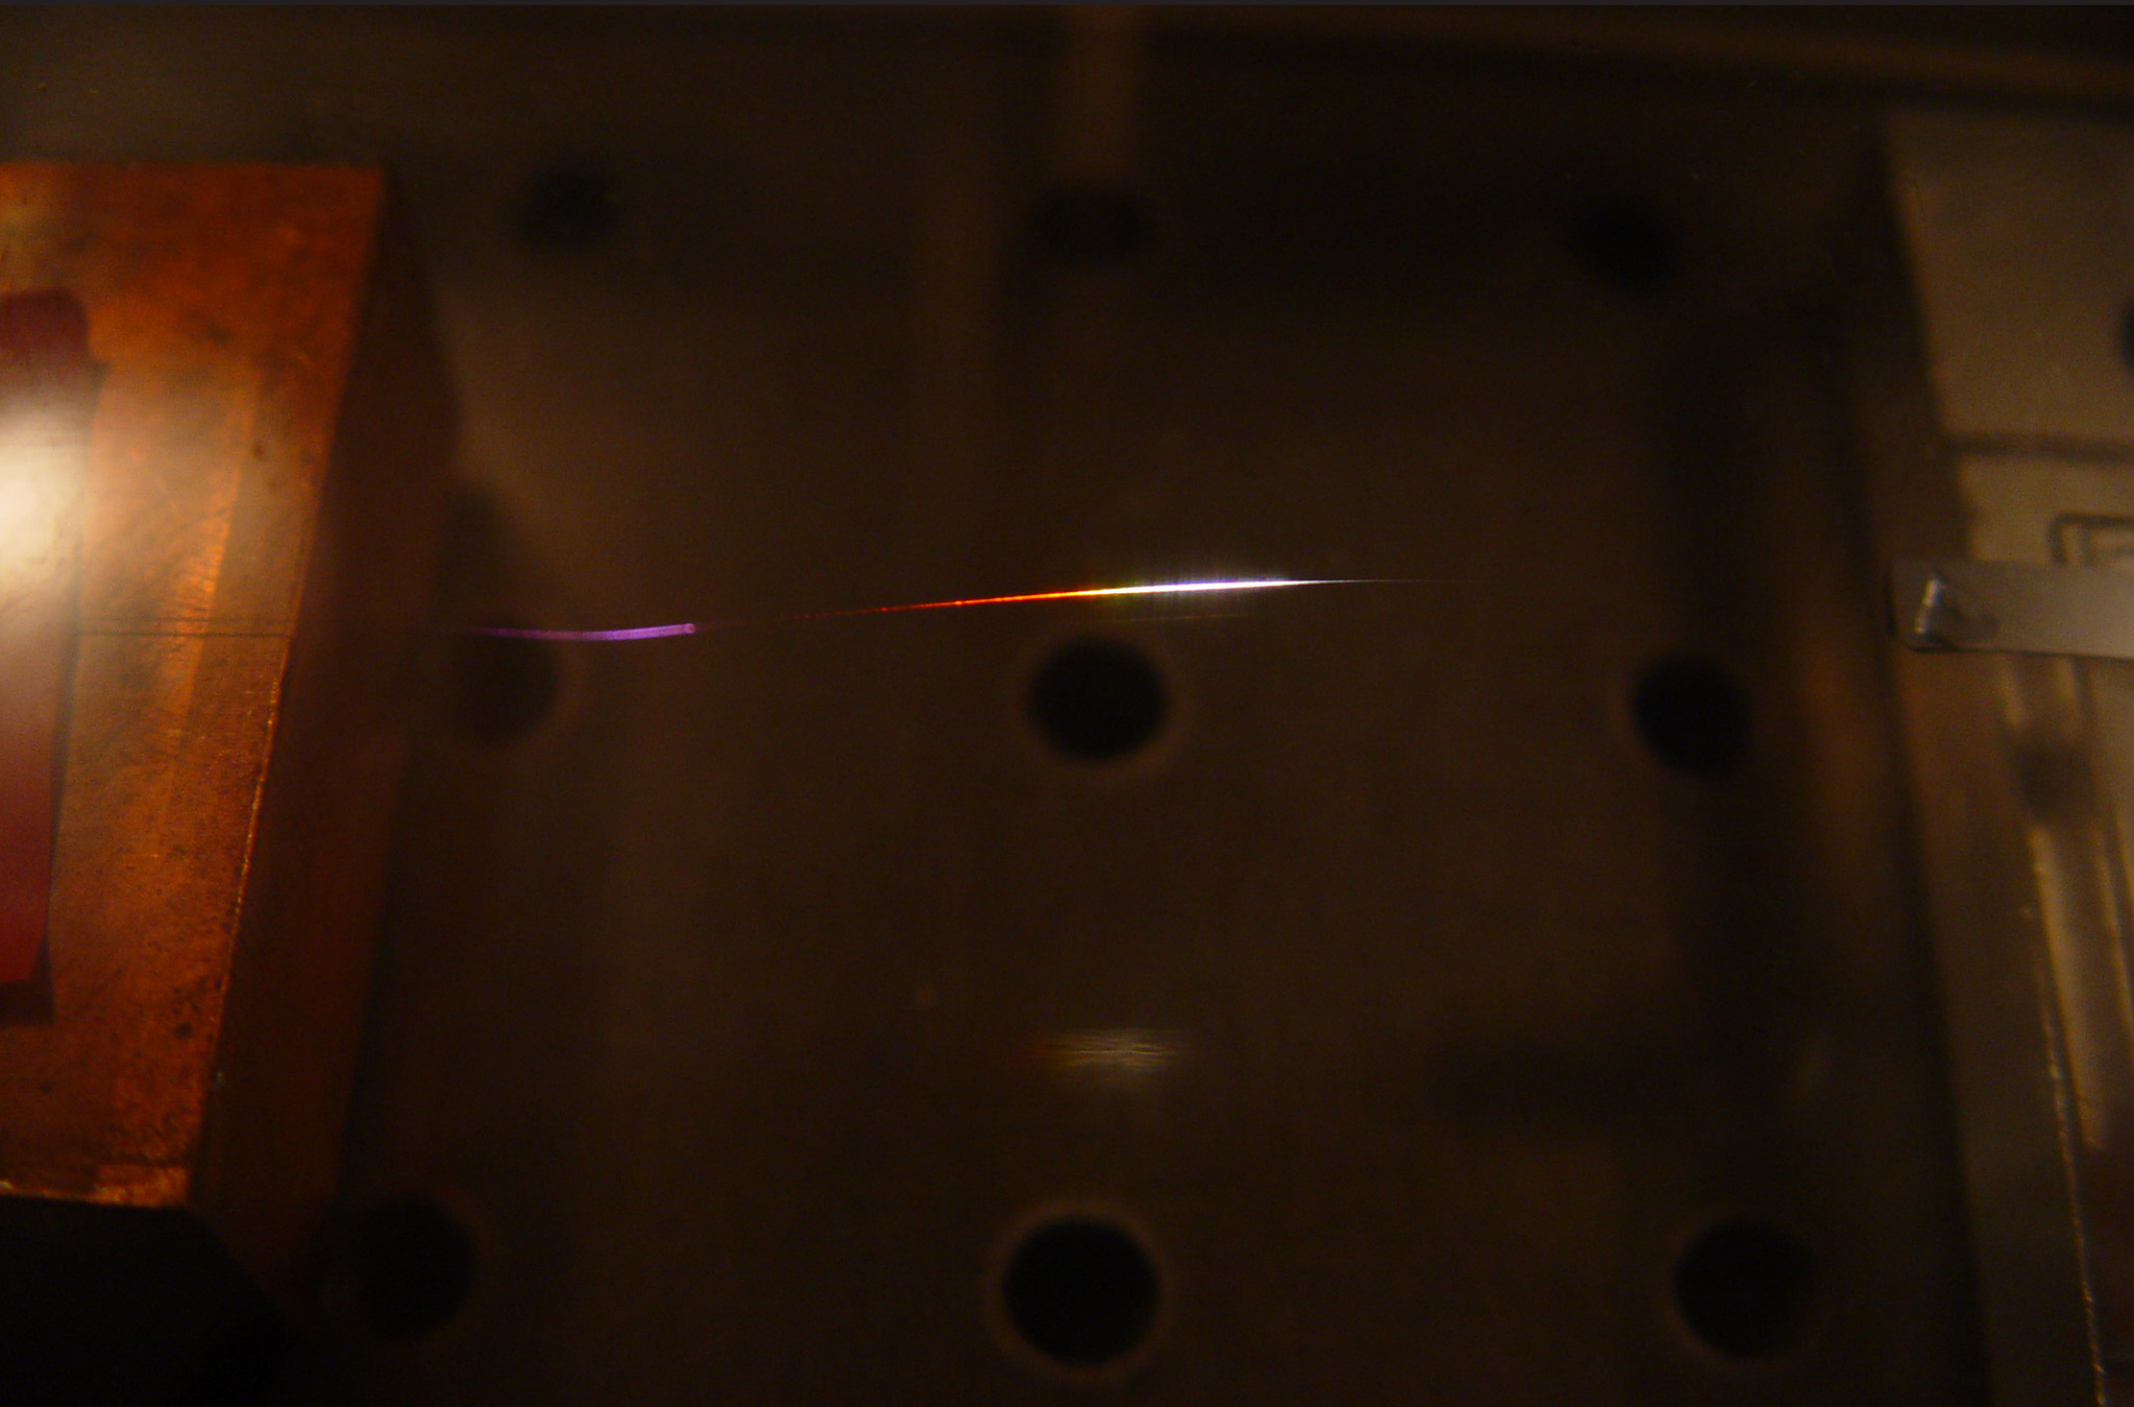

Supercontinuum generation

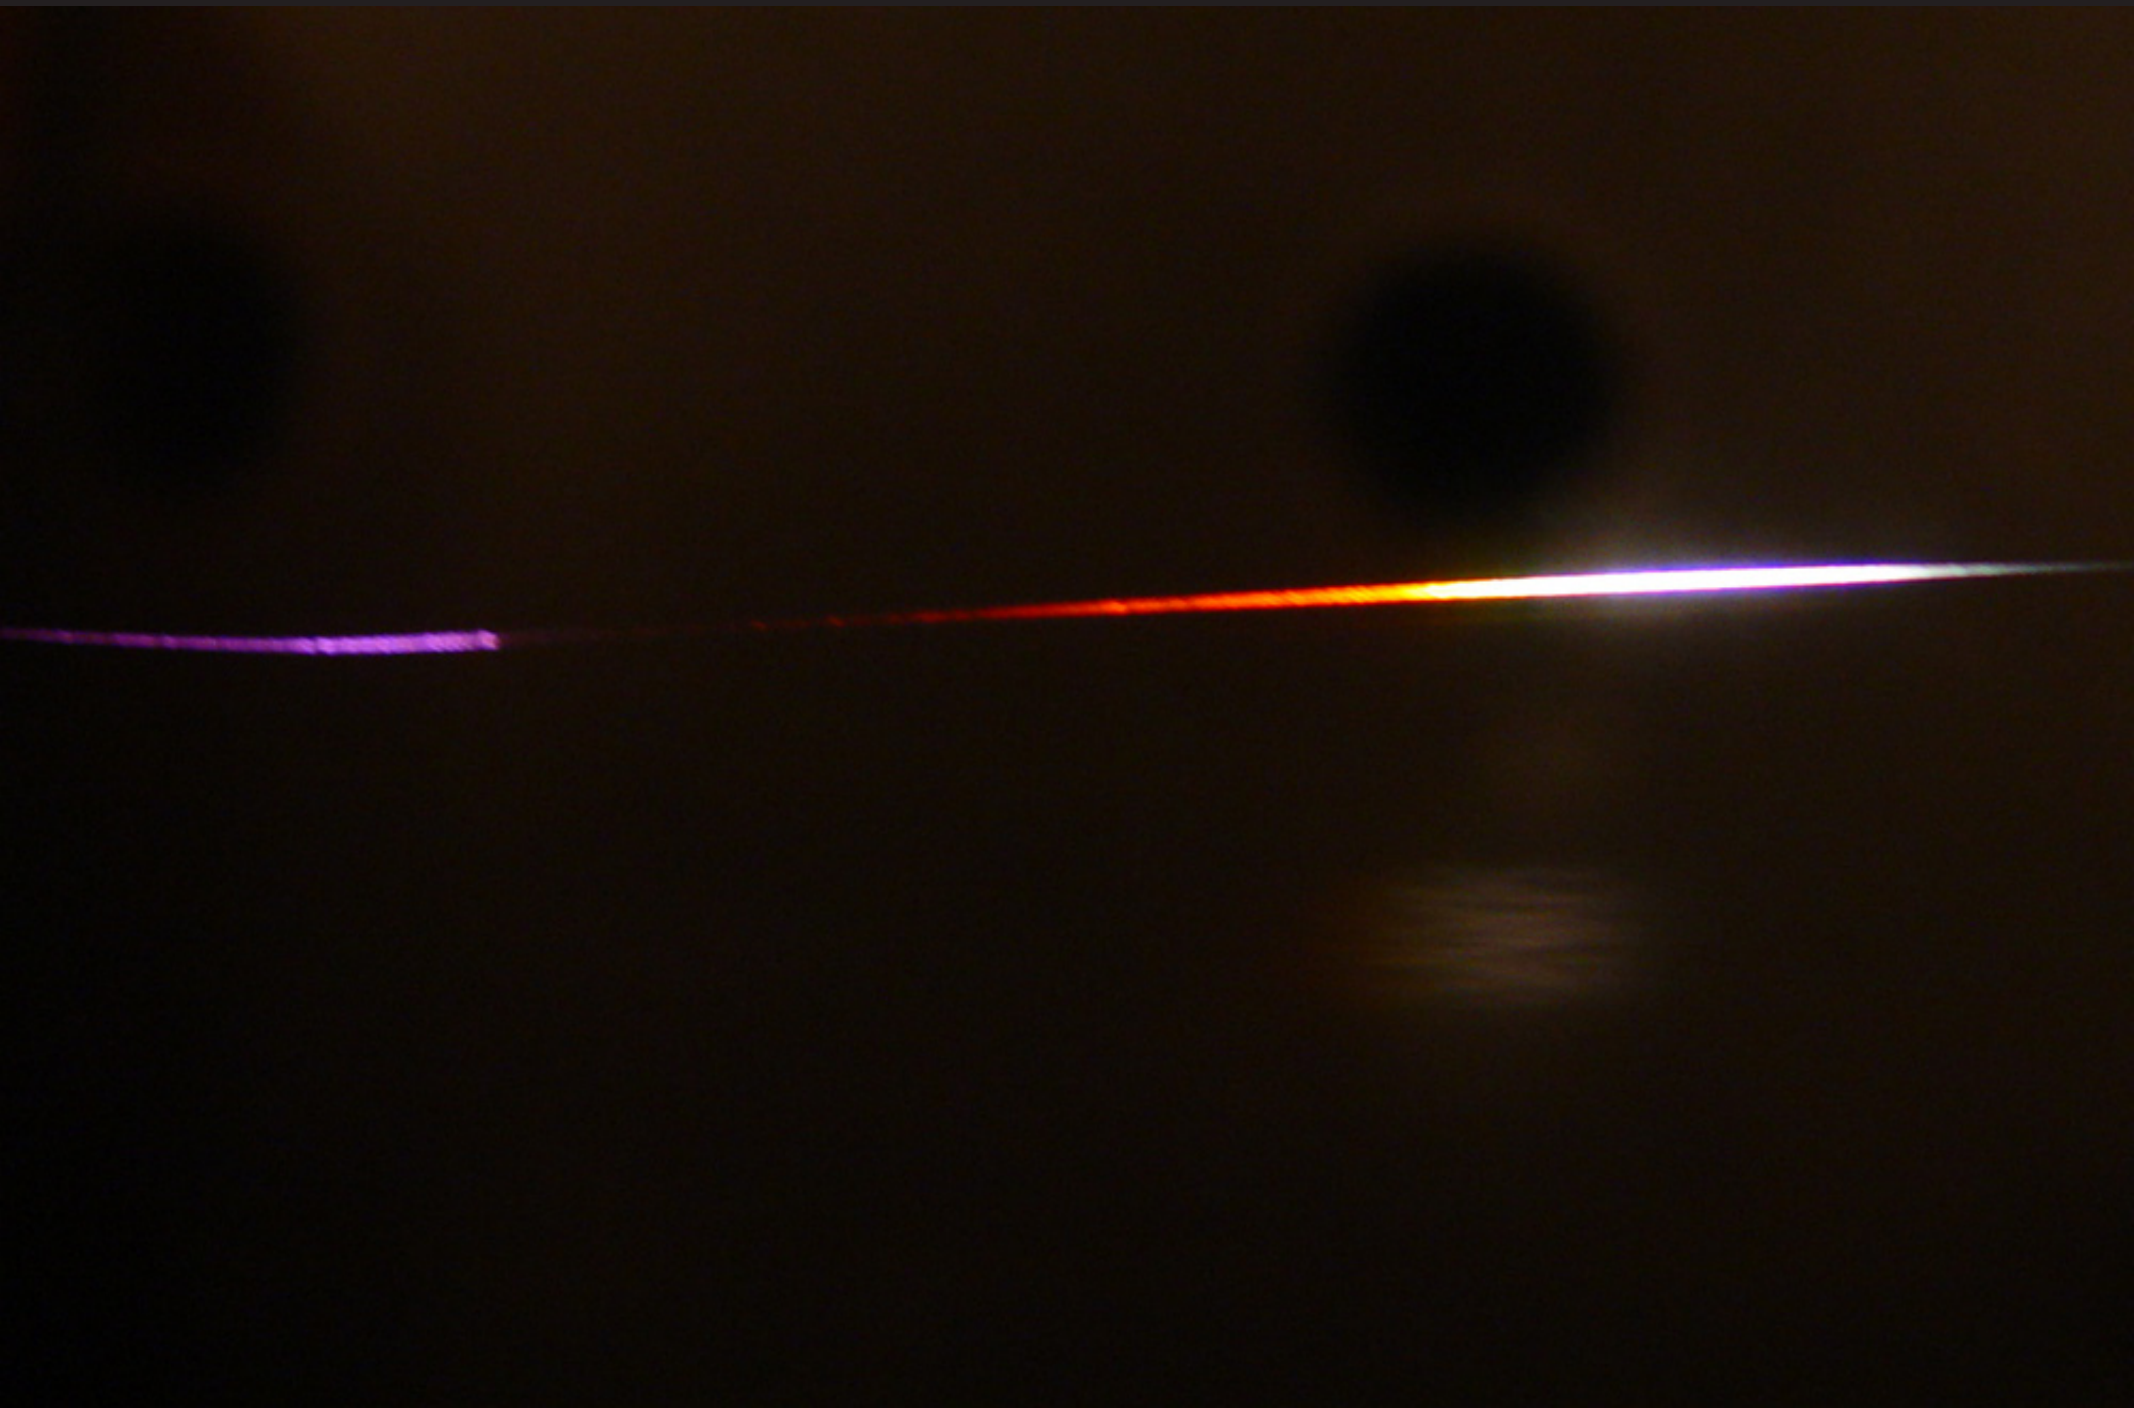

Supercontinuum generation

mode field diameter (λ = 800 nm)

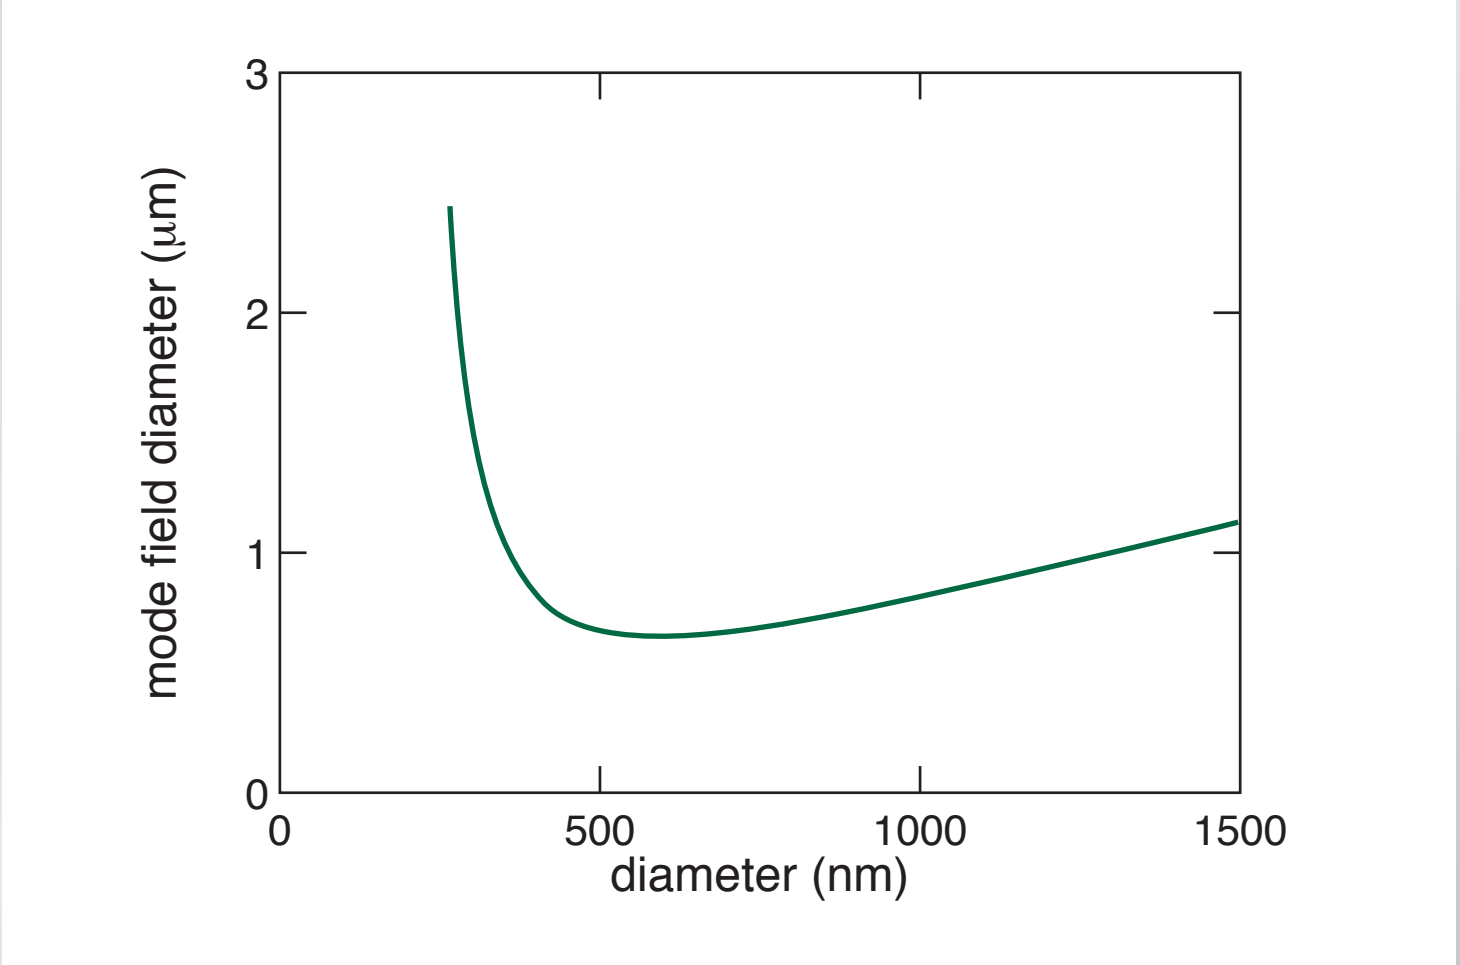

M.A. Foster, *et al.*, *Optics Express*, 12, 2880 (2004)

Supercontinuum generation

mode field diameter (λ = 800 nm)

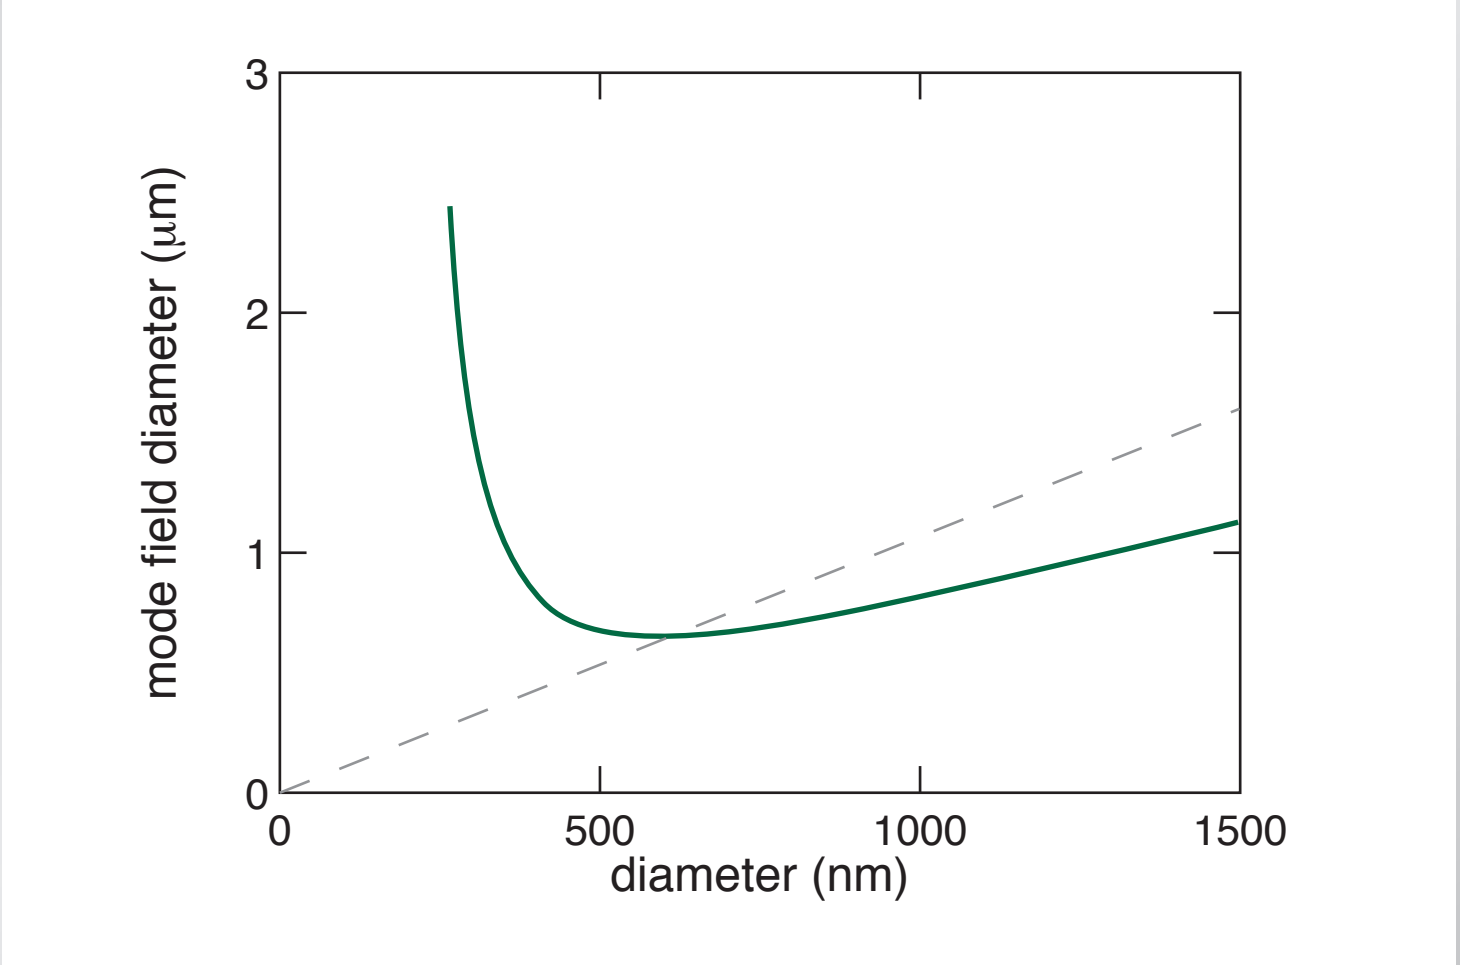

M.A. Foster, *et al.*, *Optics Express*, 12, 2880 (2004)

Supercontinuum generation

nonlinear parameter

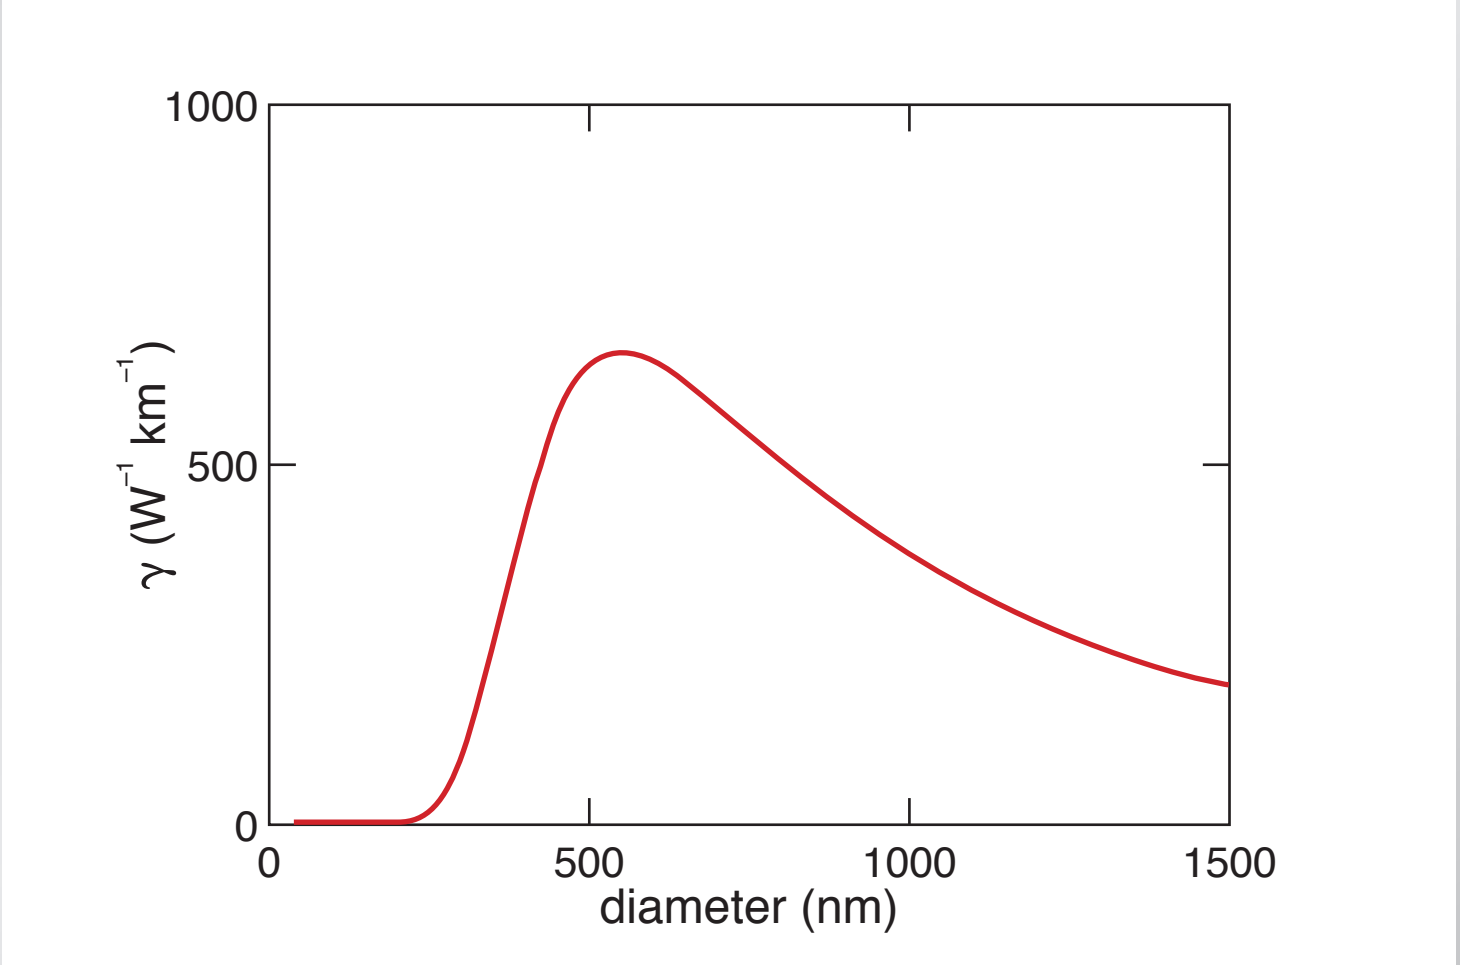

M.A. Foster, *et al.*, *Optics Express*, 12, 2880 (2004)

Supercontinuum generation

dispersion important!

Supercontinuum generation

dispersion:

- modal dispersion
- material dispersion
- waveguide dispersion
- nonlinear dispersion

Supercontinuum generation

waveguide dispersion

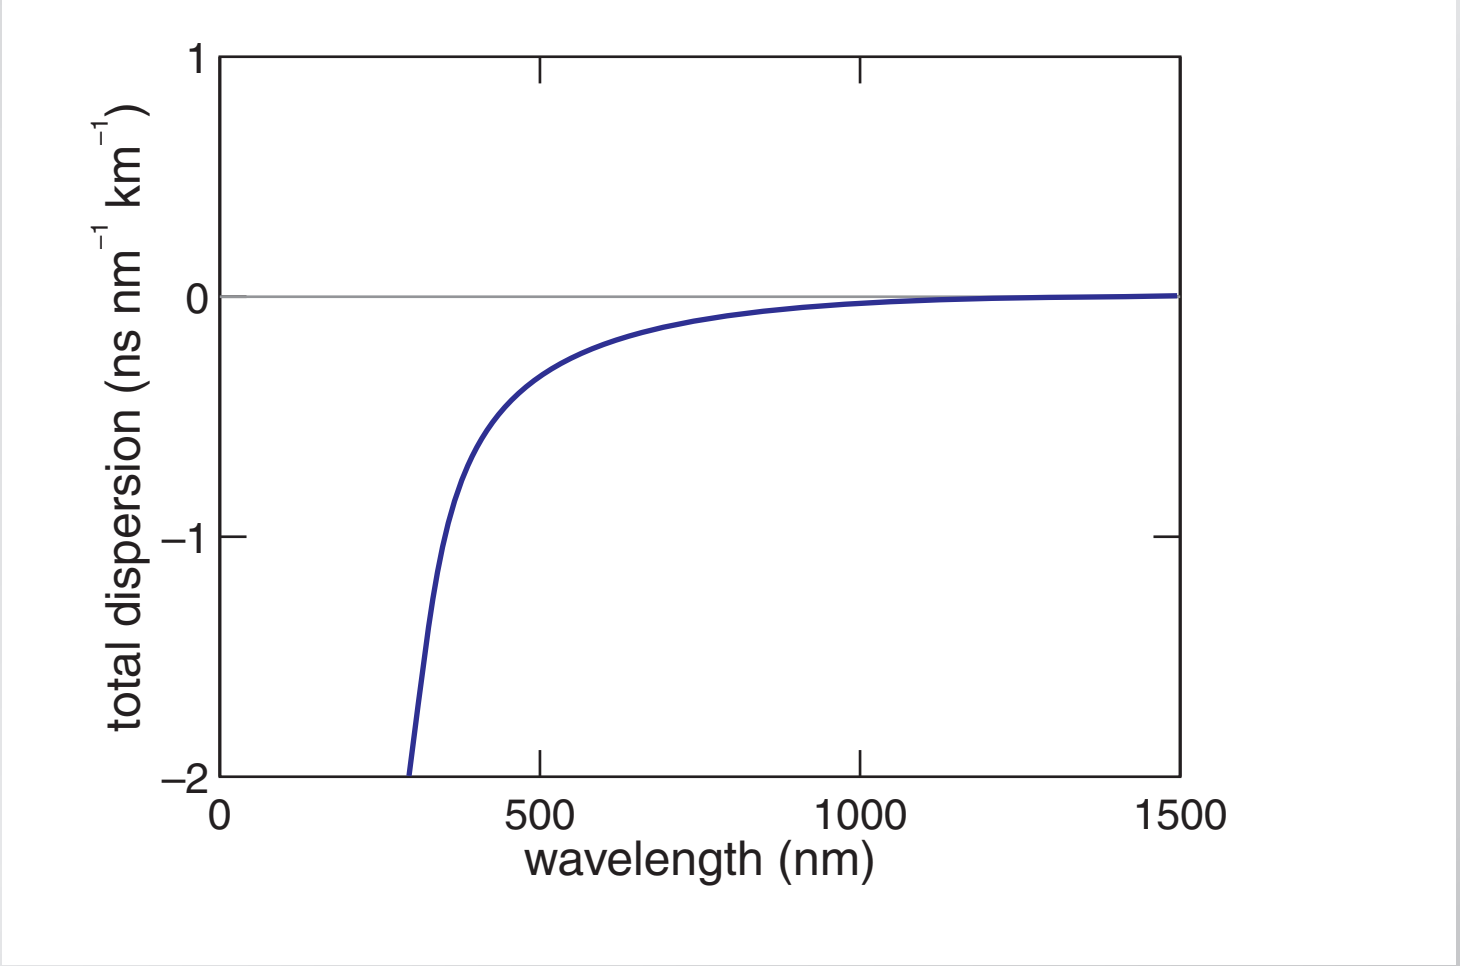

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

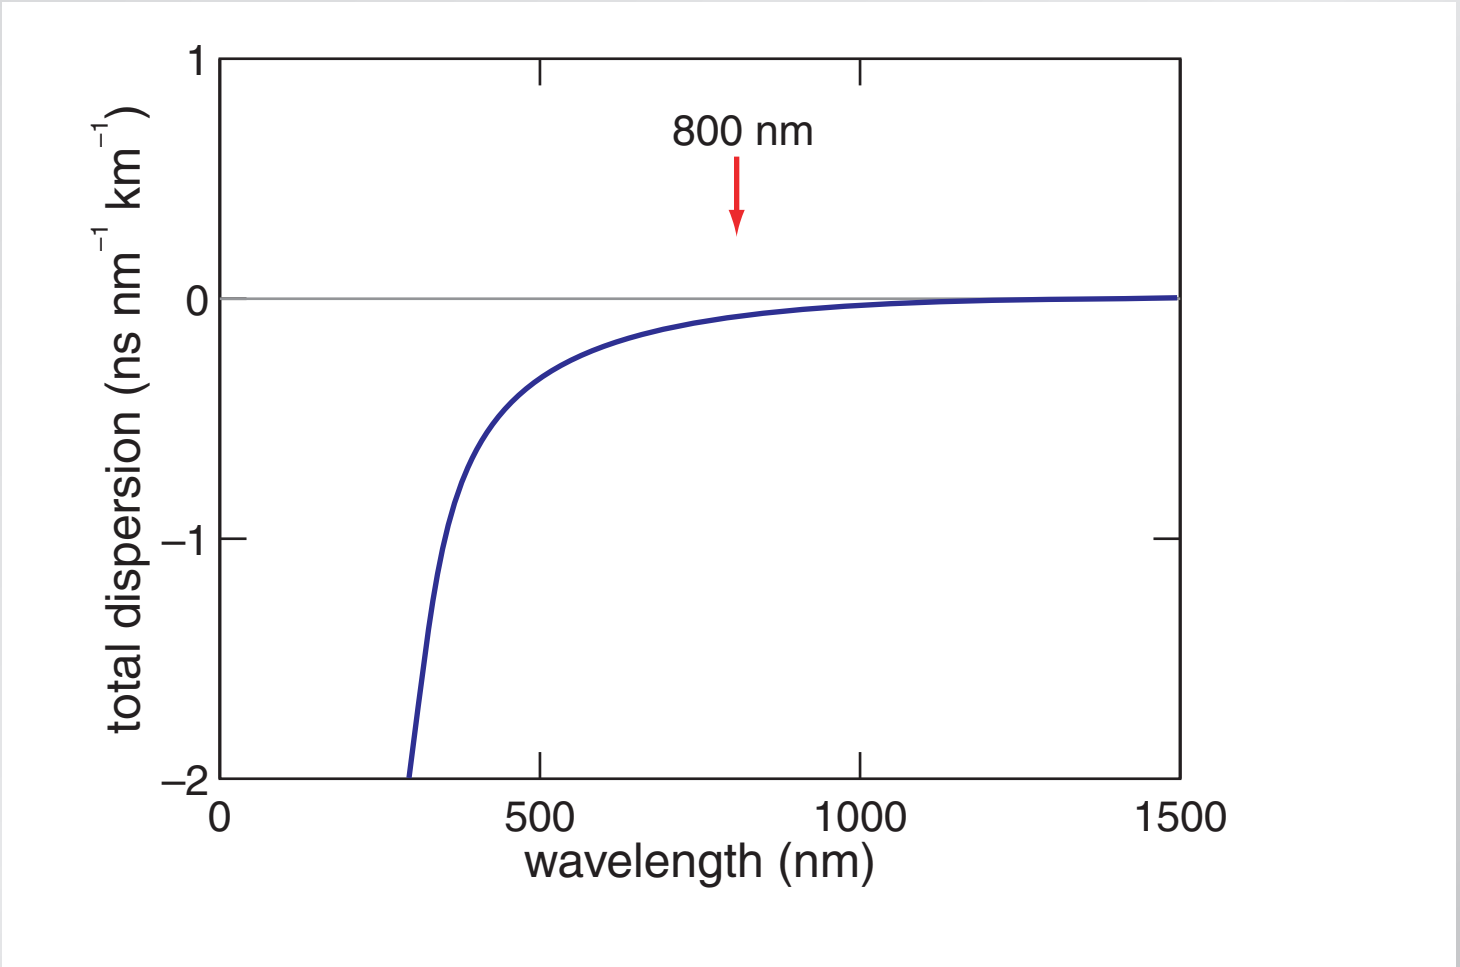

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

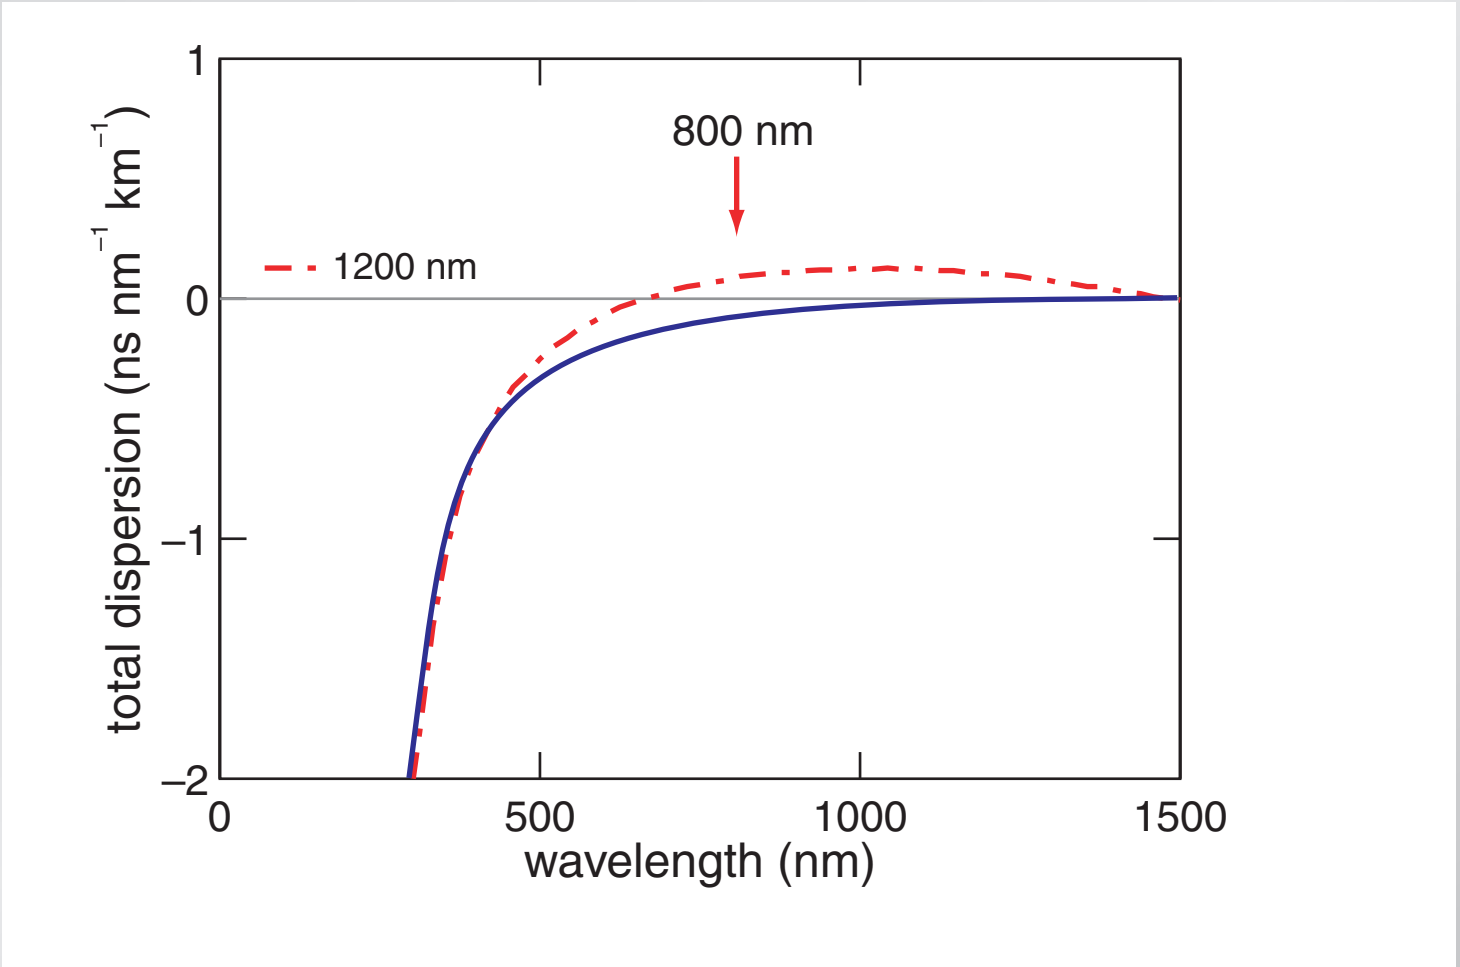

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

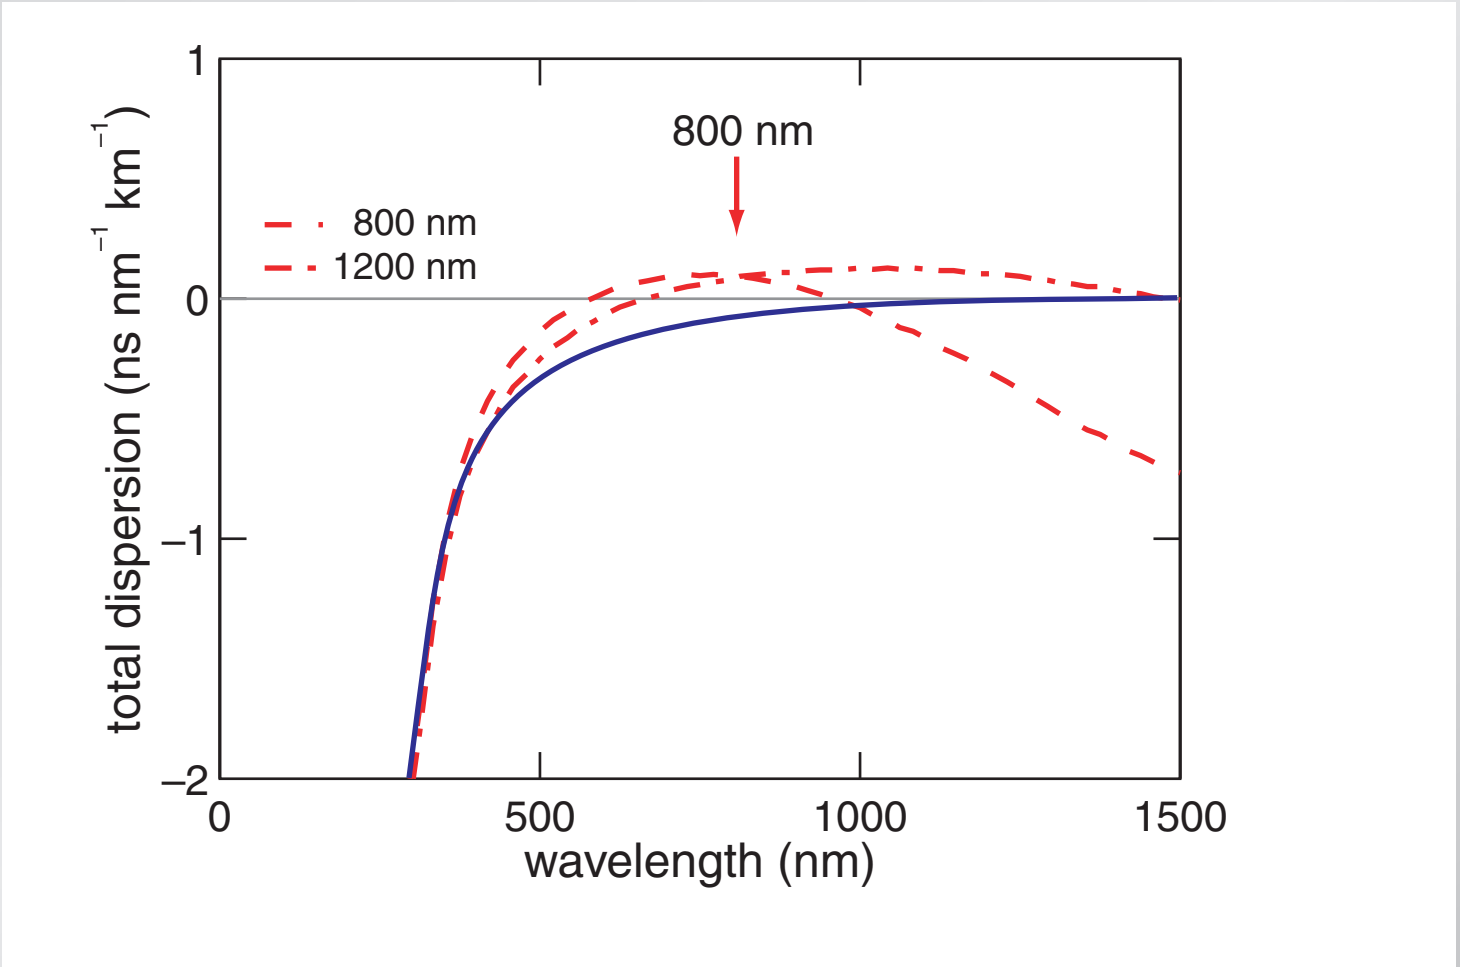

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

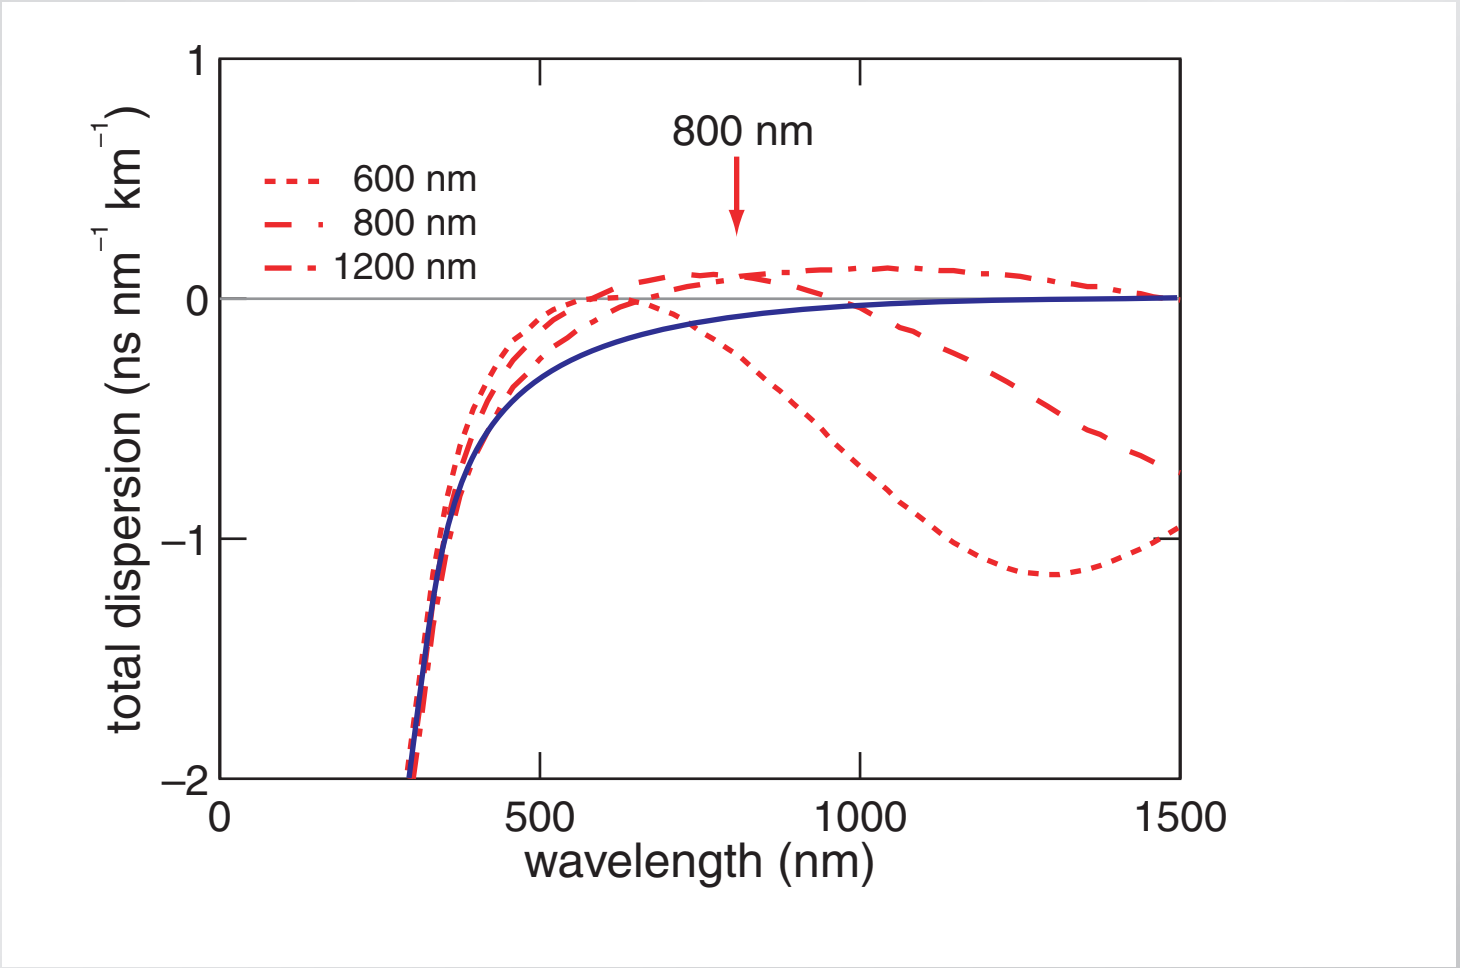

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

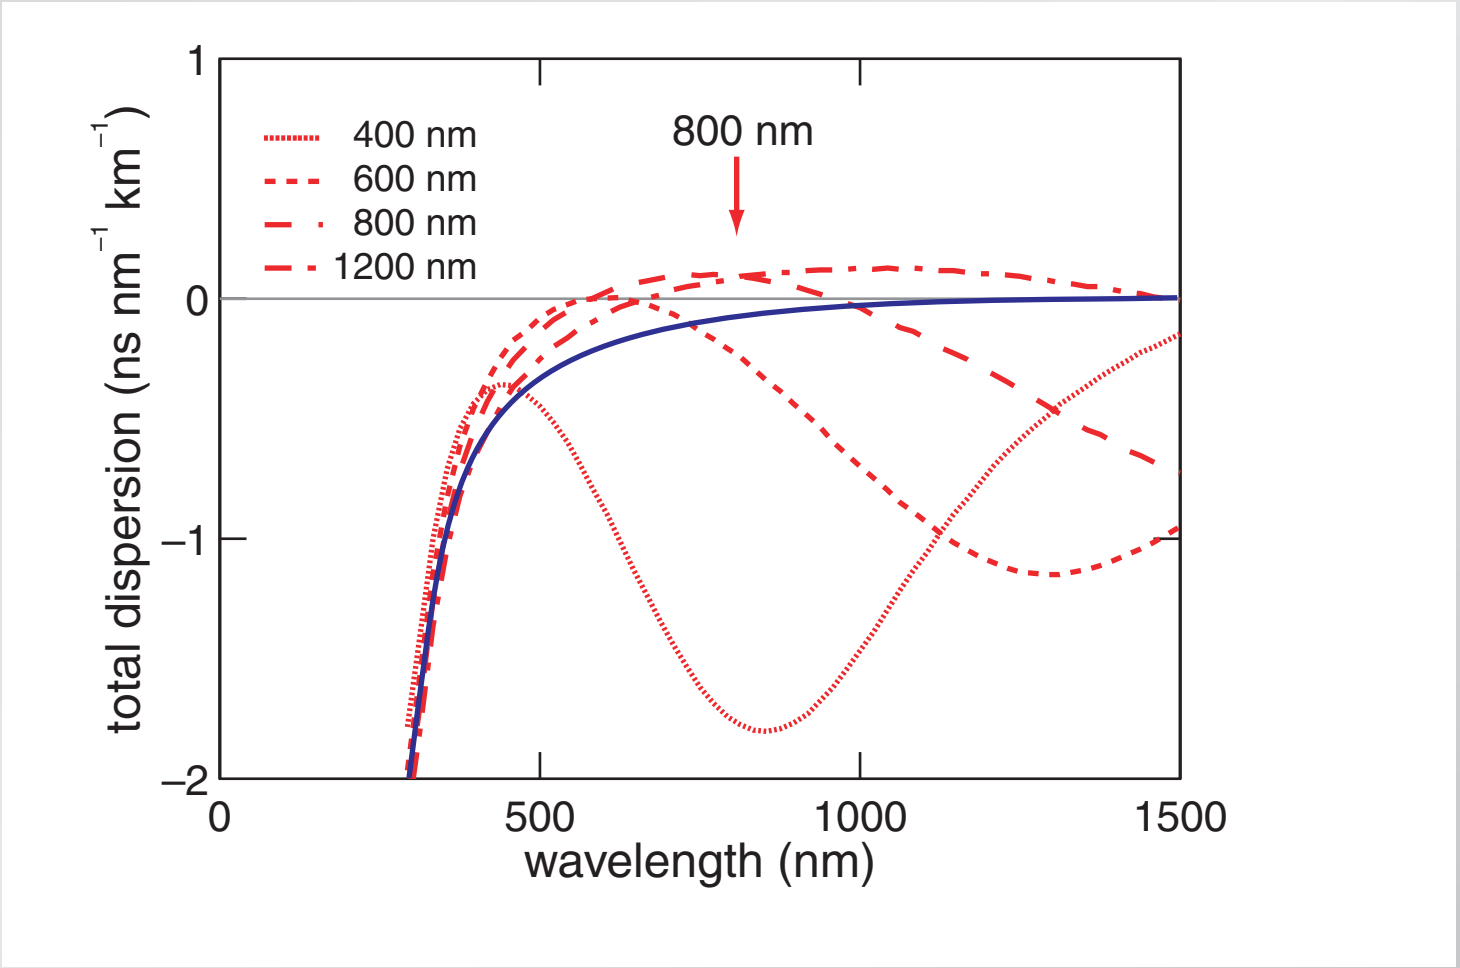

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

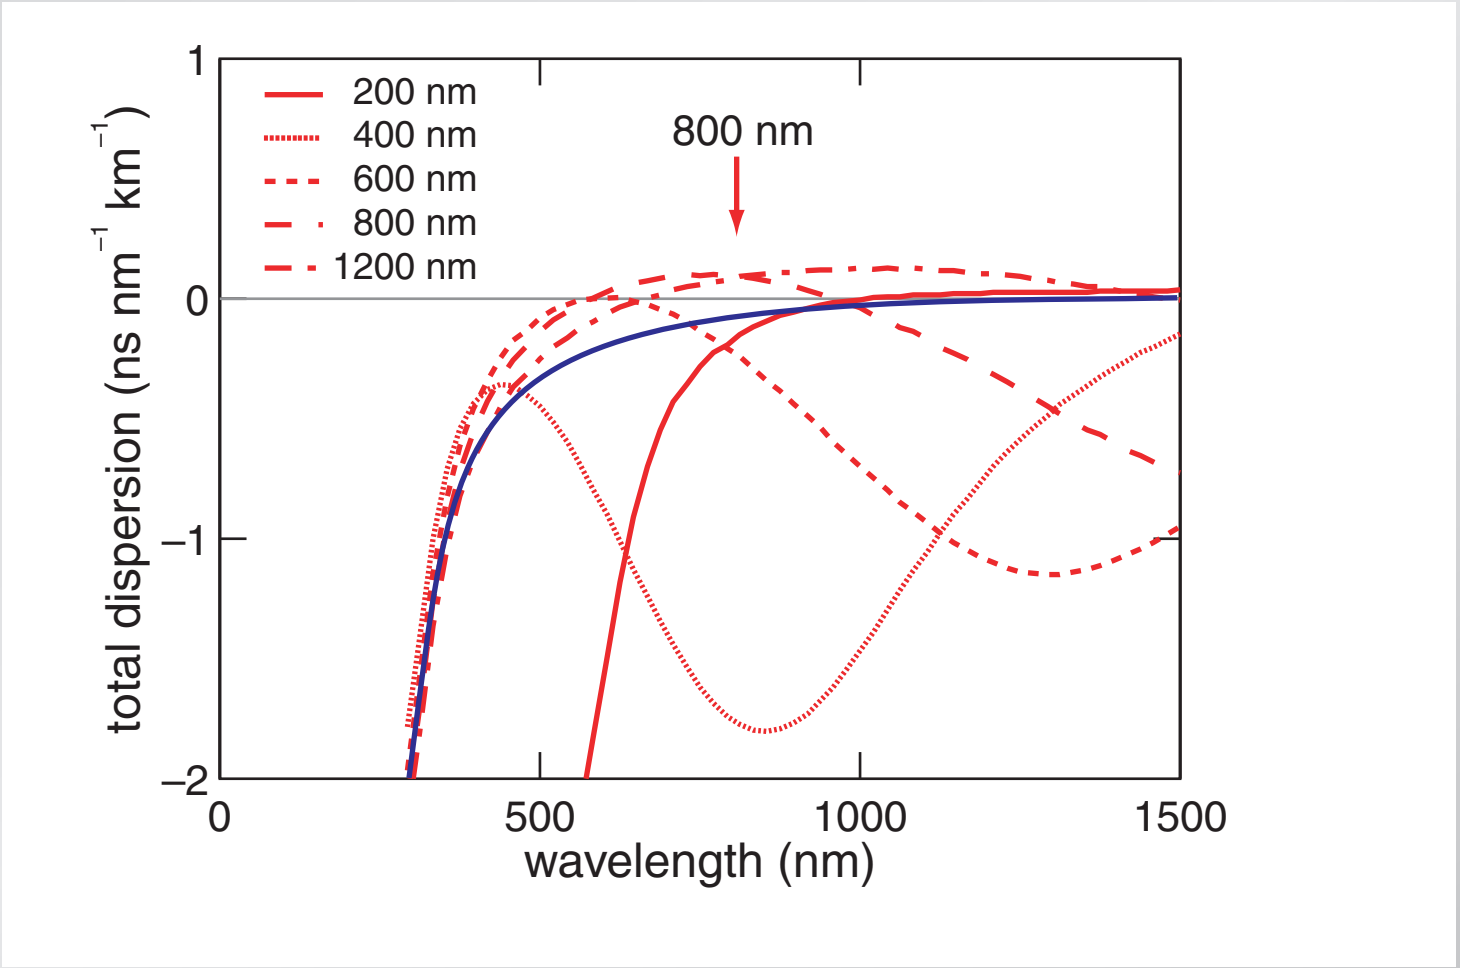

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

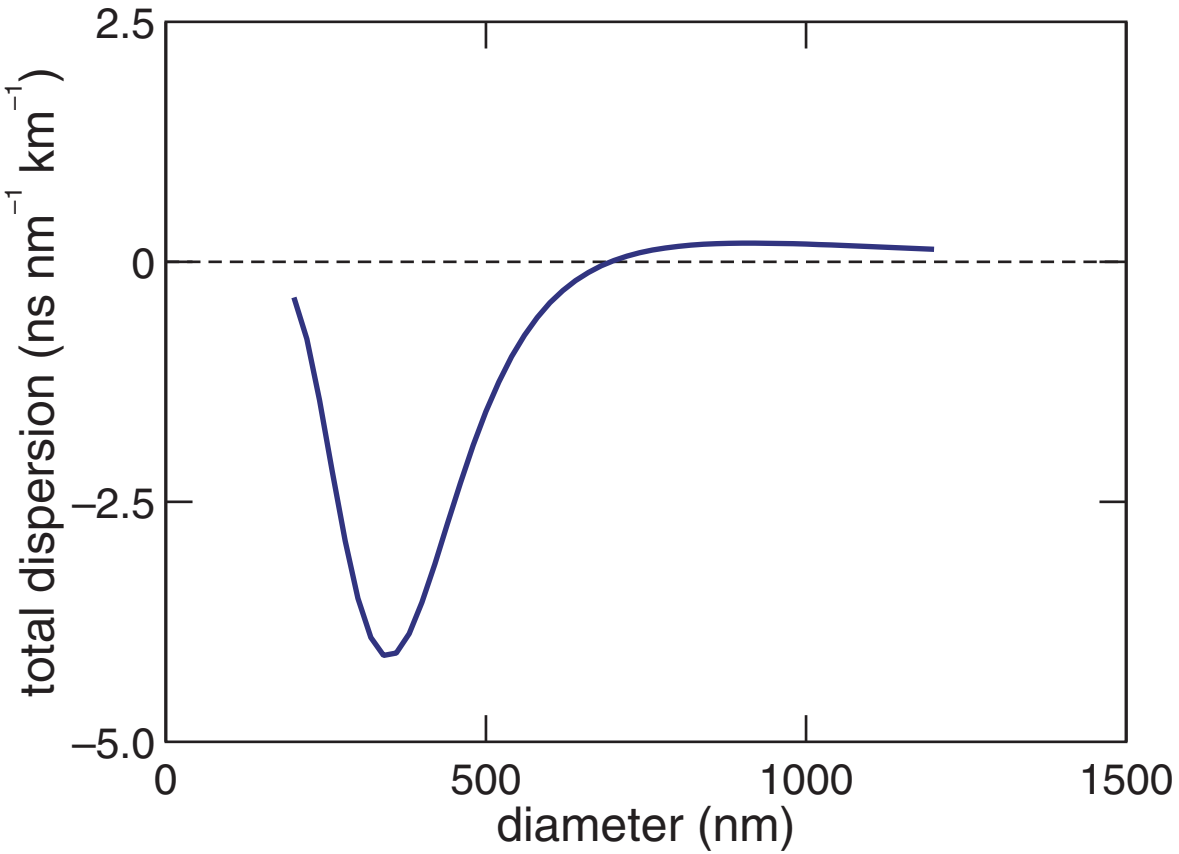

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

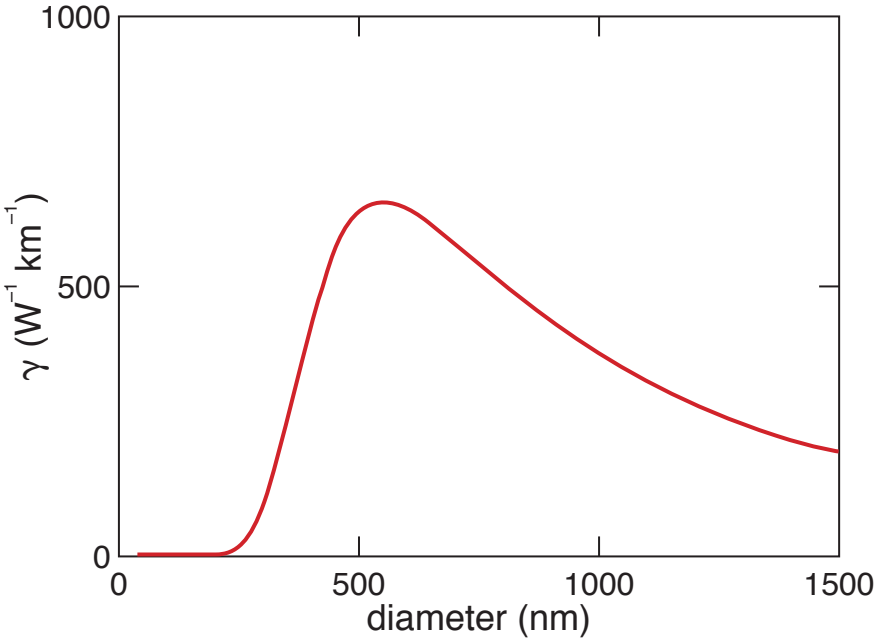

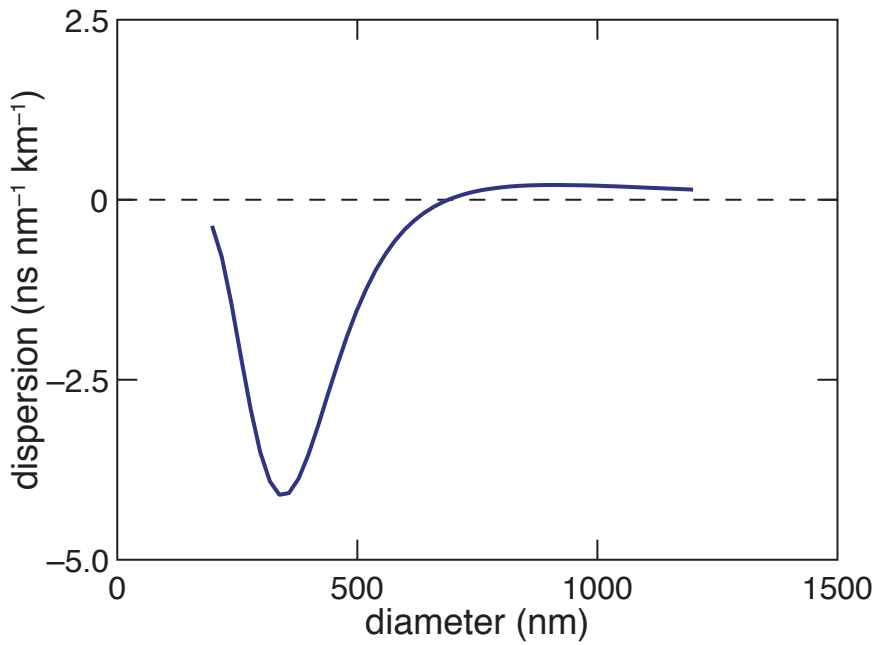

Optics Express, 12, 1025 (2004)

Supercontinuum generation

waveguide dispersion

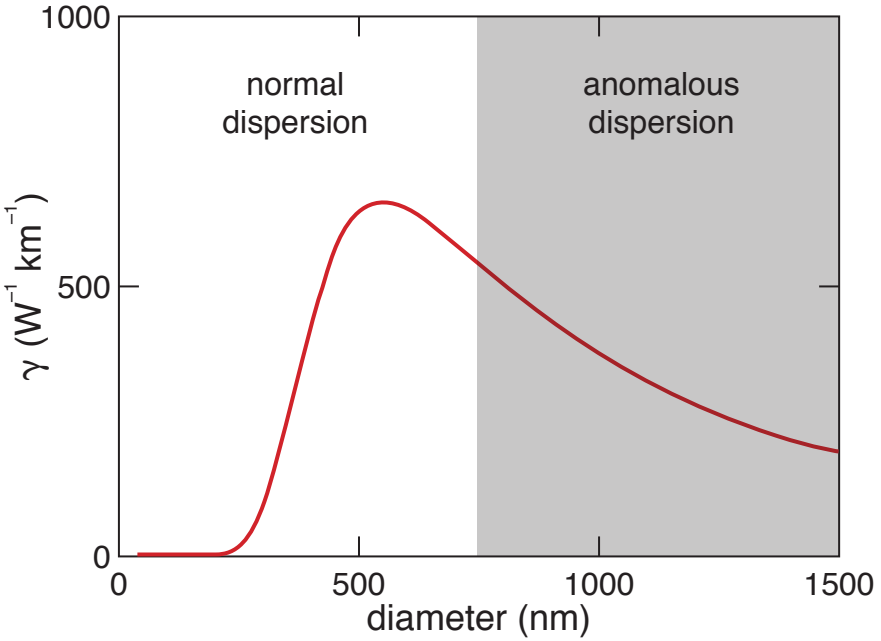

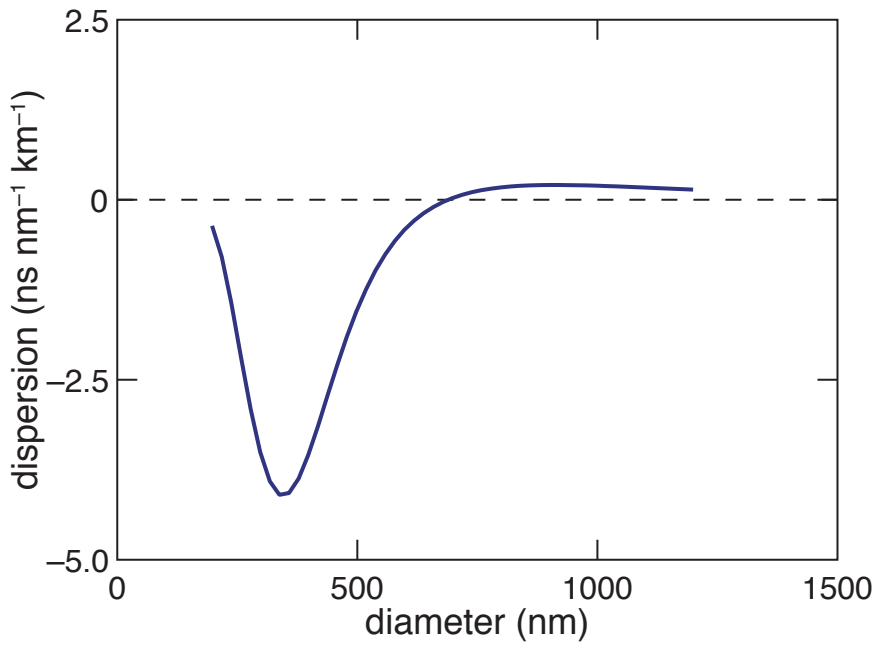

Optics Express, 12, 1025 (2004)

Supercontinuum generation

nanowire continuum generation

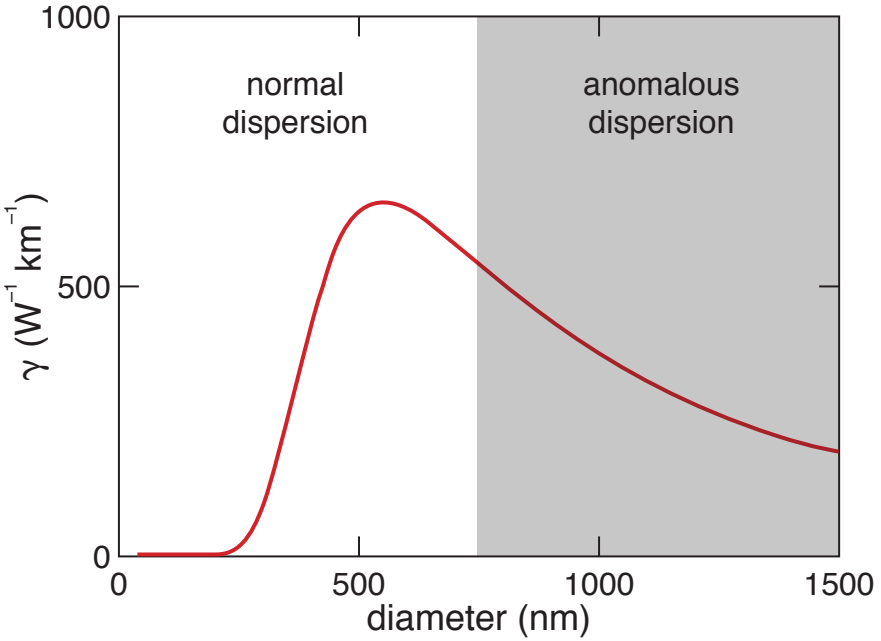

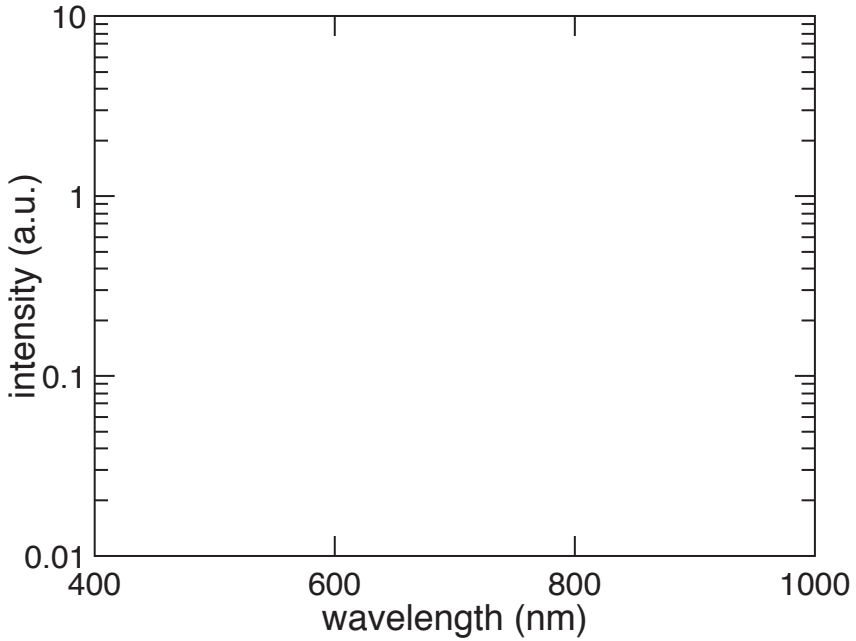

Supercontinuum generation

nanowire continuum generation

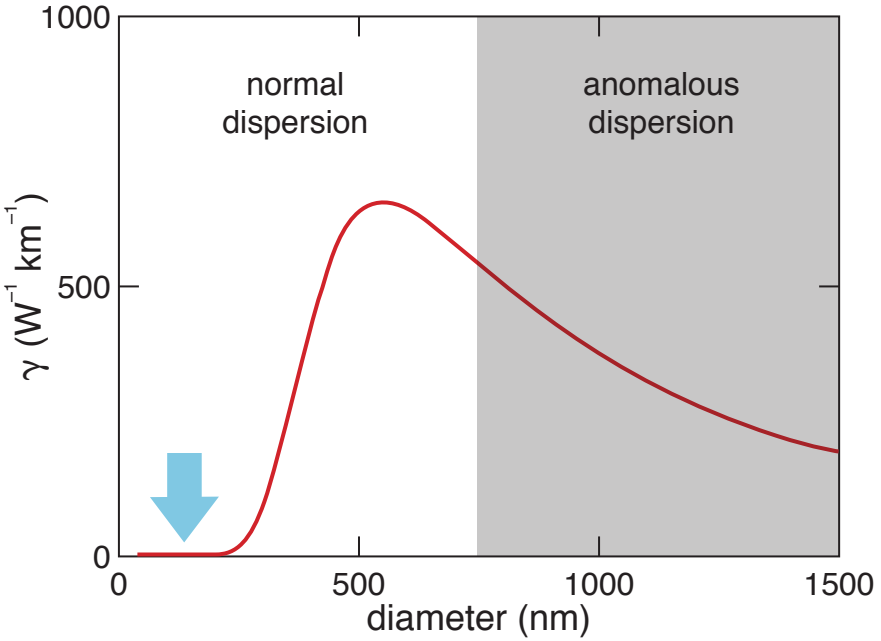

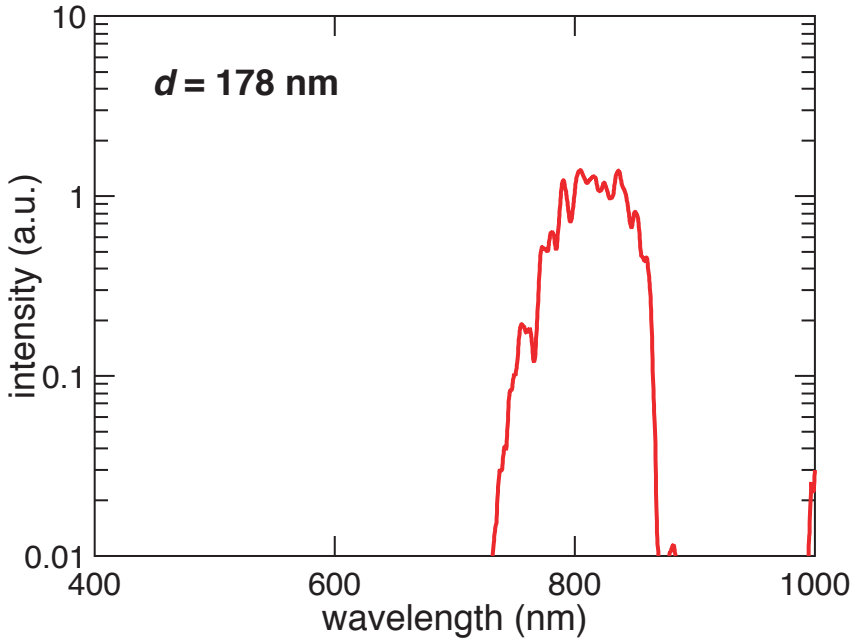

Optics Express, 14, 9408 (2006)

Supercontinuum generation

nanowire continuum generation

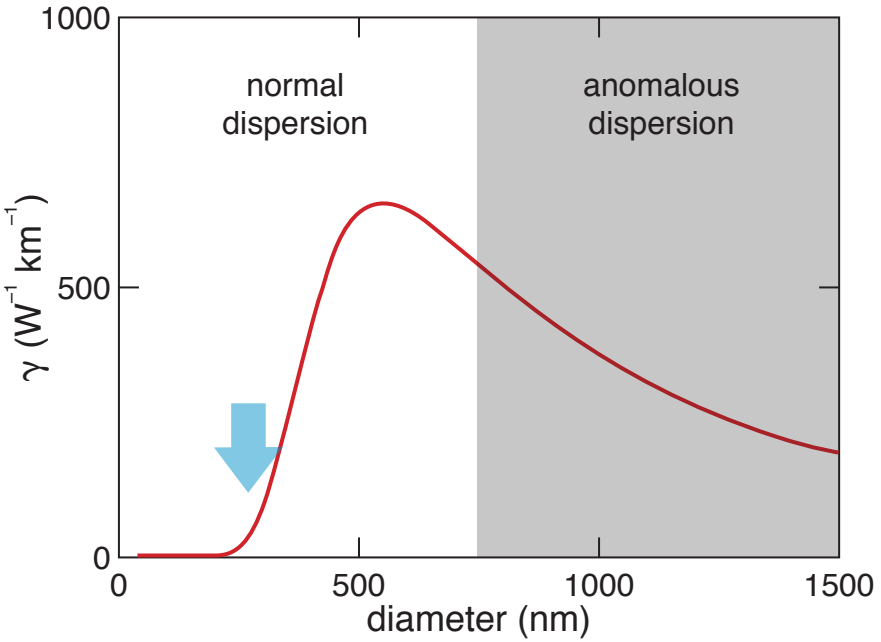

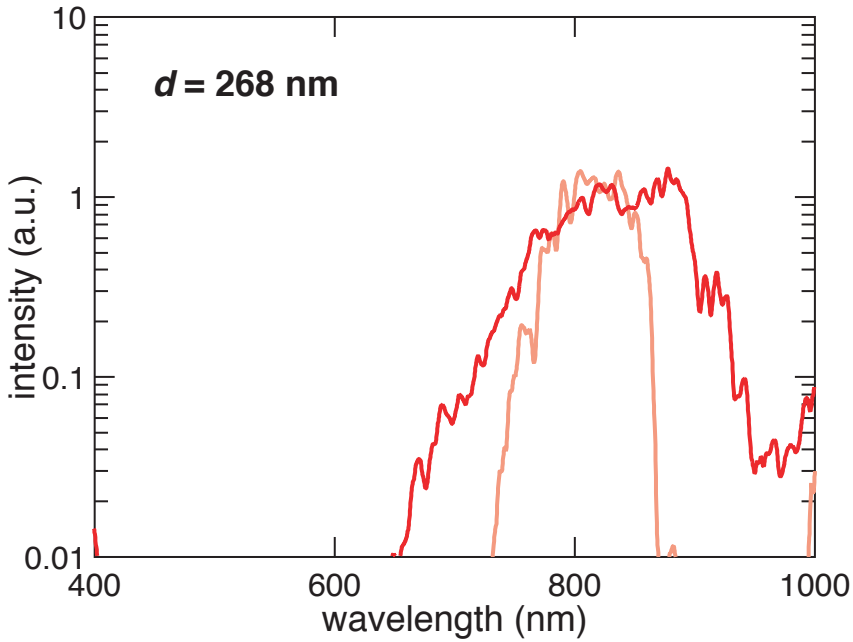

Optics Express, 14, 9408 (2006)

Supercontinuum generation

nanowire continuum generation

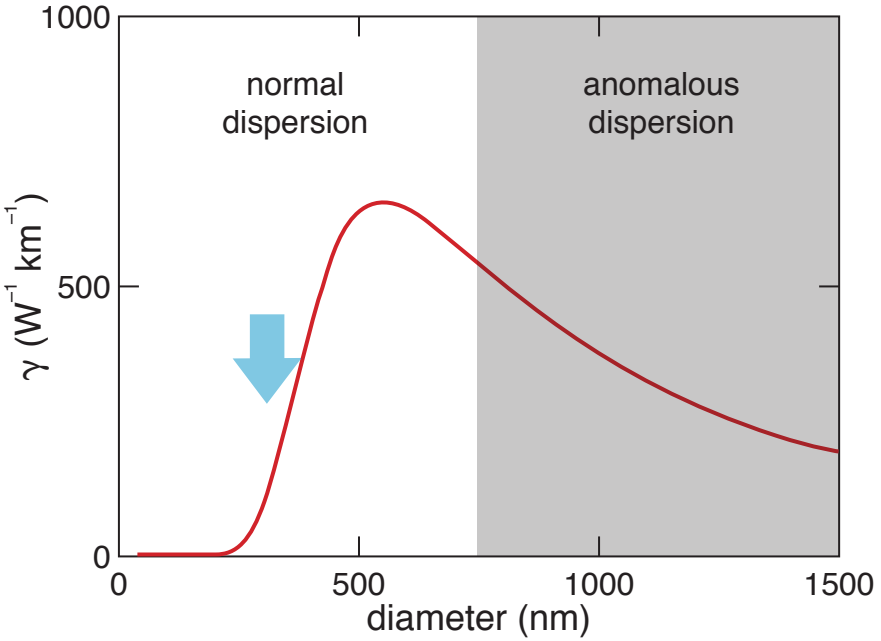

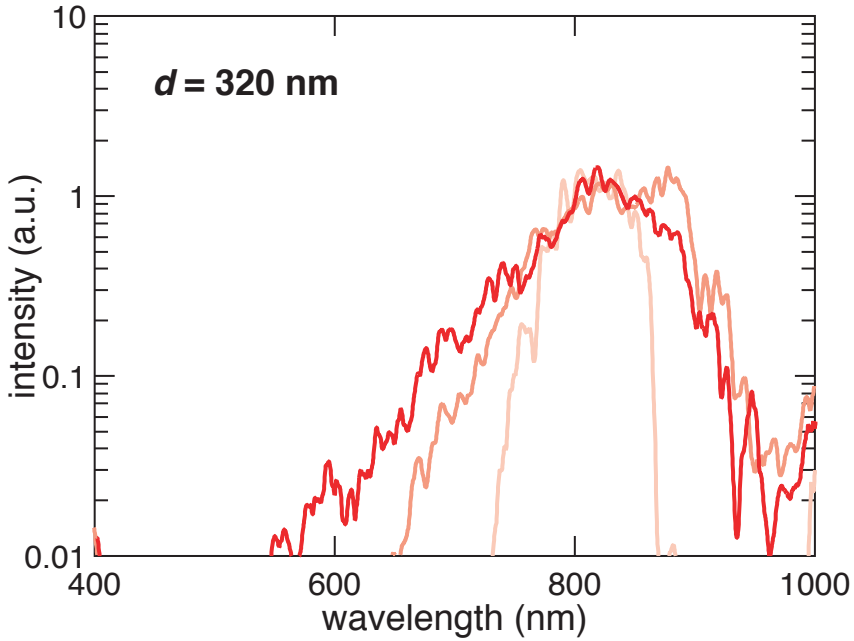

Optics Express, 14, 9408 (2006)

Supercontinuum generation

nanowire continuum generation

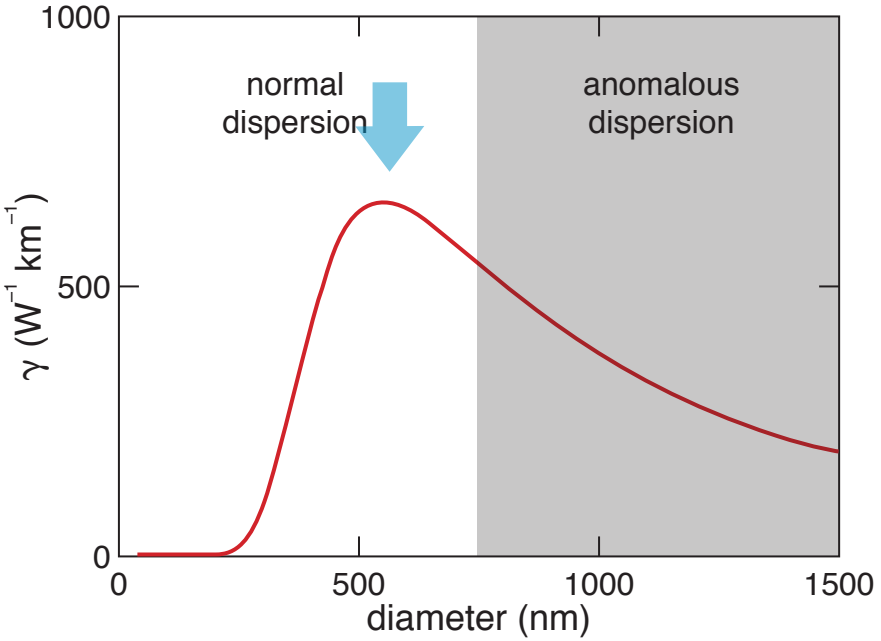

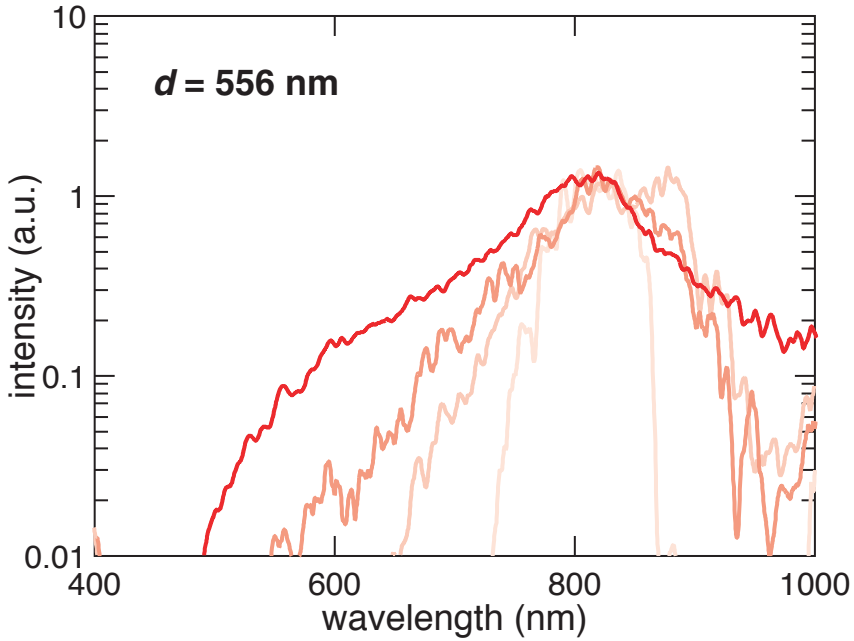

Optics Express, 14, 9408 (2006)

Supercontinuum generation

nanowire continuum generation

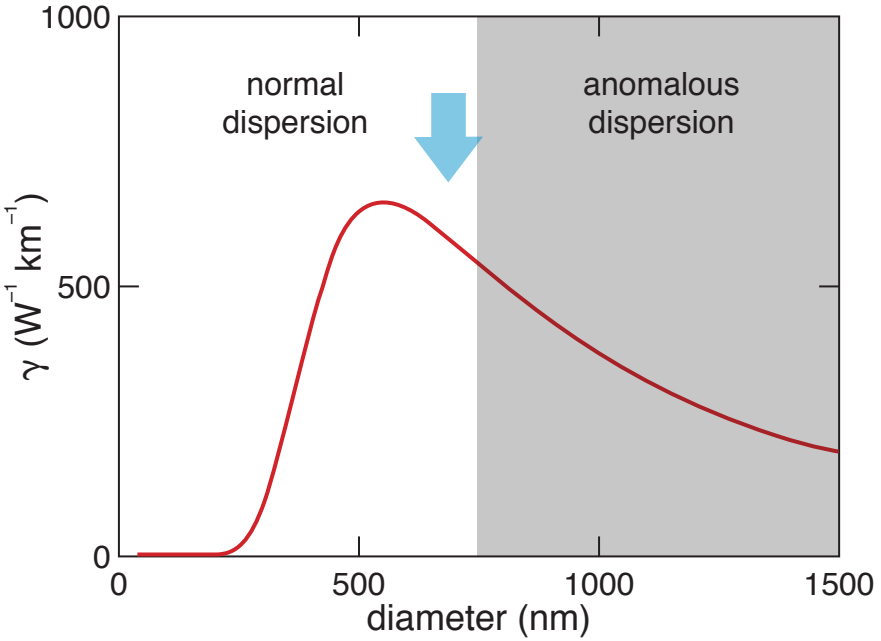

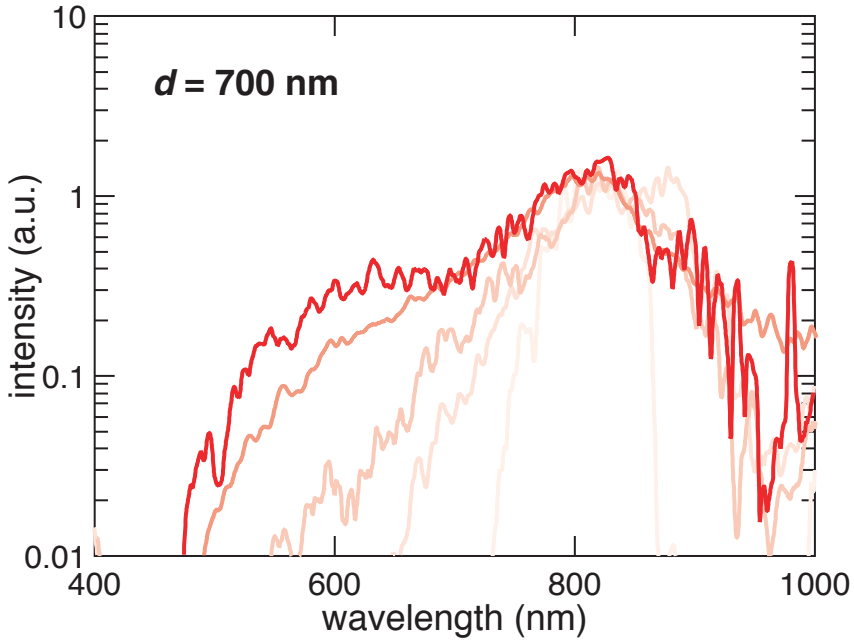

Optics Express, 14, 9408 (2006)

Supercontinuum generation

nanowire continuum generation

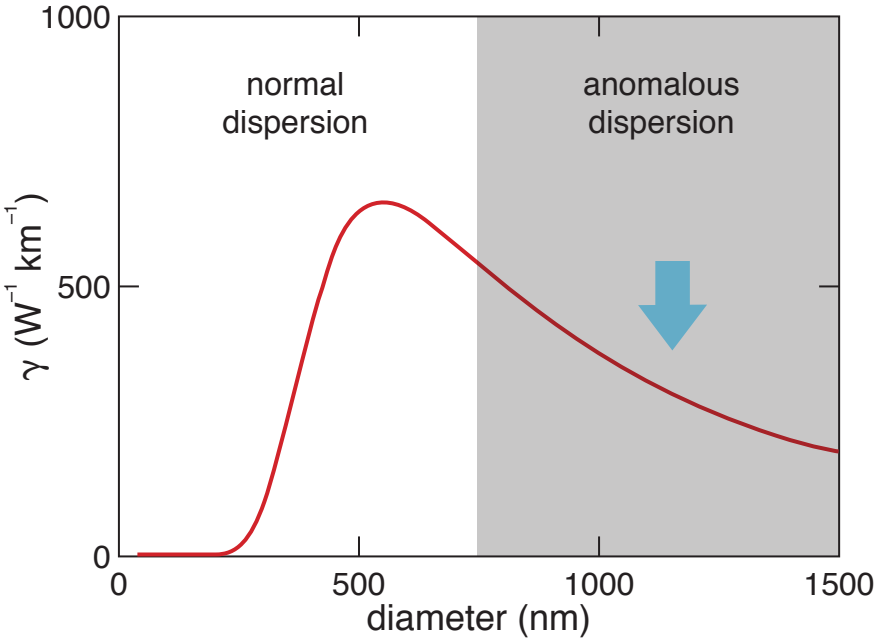

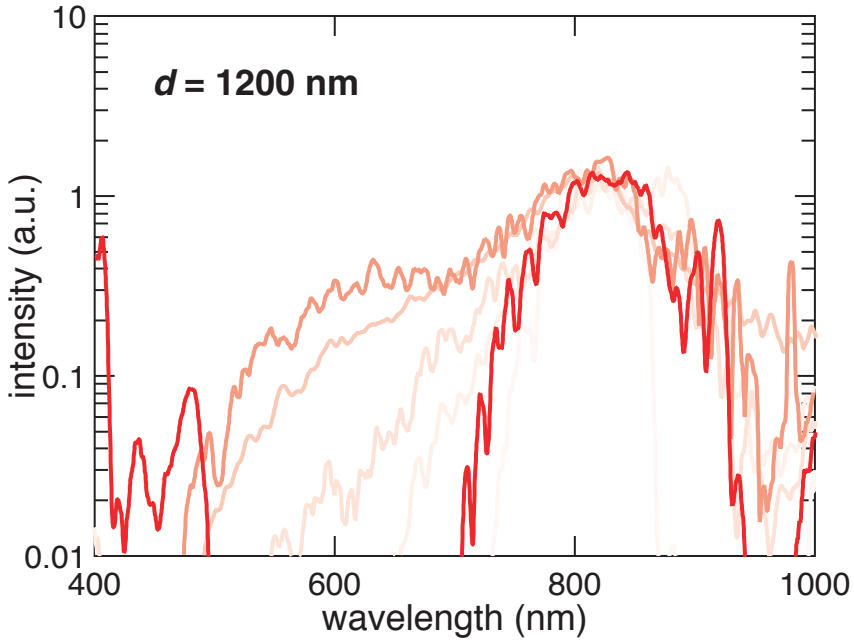

Optics Express, 14, 9408 (2006)

Supercontinuum generation

energy in nanowire < 100 pJ!

Supercontinuum generation

- picojoule nonlinear optics
- optimum diameter for silica 500–600 nm
- low dispersion

Outline

- manipulating light at the nanoscale
- supercontinuum generation
- optical logic gates

Optical logic gates

nanowire Sagnac interferometer

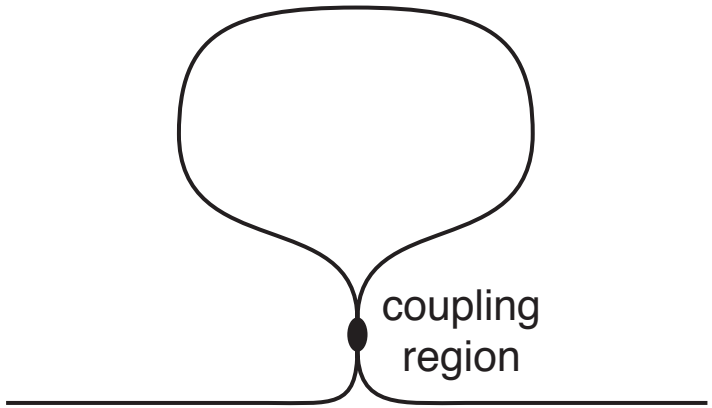

Optical logic gates

nanowire Sagnac interferometer

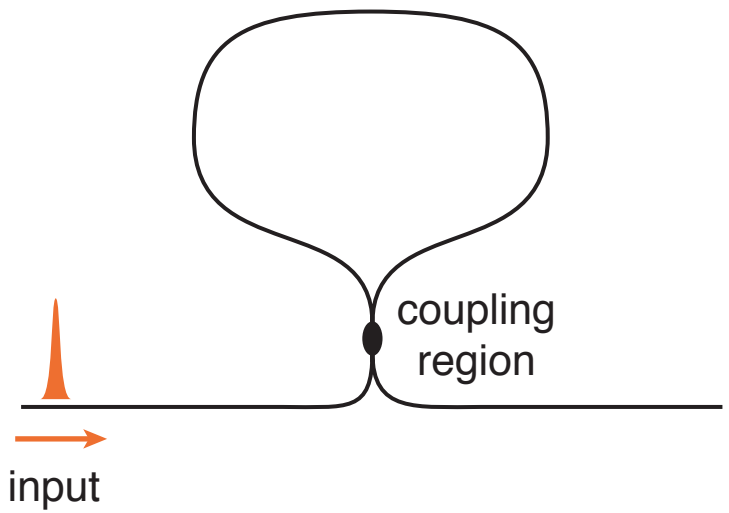

Optical logic gates

nanowire Sagnac interferometer

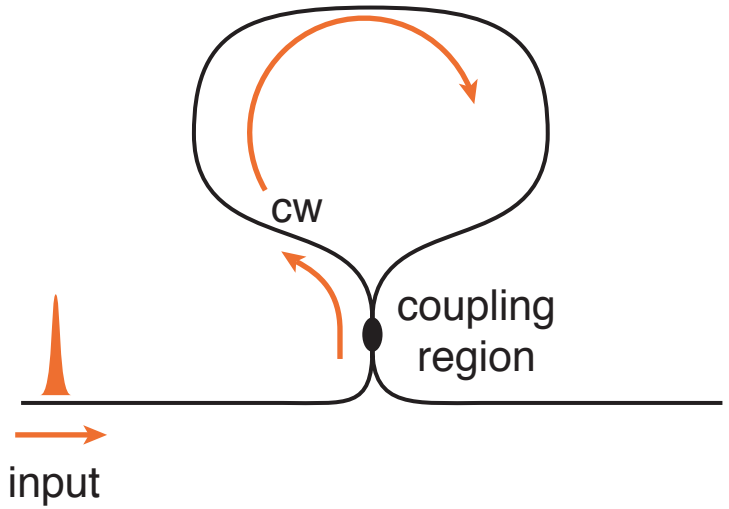

Optical logic gates

nanowire Sagnac interferometer

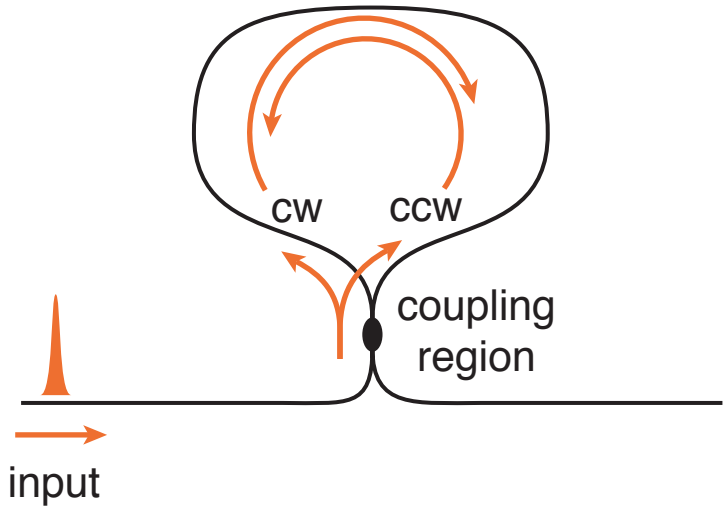

Optical logic gates

nanowire Sagnac interferometer

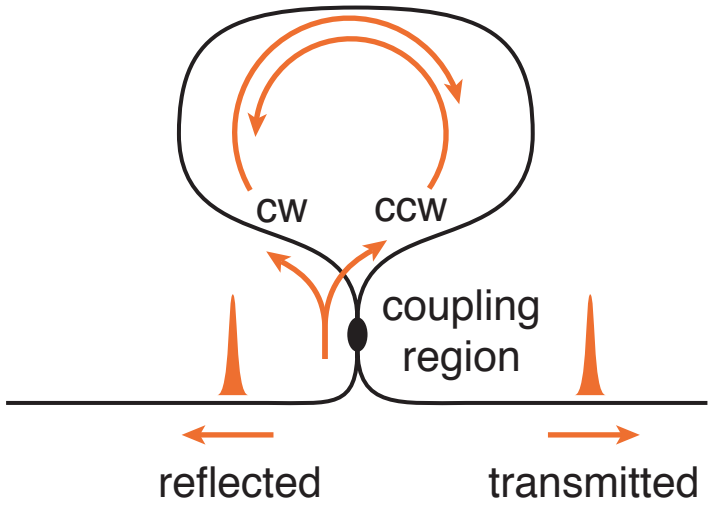

Optical logic gates

output = transmitted cw + ccw power

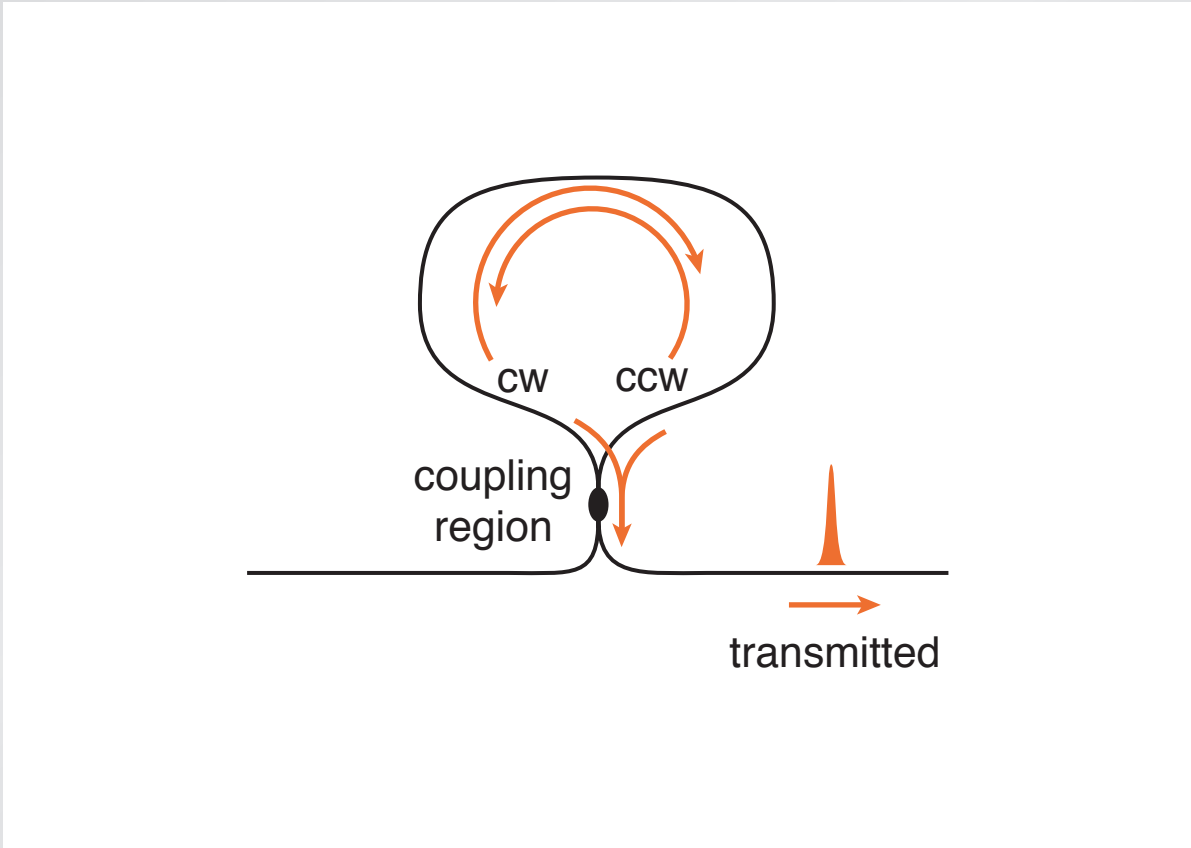

Optical logic gates

input electric field amplitude E_{in}

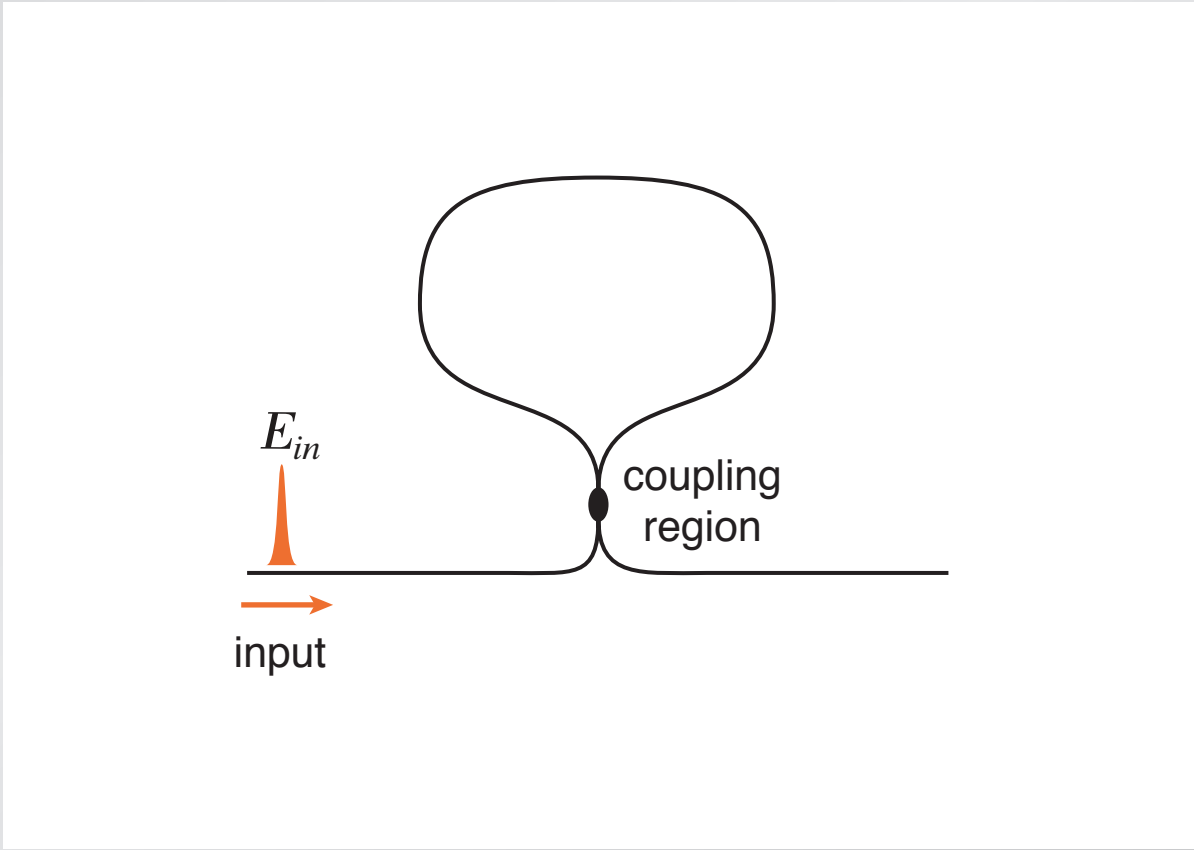

Optical logic gates

coupling parameter: ρ

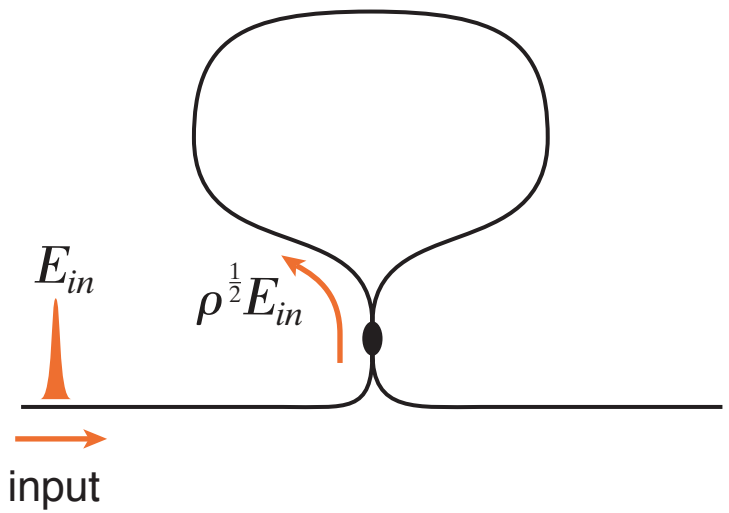

Optical logic gates

phase accumulation over path length of loop L

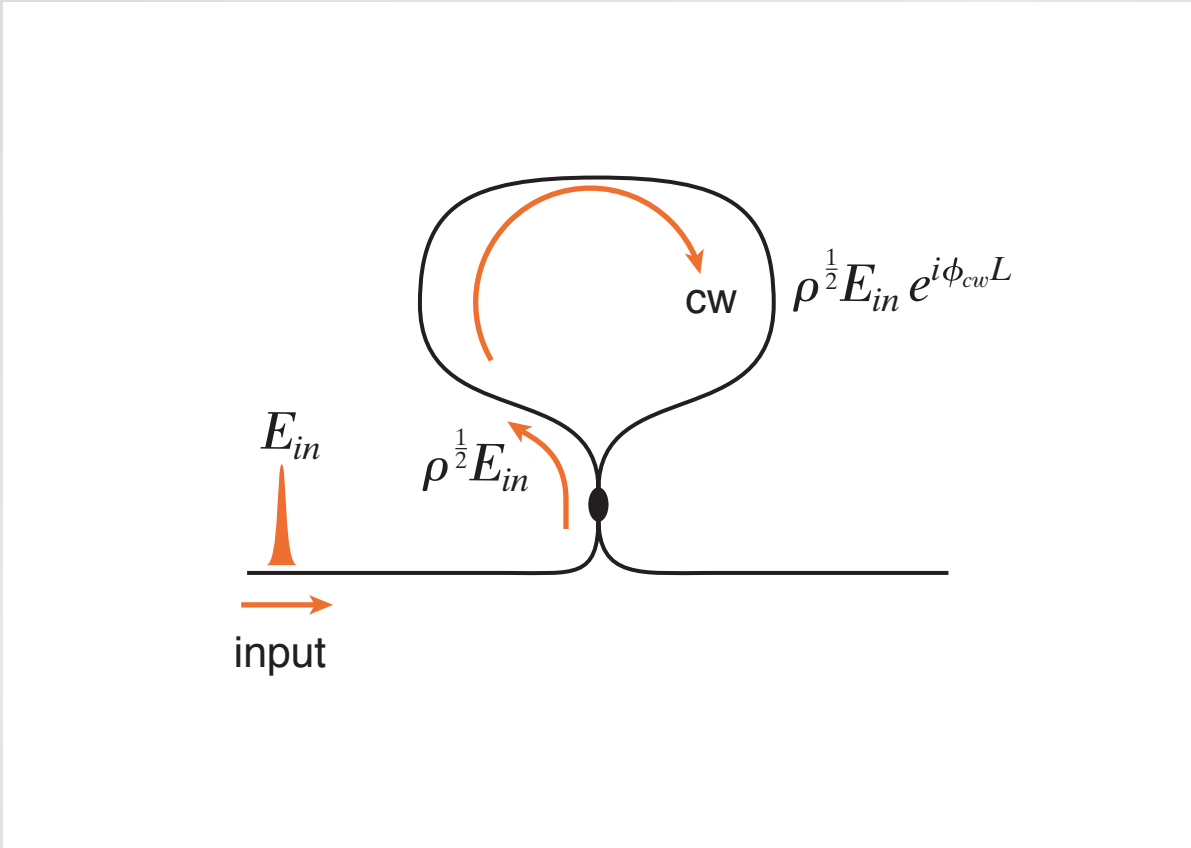

Optical logic gates

coupling parameter: ρ

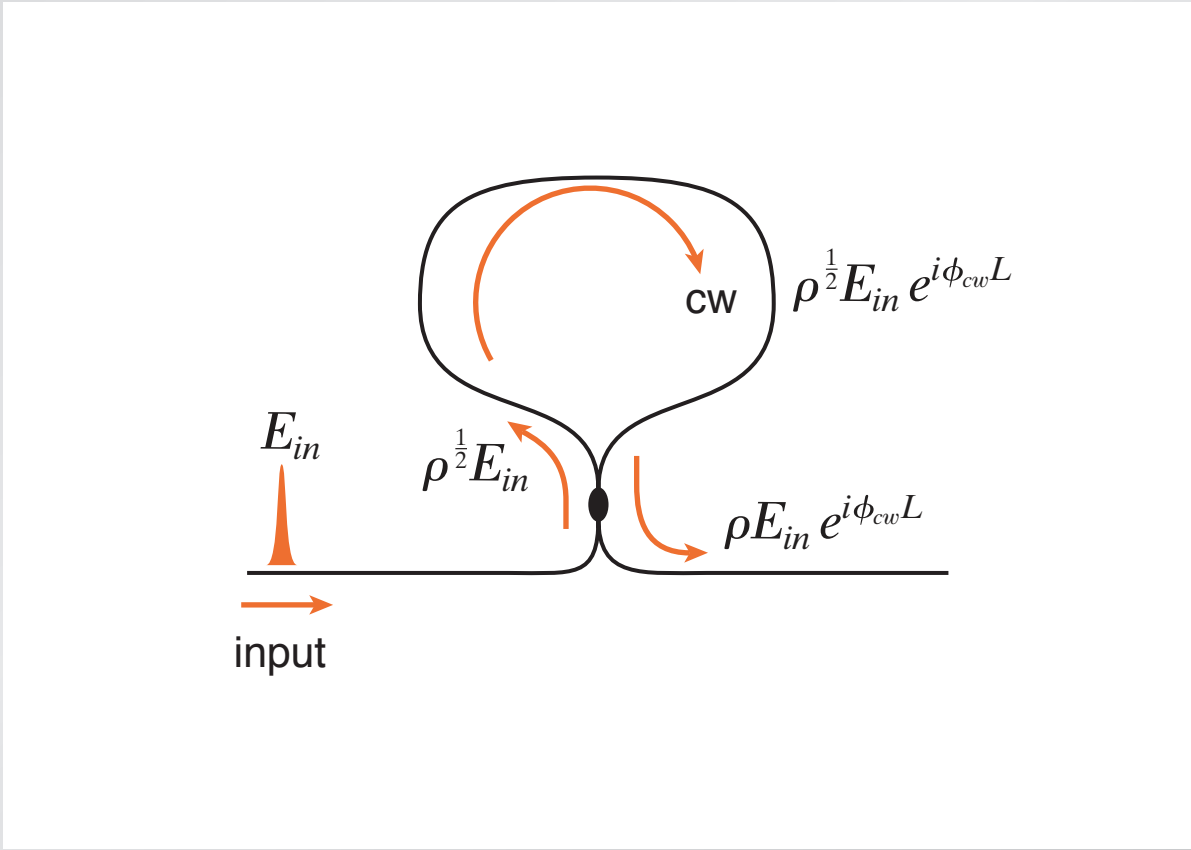

Optical logic gates

output is sum of transmitted cw and ccw

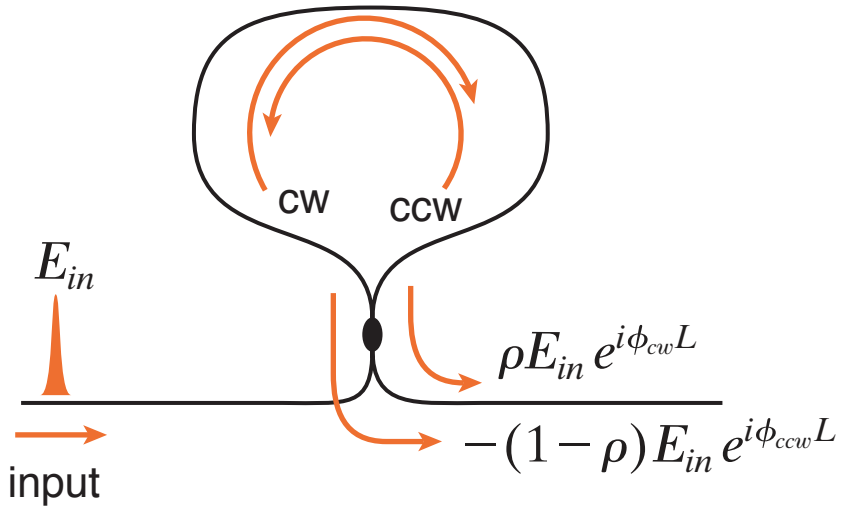

Manipulating light at the nanoscale

accumulated phase:

$$\phi = k_o n$$

Manipulating light at the nanoscale

accumulated phase:

$$\phi = k_o n$$

nonlinear index:

$$n = n_o + n_2 I = n_o + n_2 \frac{P_i}{A_{eff}}$$

Manipulating light at the nanoscale

accumulated phase:

$$\phi = k_o n$$

nonlinear index:

$$n = n_o + n_2 I = n_o + n_2 \frac{P_i}{A_{eff}}$$

nonlinear parameter:

$$\gamma = n_2 \frac{k_o}{A_{eff}}$$

Manipulating light at the nanoscale

power-dependent output:

$$\frac{E_{out}^2}{E_{in}^2} = 1 - 2\rho(1-\rho)\{1 + \cos[(1-2\rho)\gamma P_o L]\}$$

Manipulating light at the nanoscale

power-dependent output:

$$\frac{E_{out}^2}{E_{in}^2} = 1 - 2\rho(1-\rho)\{1 + \cos[(1-2\rho)\gamma P_o L]\}$$

for 50-50 coupler:

$$\rho = 0.5$$

Manipulating light at the nanoscale

power-dependent output:

$$\frac{E_{out}^2}{E_{in}^2} = 1 - 2\rho(1-\rho)\{1 + \cos[(1-2\rho)\gamma P_o L]\}$$

for 50-50 coupler:

$$\rho = 0.5$$

no transmission:

$$\frac{E_{out}^2}{E_{in}^2} = 0$$

Optical logic gates

when $\rho \neq 0.5$:

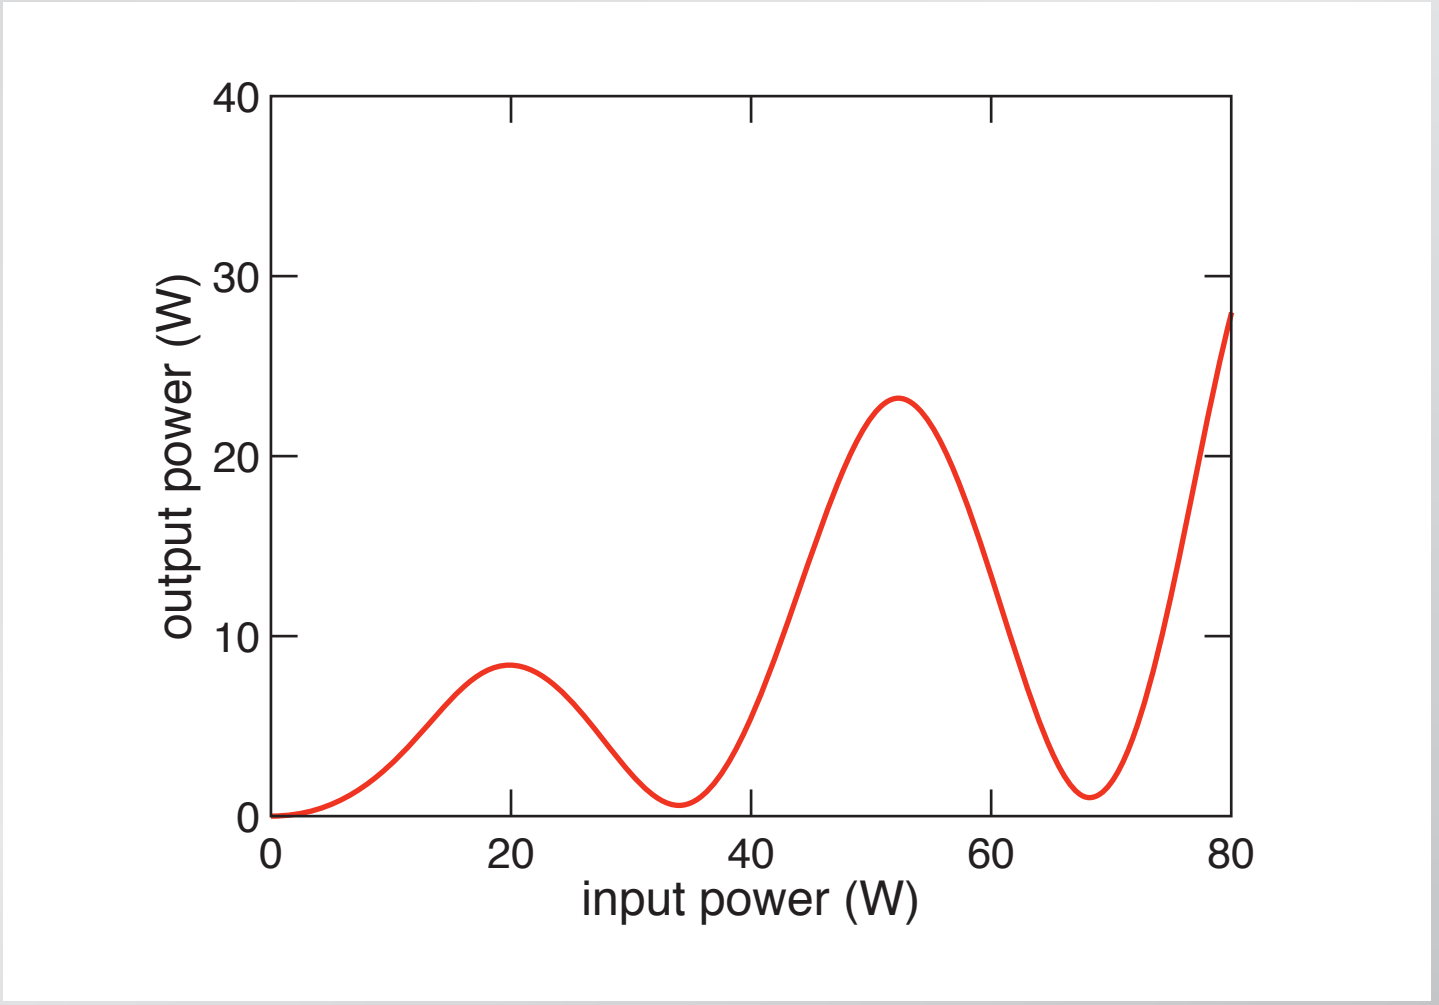

Optical logic gates

nonlinear nanogate

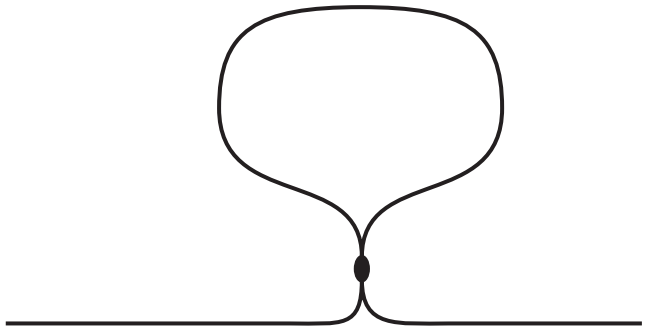

Optical logic gates

nonlinear nanogate

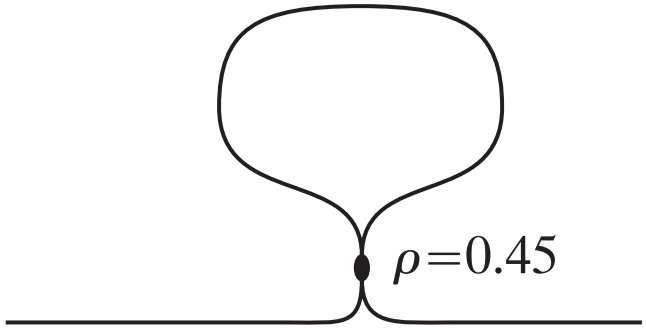

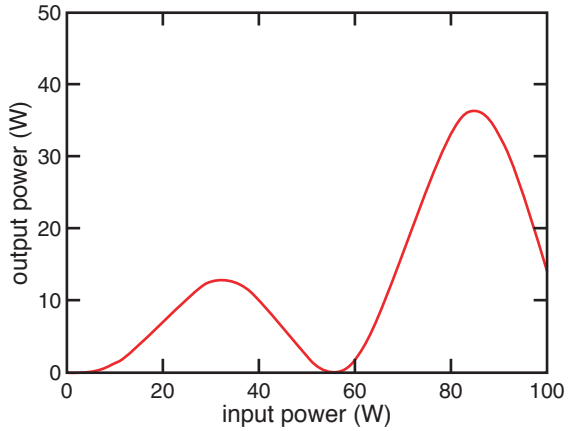

Optical logic gates

nonlinear nanogate

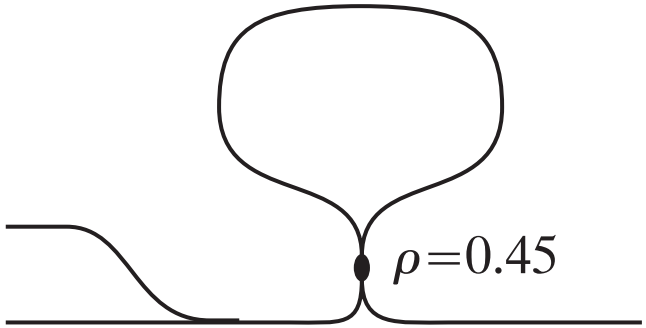

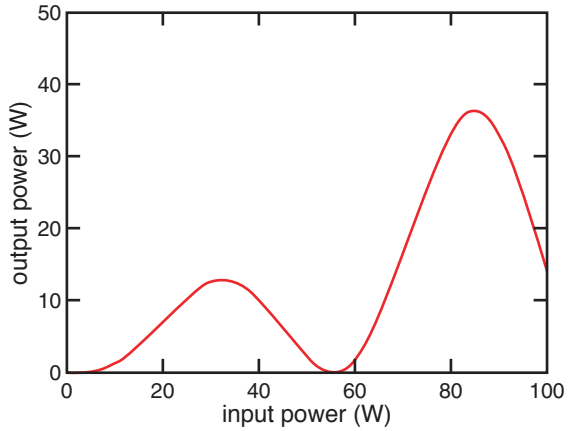

Optical logic gates

nonlinear nanogate

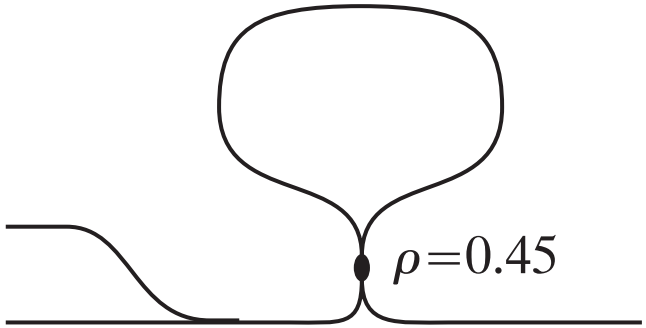

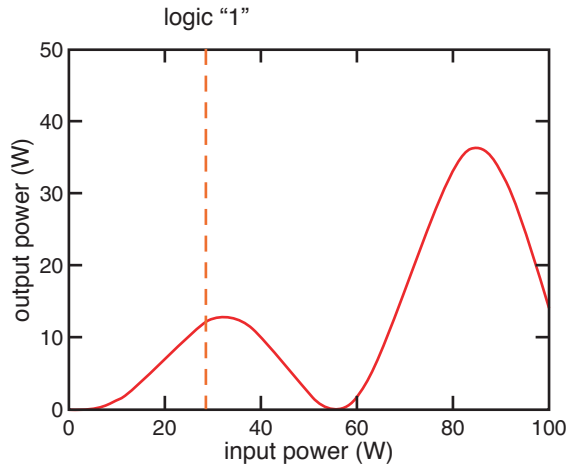

Optical logic gates

nonlinear nanogate

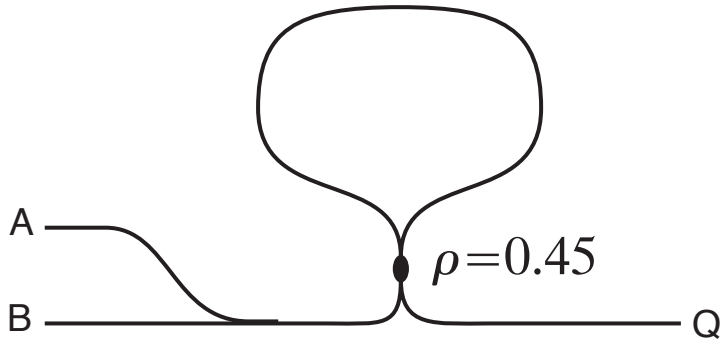

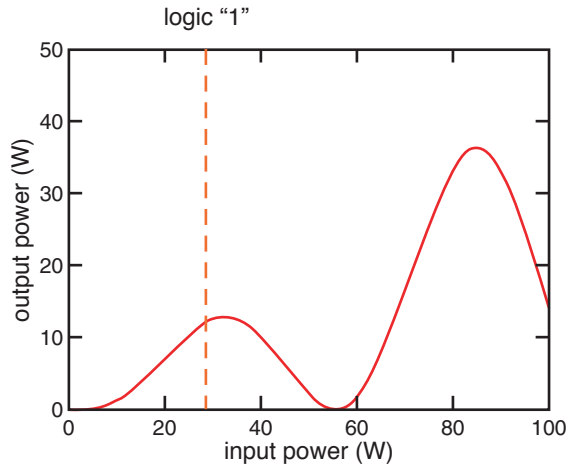

A	B	Q
0	0	0

Optical logic gates

nonlinear nanogate

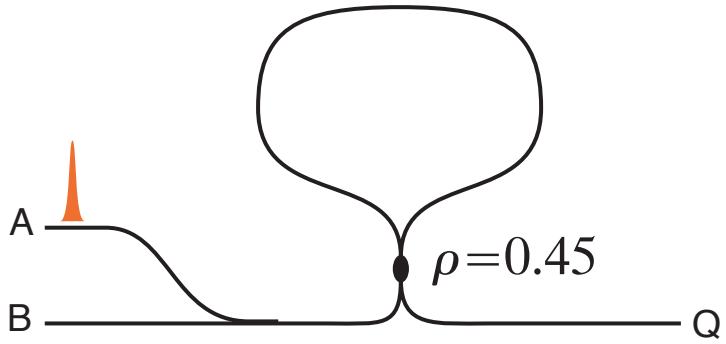

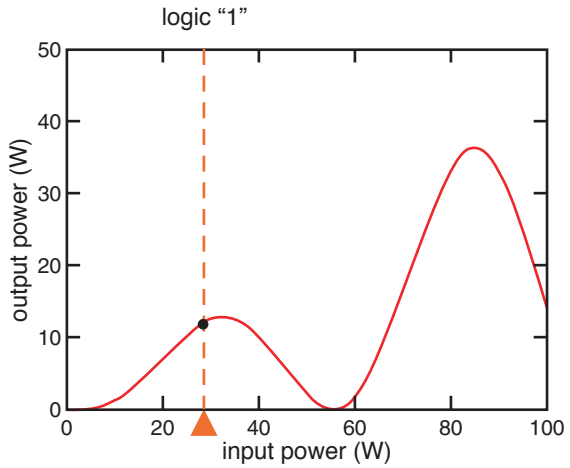

A	B	Q
0	0	0

Optical logic gates

nonlinear nanogate

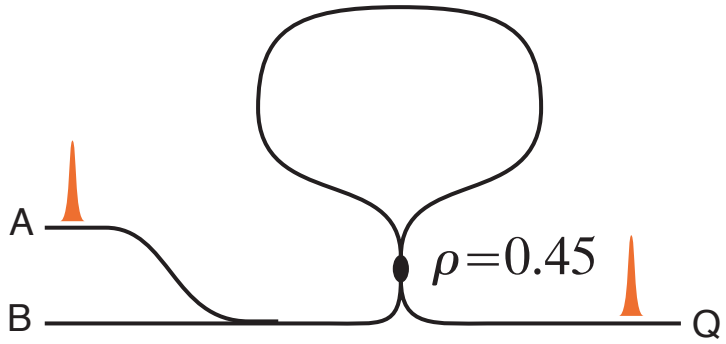

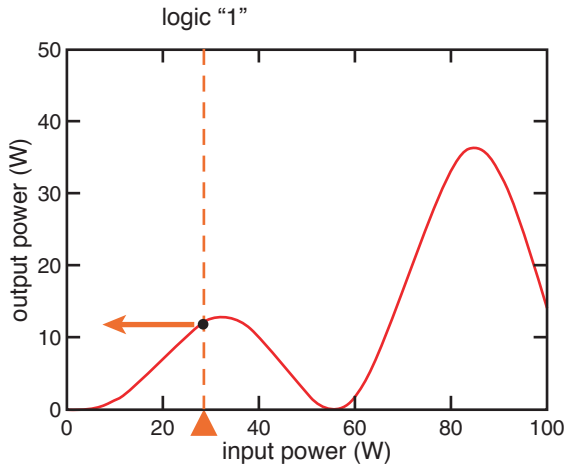

A	B	Q
0	0	0
1	0	1

Optical logic gates

nonlinear nanogate

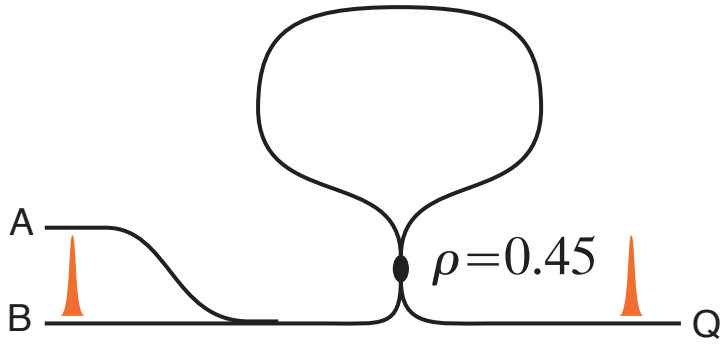

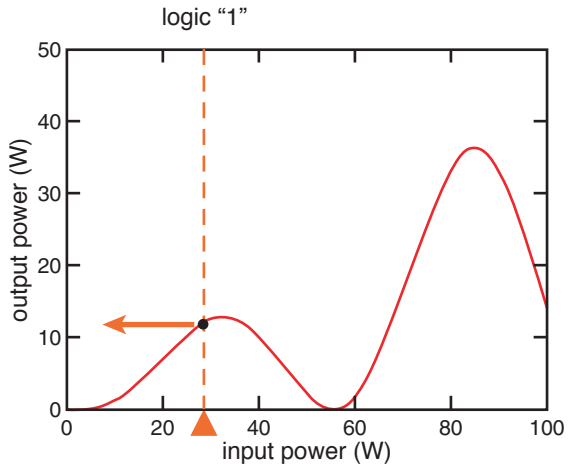

A	B	Q
0	0	0
1	0	1
0	1	1

Optical logic gates

nonlinear nanogate

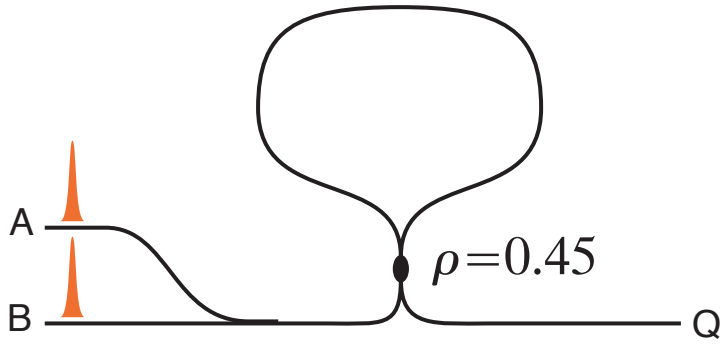

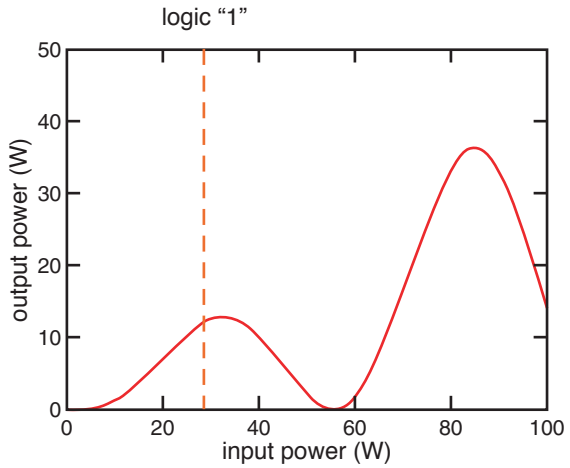

A	B	Q
0	0	0
1	0	1
0	1	1

Optical logic gates

nonlinear nanogate

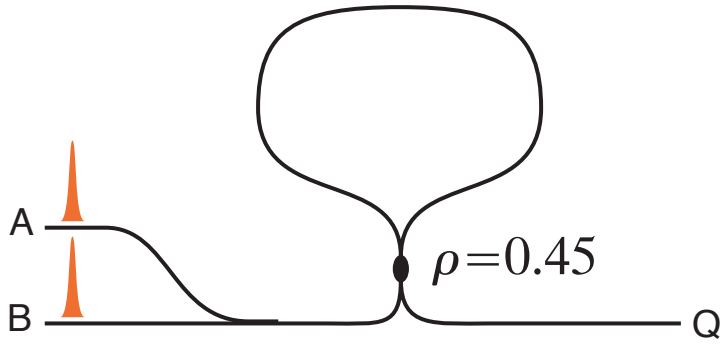

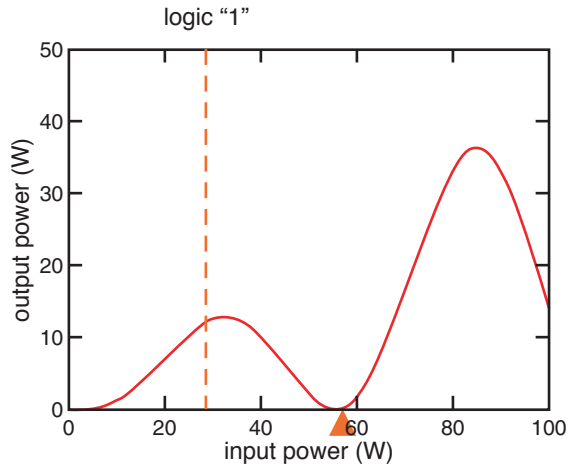

A	B	Q
0	0	0
1	0	1
0	1	1

Optical logic gates

nonlinear nanogate

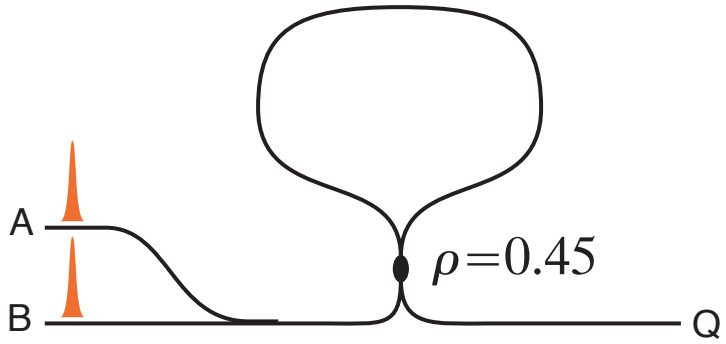

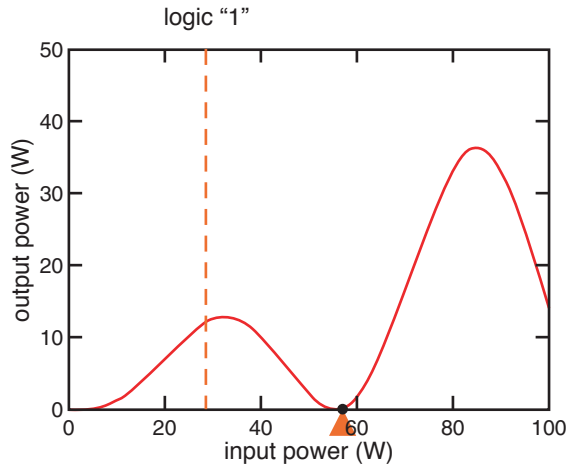

A	B	Q
0	0	0
1	0	1
0	1	1
1	1	0

Optical logic gates

nonlinear nanogate

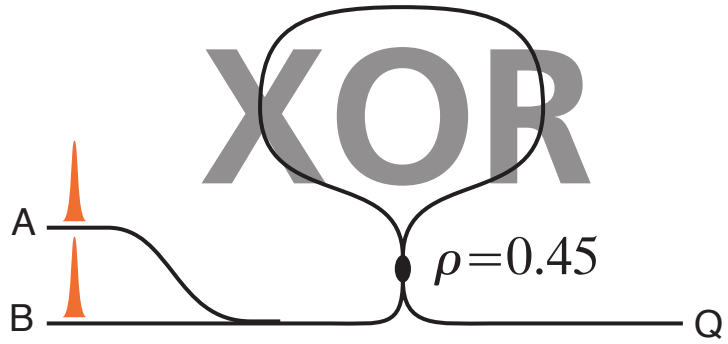

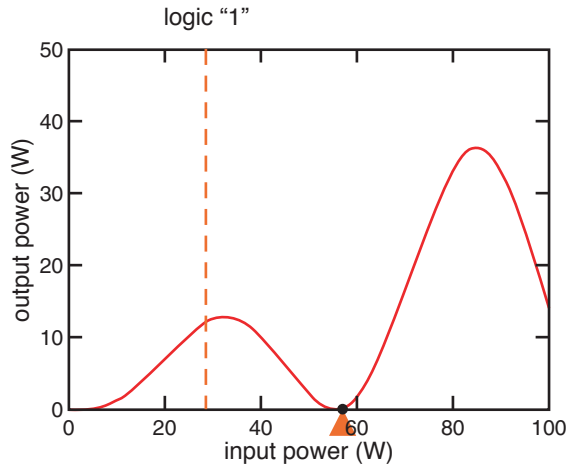

A	B	Q
0	0	0
1	0	1
0	1	1
1	1	0

Optical logic gates

nonlinear nanogate

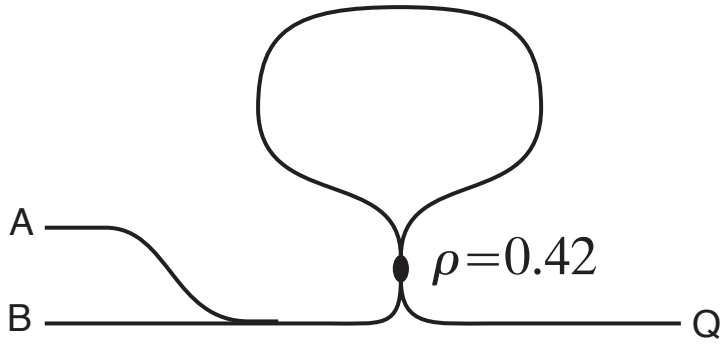

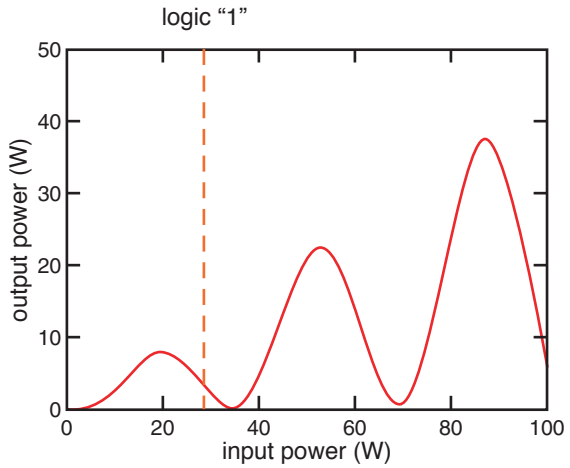

A	B	Q
0	0	0

Optical logic gates

nonlinear nanogate

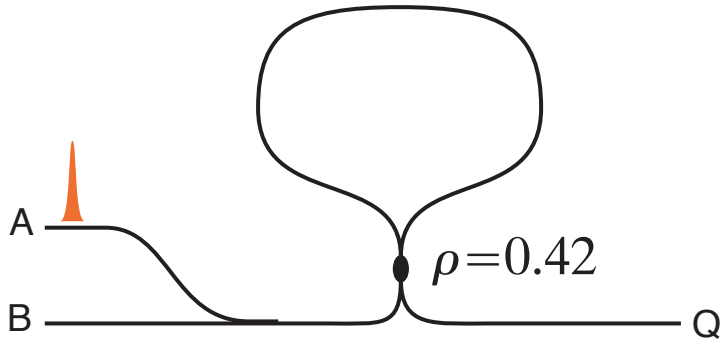

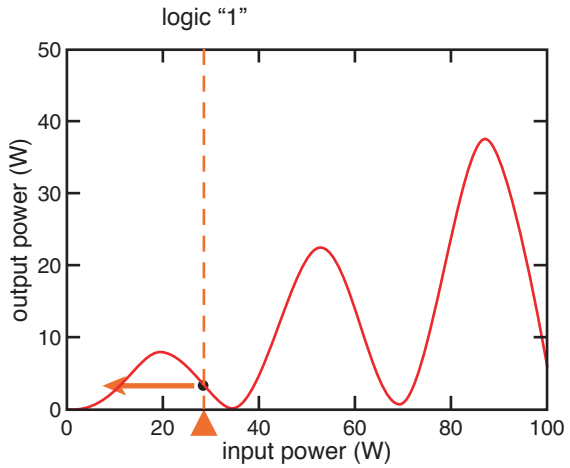

A	B	Q
0	0	0
1	0	0
0	1	0

Optical logic gates

nonlinear nanogate

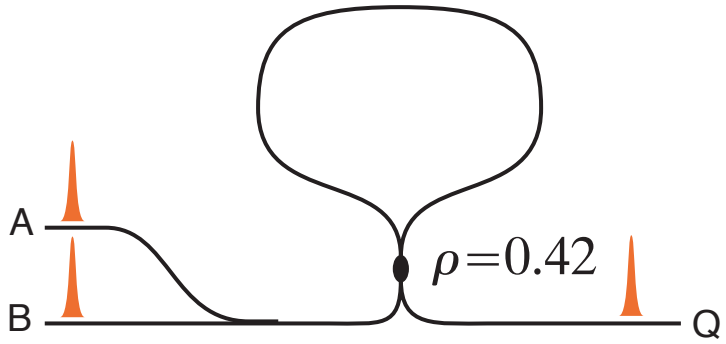

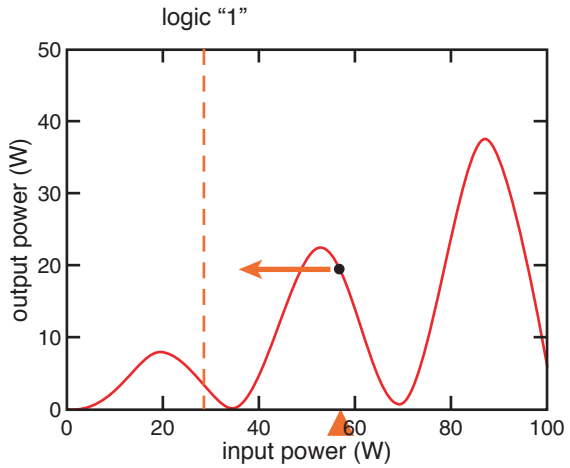

A	B	Q
0	0	0
1	0	0
0	1	0
1	1	1

Optical logic gates

nonlinear nanogate

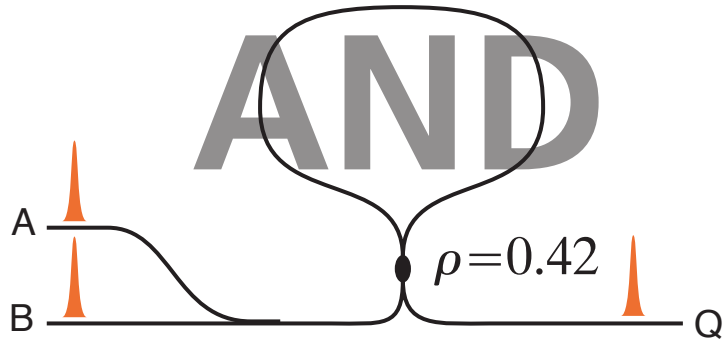

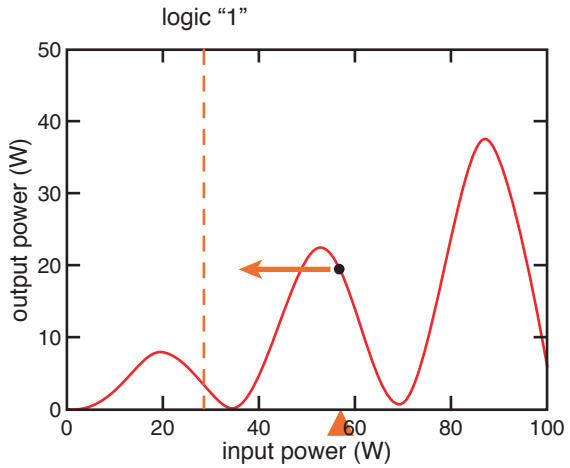

A	B	Q
0	0	0
1	0	0
0	1	0
1	1	1

Optical logic gates

for NAND gate need ouput with no input

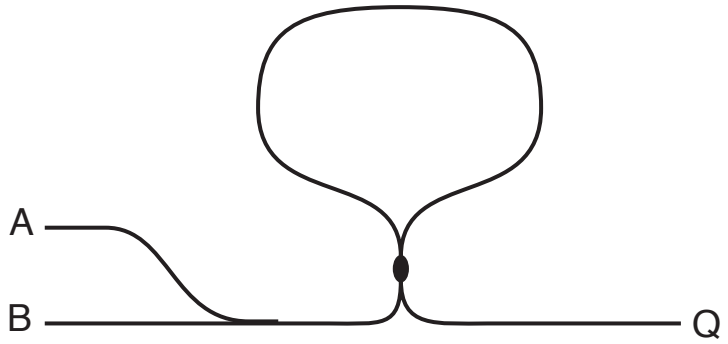

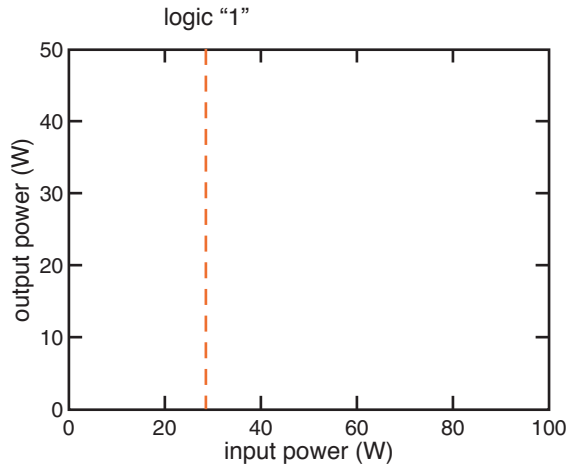

A	B	Q
0	0	1

Optical logic gates

for NAND gate need ouput with no input

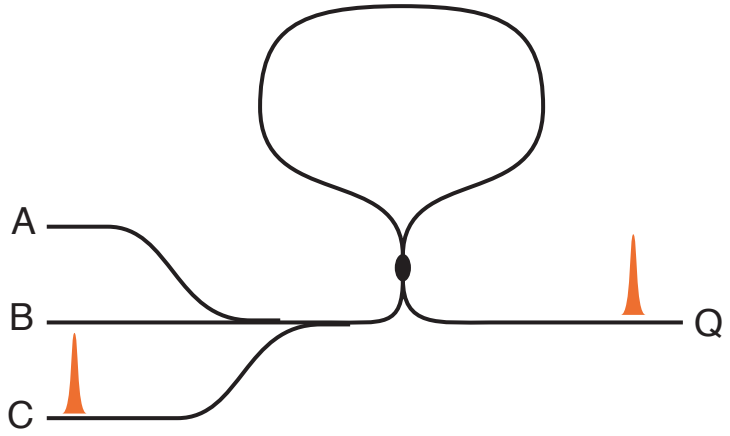

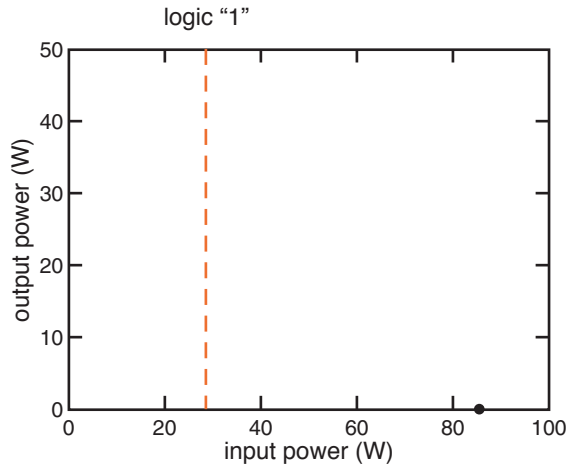

A	B	Q
0	0	1

Optical logic gates

for NAND gate need ouput with no input

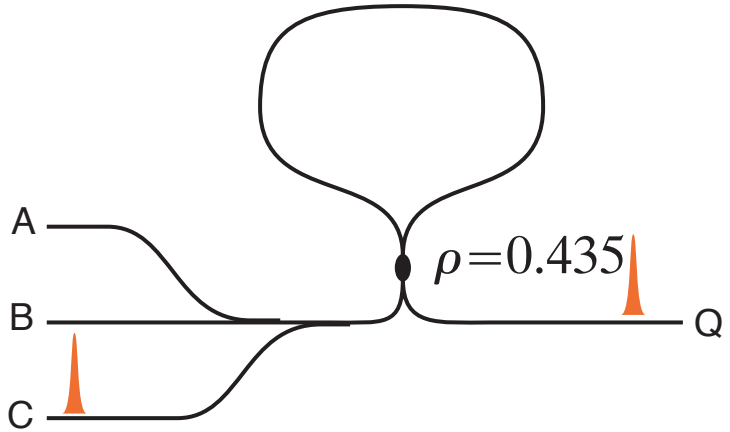

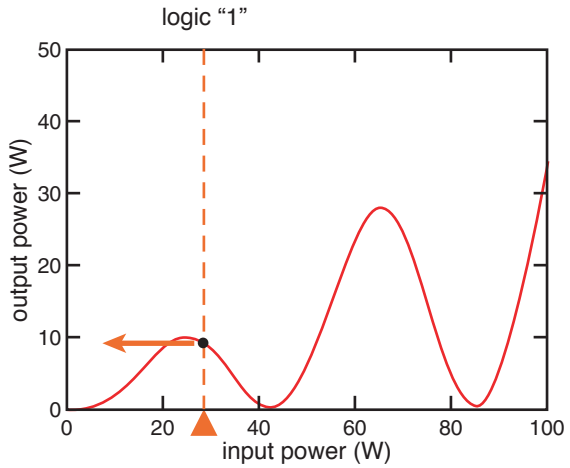

A	B	Q
0	0	1

Optical logic gates

universal NAND gate

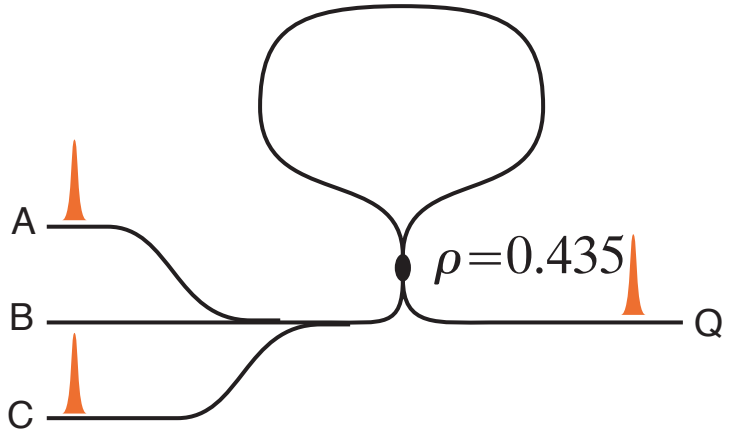

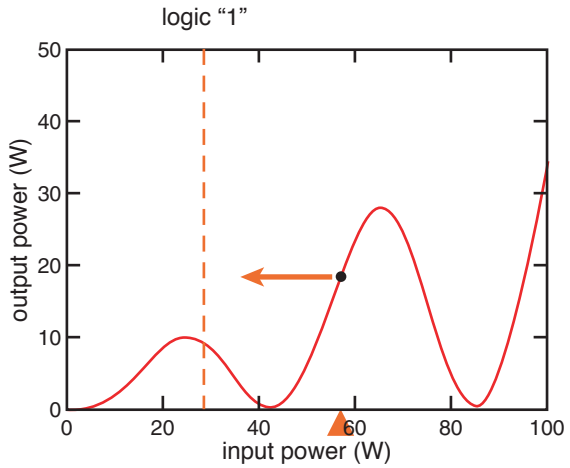

A	B	Q
0	0	1
1	0	1
0	1	1

Optical logic gates

universal NAND gate

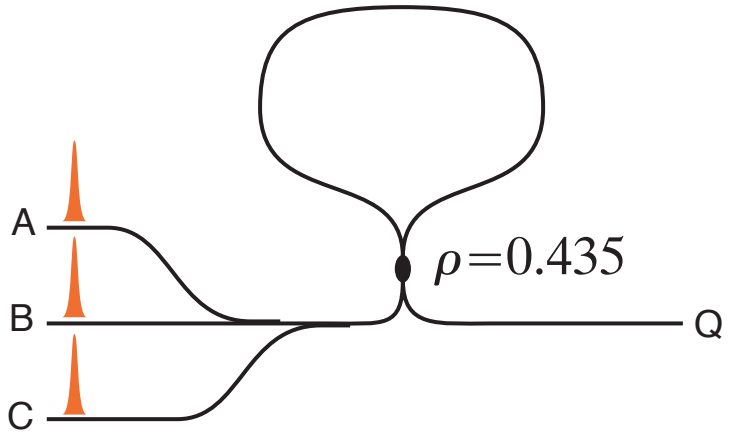

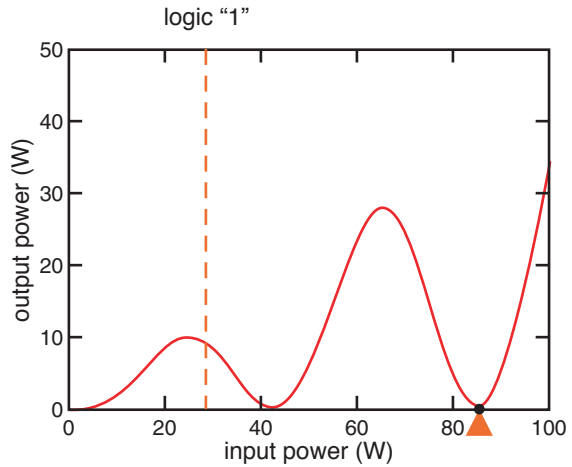

A	B	Q
0	0	1
1	0	1
0	1	1
1	1	0

Optical logic gates

universal NAND gate

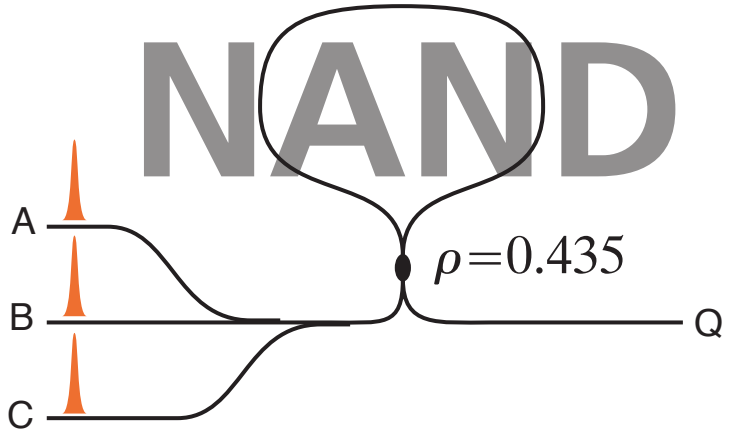

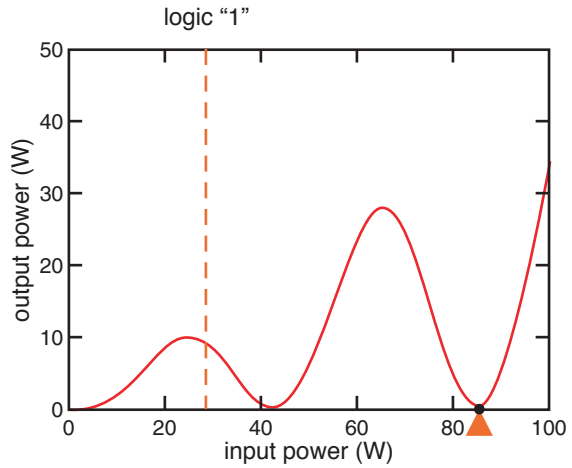

A	B	Q
0	0	1
1	0	1
0	1	1
1	1	0

Optical logic gates

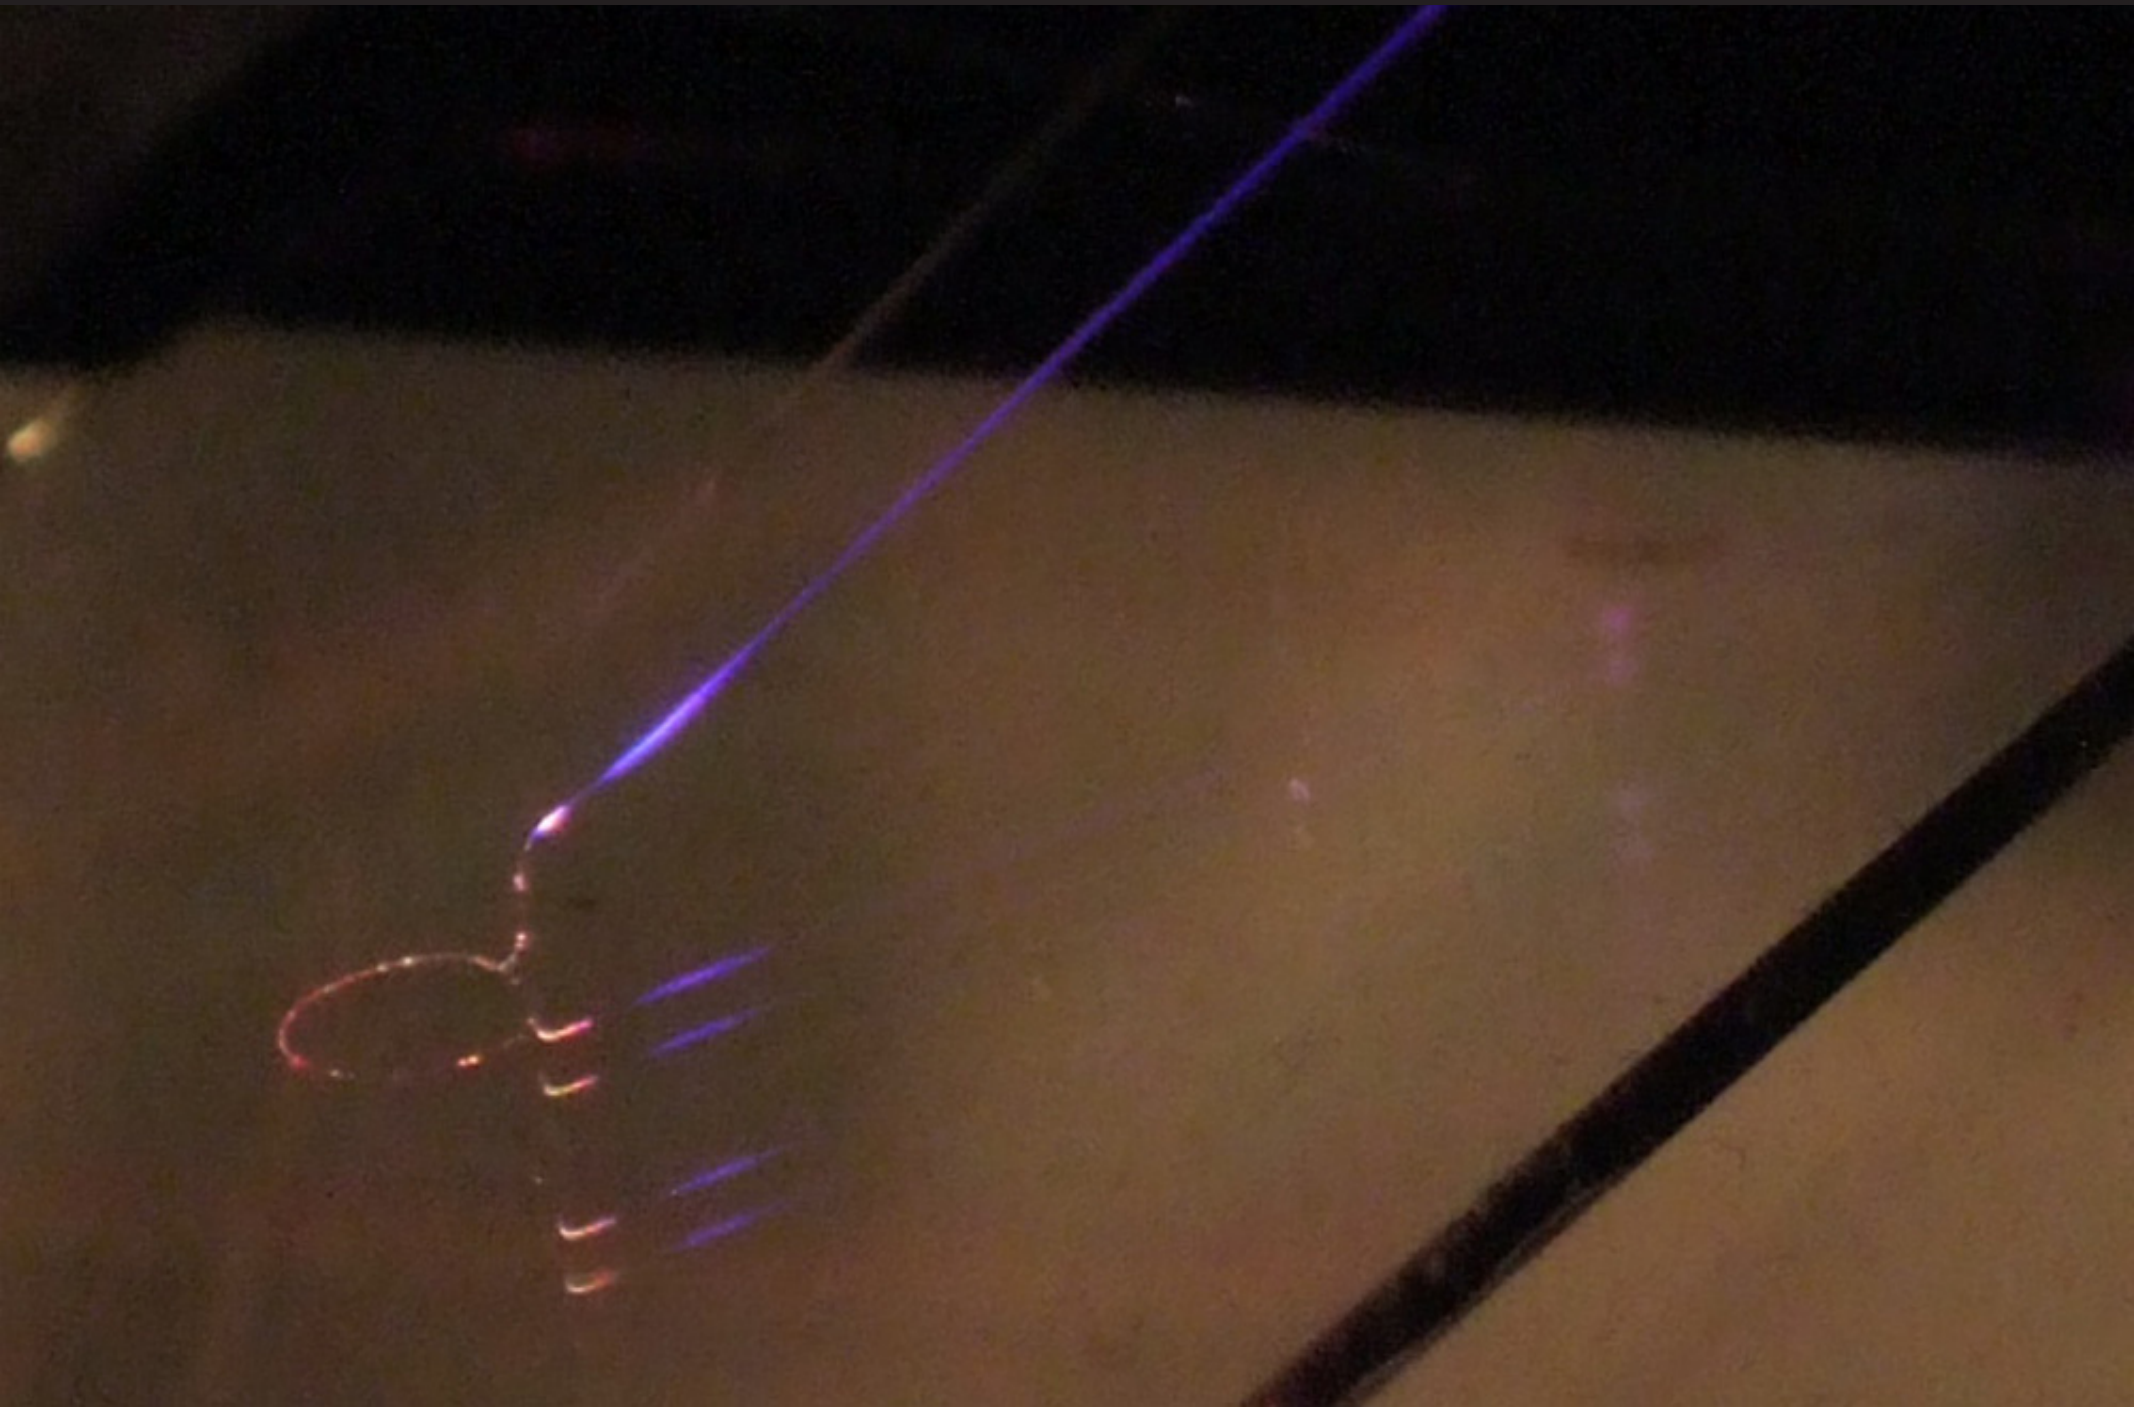

Optical logic gates

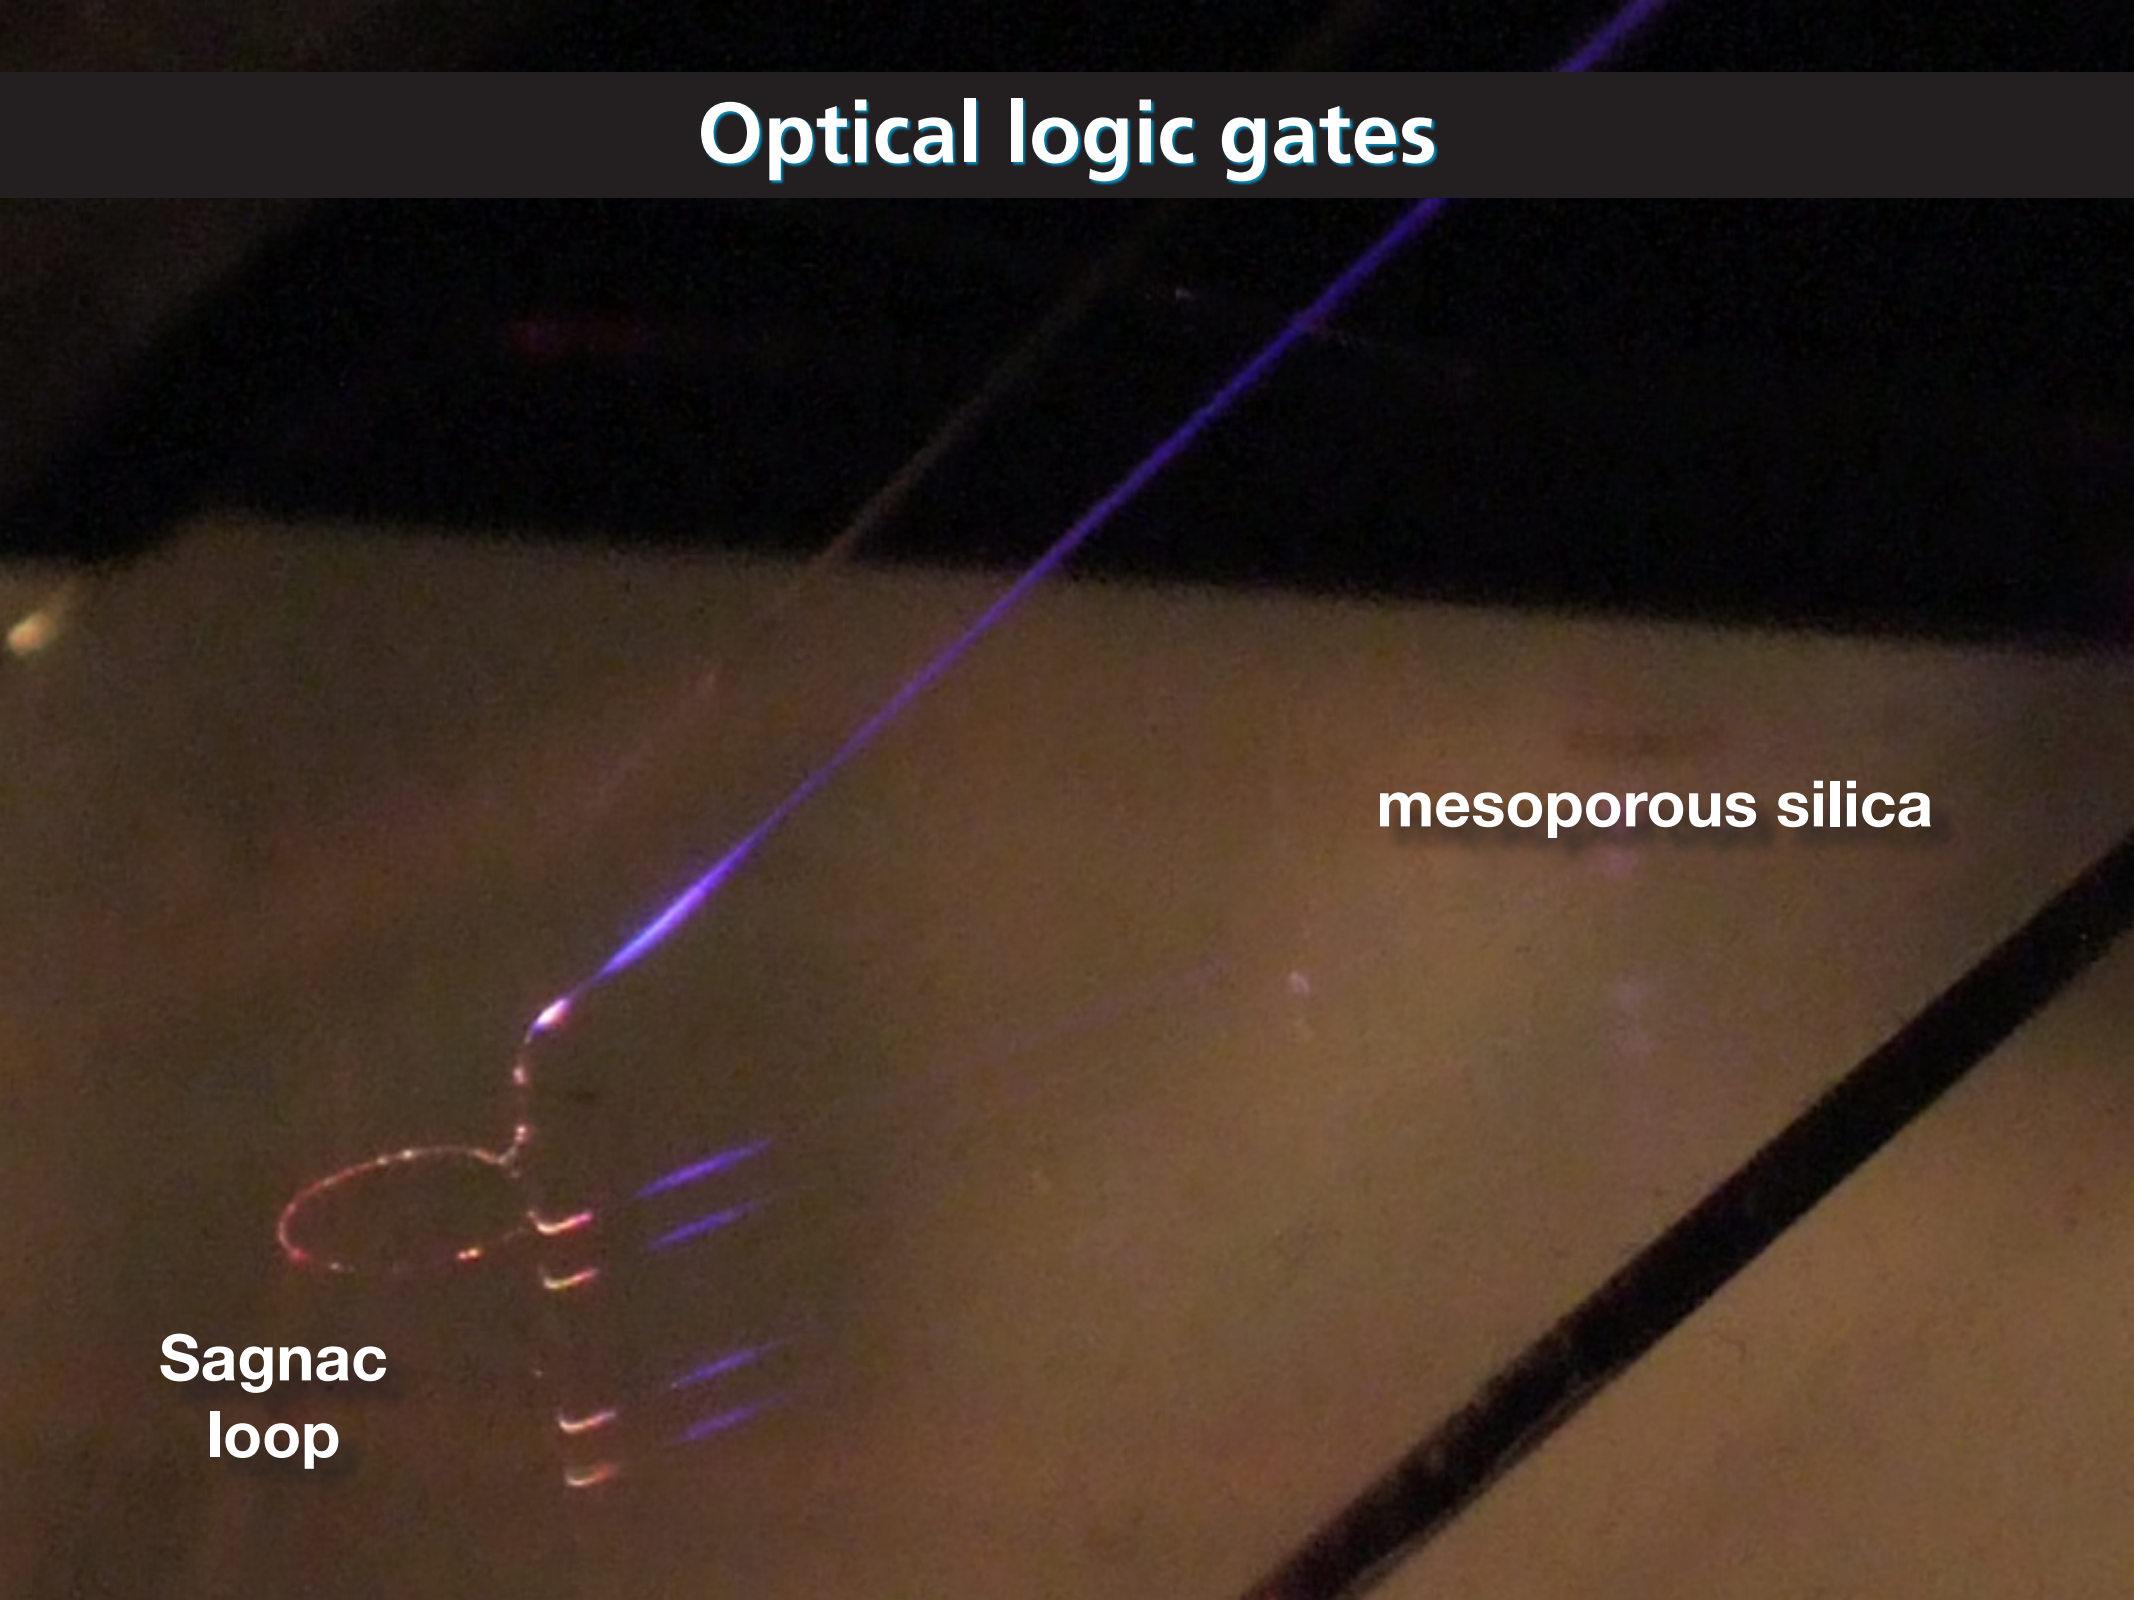

Optical logic gates

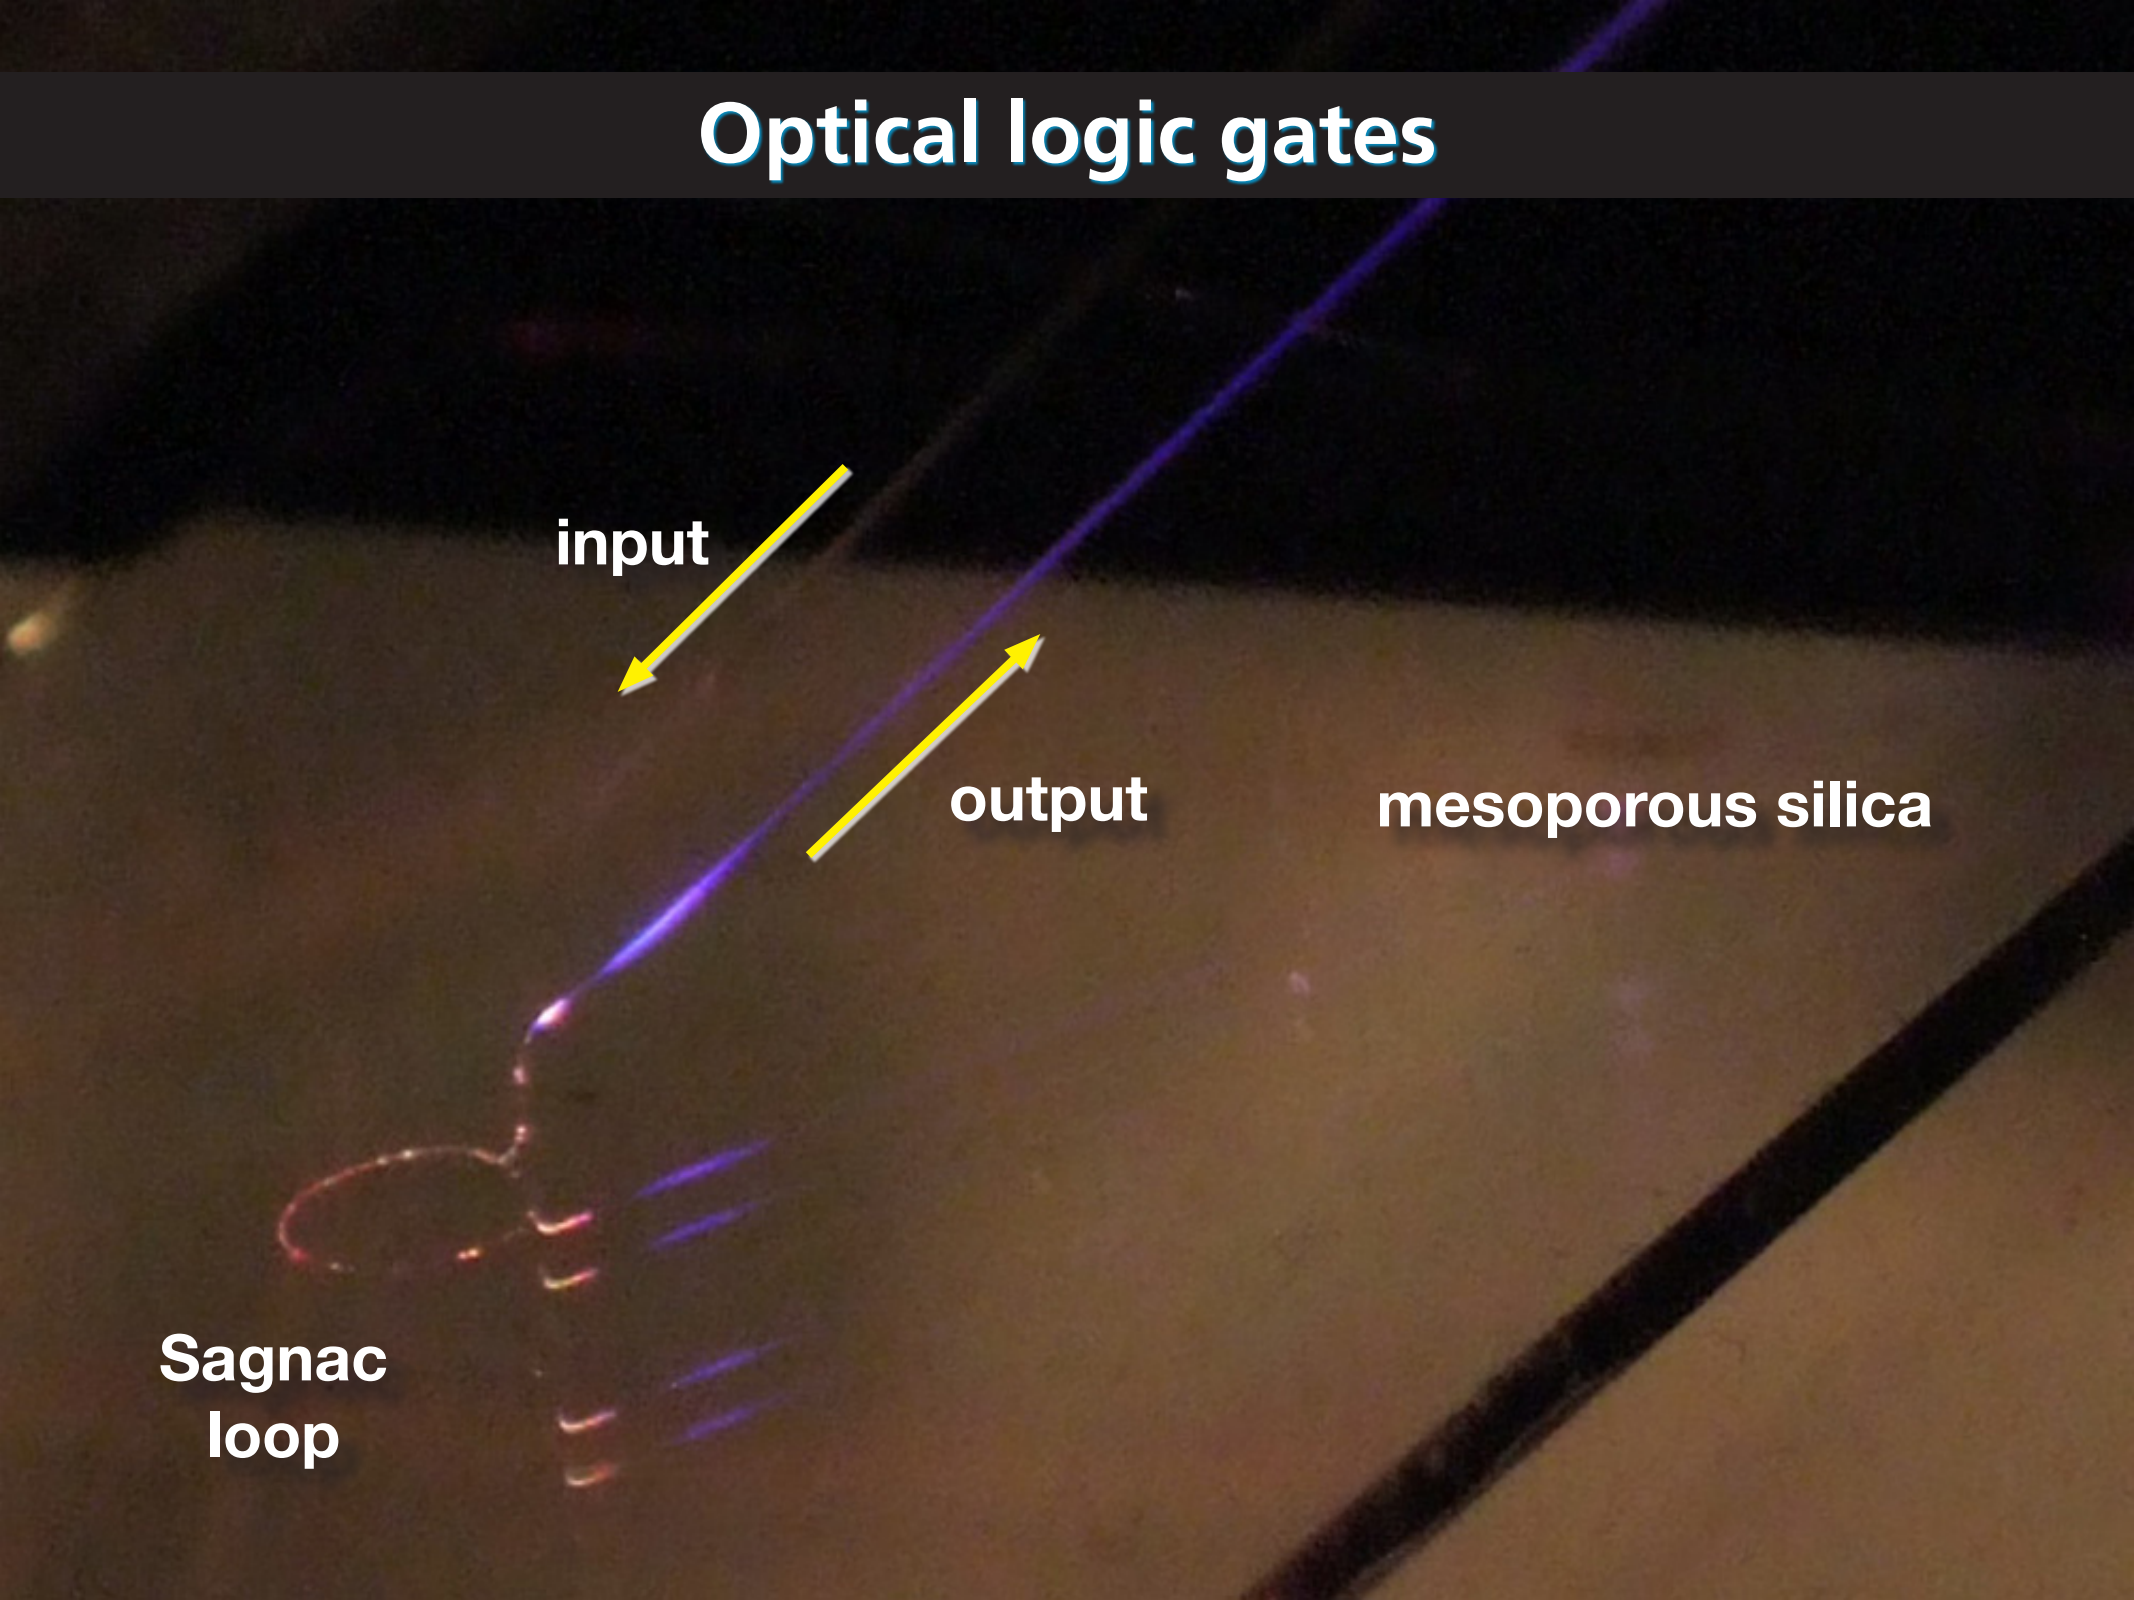

Optical logic gates

very preliminary data

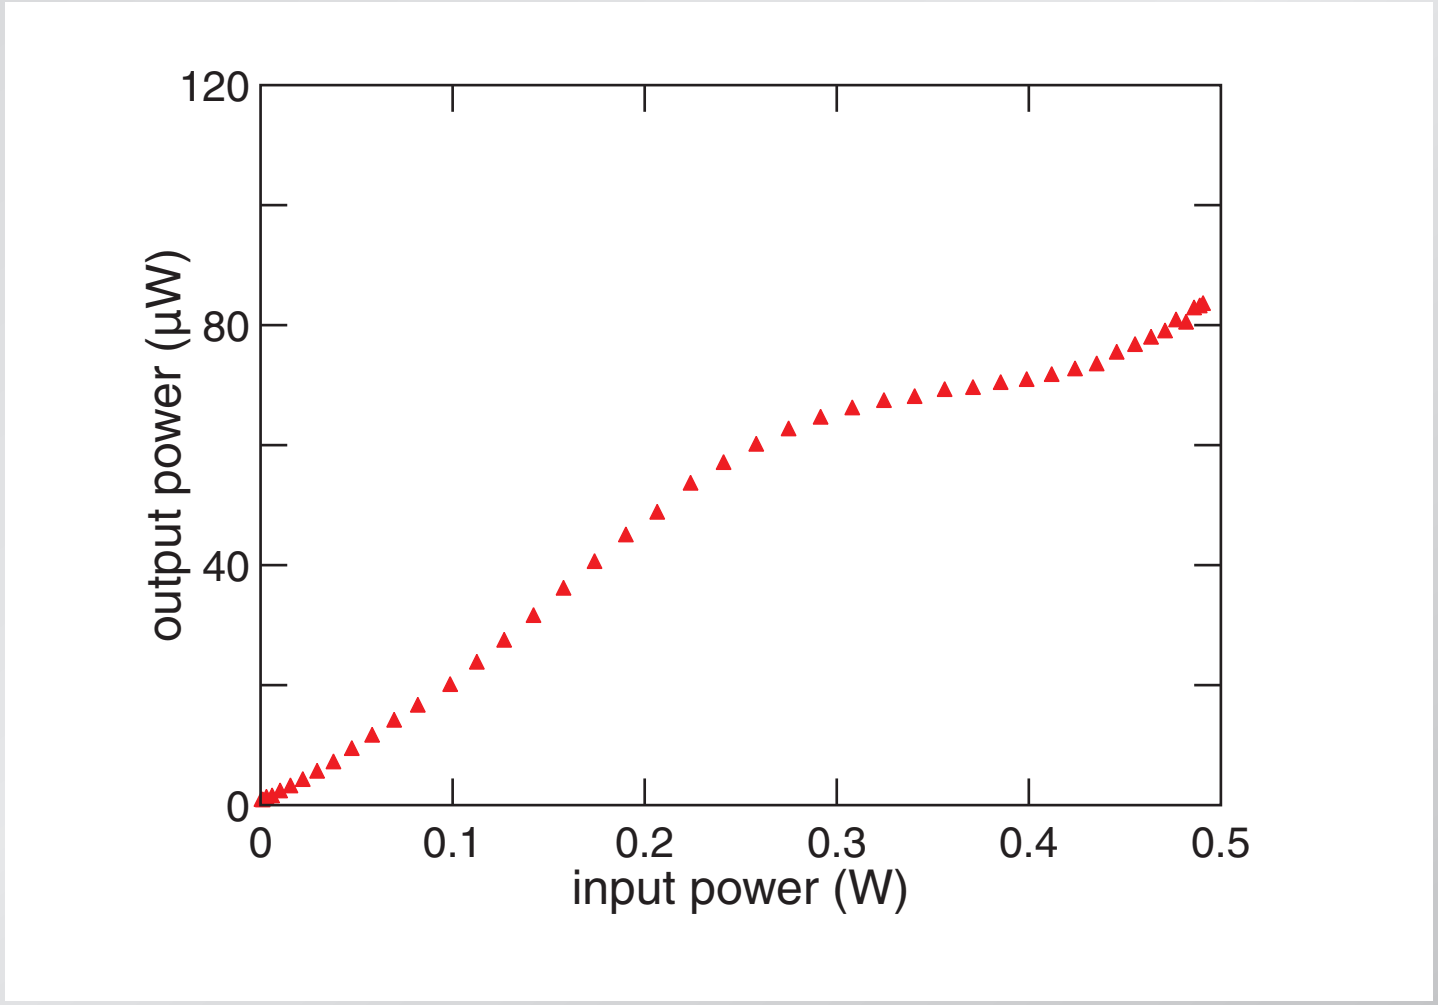

Optical logic gates

light-by-light modulation!

Optical logic gates

very preliminary data

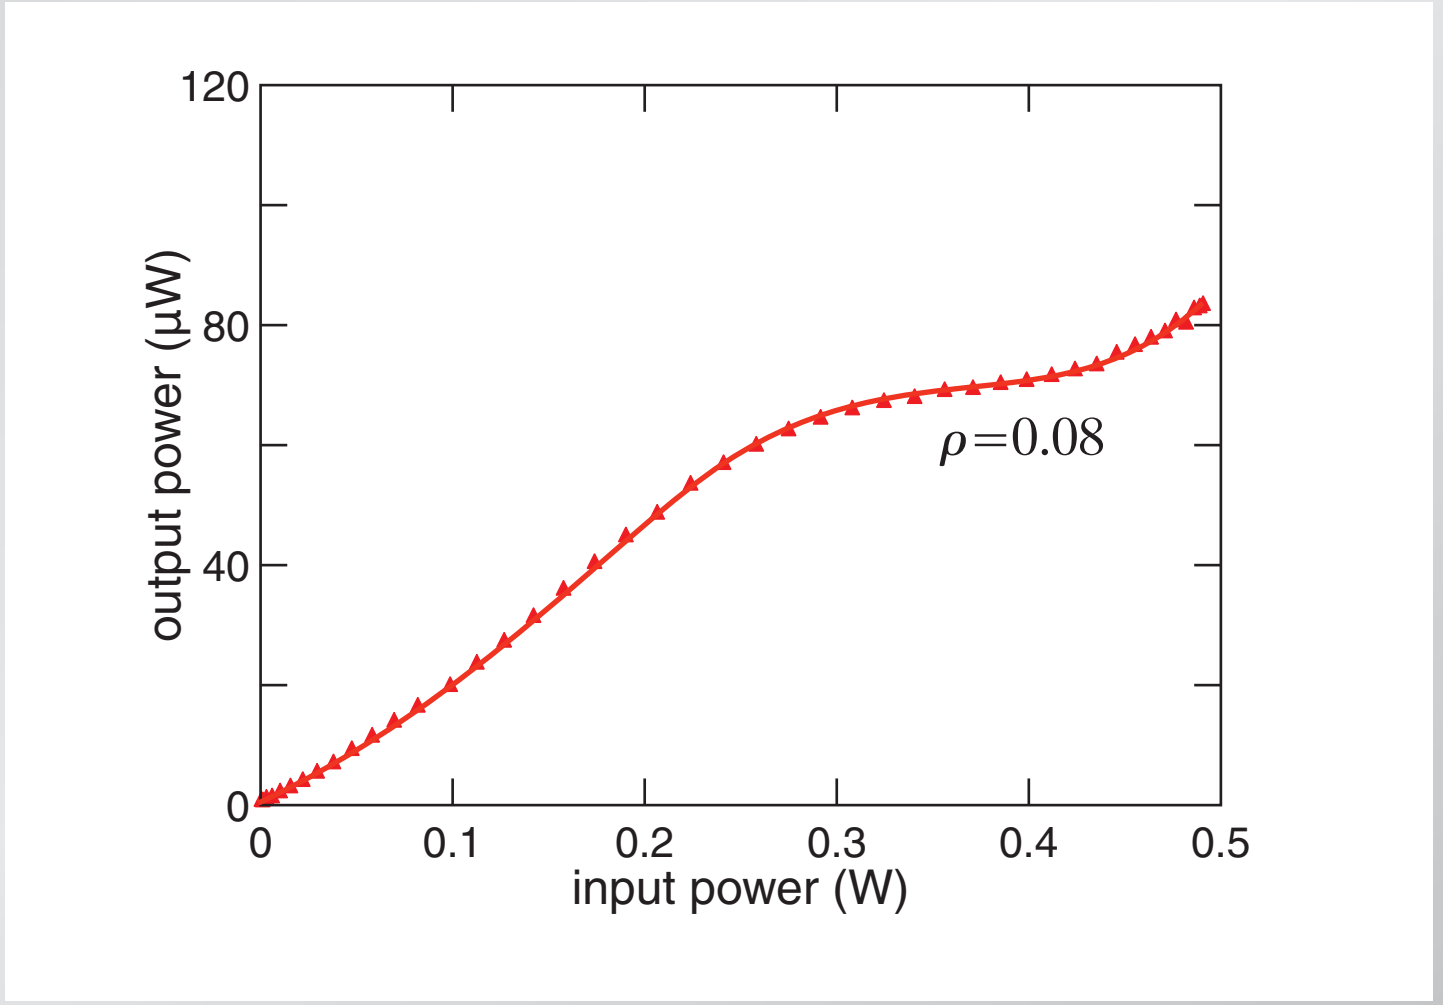

Optical logic gates

very preliminary data

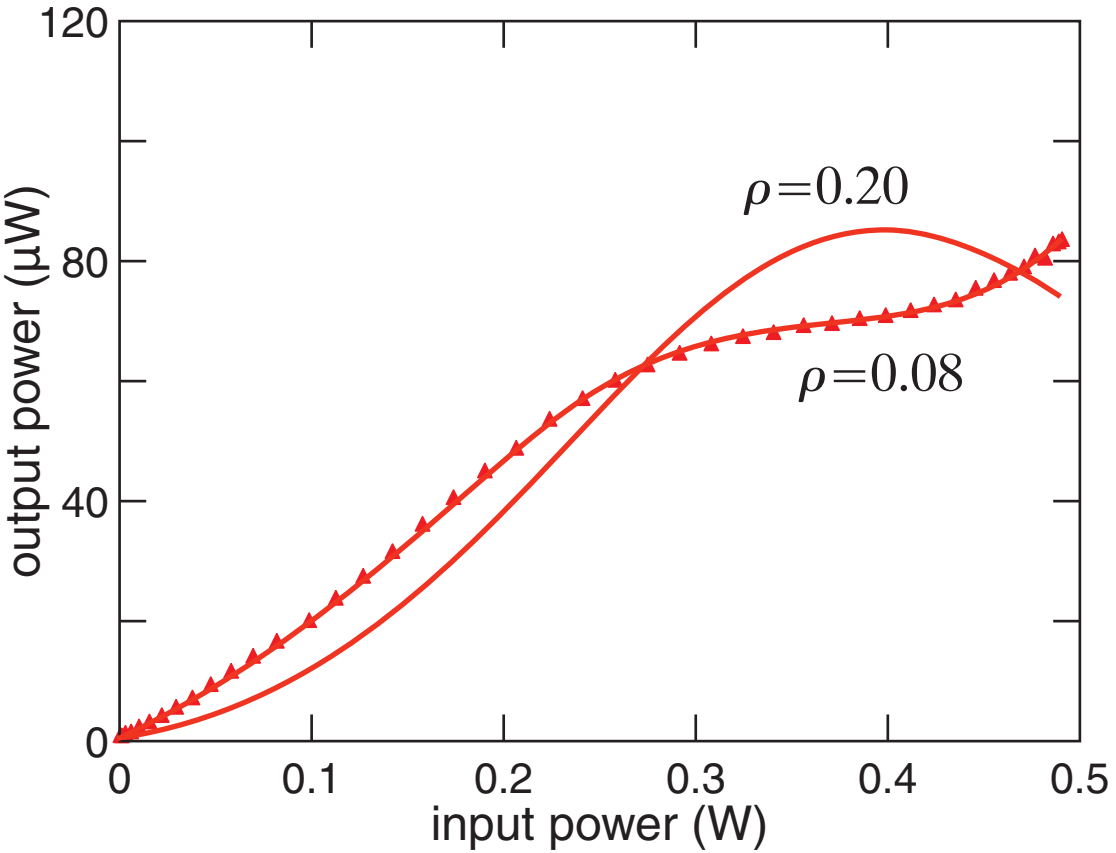

Summary

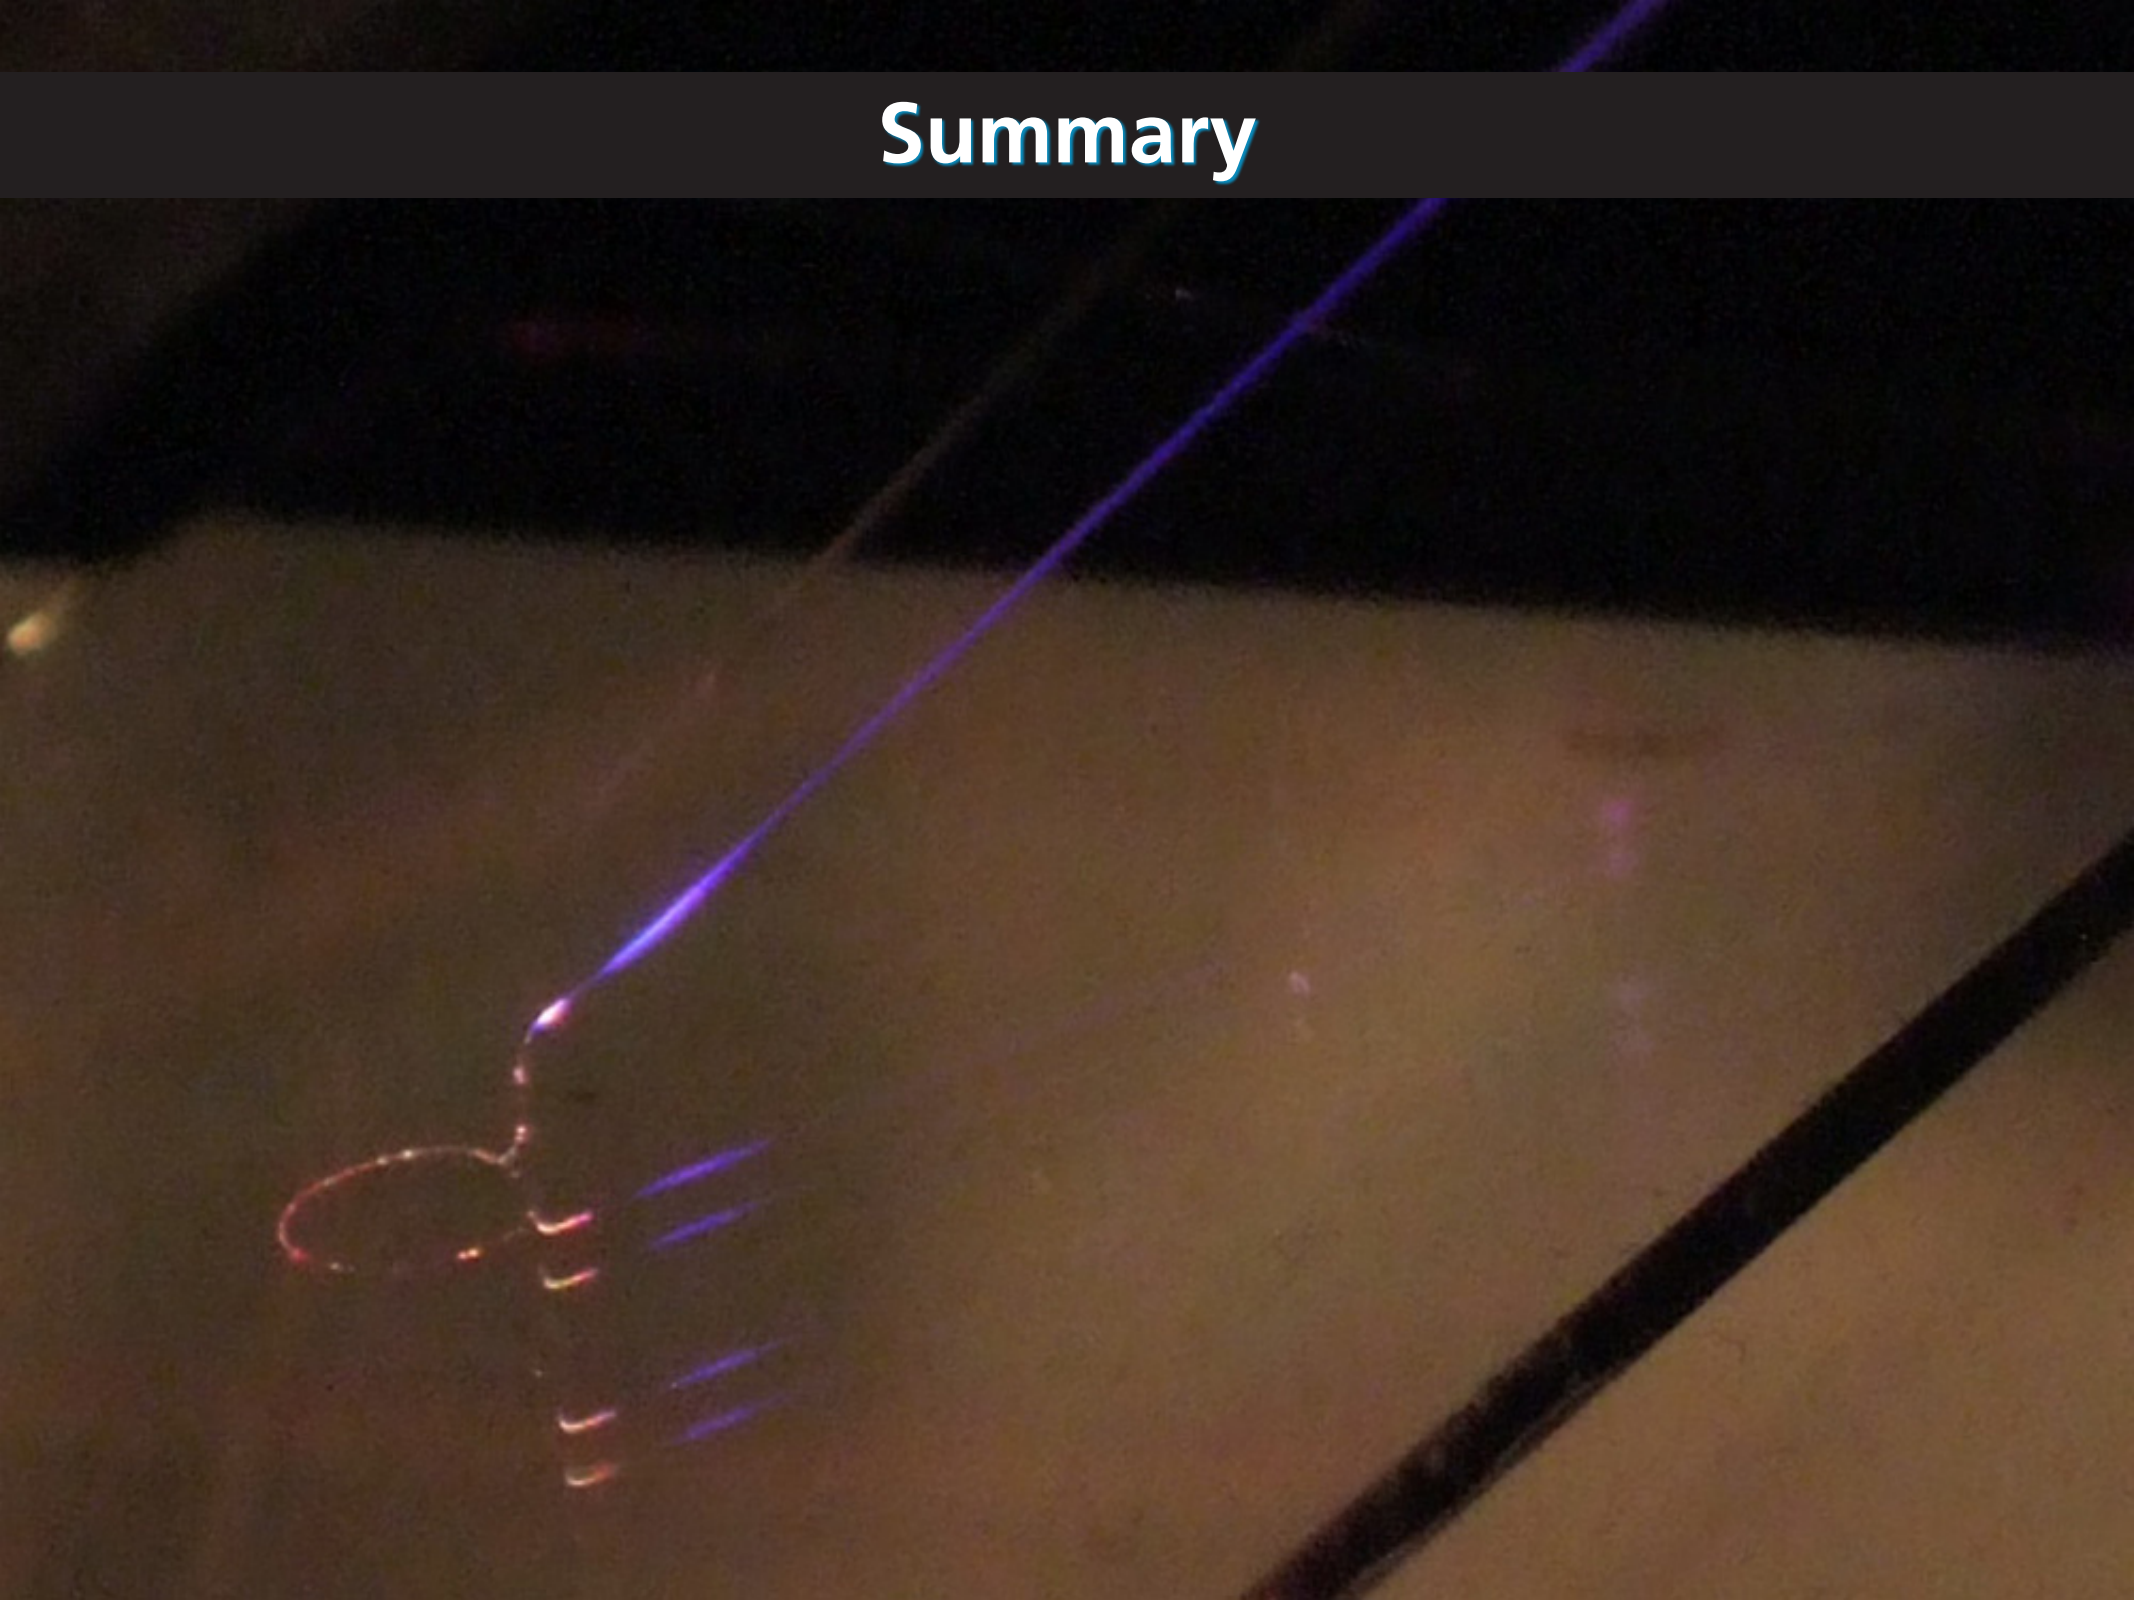

Summary

- several nanodevices demonstrated
- large γ permits miniature Sagnac loops
- switching energy < 10 pJ

Funding:

Harvard Center for Imaging and Mesoscopic Structures
National Science Foundation
National Natural Science Foundation of China

for a copy of this presentation:

http://mazur-www.harvard.edu

Google Search I'm Feeling Lucky

Google™
mazur
Google Search
I'm Feeling Lucky

Google
mazur
Google Search
I'm Feeling Lucky

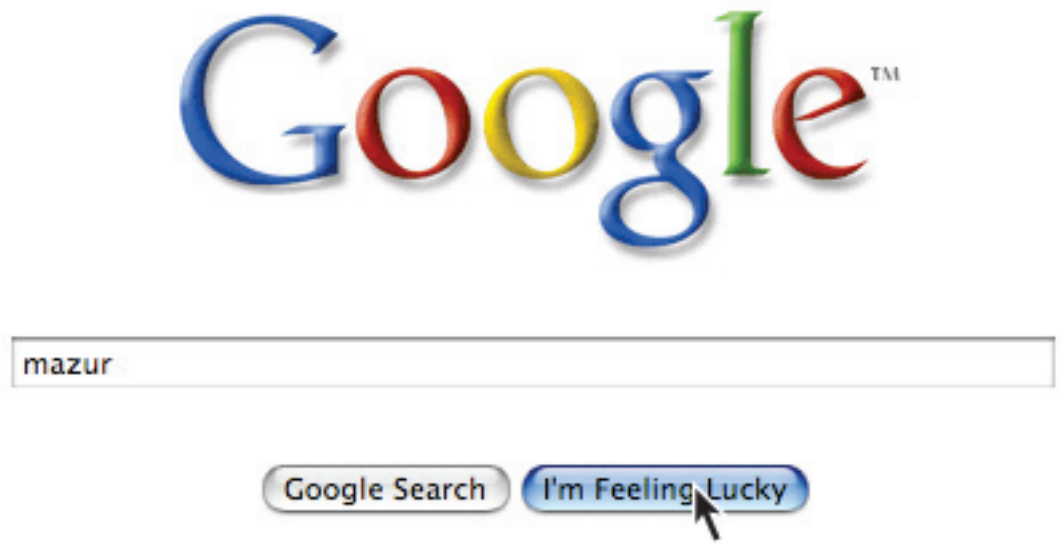
Google
mazur
Google Search
I'm Feeling Lucky

Funding:

Harvard Center for Imaging and Mesoscopic Structures
National Science Foundation
National Natural Science Foundation of China

for a copy of this presentation:

http://mazur-www.harvard.edu