Flipping the classroom and never looking back

iOnTheFuture4 Conference
Sydney, Australia, 20 August 2016

Flipping the classroom and never looking back

iOnTheFuture4 Conference
Sydney, Australia, 20 August 2016

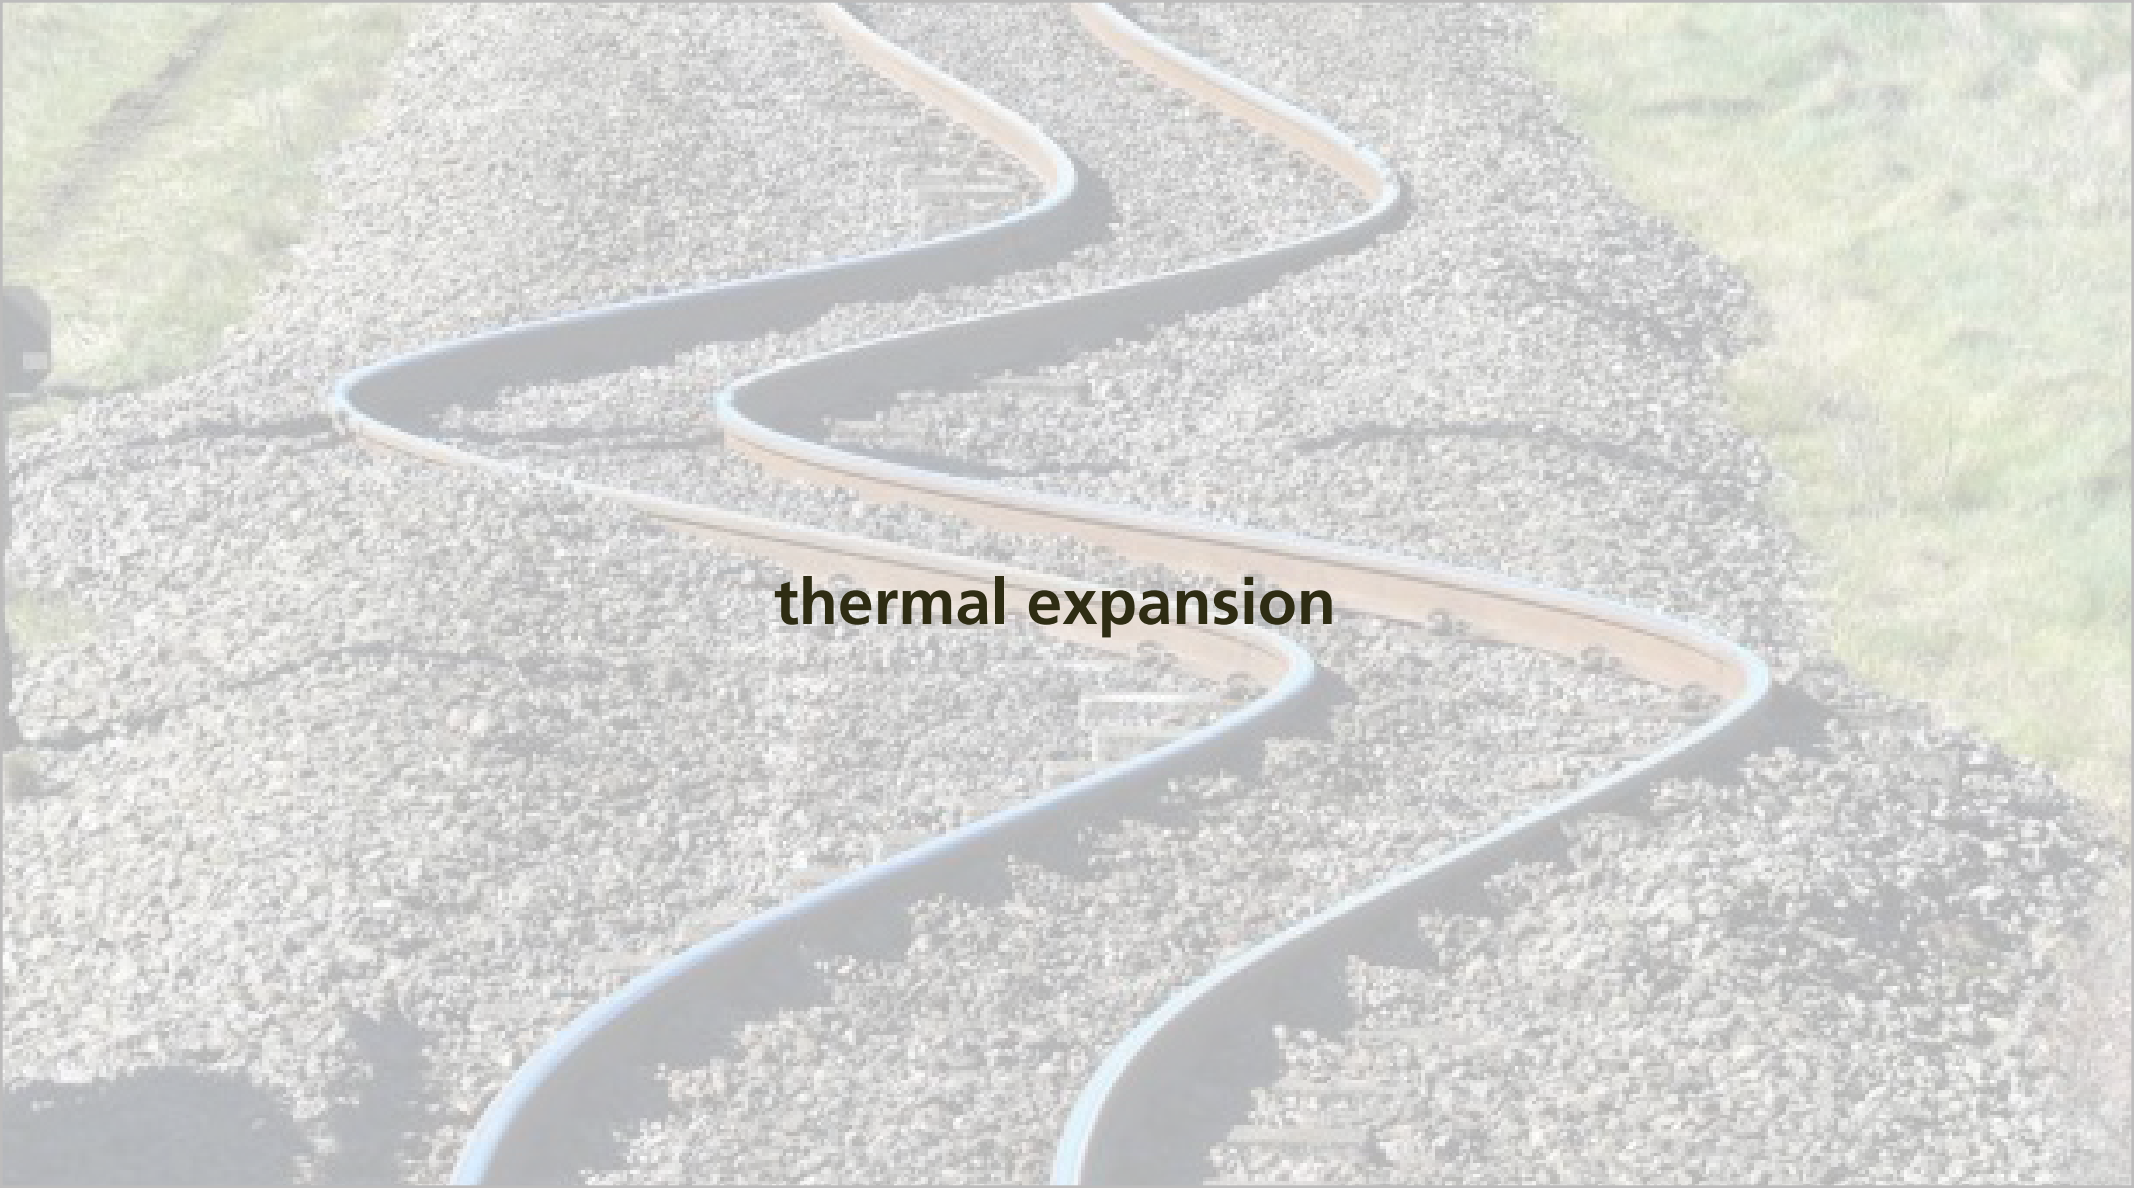

thermal expansion

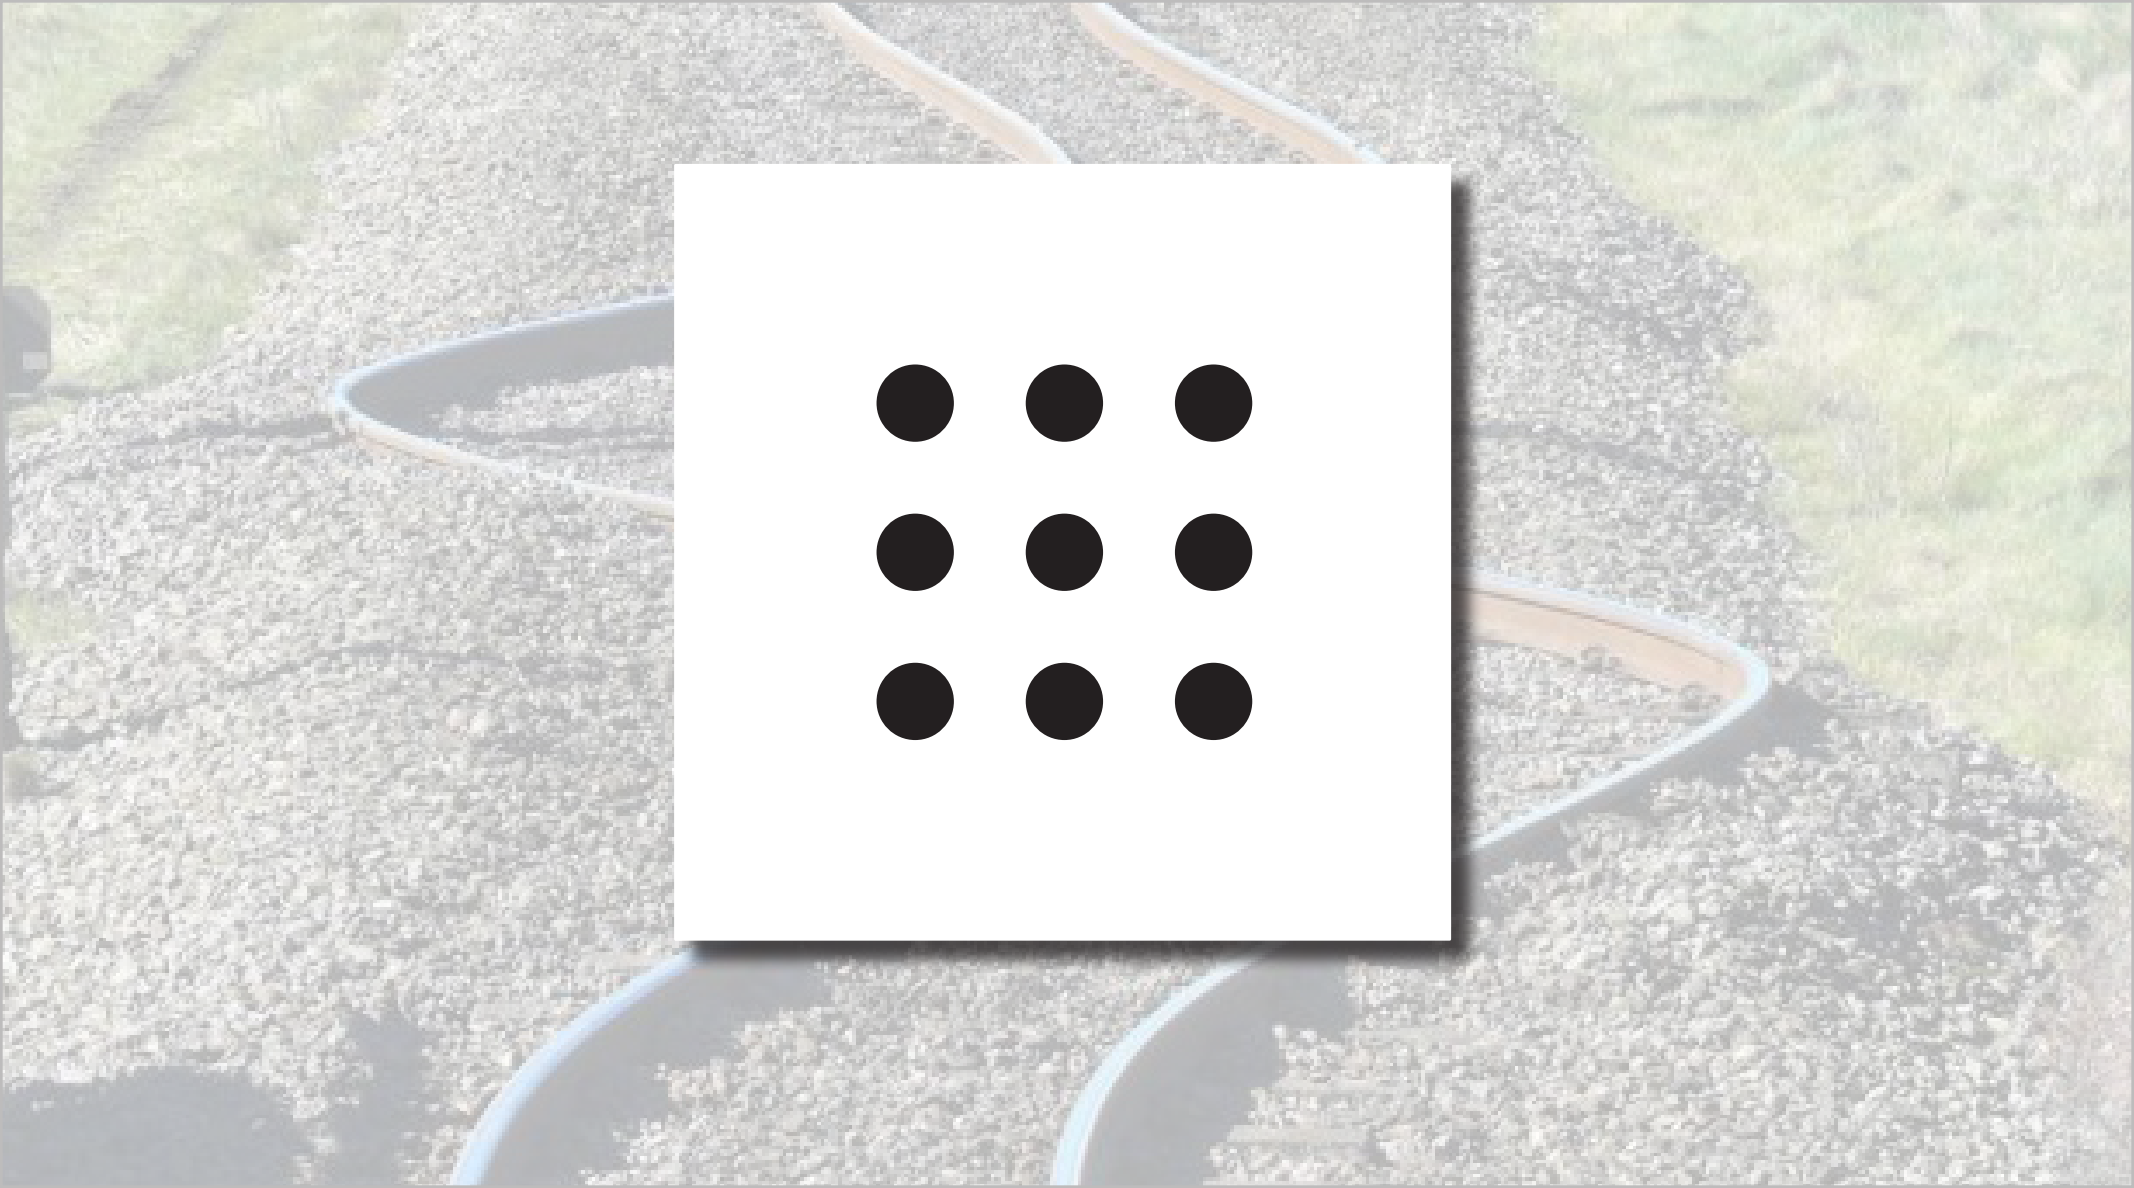

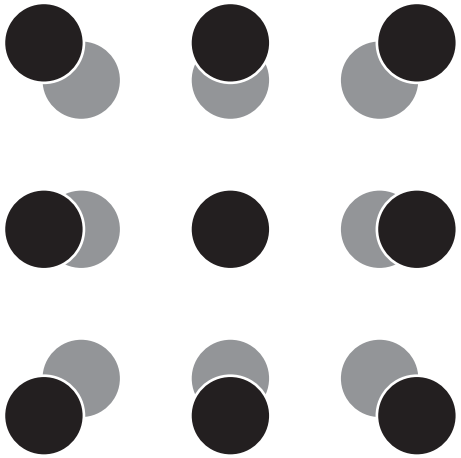


all of them

Consider a rectangular metal plate with a circular hole in it.

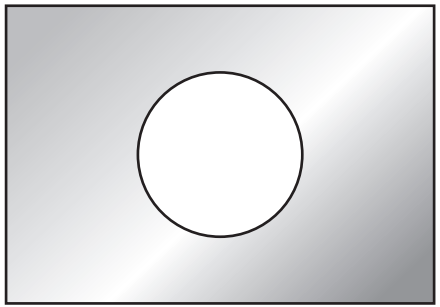

Consider a rectangular metal plate with a circular hole in it.

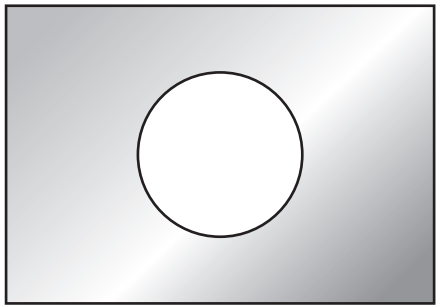

When the plate is uniformly heated, the diameter of the hole

1. increases.
2. stays the same.
3. decreases.

Consider a rectangular metal plate with a circular hole in it.

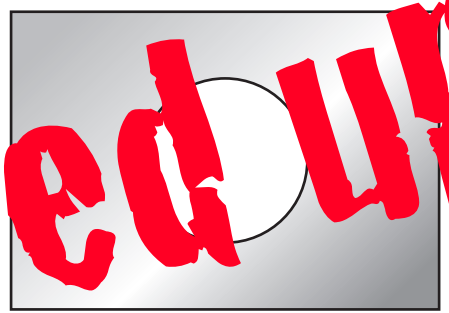

When the plate is uniformly heated, the diameter of the hole

1. increases.
2. stays the same.
3. decreases.

you got all fired up!

Before I tell you the answer, let’s analyze what happened.

Before I tell you the answer, let’s analyze what happened.

You…

Before I tell you the answer, let's analyze what happened.

You…

1. made a commitment

Before I tell you the answer, let's analyze what happened.

You…

1. made a commitment
2. externalized your answer

Before I tell you the answer, let's analyze what happened.

You…

1. made a commitment
2. externalized your answer
3. moved from the answer/fact to reasoning

Before I tell you the answer, let's analyze what happened.

You…

1. made a commitment
2. externalized your answer
3. moved from the answer/fact to reasoning
4. became emotionally invested in the learning process

Consider a rectangular metal plate with a circular hole in it.

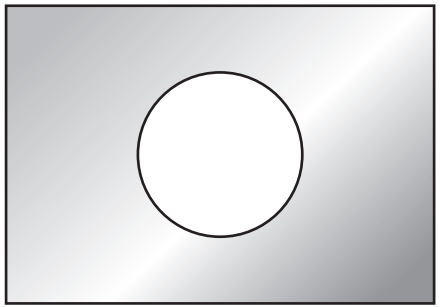

When the plate is uniformly heated, the diameter of the hole

1. increases.
2. stays the same.
3. decreases.

Consider a rectangular metal plate with a circular hole in it.

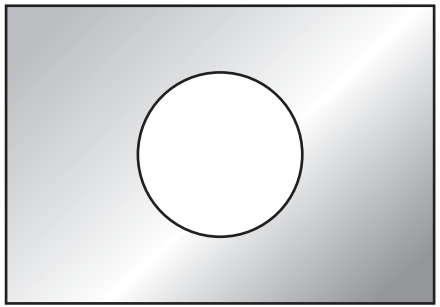

When the plate is uniformly heated, the diameter of the hole

1. increases. ✔
2. stays the same.
3. decreases.

consider atoms at rim of hole

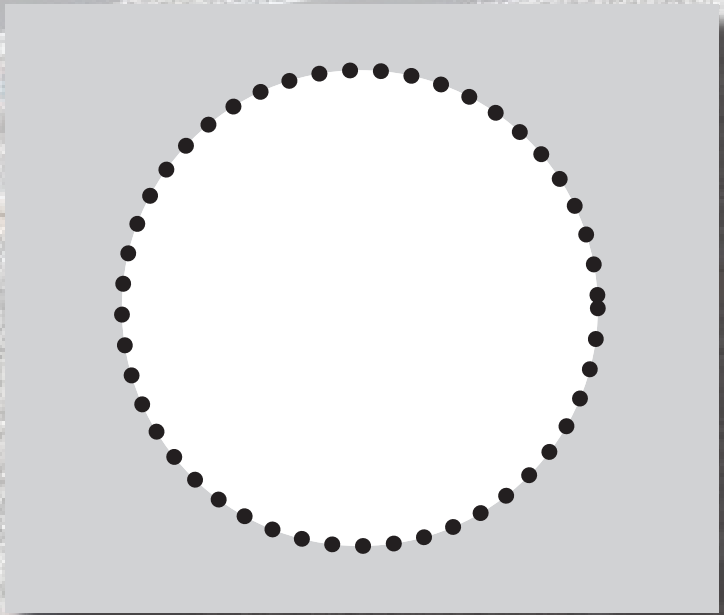

consider atoms at rim of hole

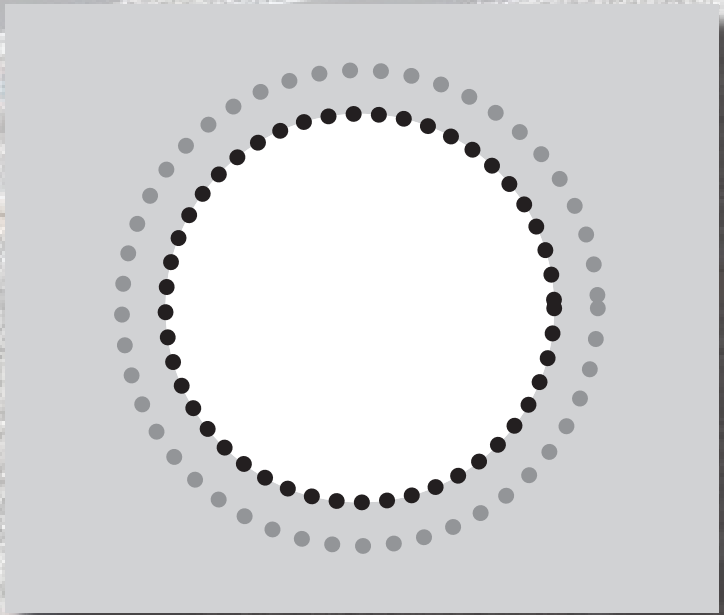

consider atoms at rim of hole

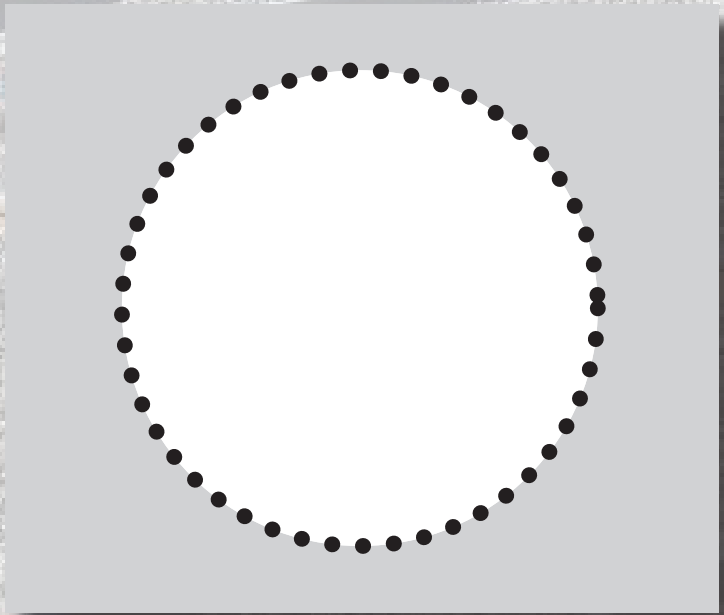

consider atoms at rim of hole

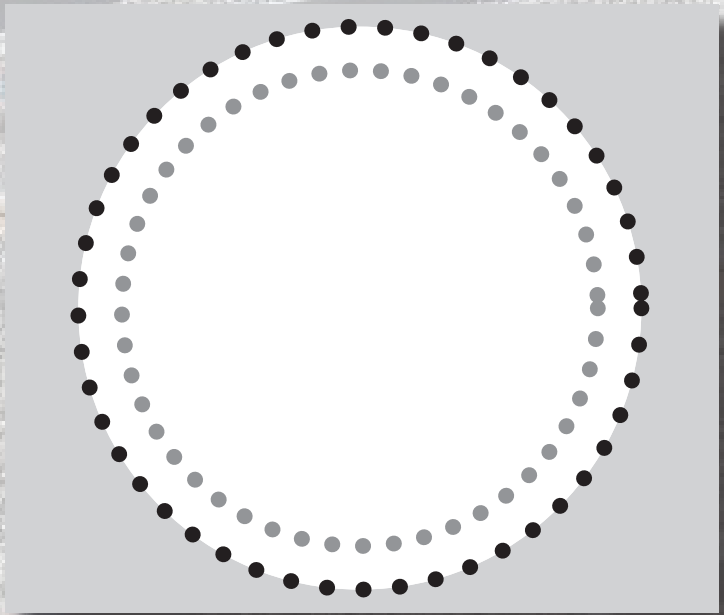

consider atoms at rim of hole

you won't forget this


CLASS
ROOM
1st exposure
deeper understanding

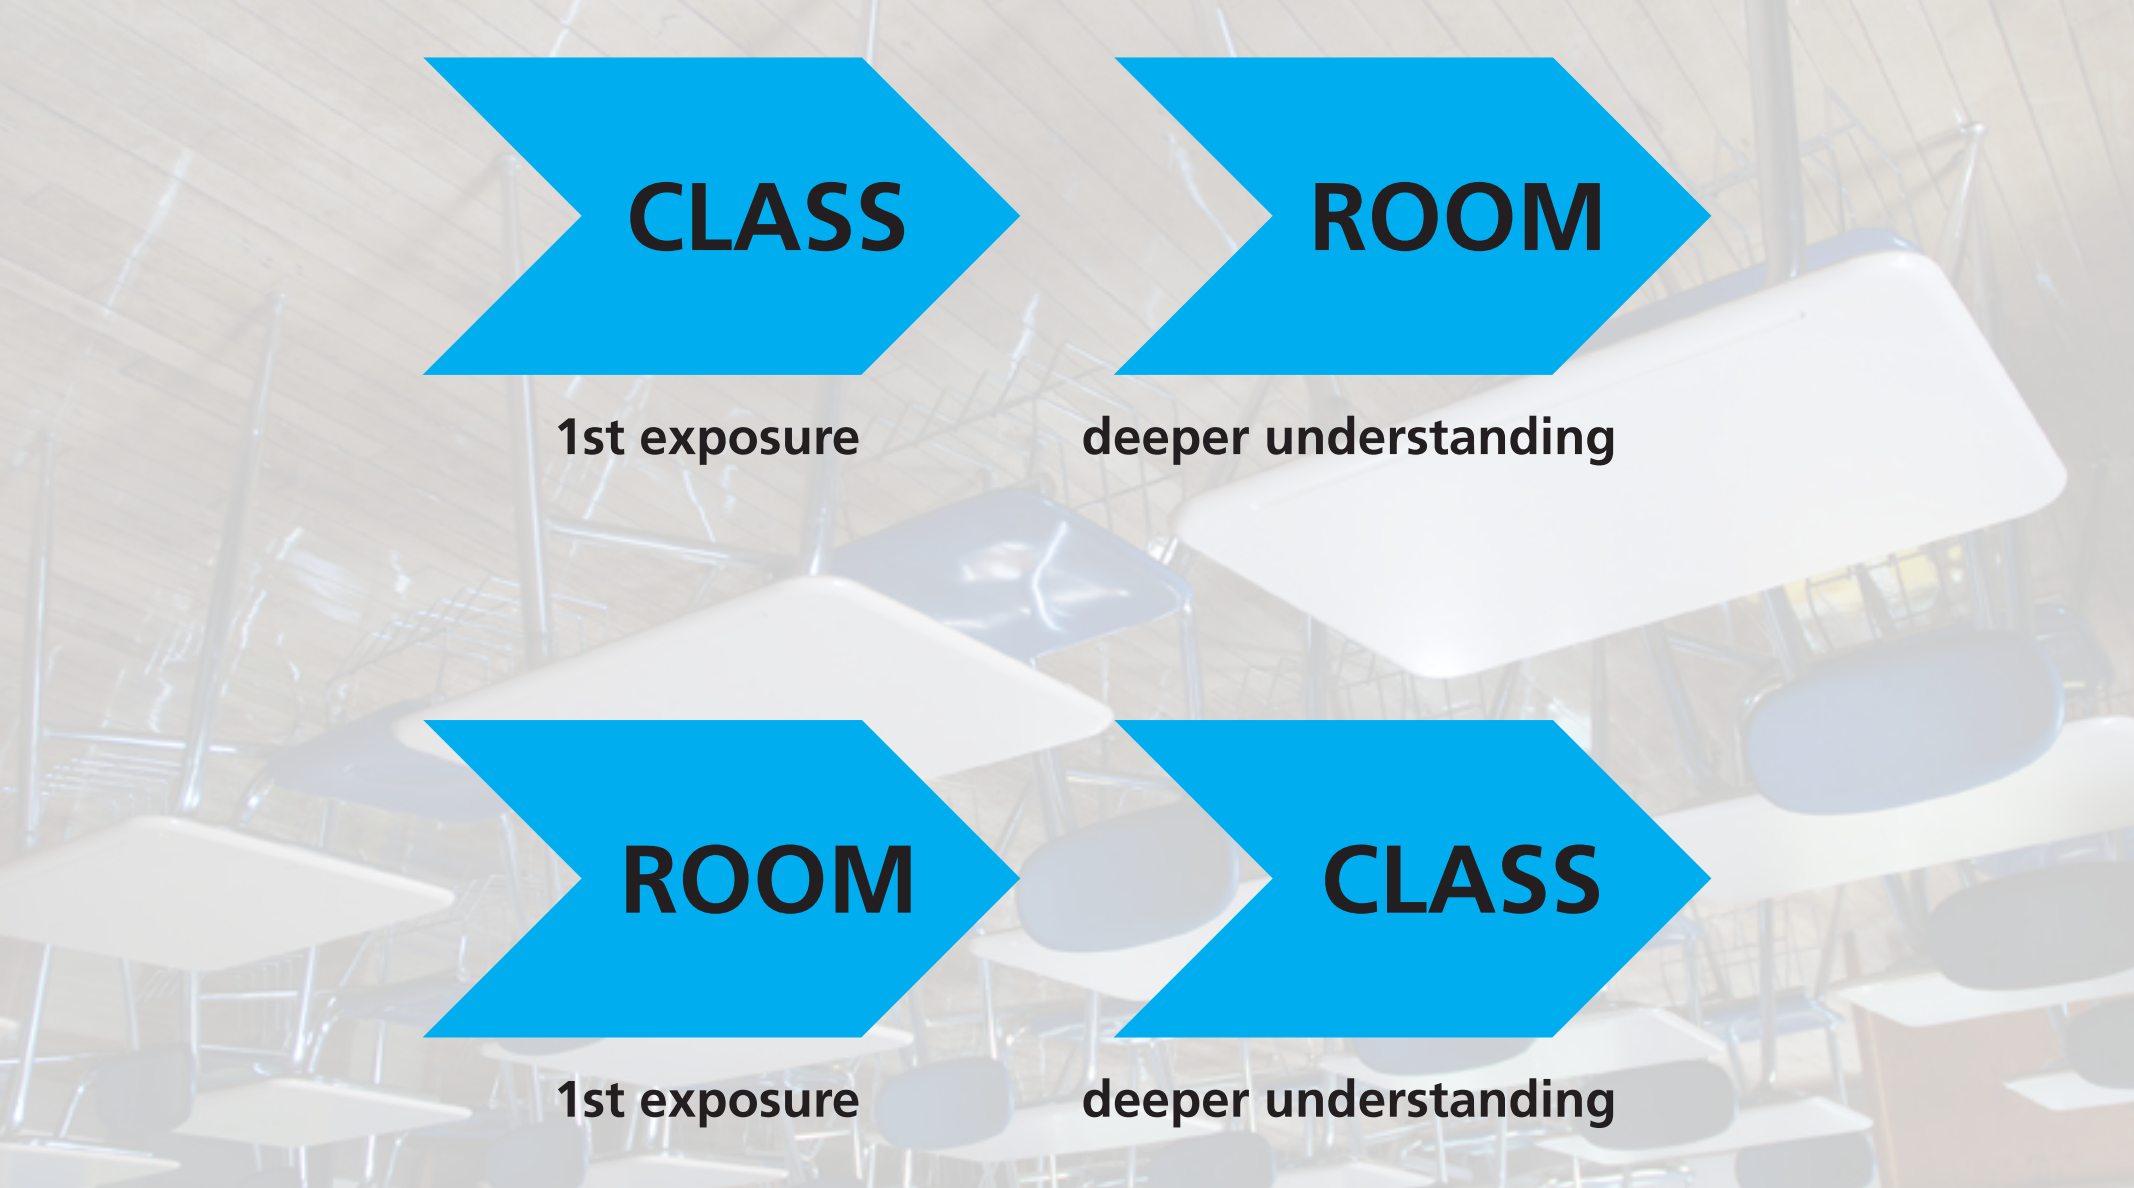
CLASS
ROOM
1st exposure
deeper understanding
ROOM
CLASS
1st exposure
deeper understanding

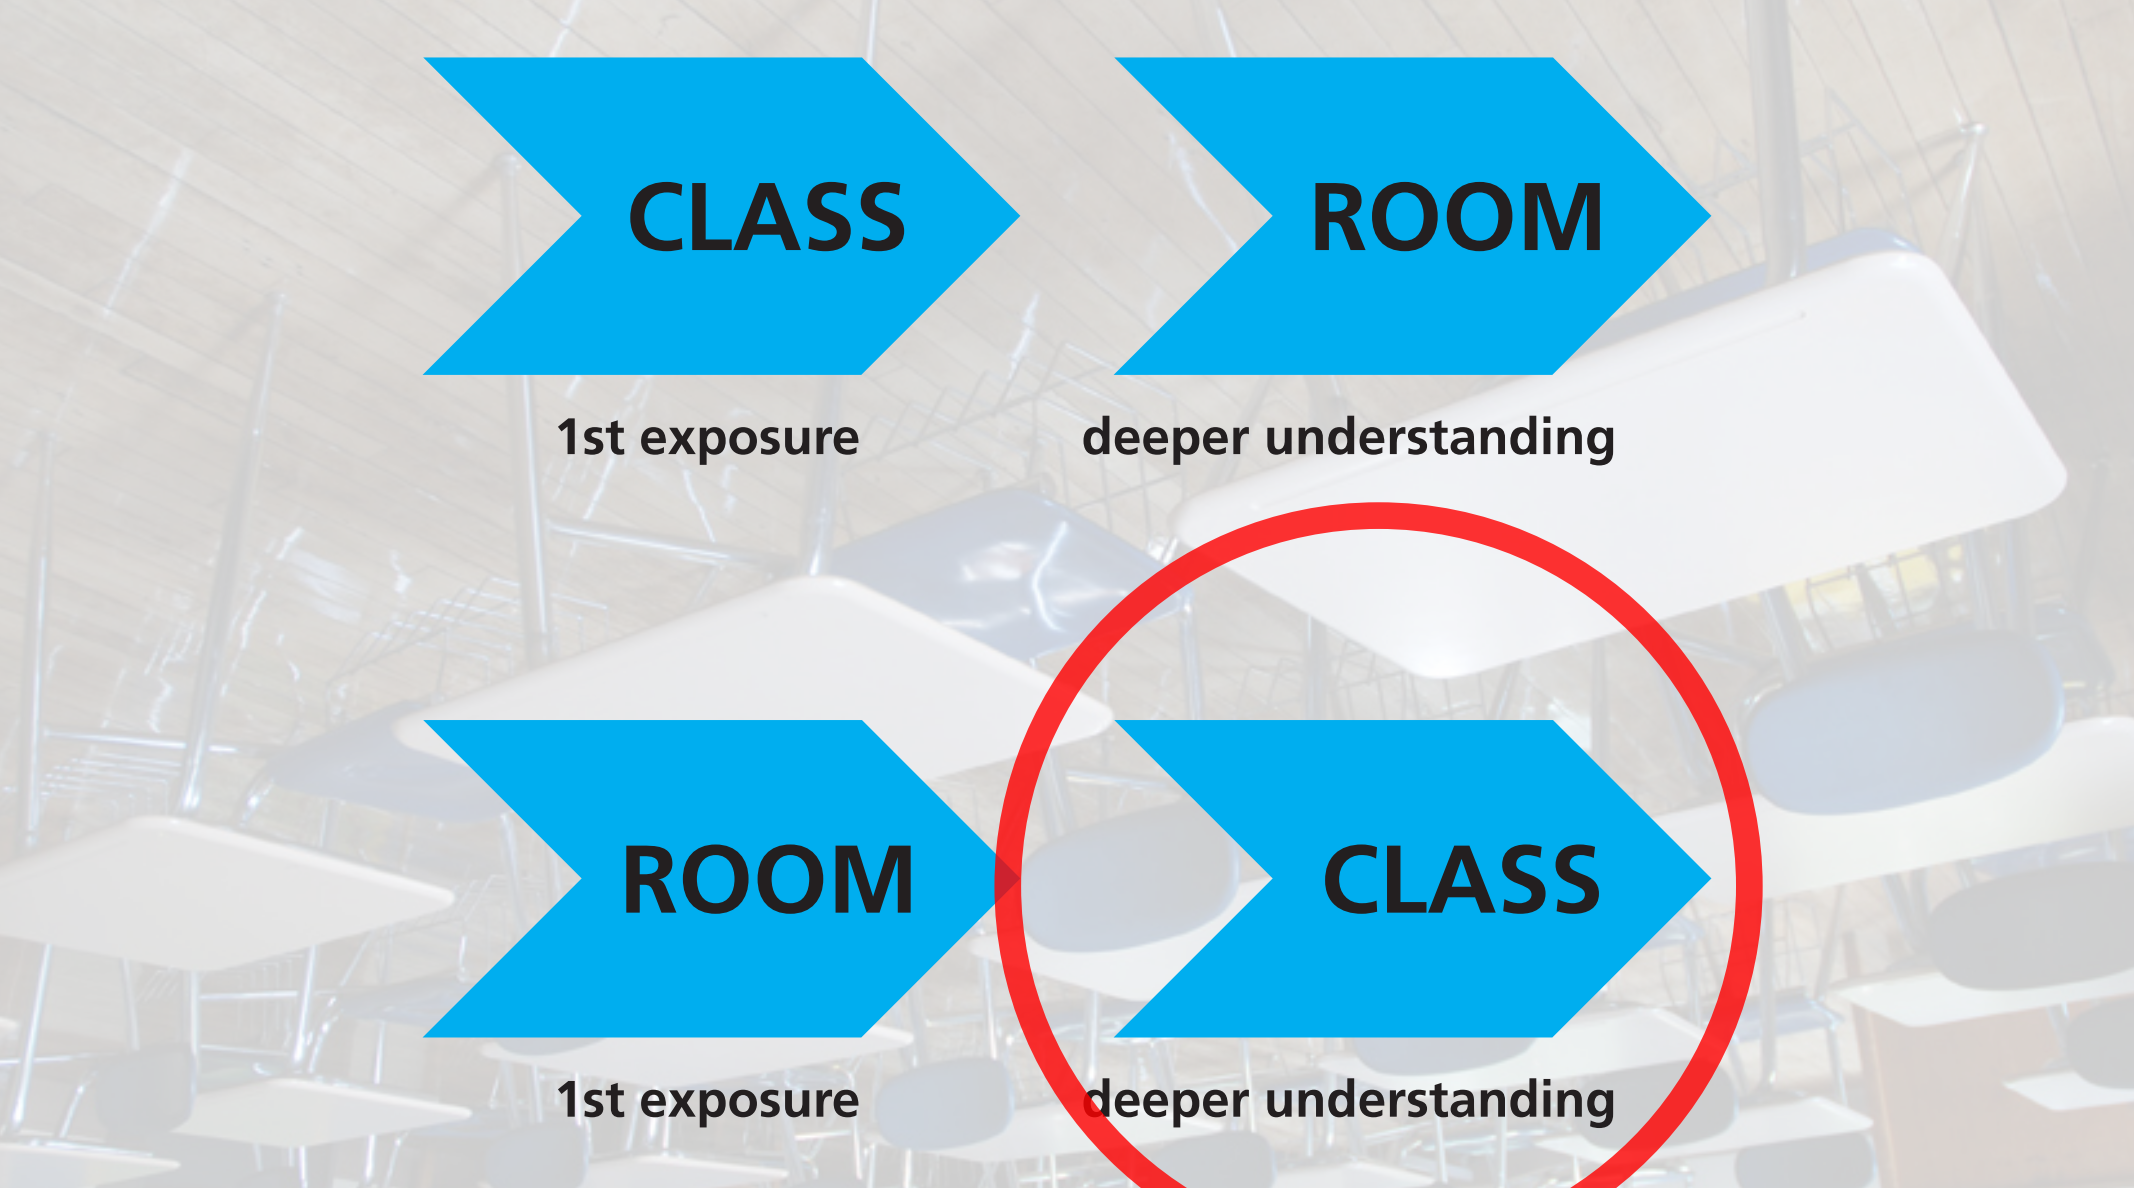
CLASS
ROOM
1st exposure
deeper understanding
ROOM
CLASS
1st exposure
deeper understanding

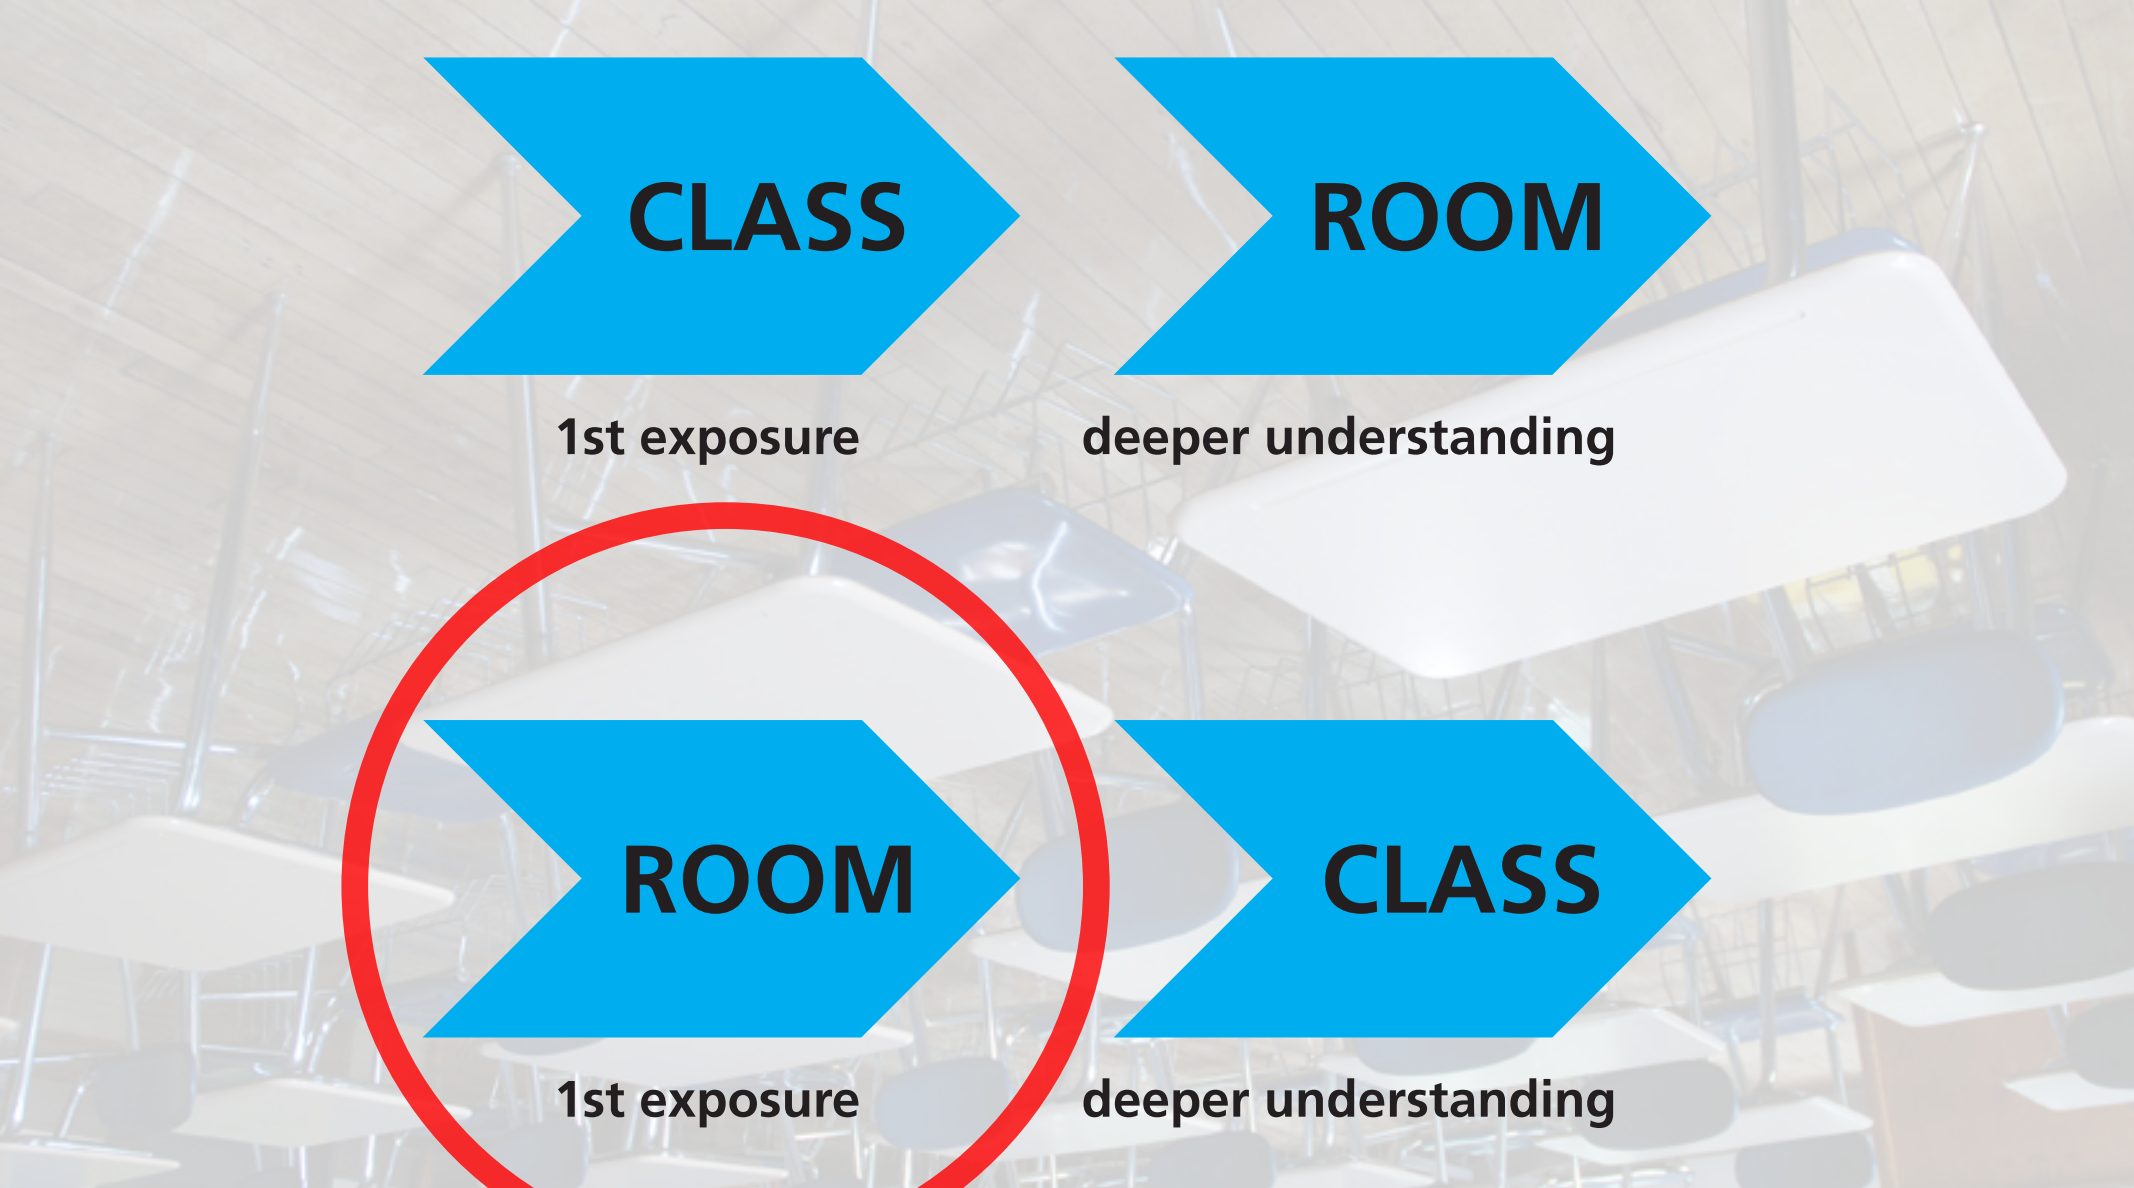
CLASS
ROOM
1st exposure
deeper understanding
ROOM
CLASS
1st exposure
deeper understanding

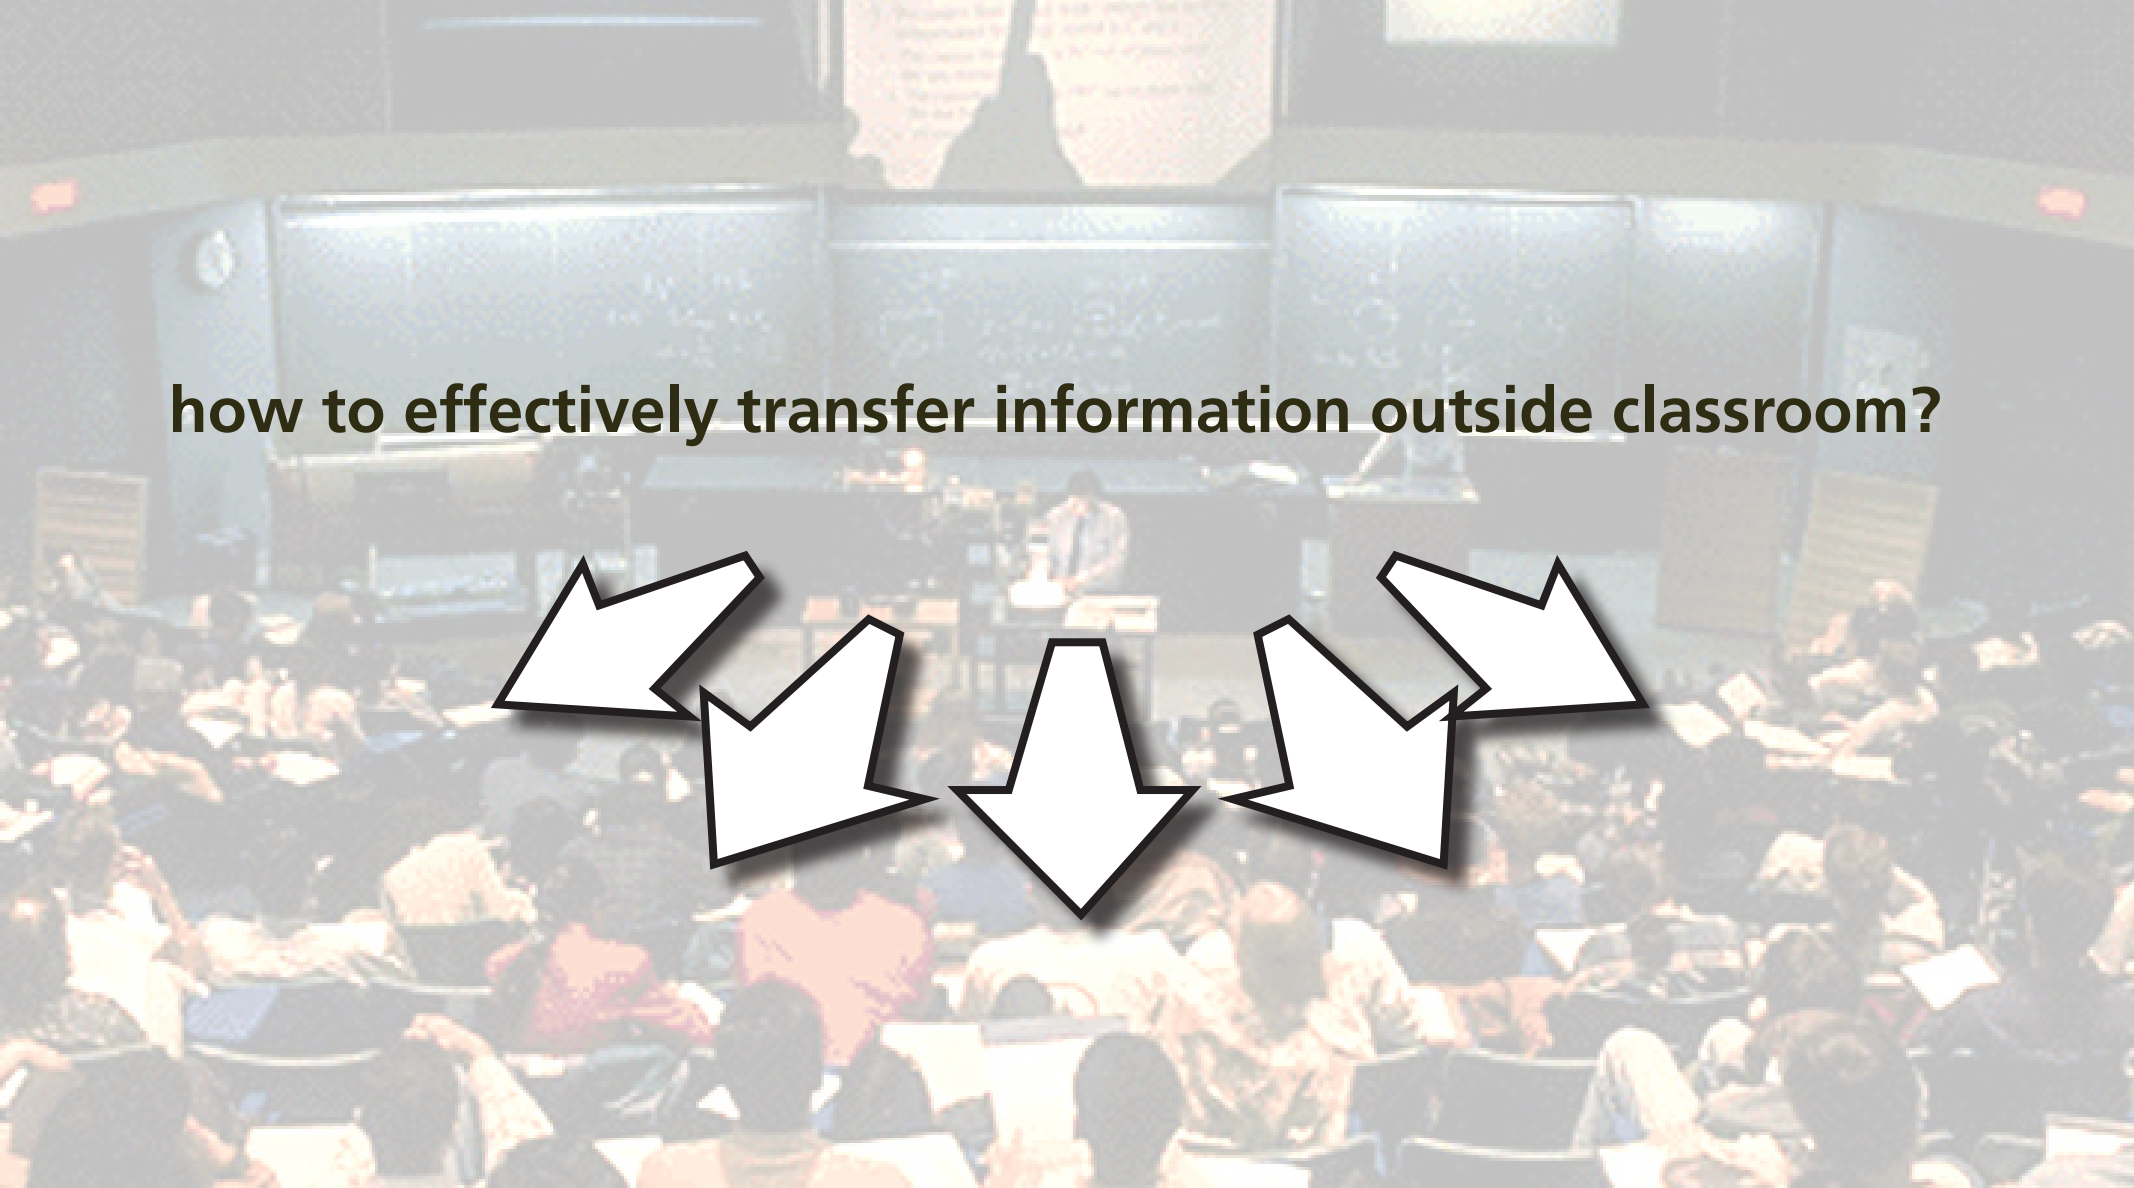
how to effectively transfer information outside classroom?

but…

- transfer pace set by video
- viewer passive
- viewing/attention tanks as time passes
- isolated/individual experience

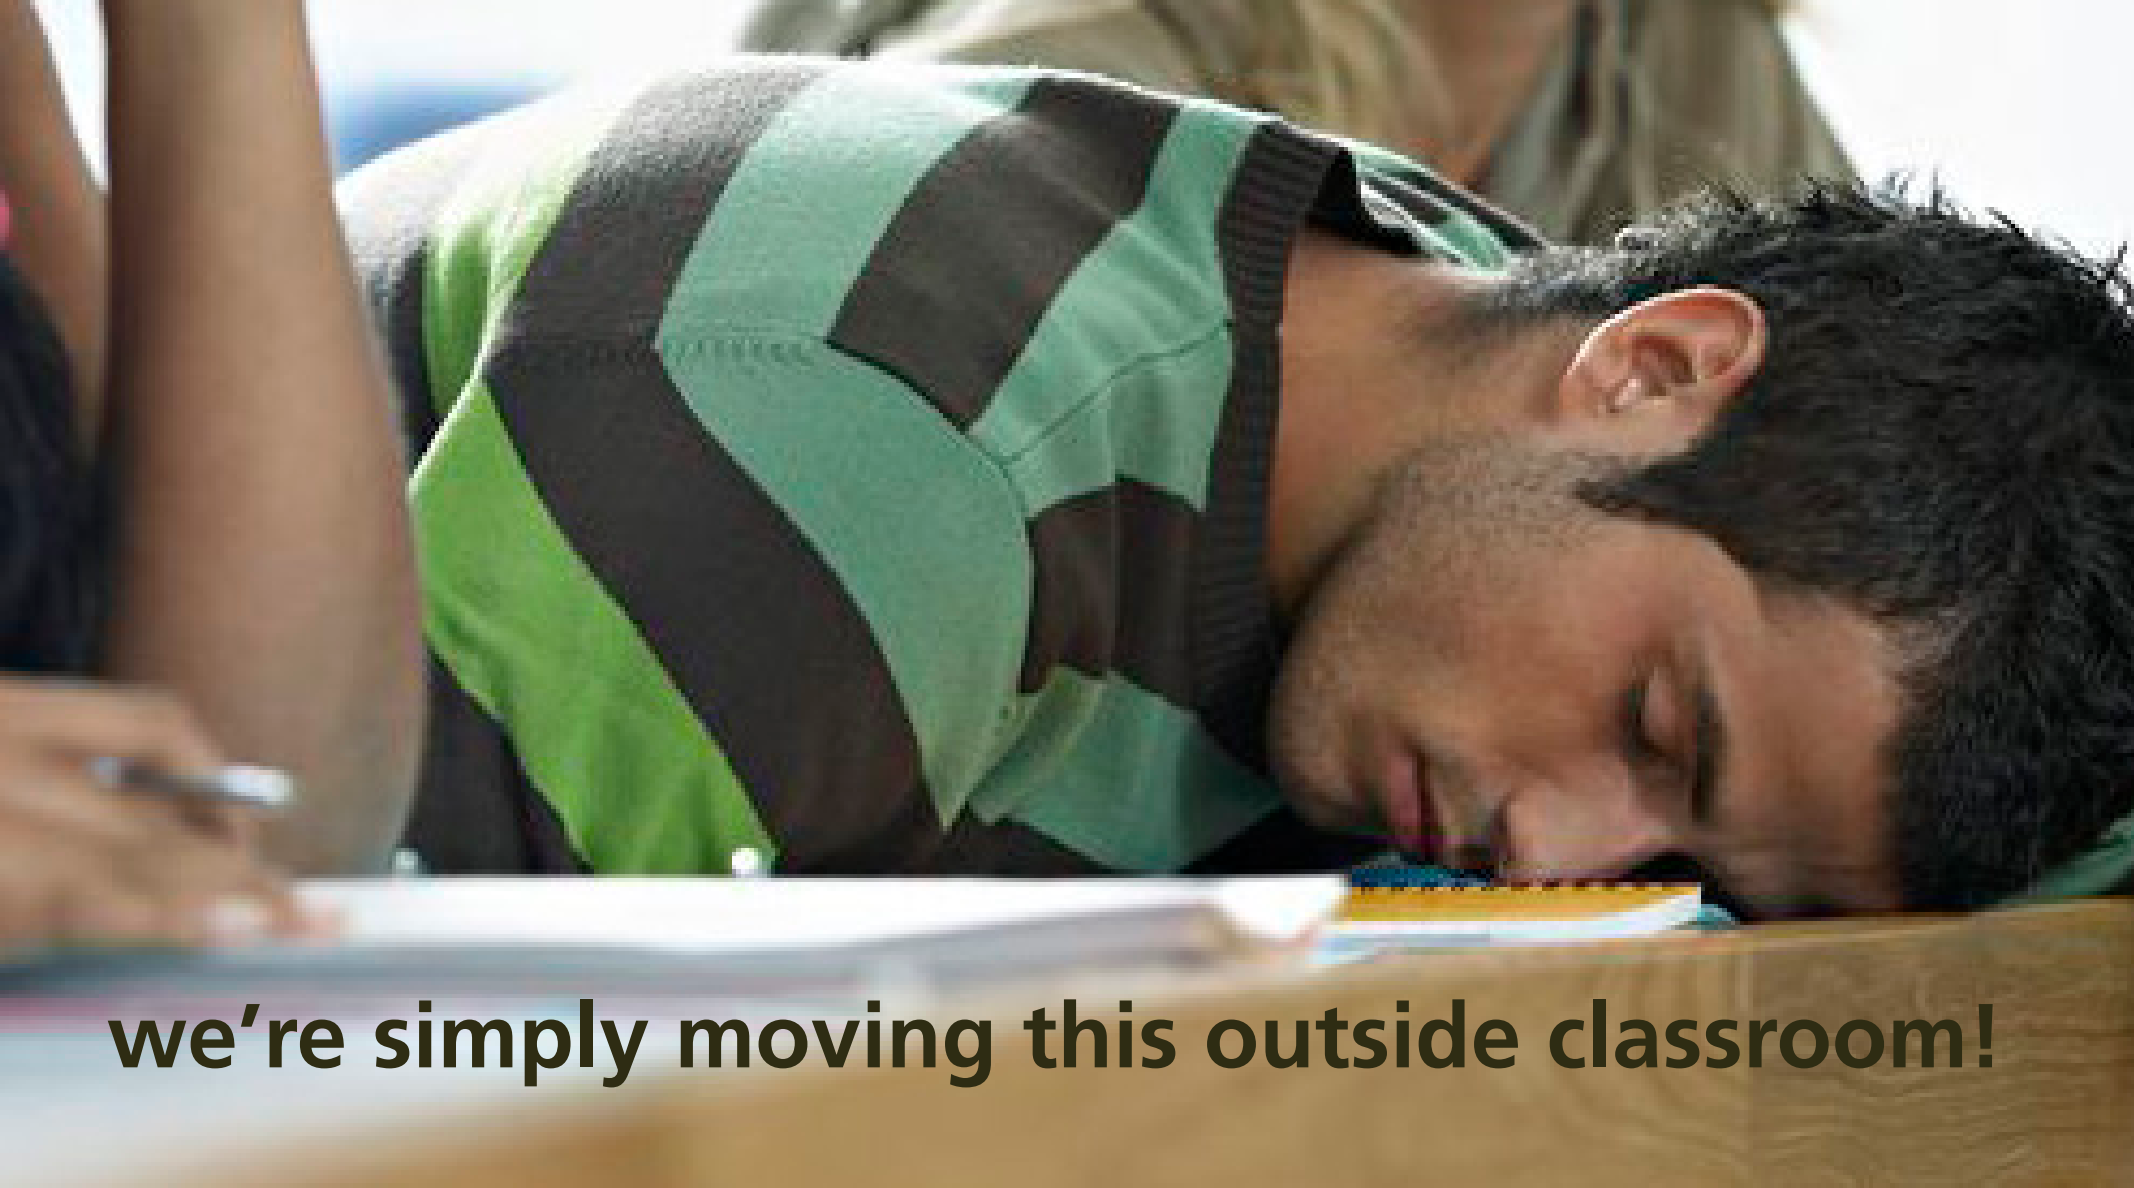

we're simply moving this outside classroom!


CITY OF ASHES

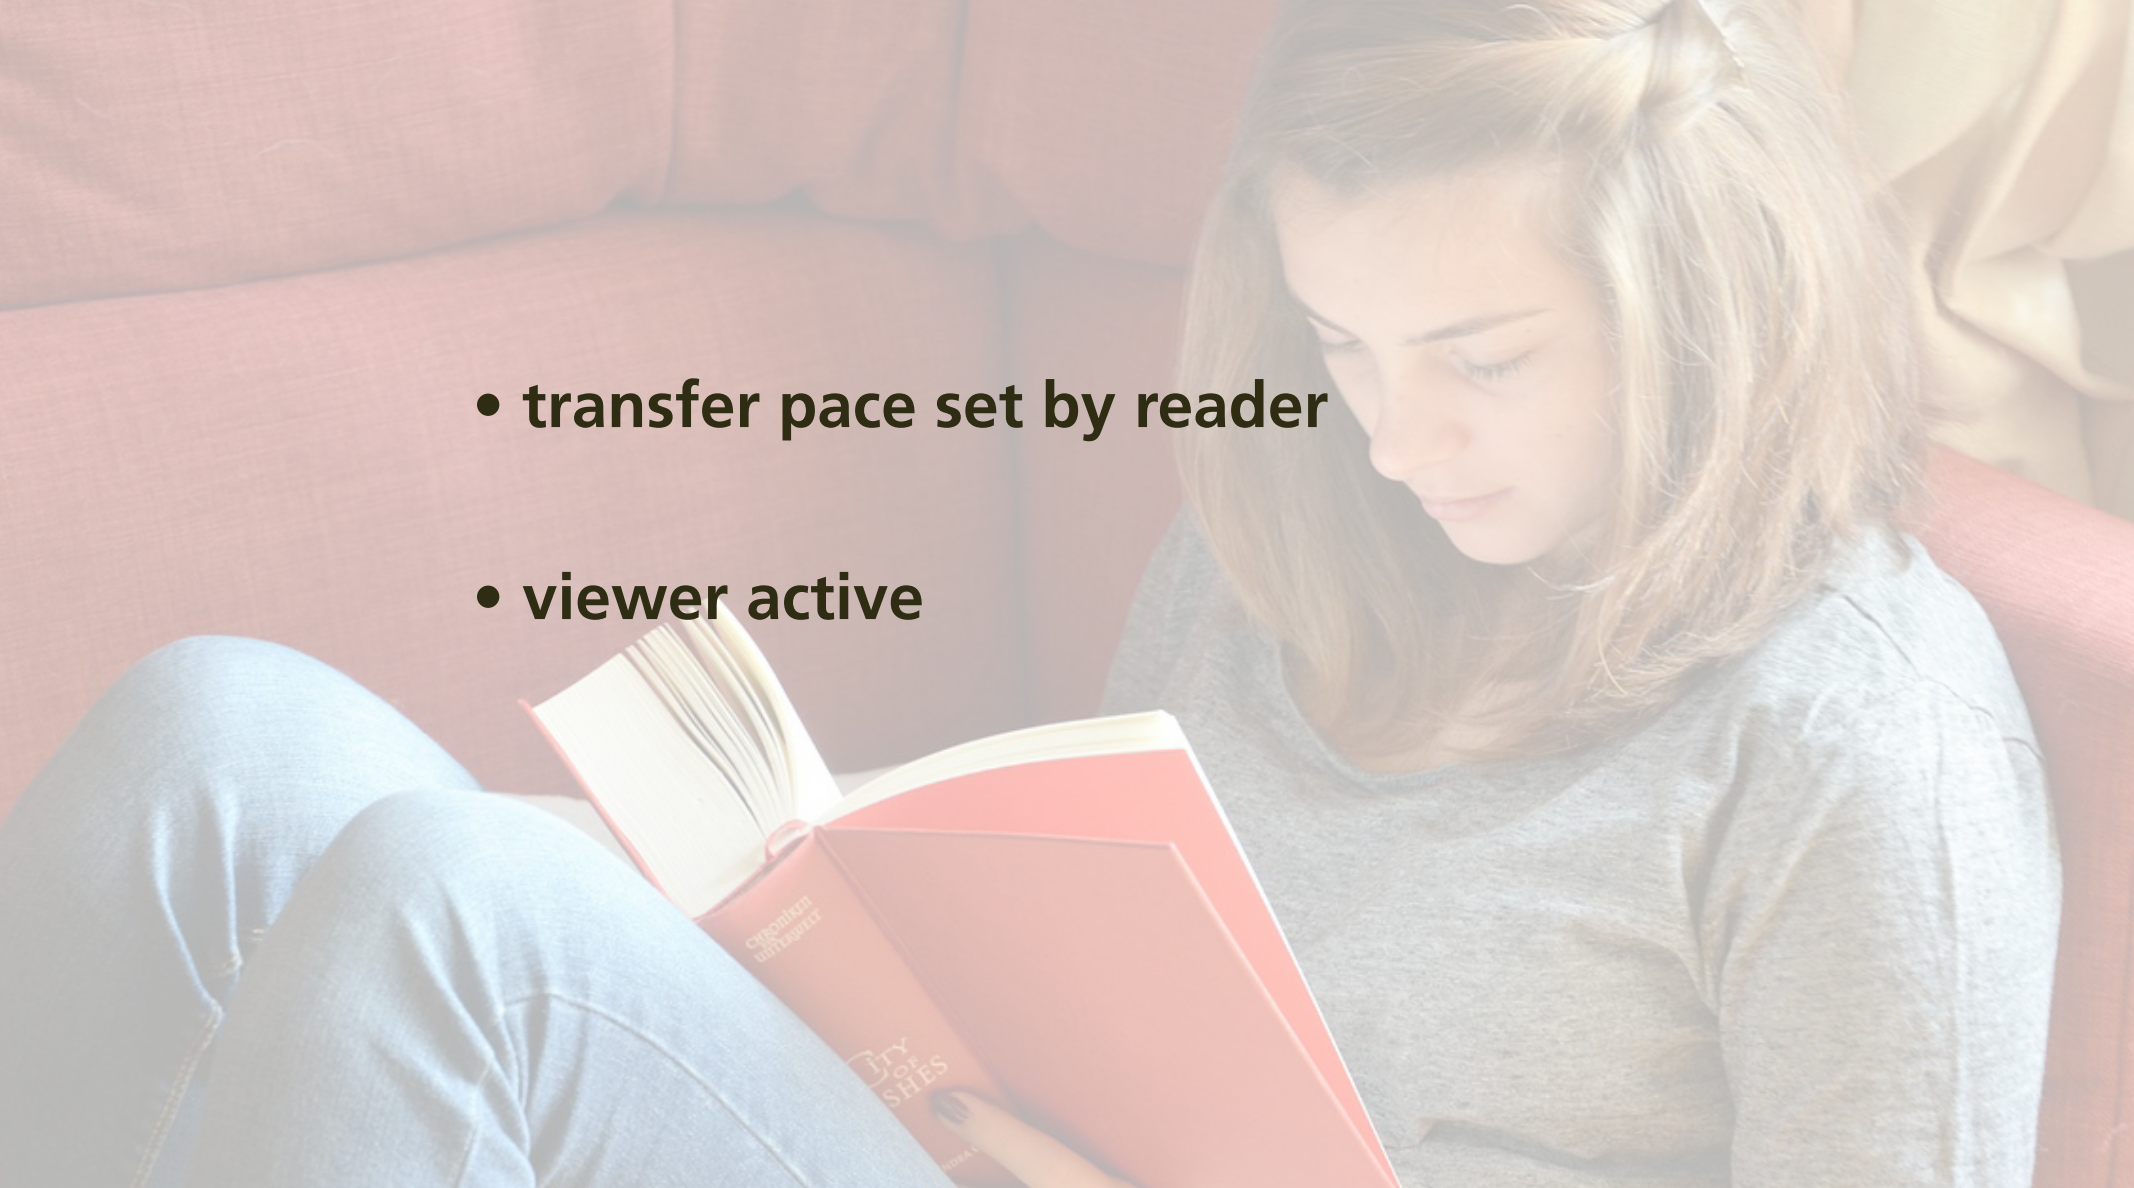

- transfer pace set by reader
- viewer active

but…

isolated/individual experience &

no real accountability

want:

***every* student prepared for *every* class**

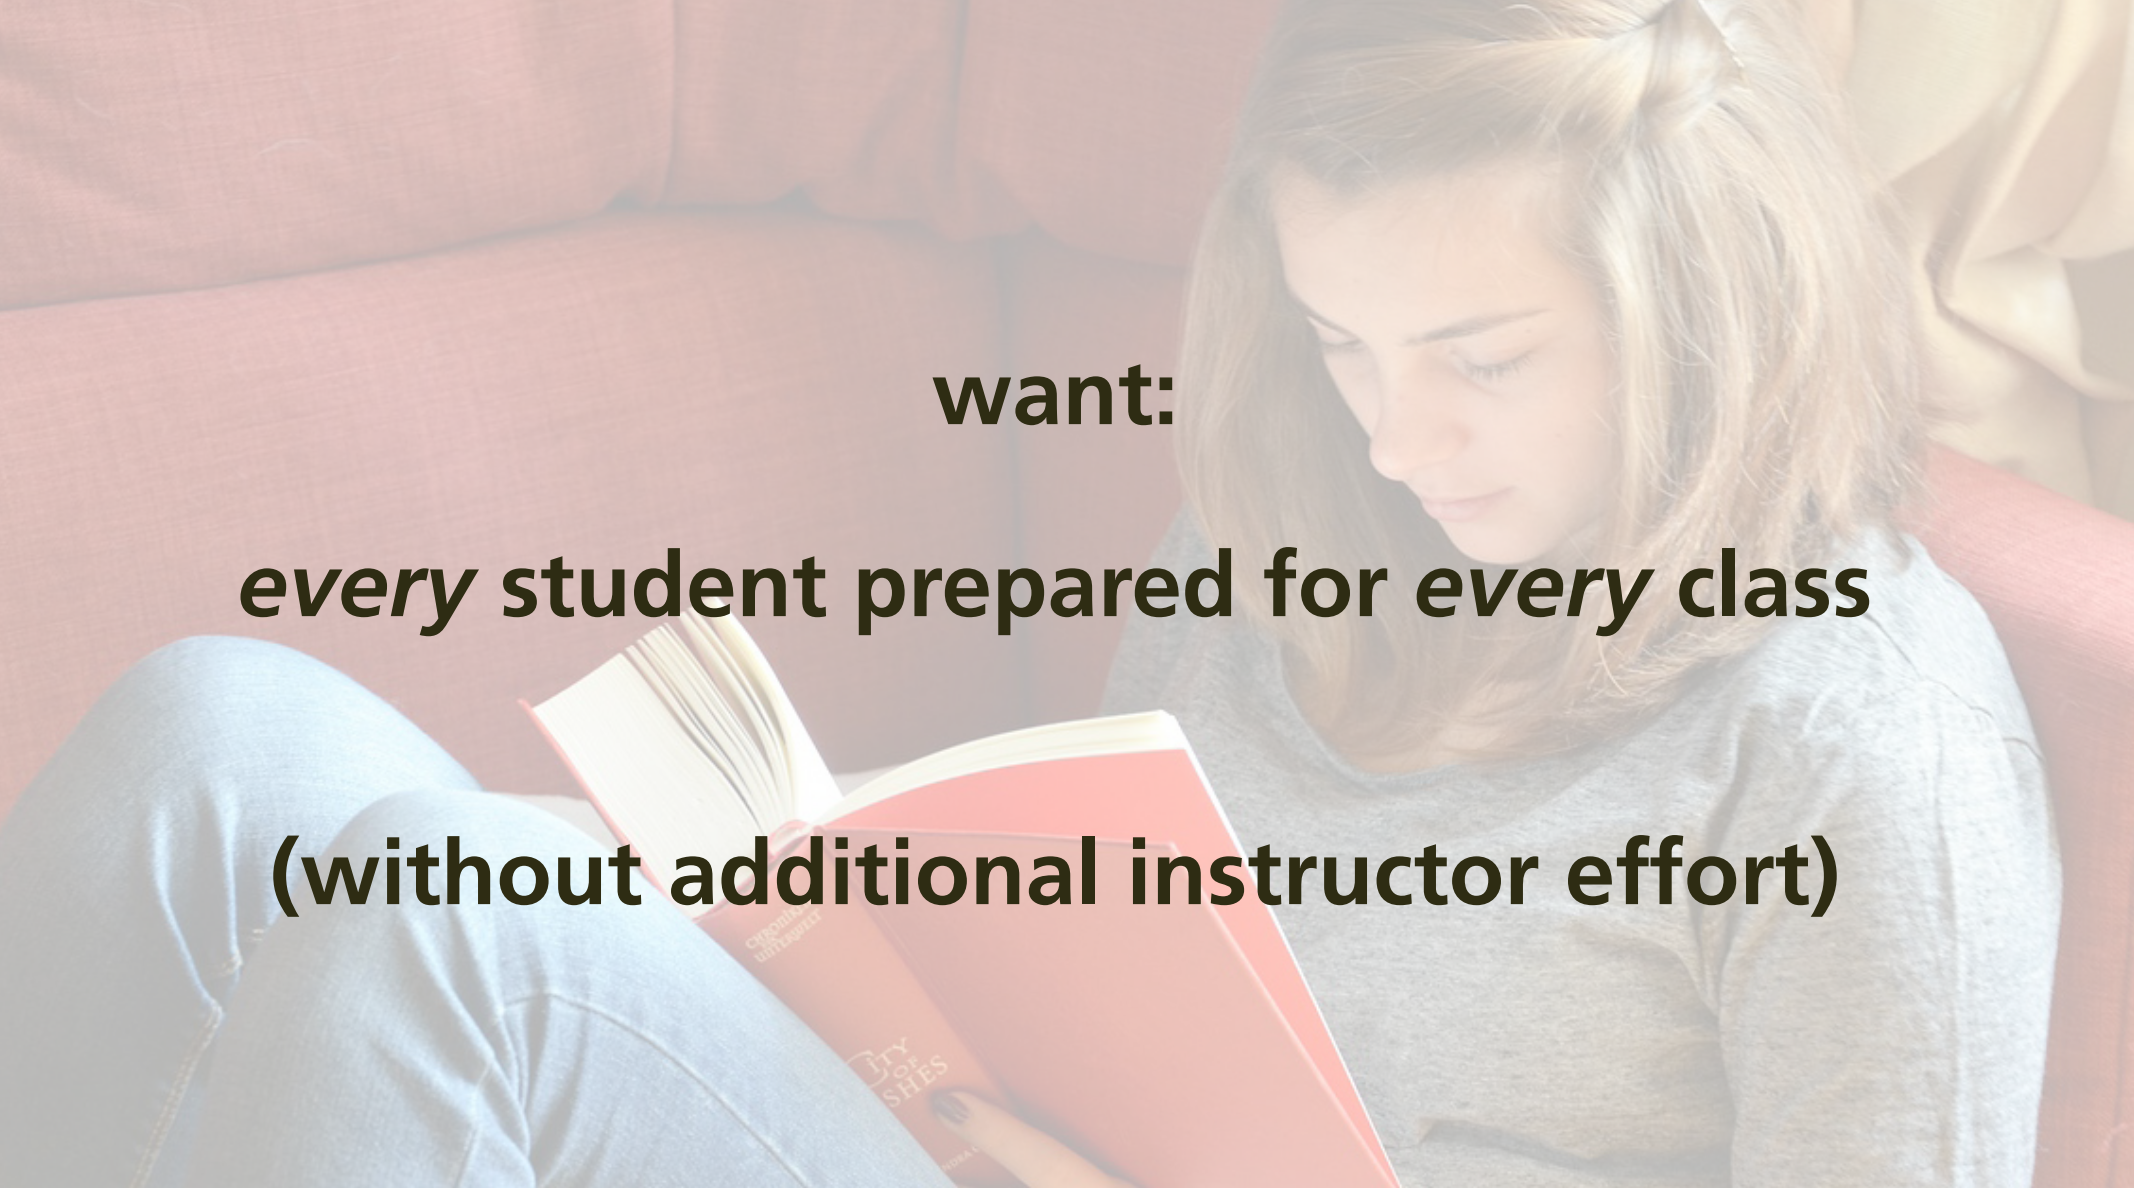

want:

***every* student prepared for *every* class**

(without additional instructor effort)

Solution

turn out-of-class component

also into a social interaction!

Perusall

***every* student prepared for *every* class**

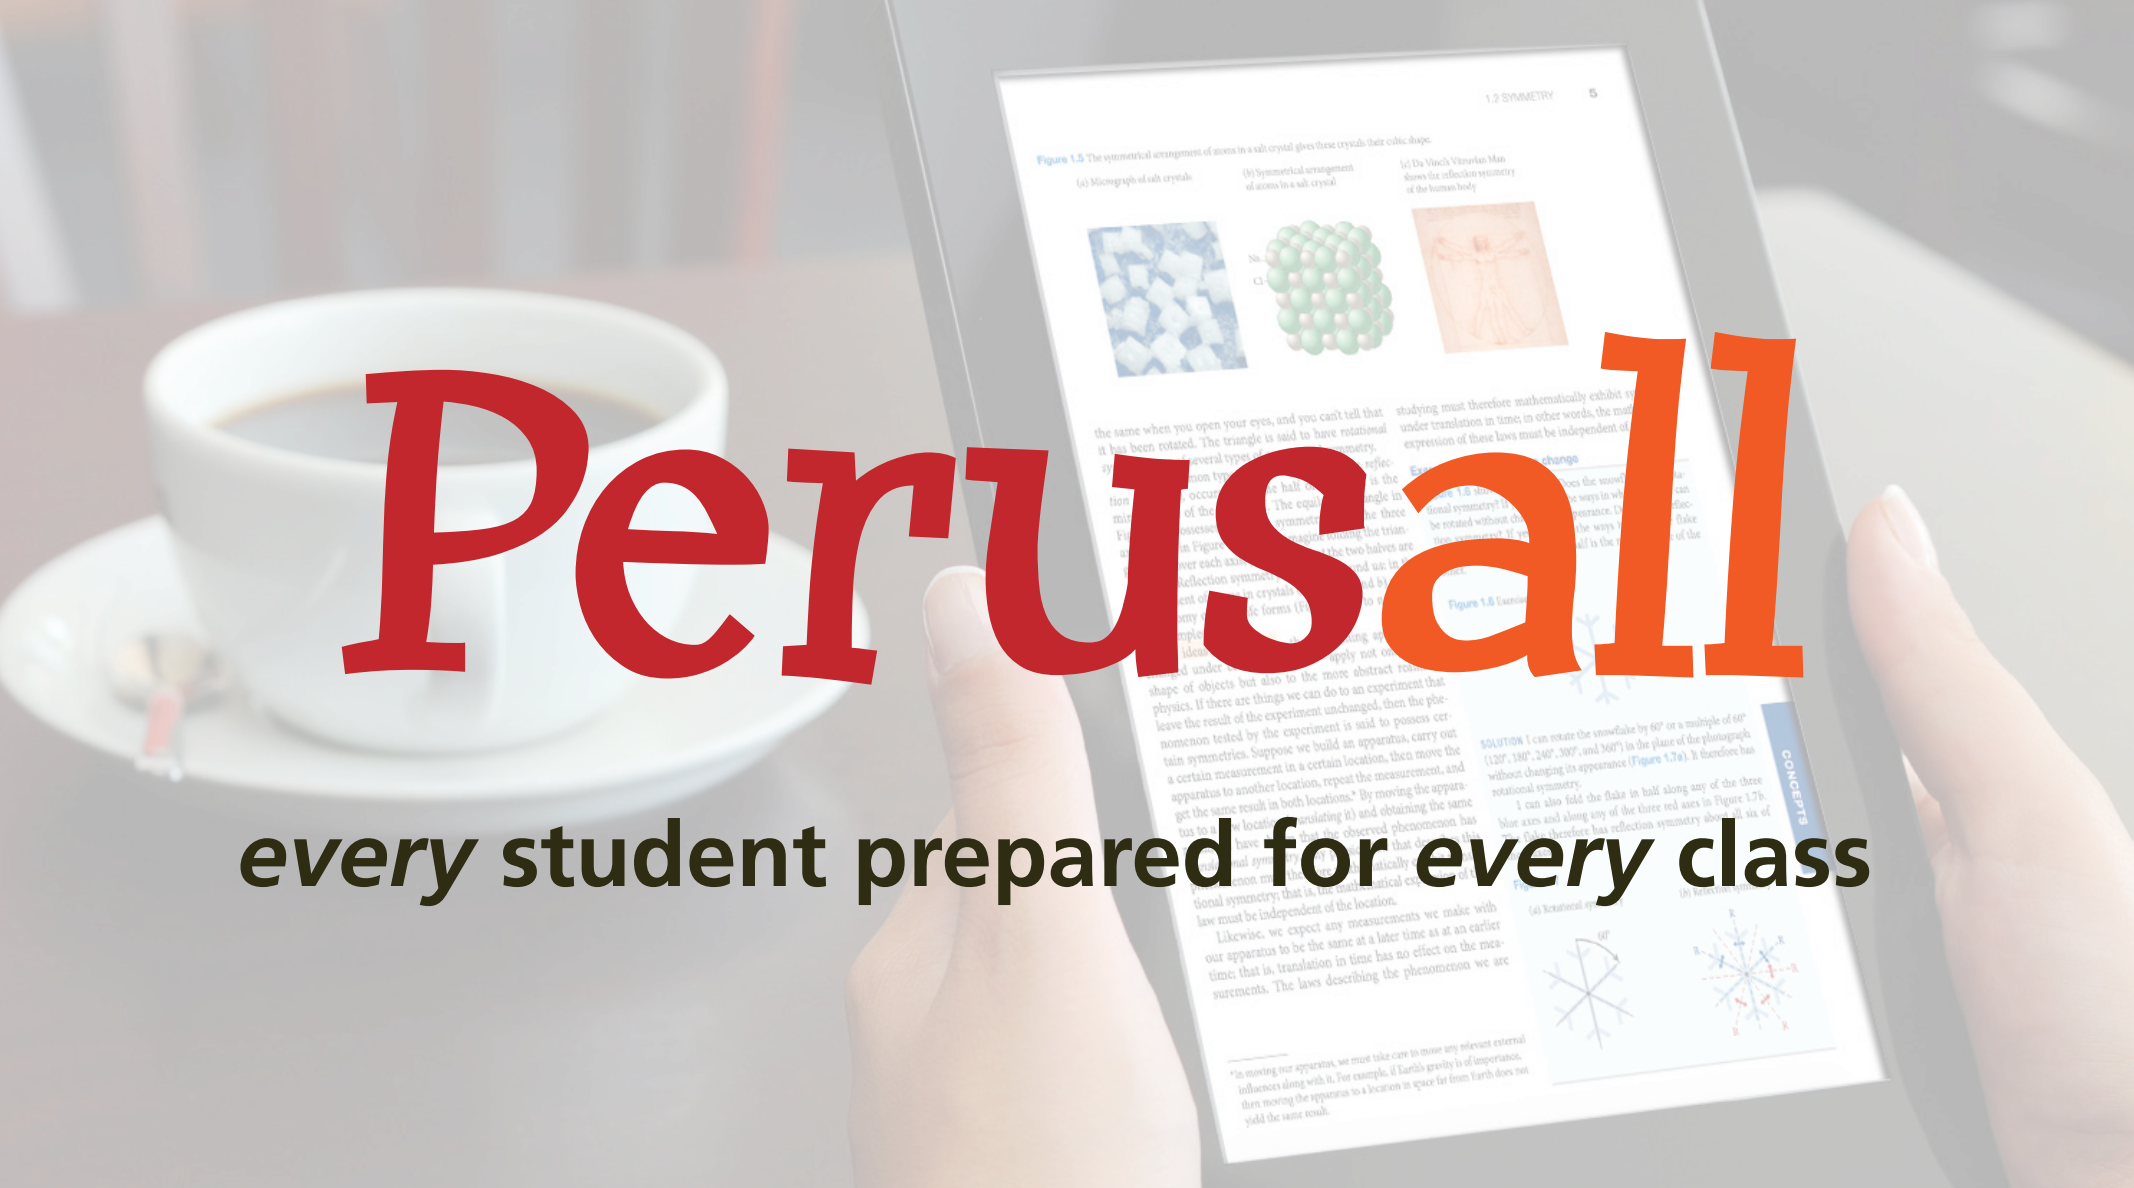

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

4.1 Friction

social learning platform

Picture a bl[illegible] wooden surf[illegible] a s[illegible] distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

[illegible] a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. Figure 4.2 shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

4.1 Friction

log in through social network

distance that eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know fr

hockey puck slides easily on

ws how the velocity of a wo

e different surfaces. The slow

e resistance to motion that on

when moving over another.

val covered by the velocity-

ty decrease as the block slides

hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted

holes through which pressuriz

s a cushion on which a conve

at, with friction between the o

inated. Alternatively, one can

riction bearings on an ordina

friction carts you may have e

Although there is still som

tracks and for the track sh

ion is so small that it can be ig

experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

> **In the absence of friction, objects moving along a horizontal track keep moving without slowing down**

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. Figure 4.2 shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this [illegible] slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there [illegible] minimize friction. You can, for instance, float an [illegible] cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. Figure 4.2 shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down

see who is online

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.1 Velocity-versus-time graph for a wooden block sliding on three different surfaces. The rougher the surface, the more quickly the velocity decreases.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. **Figure 4.2** shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down.

Another advantage of using such carts is that the track constrains the motion to being along a straight line. We can then use a high-speed camera to record the cart's position at various instants, and from that information determine its speed and acceleration.

4.1 (*a*) Are the accelerations of the motions shown in Figure 4.1 constant? (*b*) For which surface is the acceleration largest in magnitude?

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on [illegible] due to *frictio* [illegible] object encou [illegible] during the [illegible] graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

highlighting text...

Figure 4.1 Velocity-versus-time graph for a wooden block sliding on three different surfaces. The rougher the surface, the more quickly the velocity decreases.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts [illegible] re 4.2 [illegible] your [illegible] h for [illegible] e 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down.

Another advantage of using such carts is that the track constrains the motion to being along a straight line. We can then use a high-speed camera to record the cart's position at various instants, and from that information determine its speed and acceleration.

4.1 (*a*) Are the accelerations of the motions shown in Figure 4.1 constant? (*b*) For which surface is the acceleration largest in magnitude?

CEPTS

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows h[illegible] decreases on [illegible] due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.1 Velocity-versus-time graph for a wooden block sliding on three different surfaces. The rougher the surface, the more quickly the velocity decreases.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track [illegible] minimized. [illegible] carts with low-friction bearings on an ordinary track. Figure 4.2 shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down.

Another advantage of using such carts is that the track constrains the motion to being along a straight line. We can then use a high-speed camera to record the cart's position at various instants, and from that information determine its speed and acceleration.

4.1 (*a*) Are the accelerations of the motions shown in Figure 4.1 constant? (*b*) For which surface is the acceleration largest in magnitude?

...opens chat window

Enter your comment or question and press Enter

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.1 Velocity-versus-time graph for a wooden block sliding on three different surfaces. The rougher the surface, the more quickly the velocity decreases.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. **Figure 4.2** shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down.

Another advantage of using such carts is that the track constrains the motion to being along a straight line. We can then use a high-speed camera to record the cart's position at various instants, and from that information determine its speed and acceleration.

4.1 (*a*) Are the accelerations of the motions shown in Figure 4.1 constant? (*b*) For which surface is the acceleration largest in magnitude?

In the preceding two chapters, we developed a mathematical framework for describing motion along a straight line. In this chapter, we continue our study of motion by investigating inertia, a property of objects that affects their motion. The experiments we carry out in studying inertia lead us to discover one of the most fundamental laws in physics—conservation of momentum.

4.1 Friction

Picture a block of wood sitting motionless on a smooth wooden surface. If you give the block a shove, it slides some distance but eventually comes to rest. Depending on the smoothness of the block and the smoothness of the wooden surface, this stopping may happen sooner or it may happen later. If the two surfaces in contact are very smooth and slippery, the block slides for a longer time interval than if the surfaces are rough or sticky. This you know from everyday experience: A hockey puck slides easily on ice but not on a rough road.

Figure 4.1 shows how the velocity of a wooden block decreases on three different surfaces. The slowing down is due to *friction*—the resistance to motion that one surface or object encounters when moving over another. Notice that, during the interval covered by the velocity-versus-time graph, the velocity decrease as the block slides over ice is hardly observable. The block slides easily over ice because there is very little friction between the two surfaces. The effect of friction is to bring two objects to rest with respect to each other—in this case the wooden block and the surface it is sliding on. The less friction there is, the longer it takes for the block to come to rest.

Figure 4.1 Velocity-versus-time graph for a wooden block sliding on three different surfaces. The rougher the surface, the more quickly the velocity decreases.

Figure 4.2 Low-friction track and carts used in the experiments described in this chapter.

You may wonder whether it is possible to make surfaces that have no friction at all, such that an object, once given a shove, continues to glide forever. There is no totally frictionless surface over which objects slide forever, but there are ways to minimize friction. You can, for instance, float an object on a cushion of air. This is most easily accomplished with a low-friction track—a track whose surface is dotted with little holes through which pressurized air blows. The air serves as a cushion on which a conveniently shaped object can float, with friction between the object and the track all but eliminated. Alternatively, one can use wheeled carts with low-friction bearings on an ordinary track. **Figure 4.2** shows low-friction carts you may have encountered in your lab or class. Although there is still some friction both for low-friction tracks and for the track shown in Figure 4.2, this friction is so small that it can be ignored during an experiment. For example, if the track in Figure 4.2 is horizontal, carts move along its length without slowing down appreciably. In other words:

In the absence of friction, objects moving along a horizontal track keep moving without slowing down.

Another advantage of using such carts is that the track constrains the motion to being along a straight line. We can then use a high-speed camera to record the cart's position at various instants, and from that information determine its speed and acceleration.

4.1 (*a*) Are the accelerations of the motions shown in Figure 4.1 constant? (*b*) For which surface is the acceleration largest in magnitude?

No friction at all seems impossible. Isn't there always some friction in any real case.

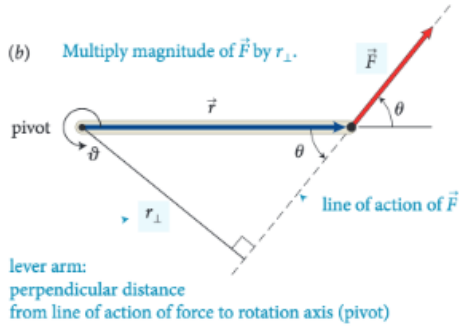

action of the force and the axis of rotation. So, the torque caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be written equivalently as $rF_\perp$ and as $r_\perp F$.

Like other rotational quantities, torque carries a sign that depends on the choice of direction for increasing ϑ. In Figure 12.4, for example, the torque caused by $\vec{F}_1$ about the pivot tends to rotate the rod in the direction of increasing ϑ and so is positive; the torque caused by $\vec{F}_2$ is negative. The sum of the two torques about the pivot is then $r_1F_1 + (-r_2F_2)$. As we've seen, the two torques are equal in magnitude when the rod is balanced, and so the sum of the torques is zero. When the sum of the torques is not zero, the rod's rotational acceleration is nonzero, and so its rotational velocity and angular momentum change.

In the situations depicted in Figures 12.4 and 12.5 we used the pivot to calculate the lever arm distances. This is a natural choice because that is the point about which the object under consideration is free to rotate. However, torques also play a role for stationary objects that are suspended or supported at several different points and that are not free

CONCEPTS

reference point

$\vec{F}_1$

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pr}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pr}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is $r_1(F_1 + F_2) - (r_1 + r_2)F_2 = r_1F_1 - r_2F_2$. This is the same result we obtained for the torques about the pivot, and so the sum of the torques about the left end is zero. ✔

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

12.2 In the situation depicted in Figure 12.2c, you must

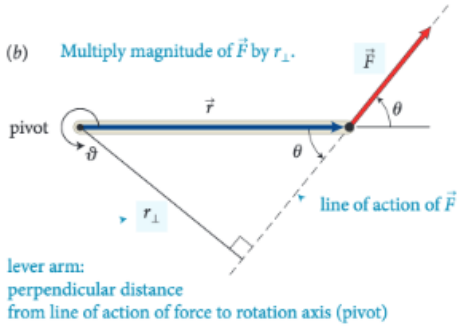

action of the force and the axis of rotation. So, the torque caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

reference point

$\vec{F}_1$

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pr}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pr}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is $r_1(F_1 + F_2) - (r_1 + r_2)F_2 = r_1F_1 - r_2F_2$. This is the same result we obtained for the torques about the pivot, and so the sum of the torques about the left end is zero. ✔

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

12.2 In the situation depicted in Figure 12.2a, you must

Perusall

Eric Mazur

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque.

Oct 20 12:09 am

SB

I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction.

Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is $\tau = r \times F$, with r being the level arm distance and F being force. We know that force is a vector vector from previous chapters, and in regards to "r" it can also be thought of as the radial vector. What this means is that this distance from the pivot points from the axis of rotation to the point where the force acts. In as previously mentioned, there is a general convention (the right-hand rule) that is used to determine the direction which happens to be perpendicular to both the radius from the axis and to the force.

Oct 22 8:48 pm

how to get students to participate?

app.perusall.com

Perusall AP50 Fall 2015 » Chapter 12 Group 1's comments Page 284 Eric Mazur

(b) Multiply magnitude of $\vec{F}$ by $r_\perp$.

pivot

line of action of $\vec{F}$

lever arm:
perpendicular distance
from line of action of force to rotation axis (pivot)

caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be

reference point

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pr}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pr}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is

the torques about the left end is zero.

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

12.2 In the situation depicted in Figure 12.2a, arm must

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

SB I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

app.perusall.com

Perusall AP50 Fall 2015 » Chapter 12 Group 1's comments Page 284 Eric Mazur

(b) Multiply magnitude of $\vec{F}$ by $r_\perp$.

pivot

line of action of $\vec{F}$

lever arm:
perpendicular distance
from line of action of fo

action of the force and the axis of rotation. So, the torque

use combination of

intrinsic and extrinsic motivation drivers

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

reference point

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pt}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is r_2; that of

and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is $r_1(F_1 + F_2) - (r_1 + r_2)F_2 = r_1F_1 - r_2F_2$. This is the same result we obtained for the torques about the pivot, and so the sum of the torques about the left end is zero. ✔

left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

rubric-based assessment

app.perusall.com

Perusall AP50 Fall 2015 » Ch... Page 284 Eric Mazur

action of the force and the axis of rotation. So, the torque caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

SB I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

reference point.

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pt}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pt}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is $r_1(F_1 + F_2) - (r_1 + r_2)F_2 = r_1F_1 - r_2F_2$. This is the same result we obtained for the torques about the pivot, and so the sum of the torques about the left end is zero. ✔

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

12.2 In the situation depicted in Figure 12.2a, arm must

rubric-based assessment

- quality (thoughtful reading & interpretation)

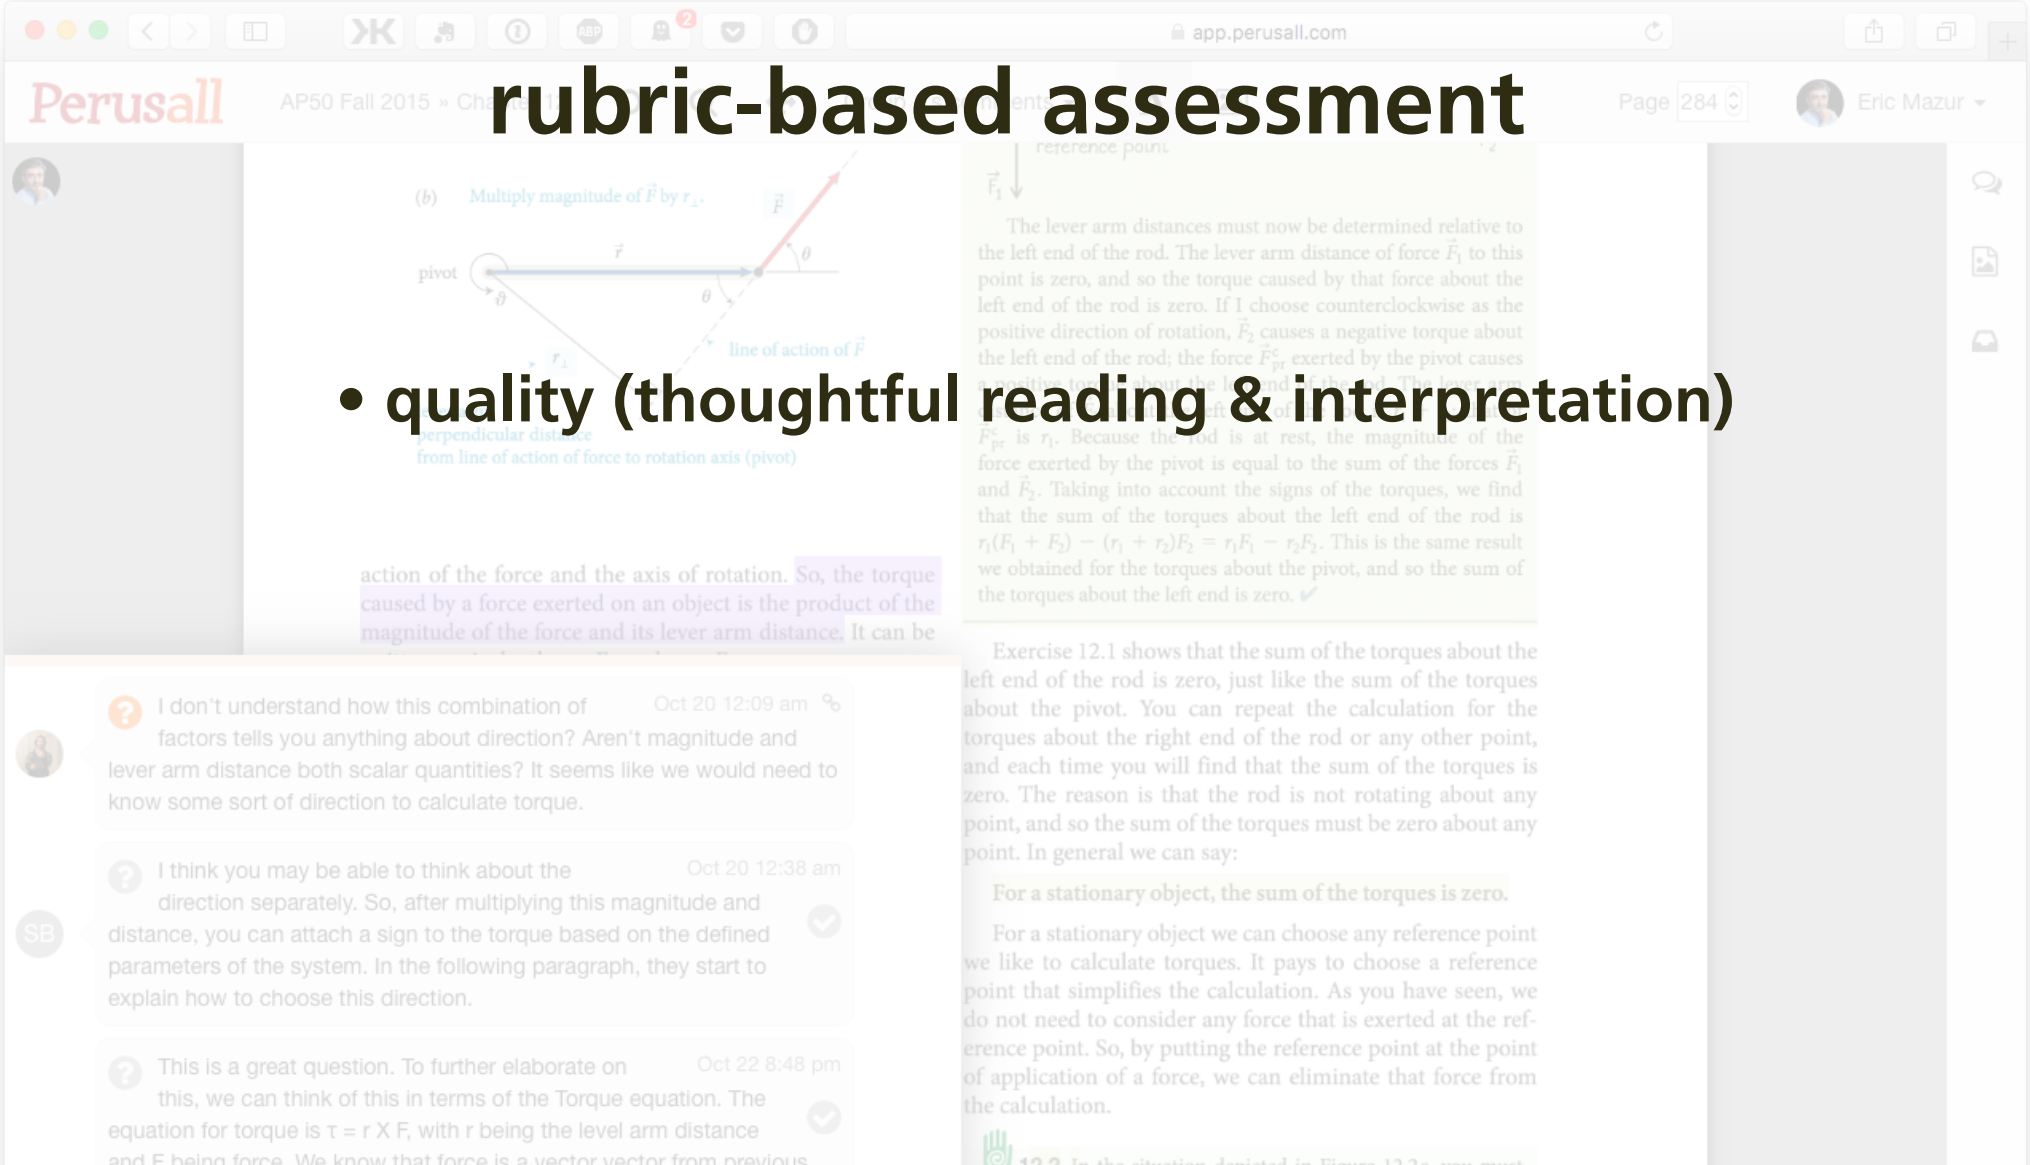

rubric-based assessment

- quality (thoughtful reading & interpretation)
- quantity (minimum 10)

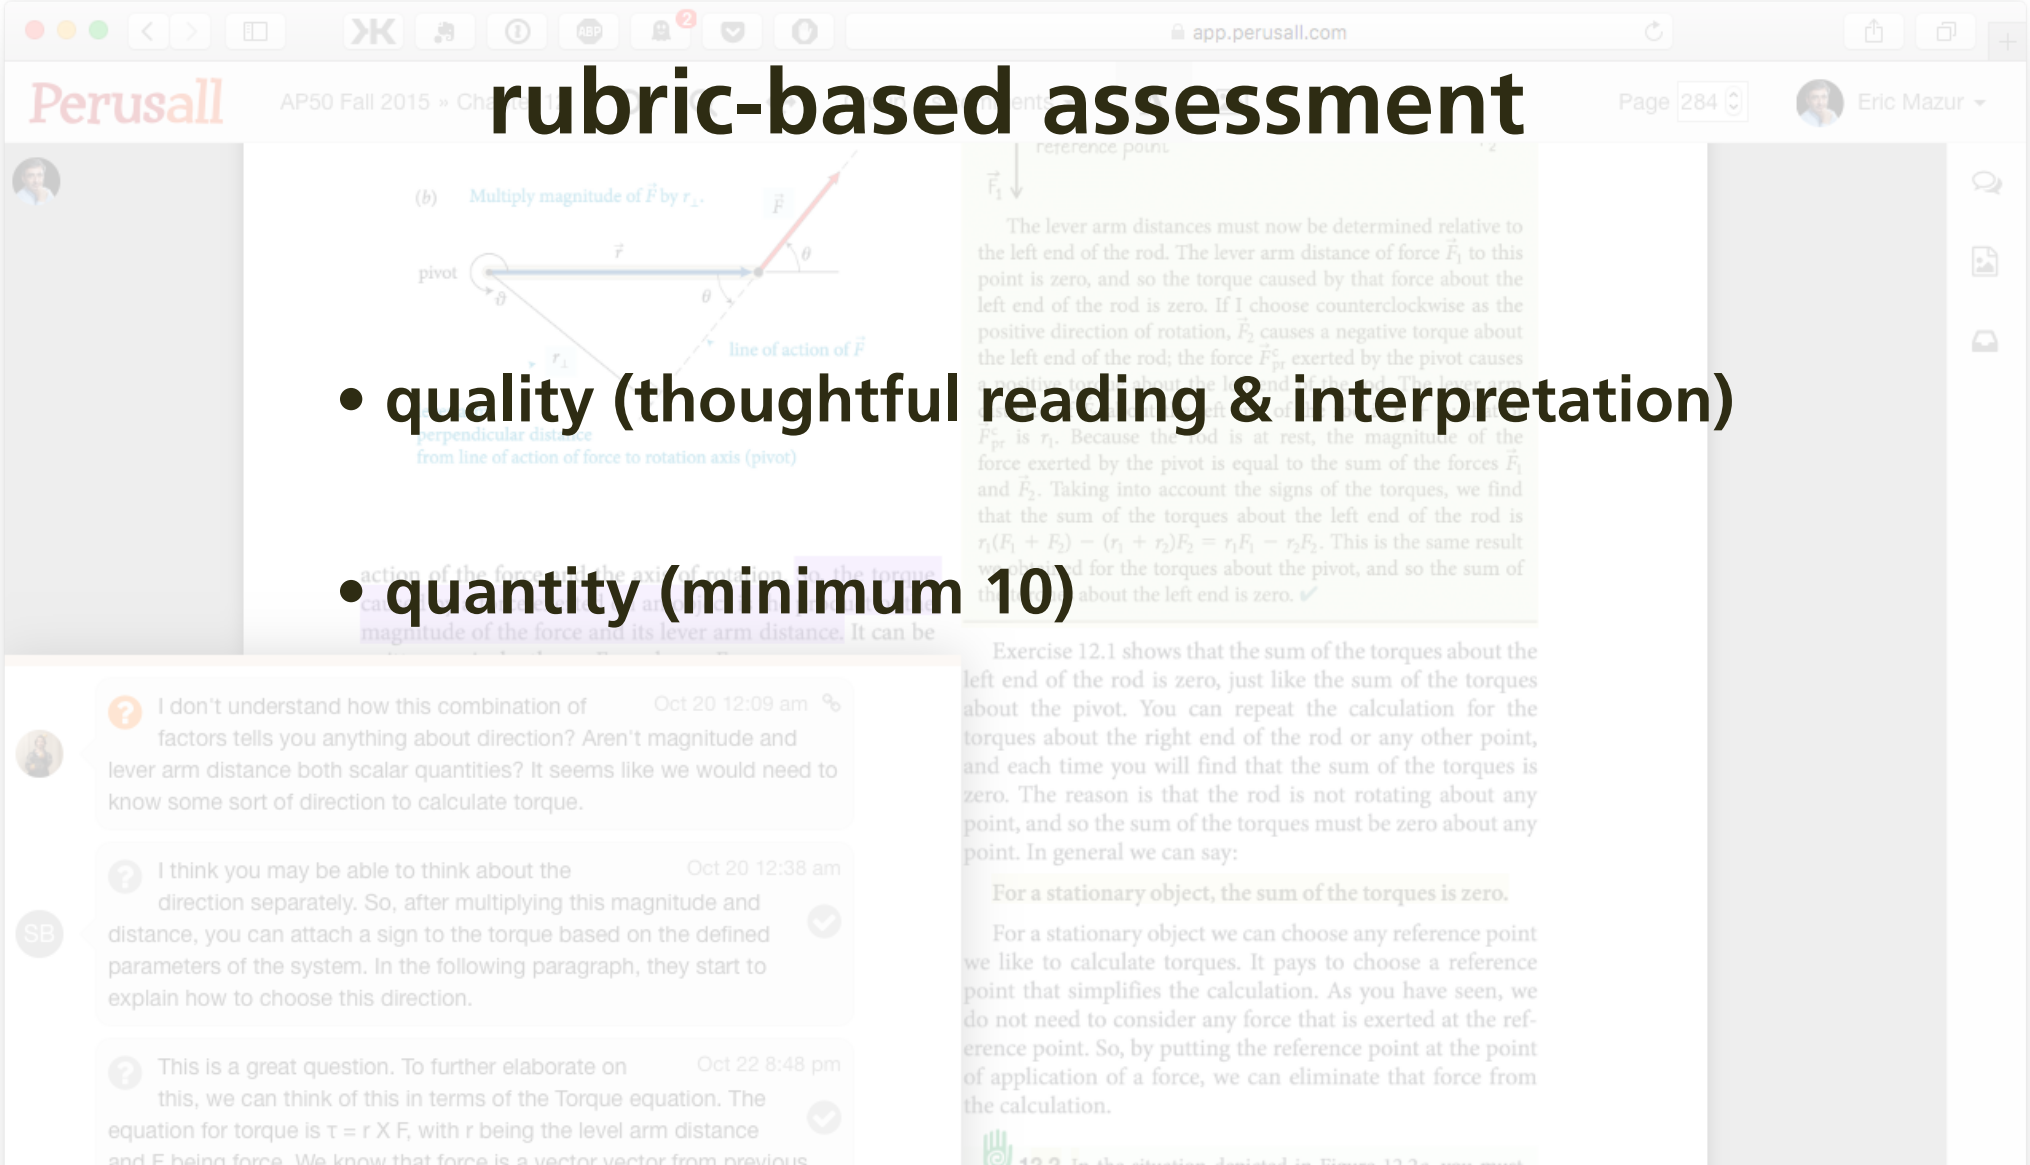

rubric-based assessment

- quality (thoughtful reading & interpretation)
- quantity (minimum 10)
- timeliness (before class)

rubric-based assessment

- quality (thoughtful reading & interpretation)
- quantity (minimum 10)
- timeliness (before class)
- distribution (not clustered)

rubric-based assessment

- quality (thoughtful reading & interpretation)
- quantity (minimum 10)
- timeliness (before class)
- distribution (not clustered)

over 20,000 annotations!

rubric-based assessment

- quality (thoughtful reading & interpretation)

how do you process all of that??

- quantity (minimum 10)
- timeliness (before class)
- distribution (not clustered)

rubric-based assessment

fully automated assessment

quality (thoughtful reading & interpretation)

how do you process all of that??

quantity (minimum 10)

- timeliness (before class)
- distribution (not clustered)

fully automated assessment

- specialized machine learning algorithm
- assesses intellectual content
- exceeds intercoder reliability

connect pre-class and in-class activities

app.perusall.com

Perusall AP50 Fall 2015 » Chapter 12 Group 1's comments Page 284 Eric Mazur

action of the force and the axis of rotation. So, the torque caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

SB I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

reference point

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pt}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pt}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ [illegible] $r_1(F_1 + F_2) - (r_1 + r_2)F_2 = r_1F_1 - r_2F_2$. This is the same result we obtained for the torques about the pivot, and so the sum of the torques about the left end is zero. ✔

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

12.2 In the situation depicted in Figure 12.2a, arm must

confusion report

Perusall AP50 Fall 2015 » Chapter 12 app.perusall.com Page 284 Eric Mazur

Confusion report for Chapter 24

right hand rule (11 questions)

JB Can someone in simpler terms explain the right- hand rule? +1

WJ Is there another way, besides the right hand rule, to find the direction of the magnetic field with a current?

SB Using the right hand rule, I believe the answer is D. Is that correct?

Show more...

direction magnetic field (8 questions)

CP Why is it that the magnet field points away from the north pole and towards the south pole? When on the previous page it stated that the direction of the magnetic field is the direction that the north pole of a compass needle points. +2

AB How can you determine which direction the magnetic field will point towards? +1

KH So whichever way the north pole faces is the direction of the magnetic field but that doesn't always mean its pointing true north? +1

Show more...

earth magnetic field (6 questions)

CP Does that mean that the compass will be distracted from the Earth's magnetic field and use the magnetic field that the current of the wire gives off?

motivating factors

Intrinsic:

- **social interaction**

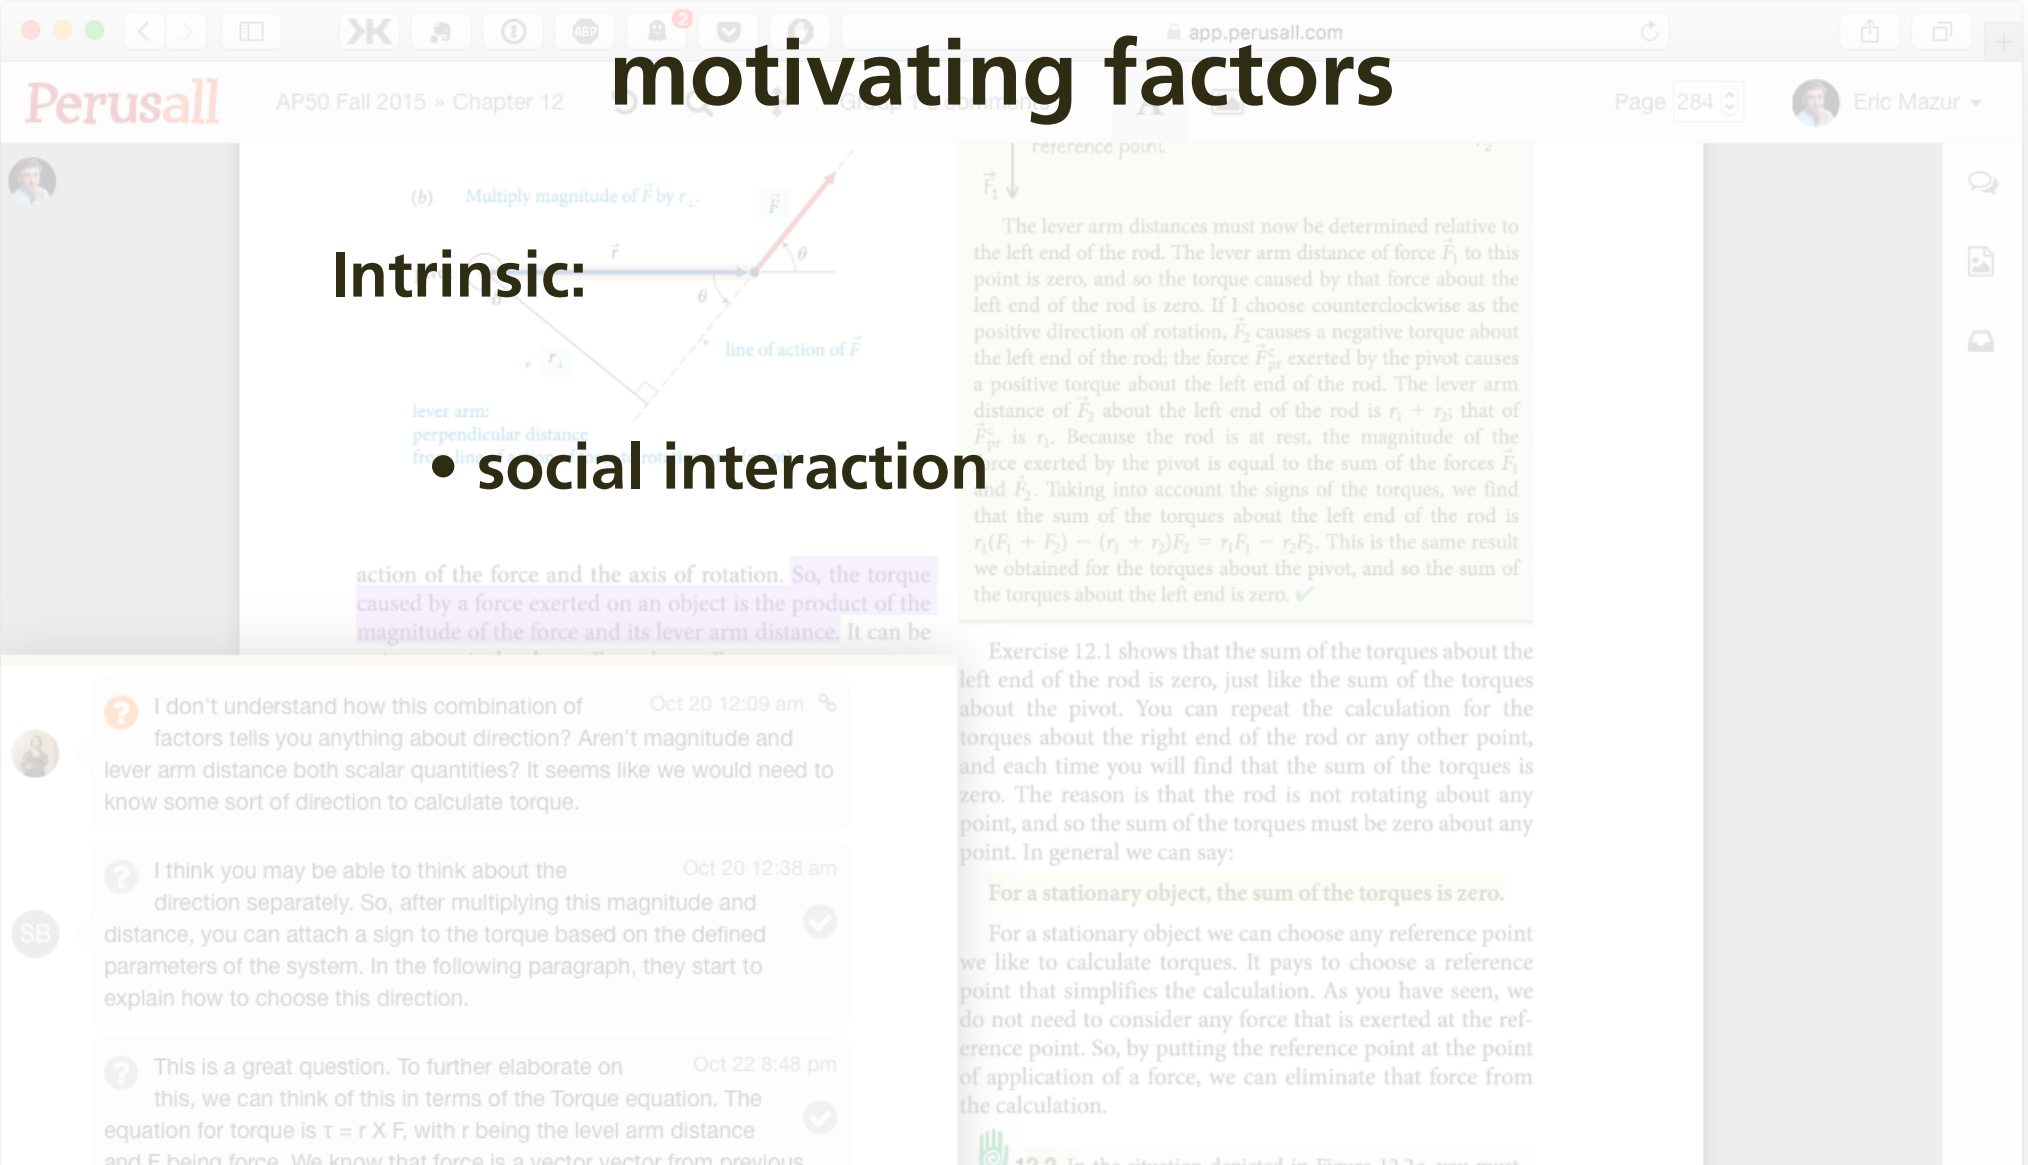

motivating factors

Intrinsic:

- social interaction
- tie-in to in-class activity

motivating factors

Intrinsic:

- social interaction
- tie-in to in-class activity

Extrinsic:

- assessment (fully automated)

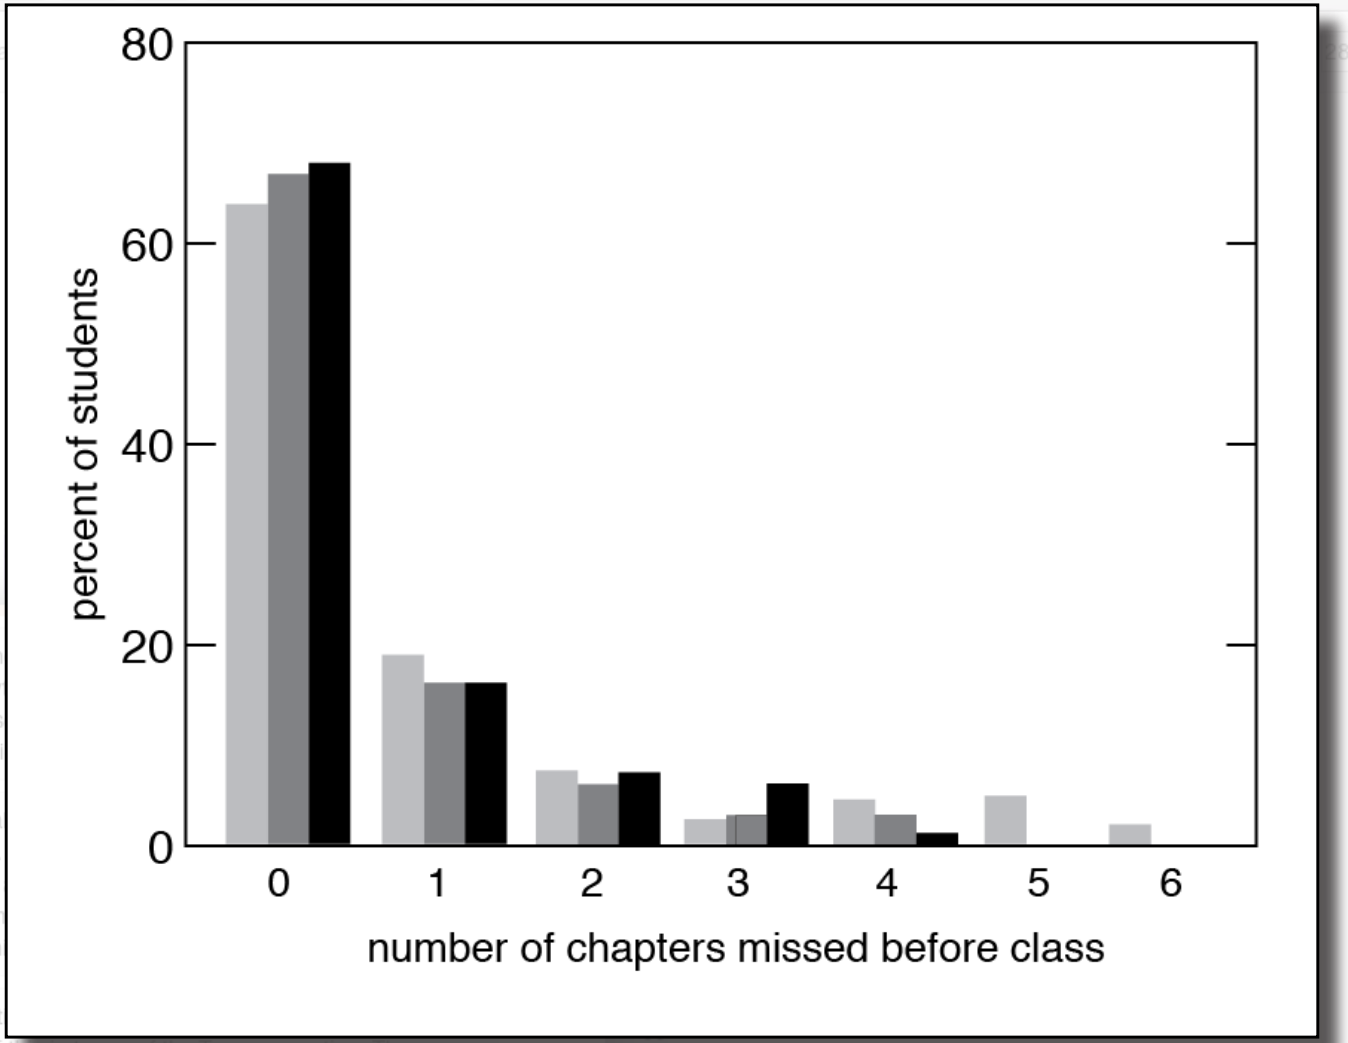
80
60
40
20
0
percent of students
0
1
2
3
4
5
6
number of chapters missed before class

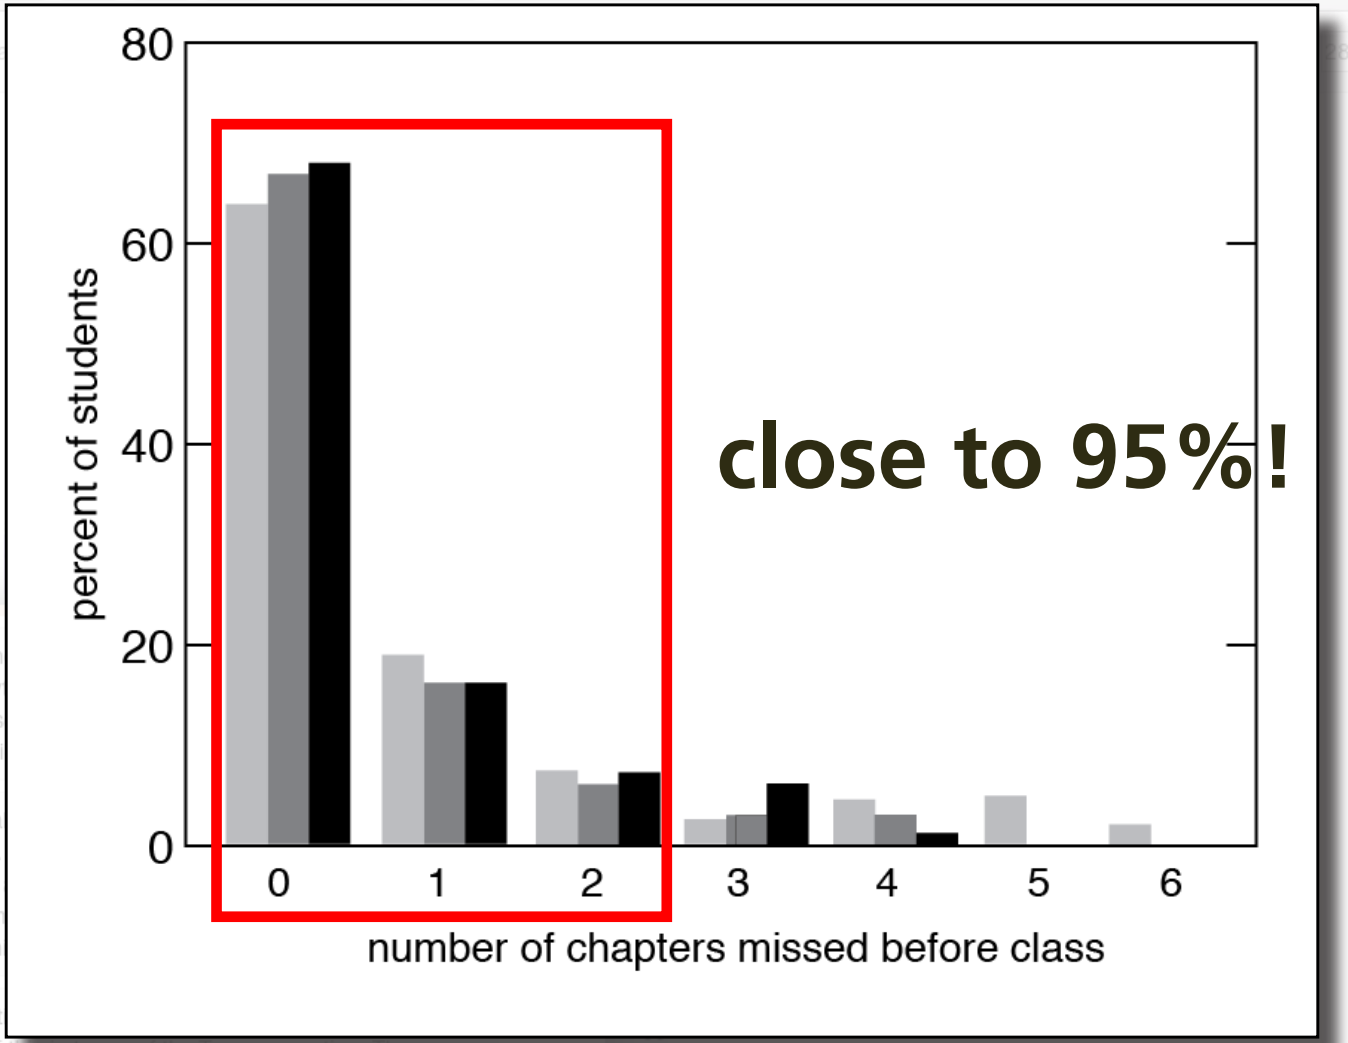
80
60
40
20
0
percent of students
0
1
2
3
4
5
6
number of chapters missed before class
close to 95%!

every student prepared for *every* class

app.perusall.com

Perusall AP50 Fall 2015 » Chapter 12 Group 1's comments Page 284 Eric Mazur

(b) Multiply magnitude of $\vec{F}$ by $r_\perp$.

pivot

line of action of $\vec{F}$

lever arm:
perpendicular distance
from line of action of force to rotation axis (pivot)

caused by a force exerted on an object is the product of the magnitude of the force and its lever arm distance. It can be

I don't understand how this combination of factors tells you anything about direction? Aren't magnitude and lever arm distance both scalar quantities? It seems like we would need to know some sort of direction to calculate torque. Oct 20 12:09 am

I think you may be able to think about the direction separately. So, after multiplying this magnitude and distance, you can attach a sign to the torque based on the defined parameters of the system. In the following paragraph, they start to explain how to choose this direction. Oct 20 12:38 am

This is a great question. To further elaborate on this, we can think of this in terms of the Torque equation. The equation for torque is τ = r X F, with r being the level arm distance and F being force. We know that force is a vector vector from previous Oct 22 8:48 pm

reference point

The lever arm distances must now be determined relative to the left end of the rod. The lever arm distance of force $\vec{F}_1$ to this point is zero, and so the torque caused by that force about the left end of the rod is zero. If I choose counterclockwise as the positive direction of rotation, $\vec{F}_2$ causes a negative torque about the left end of the rod; the force $\vec{F}^c_{pr}$ exerted by the pivot causes a positive torque about the left end of the rod. The lever arm distance of $\vec{F}_2$ about the left end of the rod is $r_1 + r_2$; that of $\vec{F}^c_{pr}$ is r_1. Because the rod is at rest, the magnitude of the force exerted by the pivot is equal to the sum of the forces $\vec{F}_1$ and $\vec{F}_2$. Taking into account the signs of the torques, we find that the sum of the torques about the left end of the rod is

the torques about the left end is zero.

Exercise 12.1 shows that the sum of the torques about the left end of the rod is zero, just like the sum of the torques about the pivot. You can repeat the calculation for the torques about the right end of the rod or any other point, and each time you will find that the sum of the torques is zero. The reason is that the rod is not rotating about any point, and so the sum of the torques must be zero about any point. In general we can say:

For a stationary object, the sum of the torques is zero.

For a stationary object we can choose any reference point we like to calculate torques. It pays to choose a reference point that simplifies the calculation. As you have seen, we do not need to consider any force that is exerted at the reference point. So, by putting the reference point at the point of application of a force, we can eliminate that force from the calculation.

Benefits

- virtually 100% completion of assignments
- improved use of class time

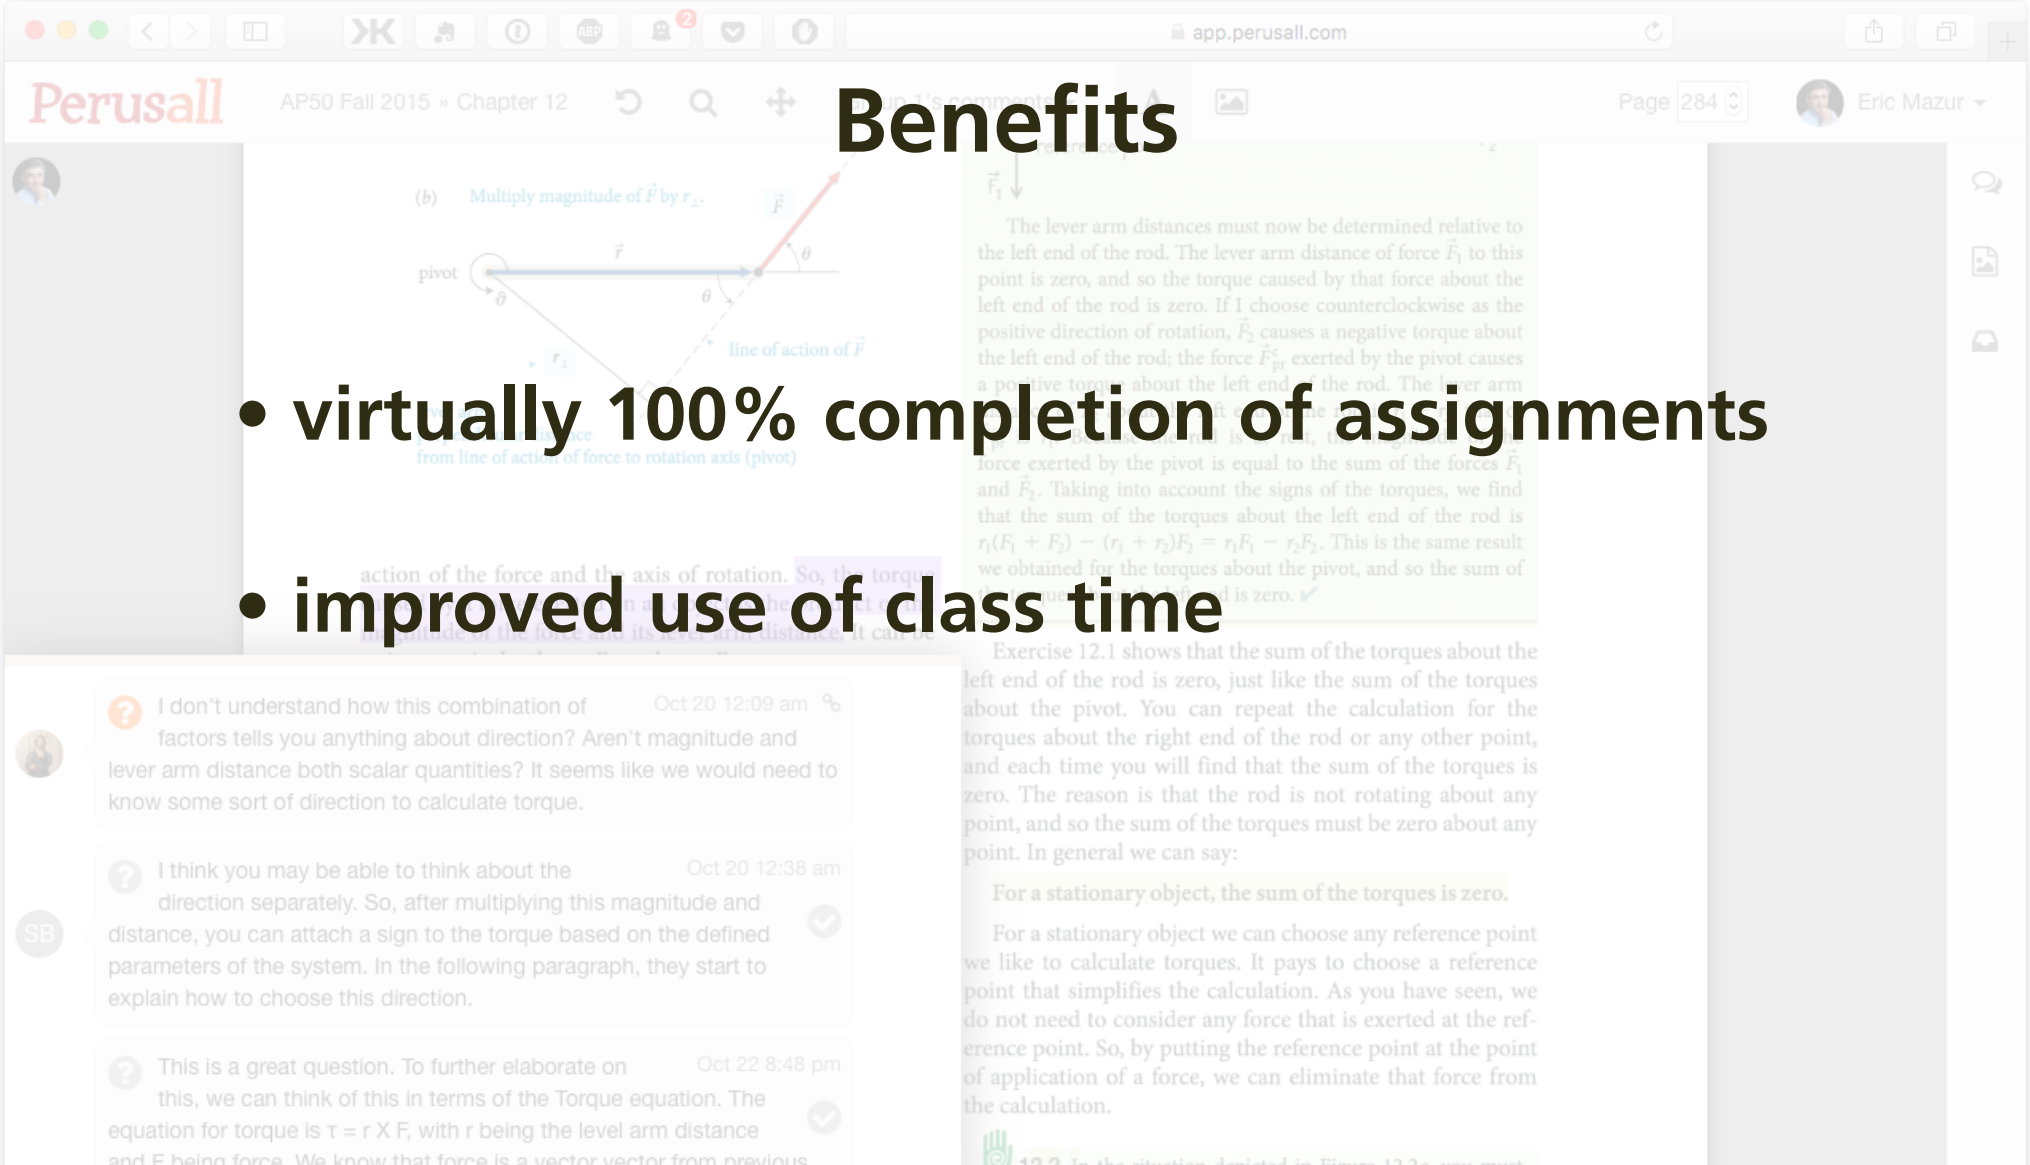

Benefits

- virtually 100% completion of assignments
- improved use of class time

all at no cost & without additional instructor effort!

Education is not just about:

- transferring information
- getting students to do what we do

Education is not just about:

- transferring information
- getting students to do what we do

active participation/social interaction a must!

for a copy of this presentation

ericmazur.com

Follow me! @eric_mazur