Manipulating matter with light

Raffael Gattass
Iva Maxwell
Loren Cerami
Jonathan Ashcom
Eli Glezer
Chris Schaffer
Nan Shen

Limin Tong
Alex Heisterkamp
Samuel Chung
Debjyoti Datta
Philip LeDuc
Donald E. Ingber
Aravi Samuel

University of Missouri-Columbia
Columbia, MO, 26 February 2004

Introduction

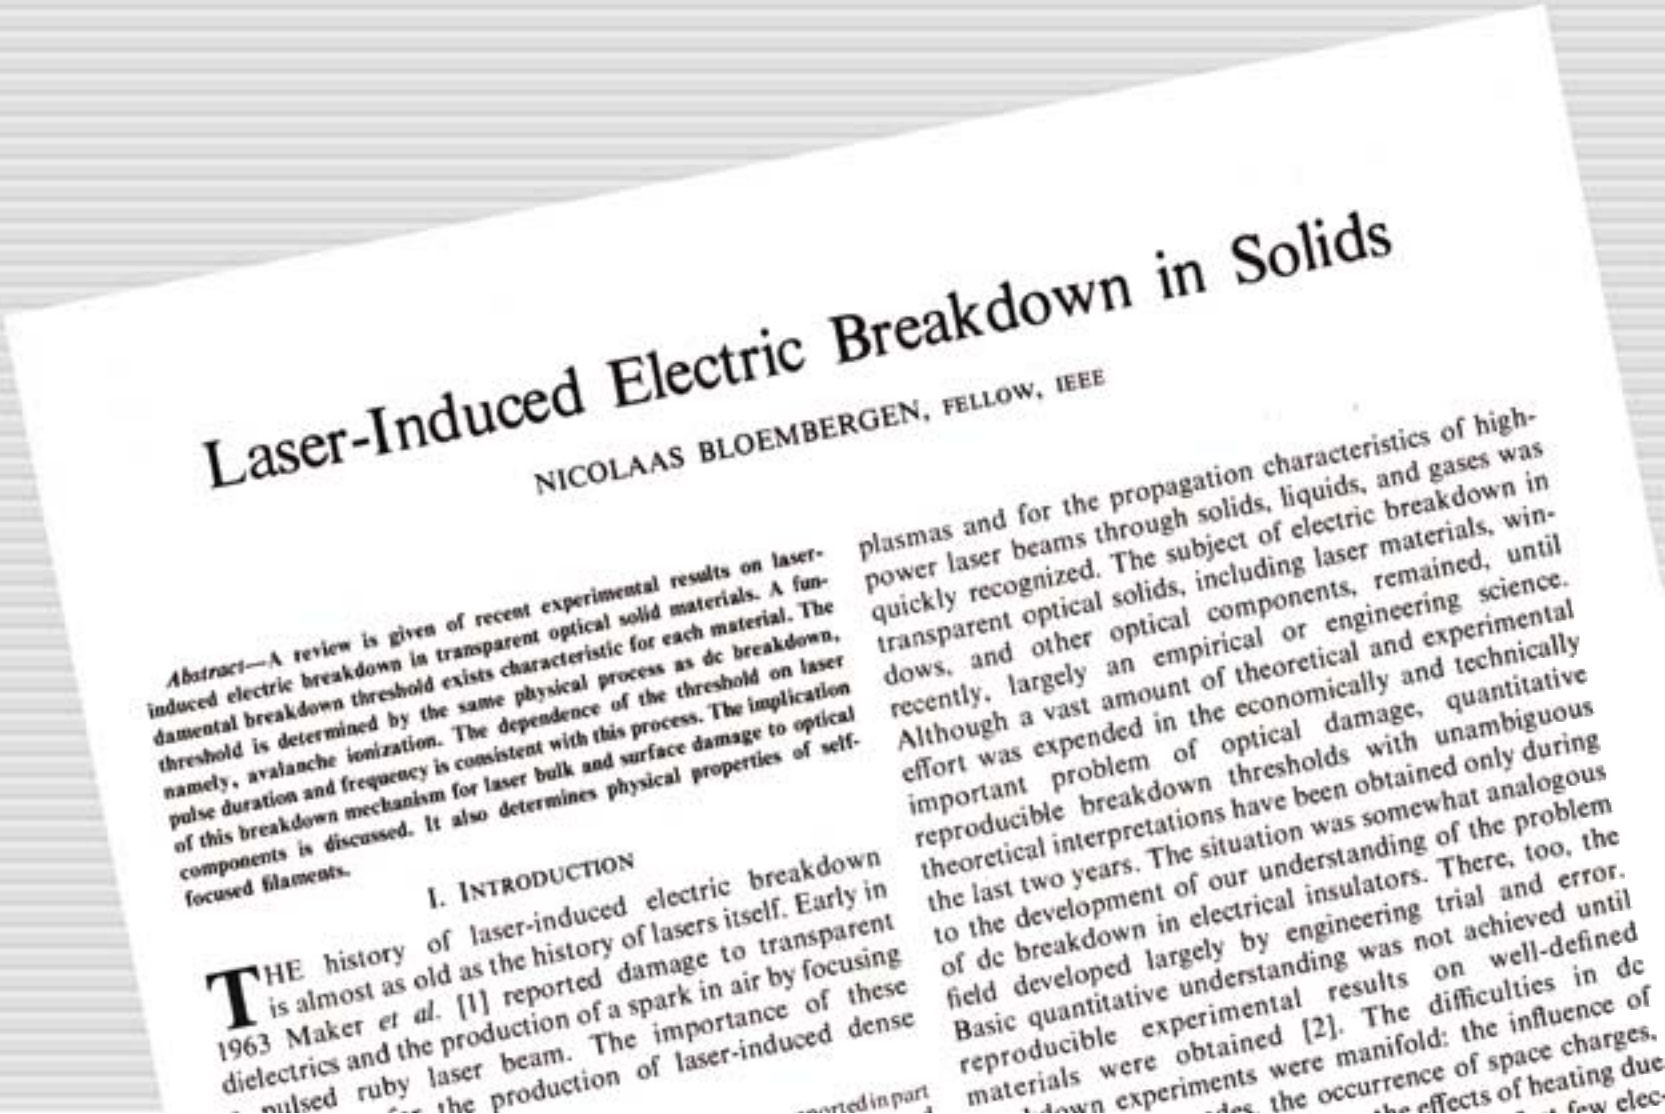

Laser-Induced Electric Breakdown in Solids

NICOLAAS BLOEMBERGEN, FELLOW, IEEE

Abstract—A review is given of recent experimental results on laser-induced electric breakdown in transparent optical solid materials. A fundamental breakdown threshold exists characteristic for each material. The threshold is determined by the same physical process as dc breakdown, namely, avalanche ionization. The dependence of the threshold on laser pulse duration and frequency is consistent with this process. The implication of this breakdown mechanism for laser bulk and surface damage to optical components is discussed. It also determines physical properties of self-focused filaments.

I. INTRODUCTION

THE history of laser-induced electric breakdown is almost as old as the history of lasers itself. Early in 1963 Maker *et al.* [1] reported damage to transparent dielectrics and the production of a spark in air by focusing pulsed ruby laser beam. The importance of these for the production of laser-induced dense plasmas and for the propagation characteristics of high-power laser beams through solids, liquids, and gases was quickly recognized. The subject of electric breakdown in transparent optical solids, including laser materials, windows, and other optical components, remained, until recently, largely an empirical or engineering science. Although a vast amount of theoretical and experimental effort was expended in the economically and technically important problem of optical damage, quantitative reproducible breakdown thresholds with unambiguous theoretical interpretations have been obtained only during the last two years. The situation was somewhat analogous to the development of our understanding of the problem of dc breakdown in electrical insulators. There, too, the field developed largely by engineering trial and error. Basic quantitative understanding was not achieved until reproducible experimental results on well-defined materials were obtained [2]. The difficulties in dc breakdown experiments were manifold: the influence of the occurrence of space charges, the effects of heating due

Introduction

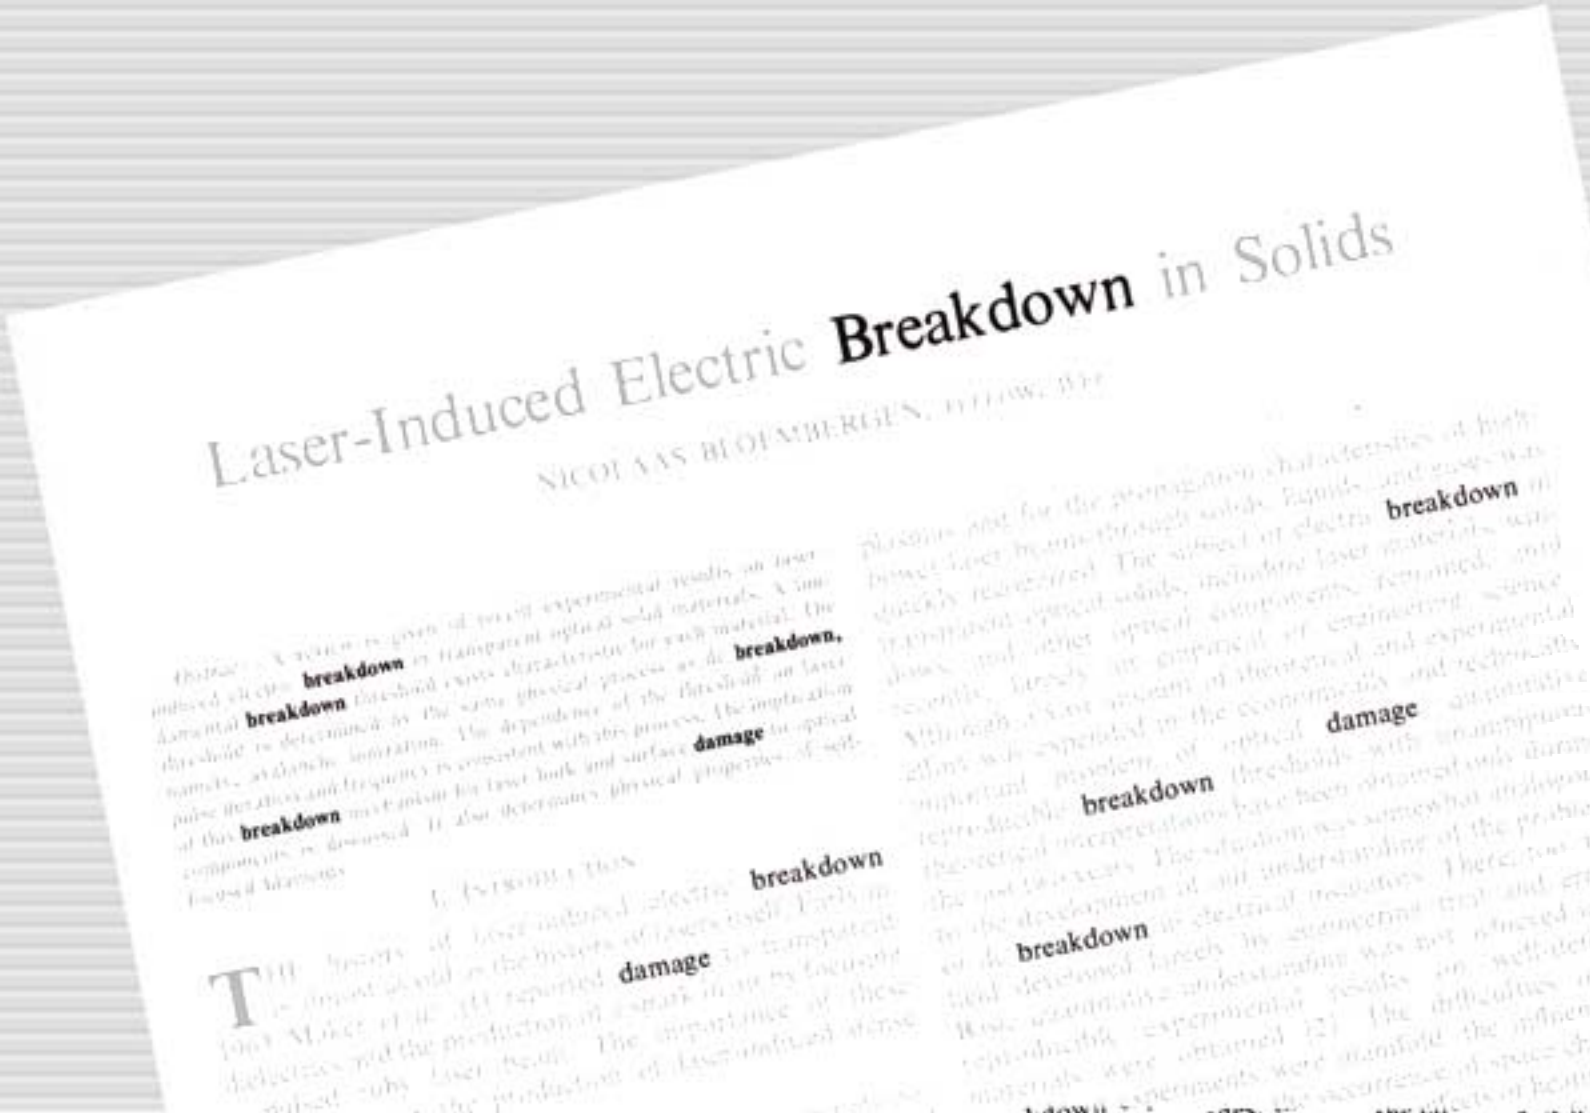

Introduction

STP 1141

DAMAGED

22nd ANNUAL BOULDER DAMAGE SYMPOSIUM

Proceedings

LASER-INDUCED DAMAGE IN OPTICAL MATERIALS: 1990

24–26 OCTOBER 1990

BOULDER, COLORADO

Introduction

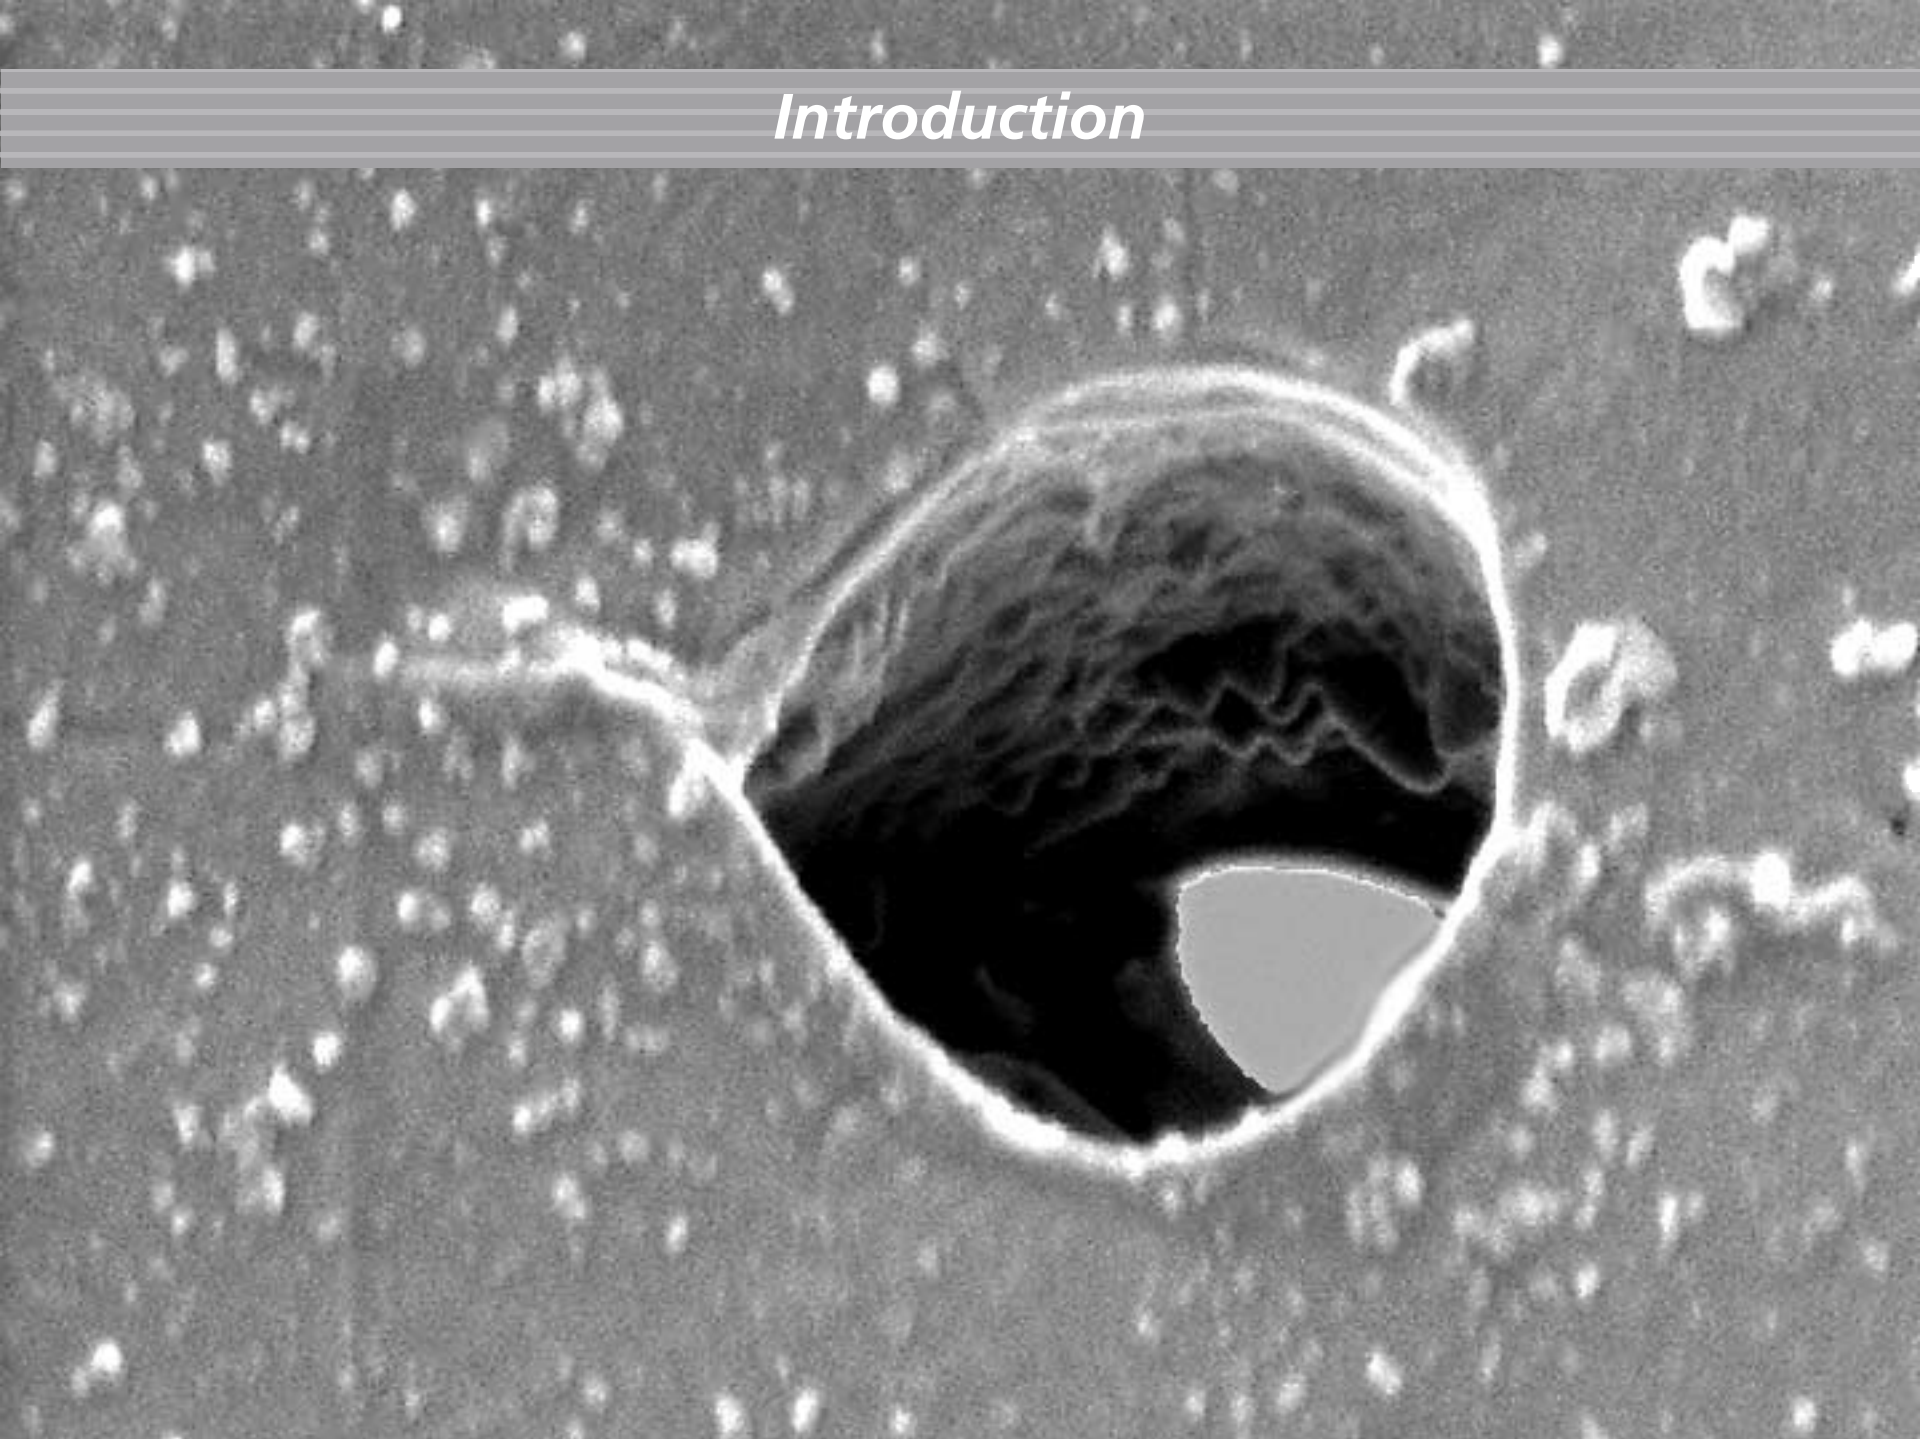

use damage for processing!

Outline

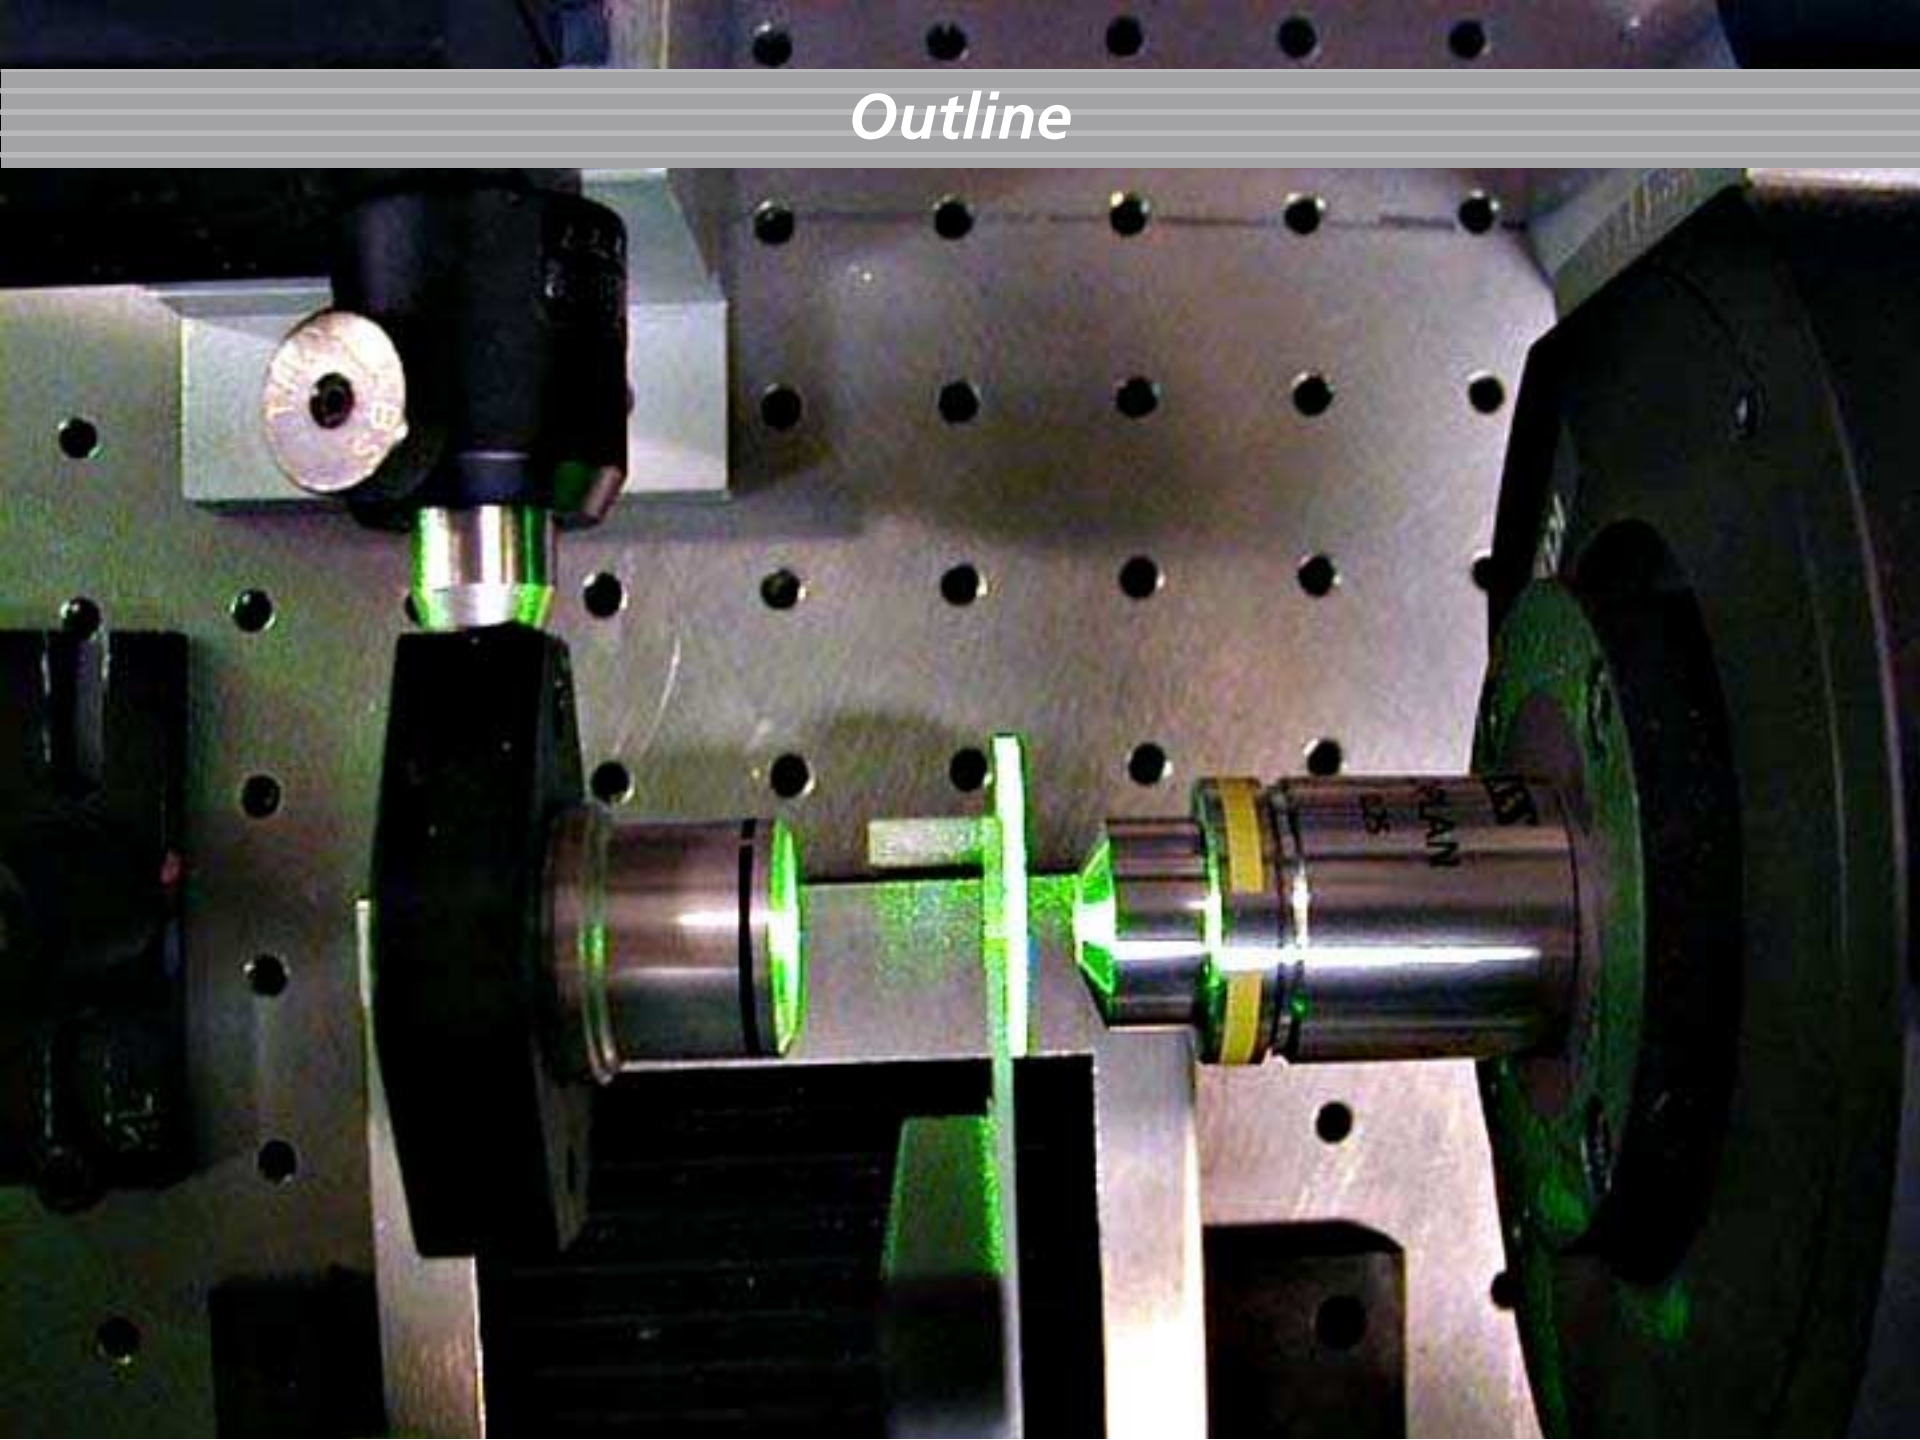

Outline

- Processing with fs pulses
- Role of focusing
- Low-energy processing

Processing with fs pulses

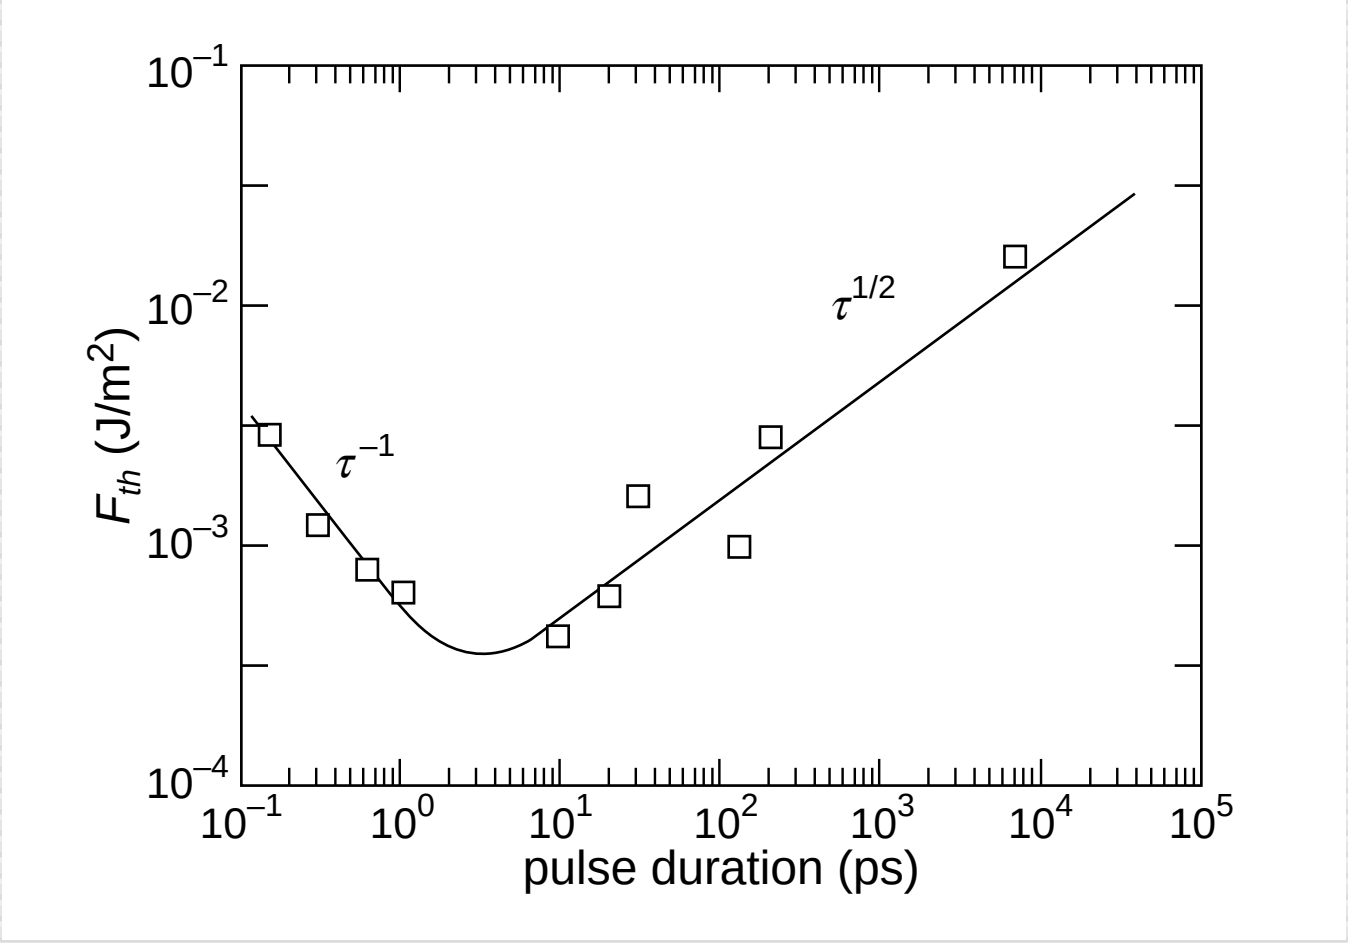

Du *et al*., *Appl. Phys. Lett.* 64, 3071 (1994)

Processing with fs pulses

Breakdown threshold and plasma formation in femtosecond laser–solid interaction

D. von der Linde and H. Schüler

Institut für Laser- und Plasmaphysik, Universität Essen, D-45117 Essen, Germany

Received March 6, 1995; revised manuscript received June 15, 1995

Combining femtosecond pump–probe techniques with optical microscopy, we have studied laser-induced optical breakdown in optically transparent solids with high temporal and spatial resolution. The threshold of plasma formation has been determined from measurements of the changes of the optical reflectivity associated with the developing plasma. It is shown that plasma generation occurs at the surface. We have observed a remarkable resistance to optical breakdown and material damage in the interaction of femtosecond laser pulses with bulk optical materials. © 1996 Optical Society of America

1. INTRODUCTION

The interaction of intense femtosecond laser pulses with solids offers the possibility of producing a new class of plasmas having approximately solid-state density and spatial density scale lengths much smaller than the wavelength of light. These high-density plasmas with extremely sharp density gradients are currently of great interest, particularly from the point of view of generating short x-ray pulses. To produce such a [illegible] rise from the intensity level [illegible] formation to the [illegible] scale

One of the key points in the research of Bloembergen and his co-workers was the use of very tightly focused laser beams, which allowed them to reach the breakdown threshold of the materials while staying well below the critical power of self-focusing. Self-focusing is one of the major problems in the measurement of bulk breakdown thresholds. In a more recent review Soileau *et al.*[5] carefully examined the role of self-focusing in experiments measuring laser-induced breakdown of bulk dielectric materials. They concluded that the breakdown and damage thresholds are also strongly influenced by extrinsic effects.

Thus far, the issue of breakdown thresholds in femtosecond laser–solid interaction has barely been touched. Recently, Du *et al.*[6] carried out laser-induced breakdown on fused silica with pulses ranging in [illegible] as 150 fs. They reported [illegible] threshold on [illegible] of the

Processing with fs pulses

"… clear evidence that no bulk plasmas …

[and] … no bulk damage could be produced

with femtosecond laser pulses."

von der Linde, *et al.*, *J. Opt. Soc. Am.* 13, 216 (1996)

Processing with fs pulses

focus laser beam inside material

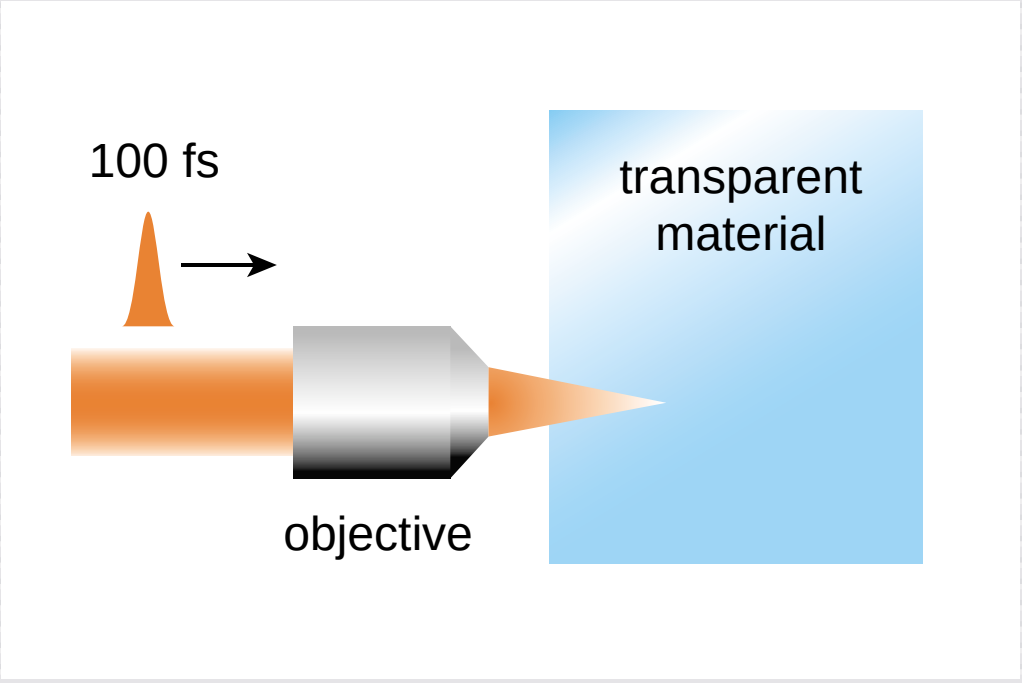

Glezer, *et al.*, *Opt. Lett.* 21, 2023 (1996)

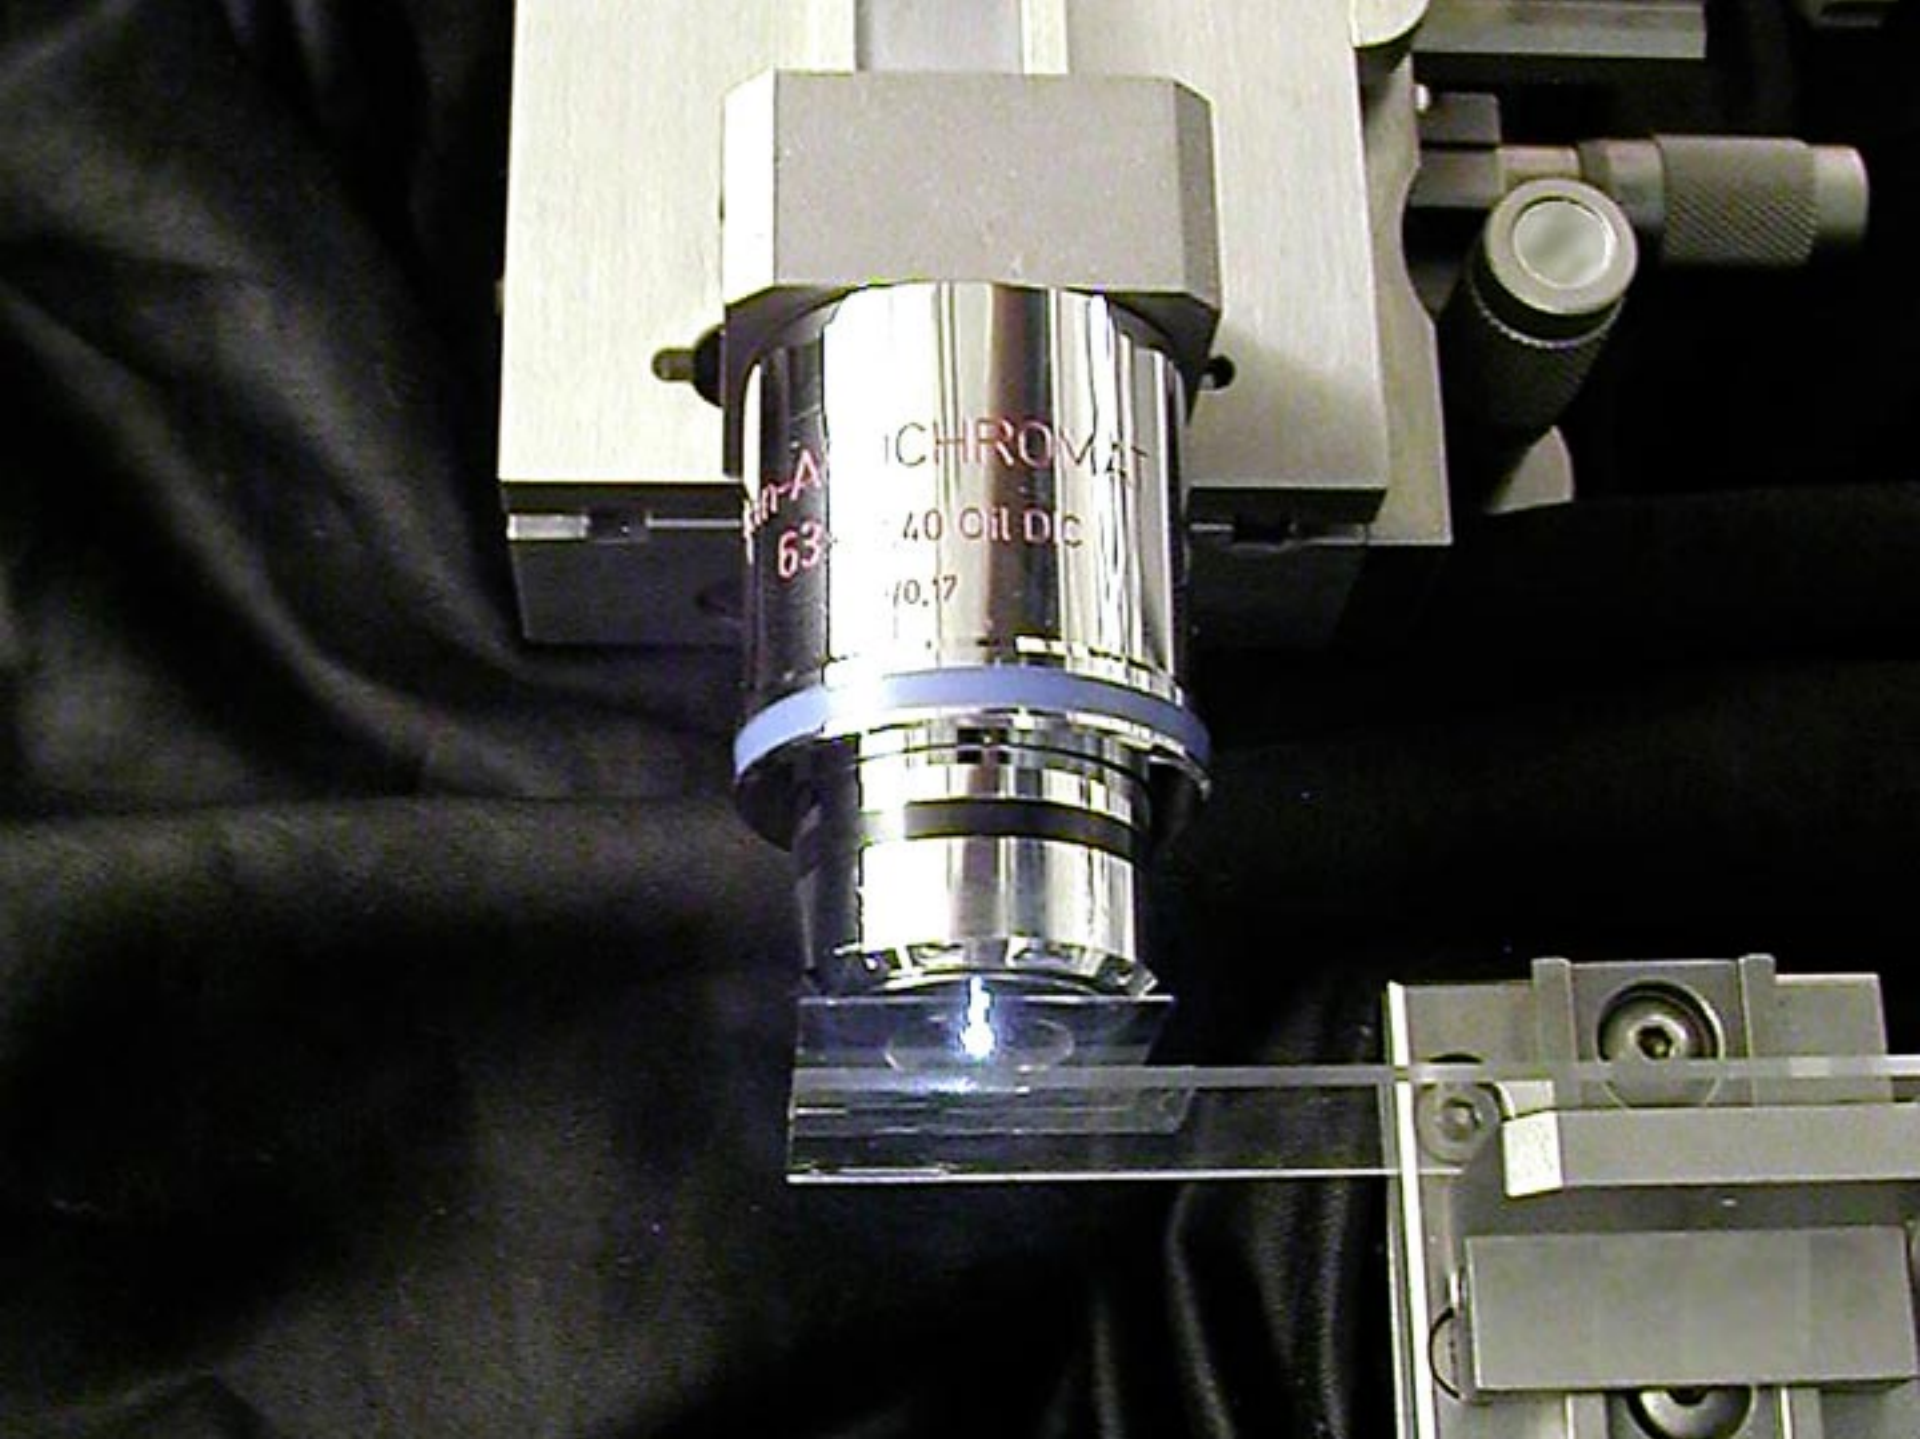
CHROMAT
40 Oil DC
0.17

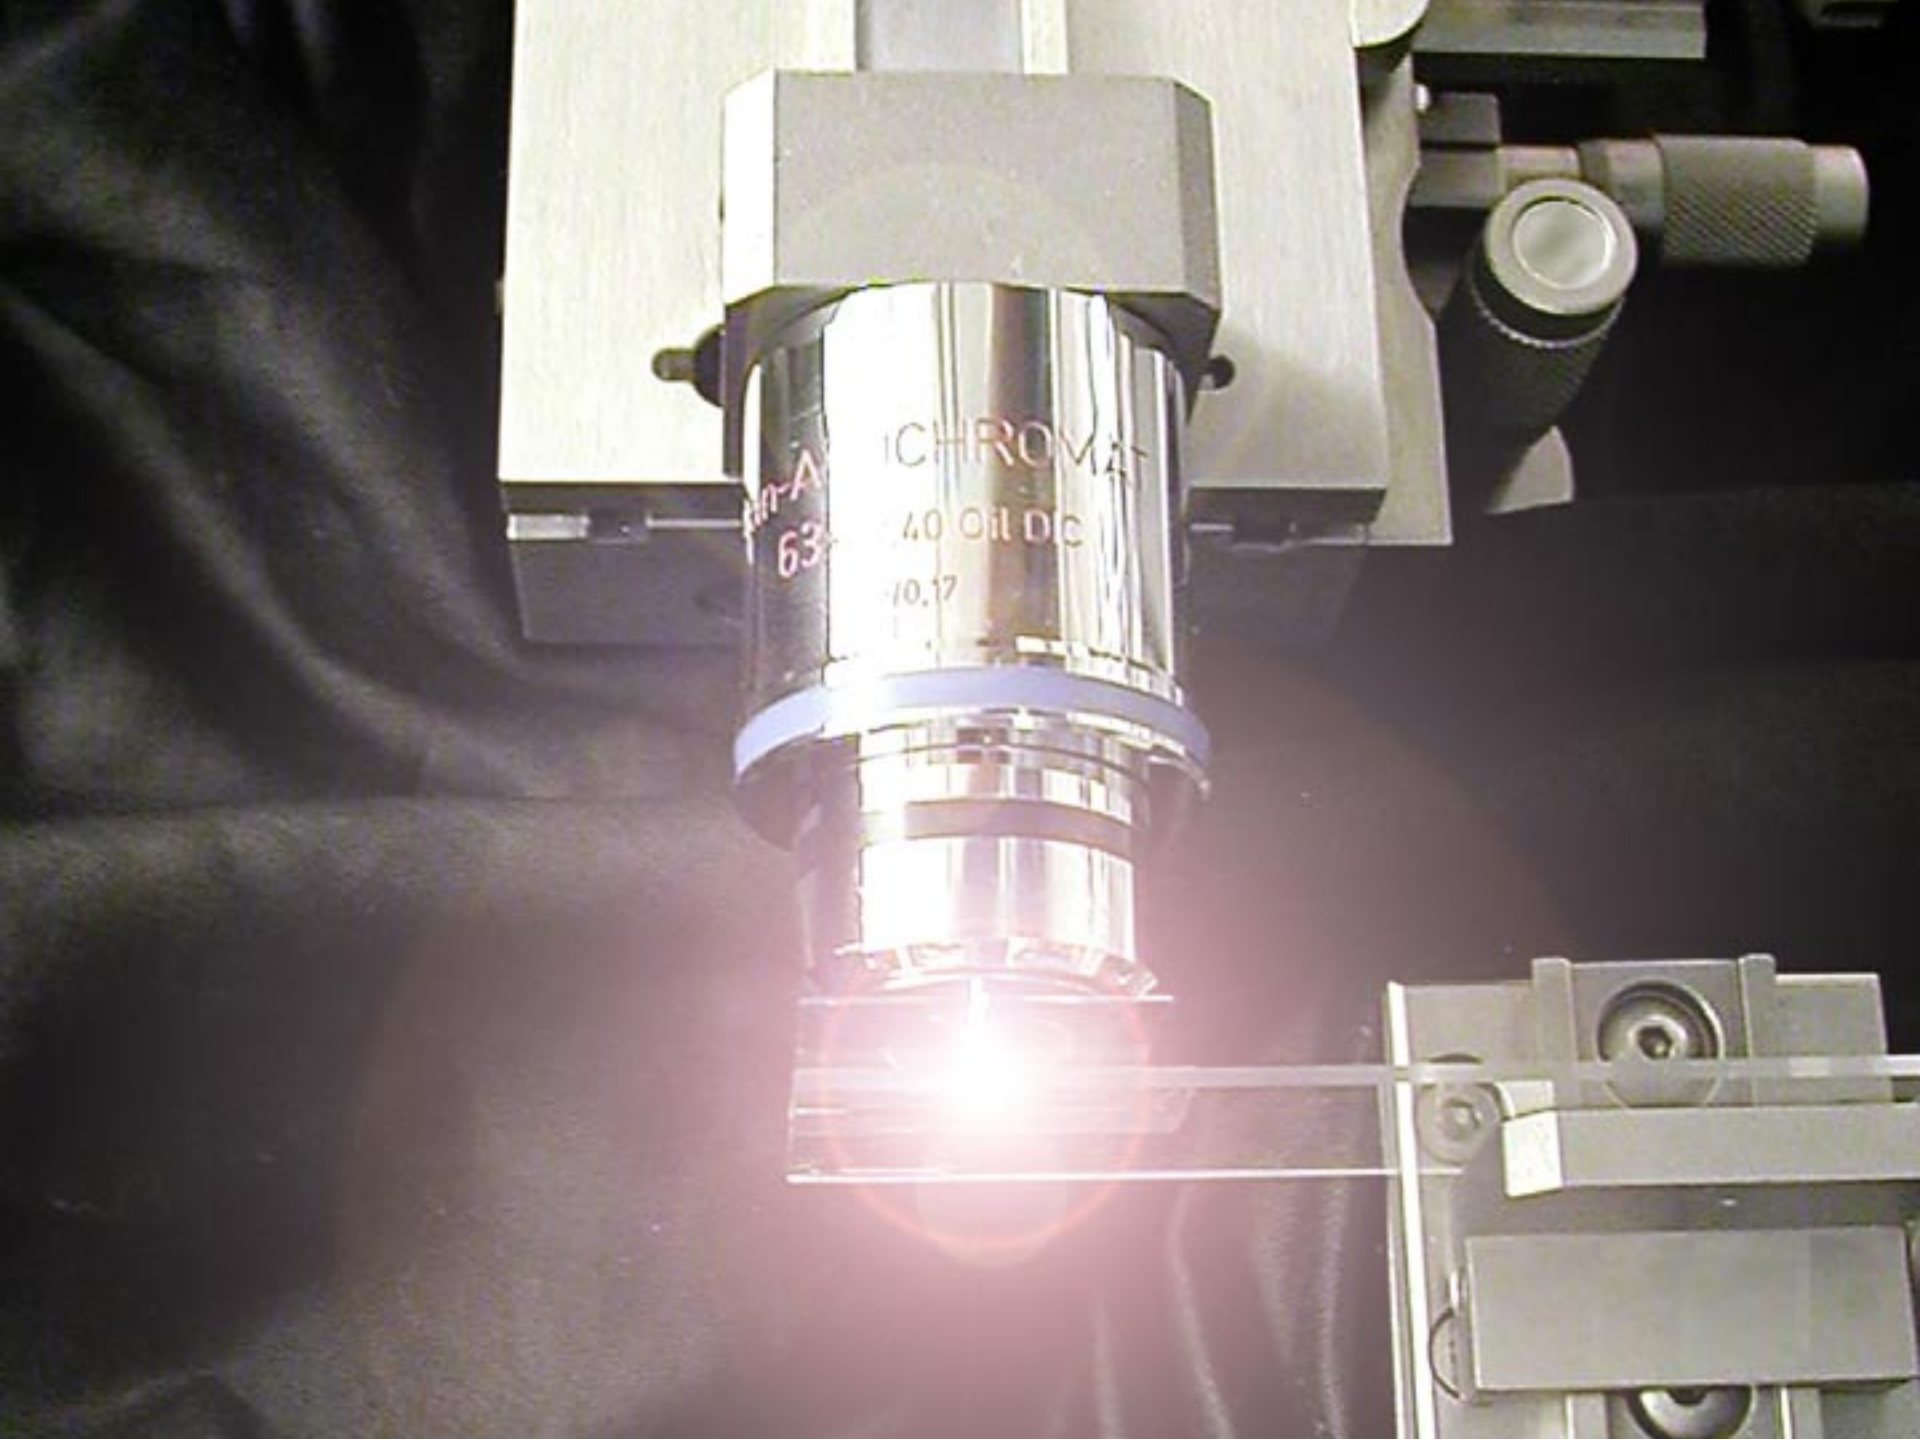
CHROMAT
40 Oil DC
0.17

Processing with fs pulses

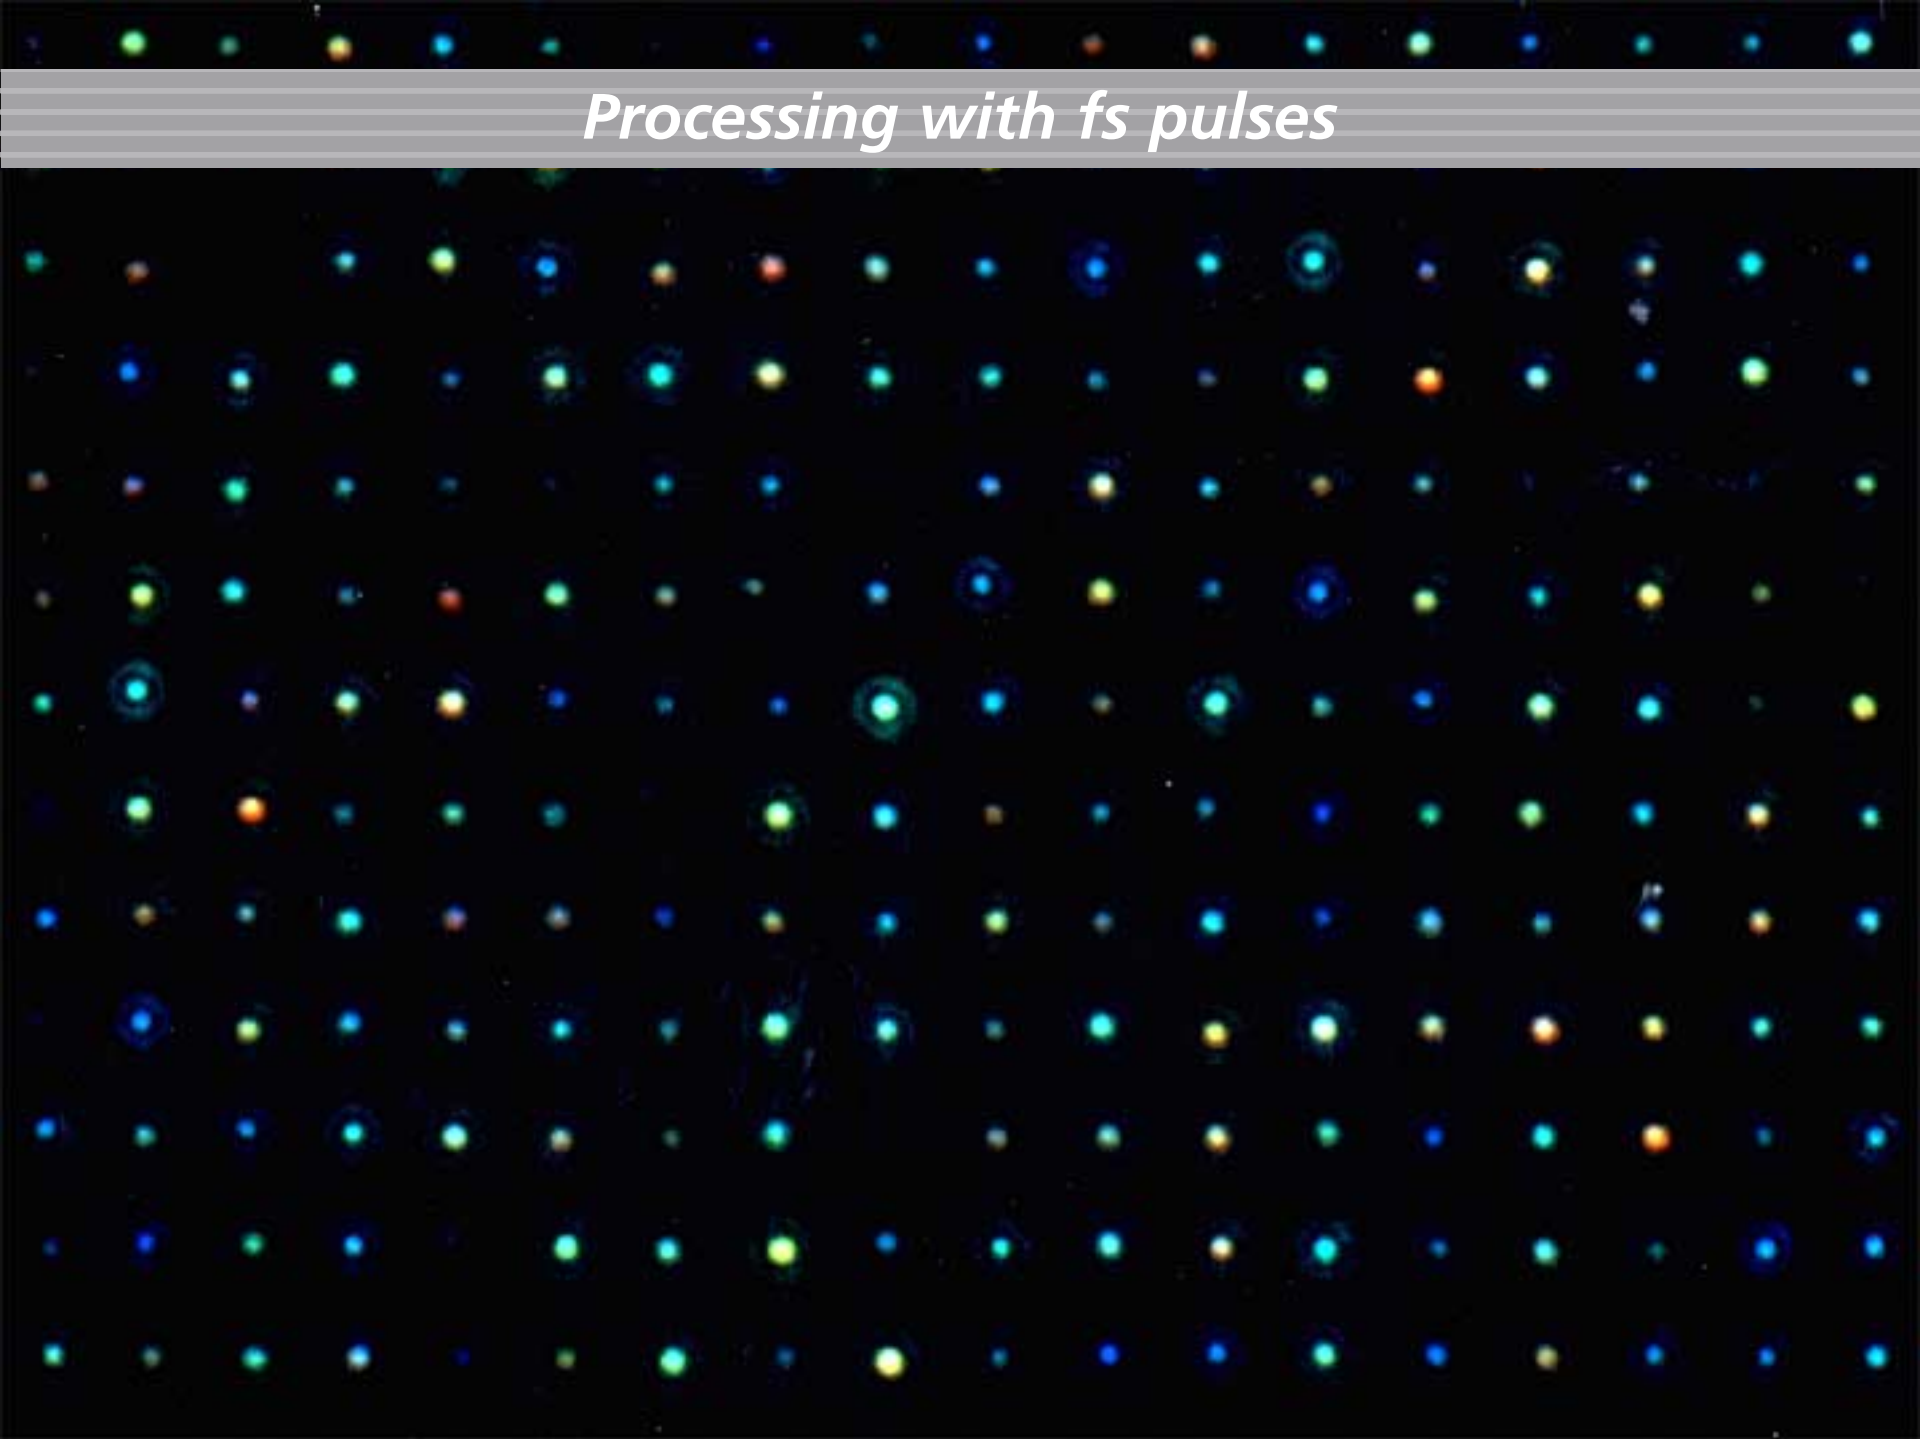

Processing with fs pulses

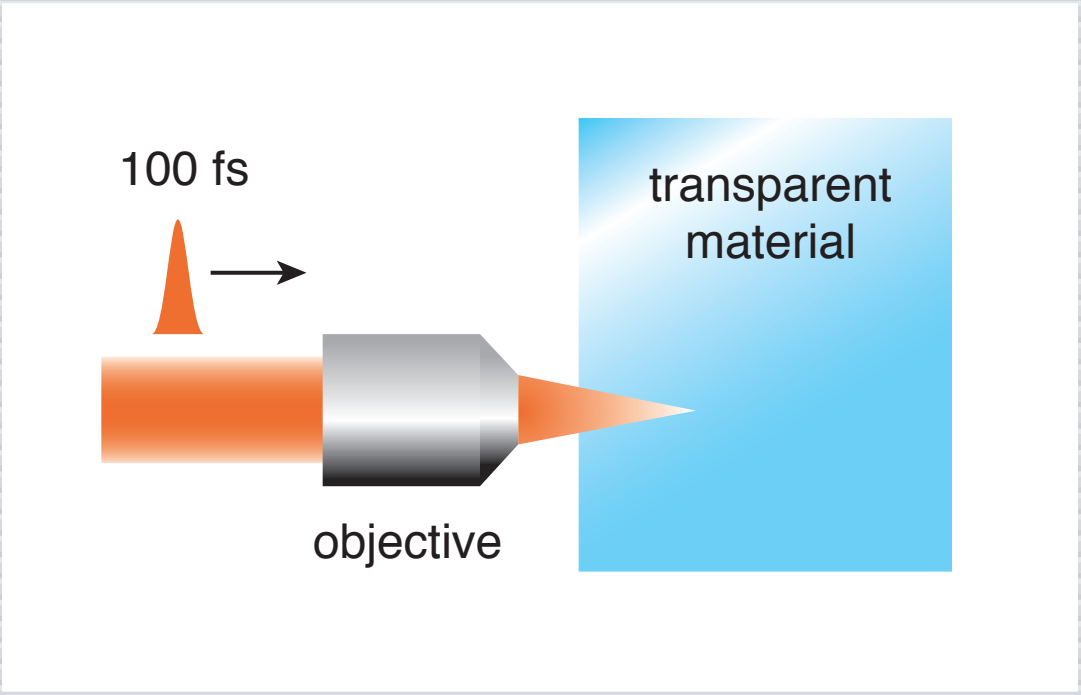

high intensity at focus…

Processing with fs pulses

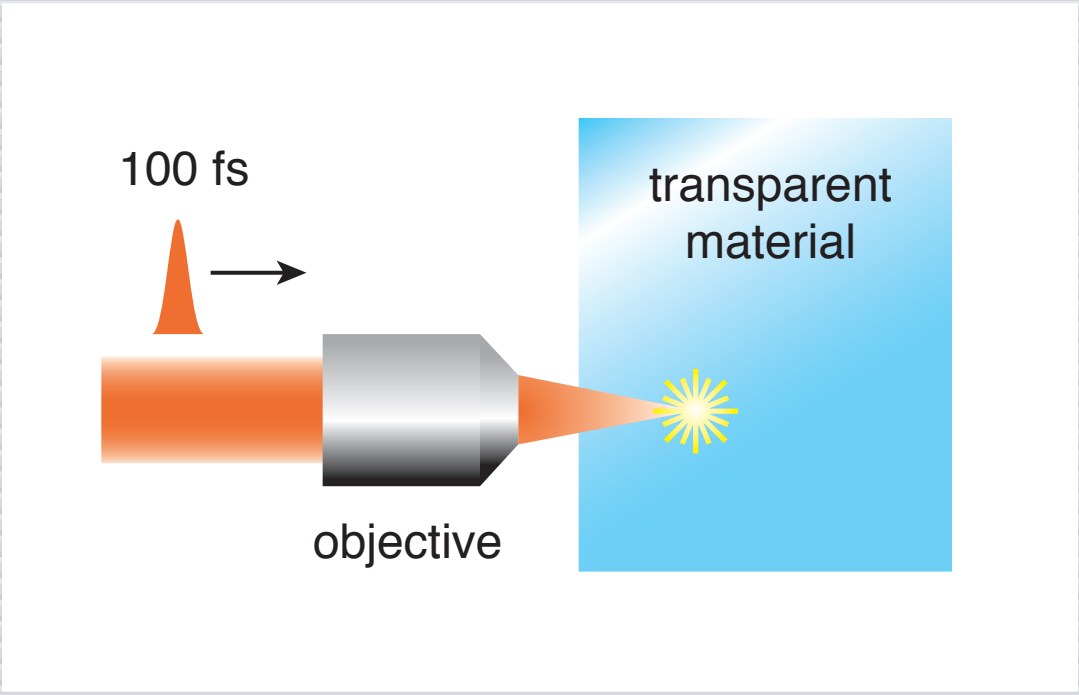

…causes nonlinear ionization…

Processing with fs pulses

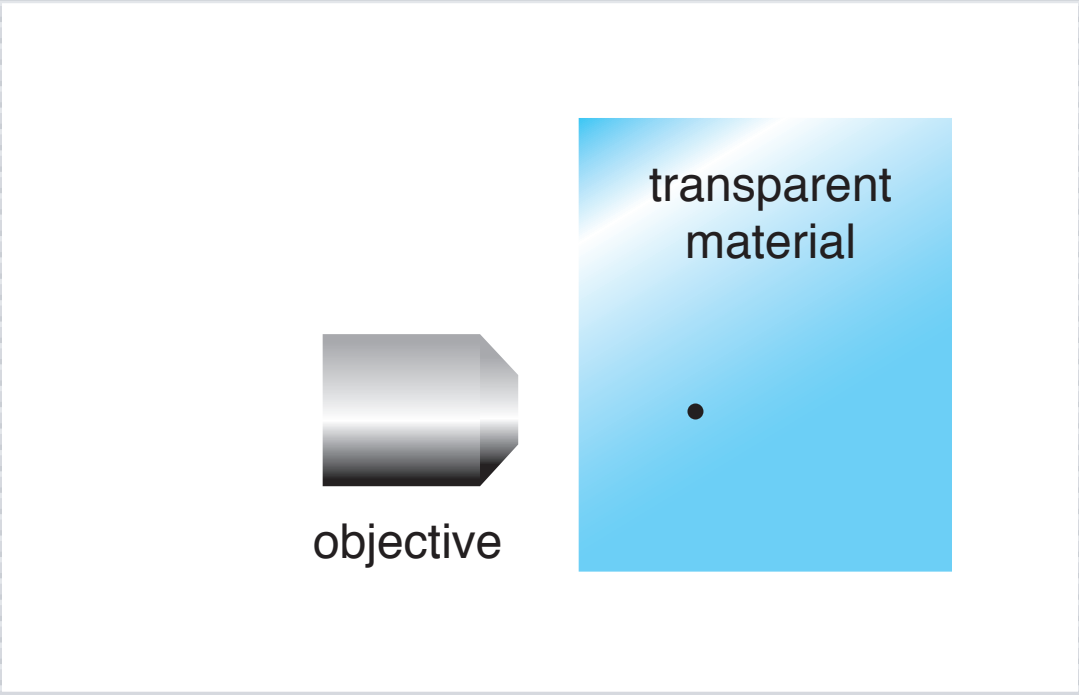

and ‘microexplosion’ causes microscopic damage

Processing with fs pulses

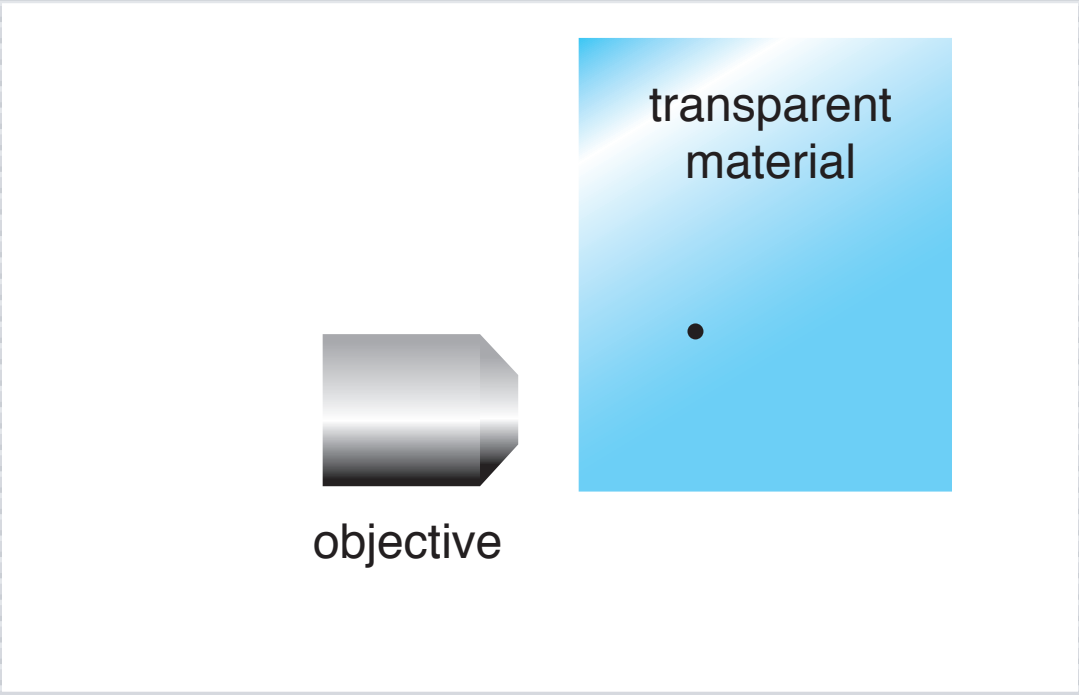

translate sample

Processing with fs pulses

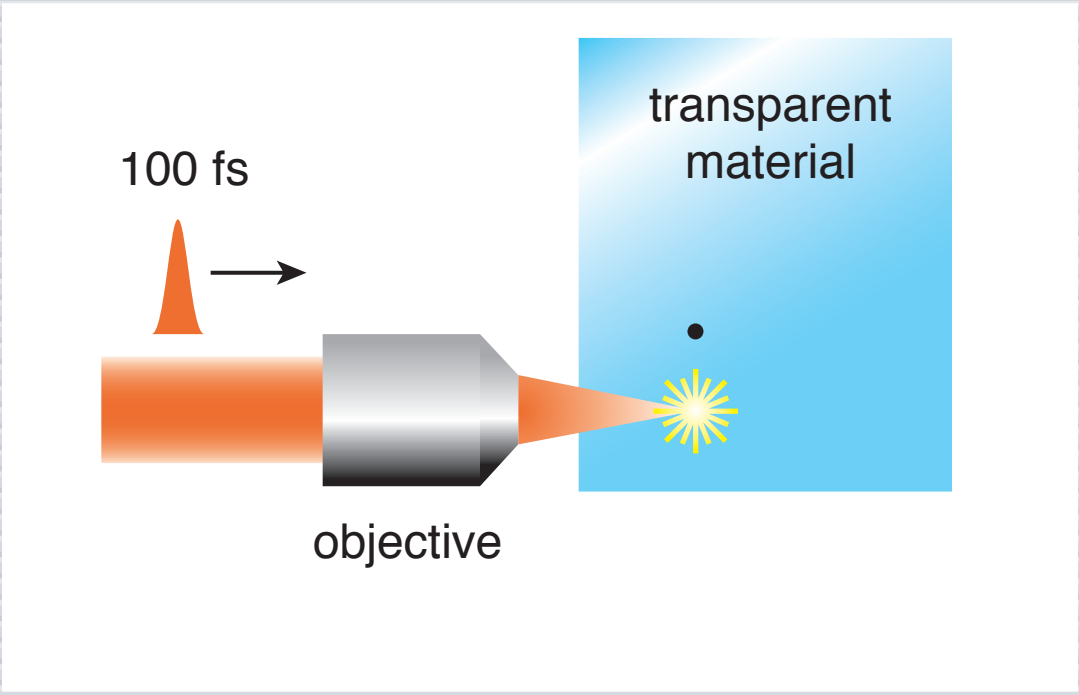

100 fs: laser energy transfered to electrons

Processing with fs pulses

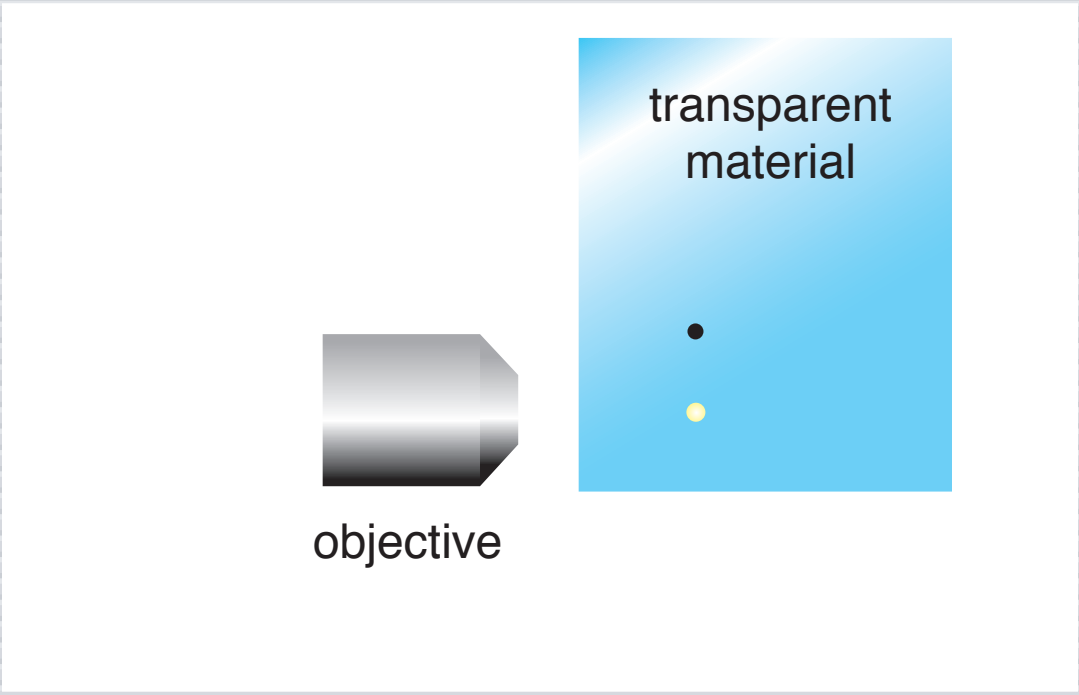

10 ps: energy transfer to ions

Processing with fs pulses

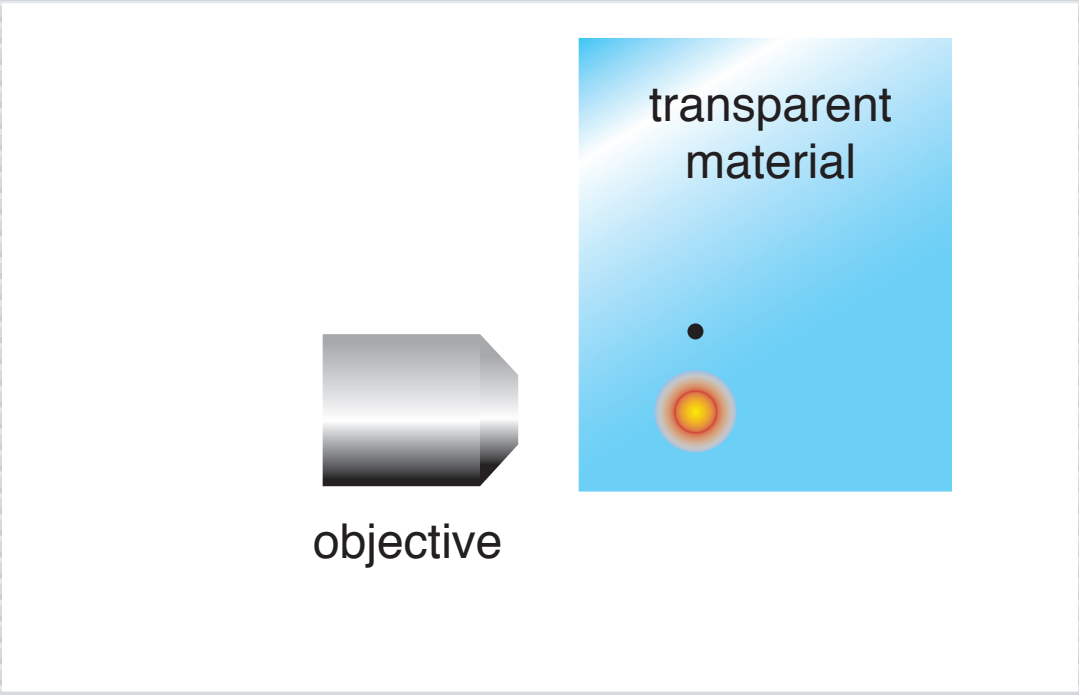

100 ps: plasma expansion

Processing with fs pulses

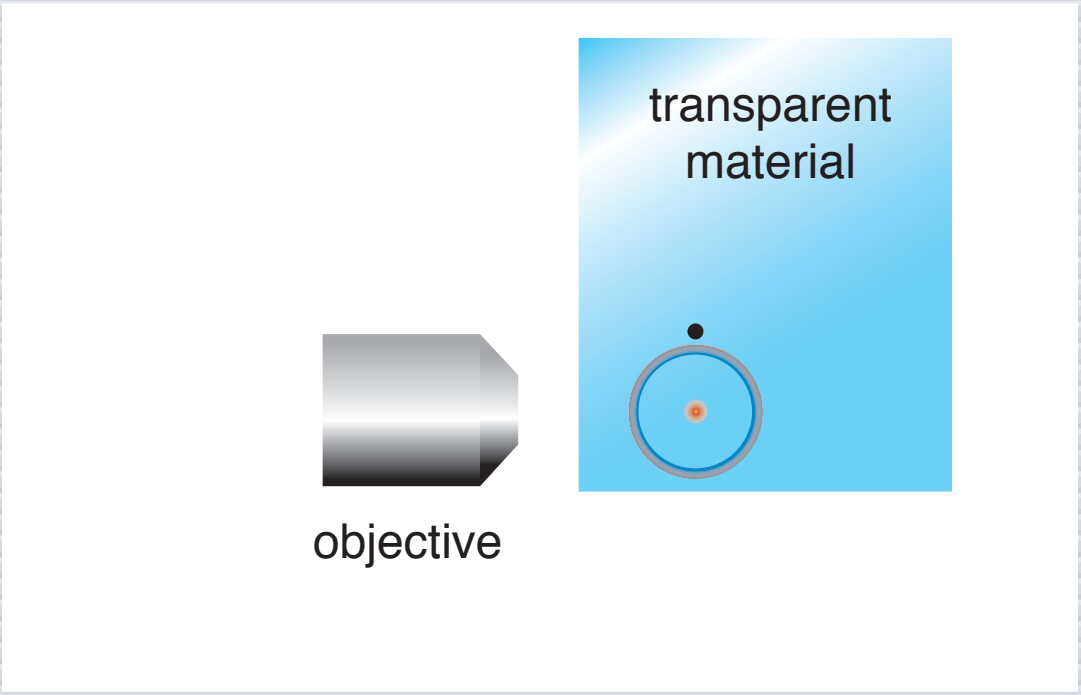

10–100 ns: shock propagation

Processing with fs pulses

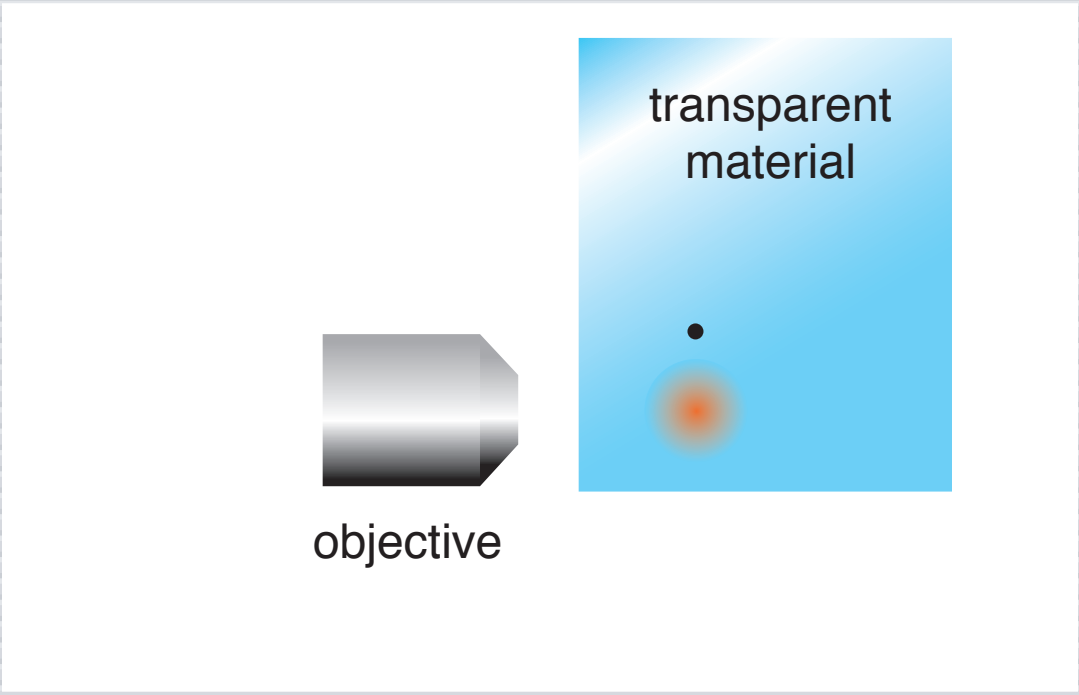

1 µs: thermal expansion

Processing with fs pulses

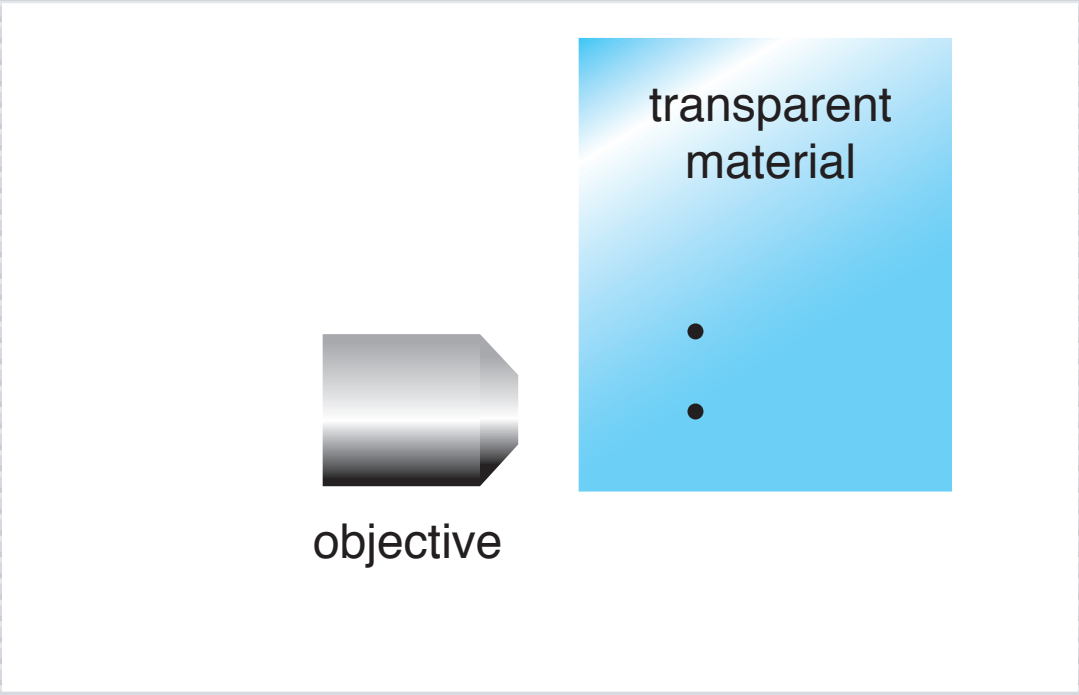

1 ms: permanent structural damage

Processing with fs pulses

2 x 2 μm array

fused silica, 0.65 NA

0.5 μJ, 100 fs, 800 nm

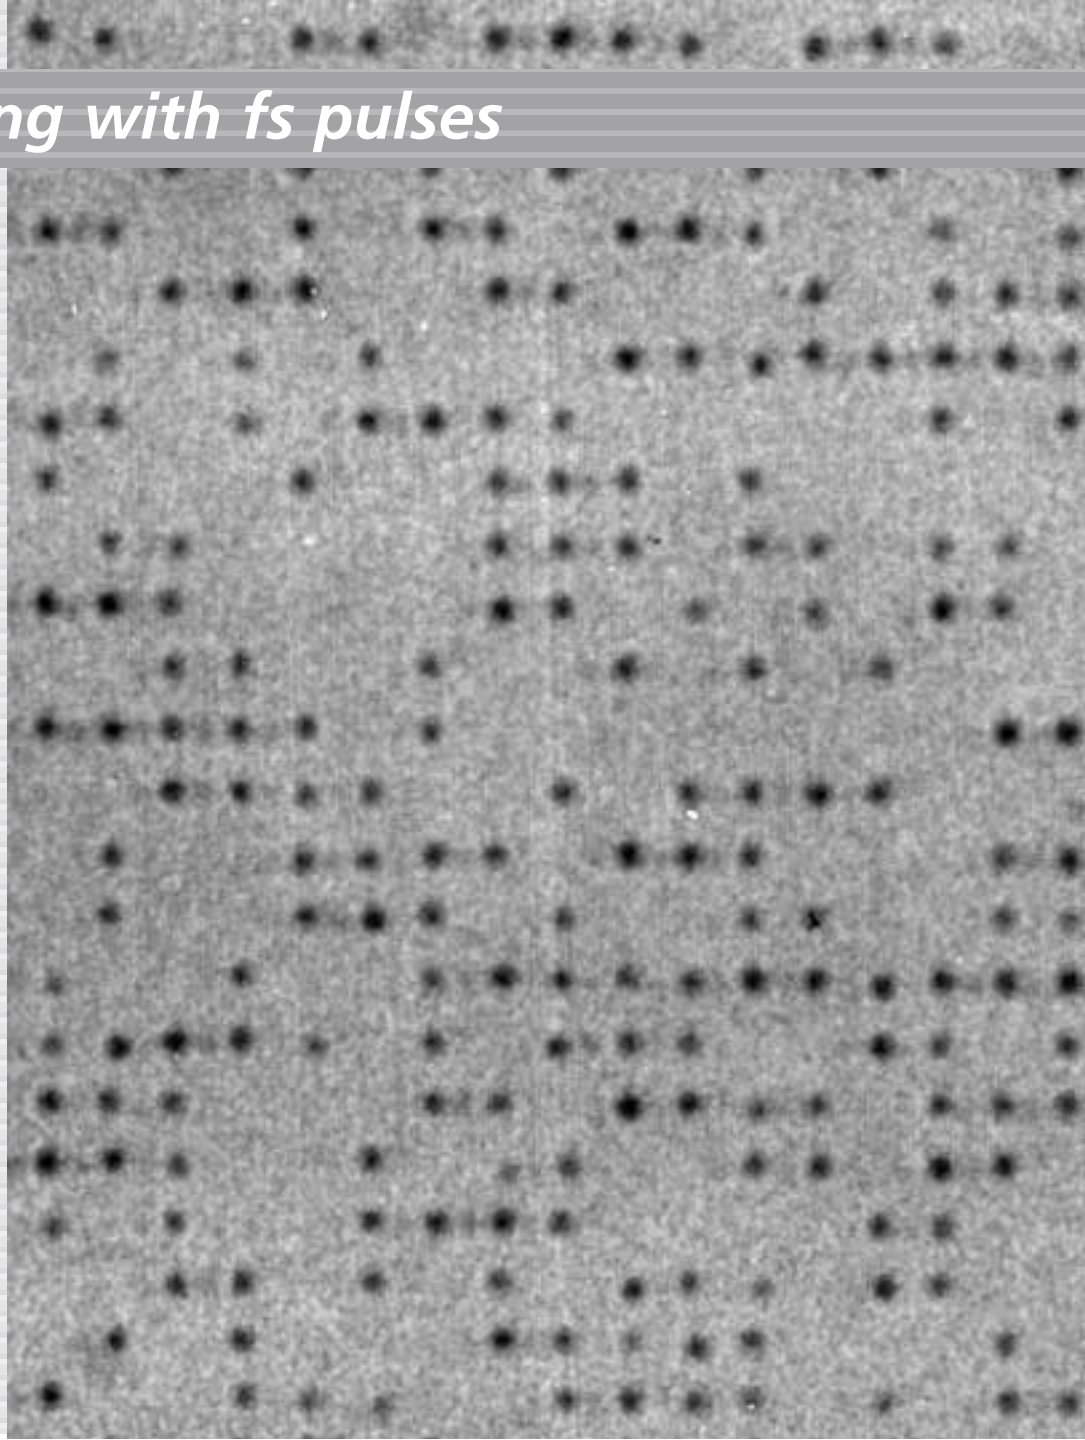

***Opt. Lett.* 21, 2023 (1996)**

Processing with fs pulses

2 x 2 μm array

fused silica, 0.65 NA

0.5 μJ, 100 fs, 800 nm

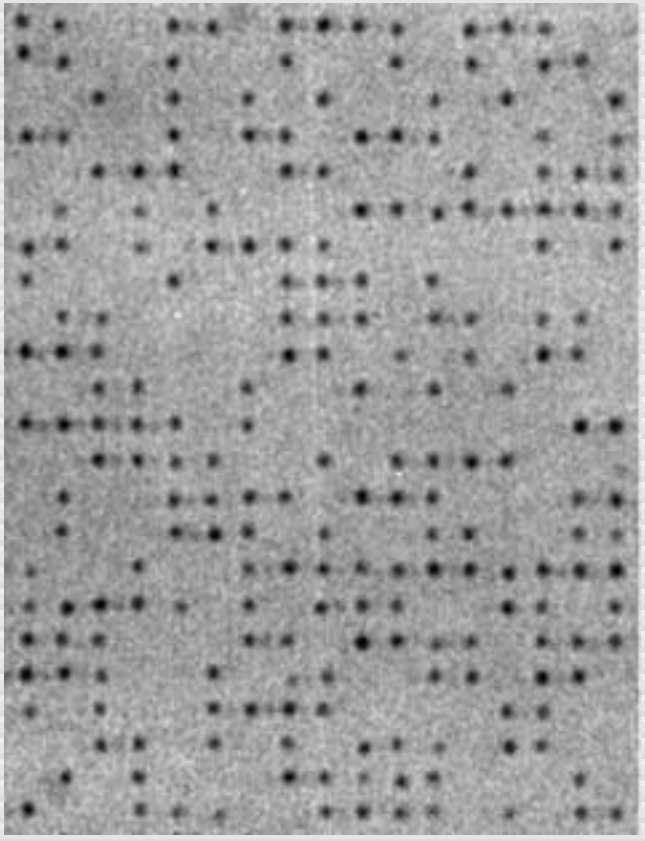

***Opt. Lett.* 21, 2023 (1996)**

Processing with fs pulses

2 x 2 μm array

fused silica, 0.65 NA

0.5 μJ, 100 fs, 800 nm

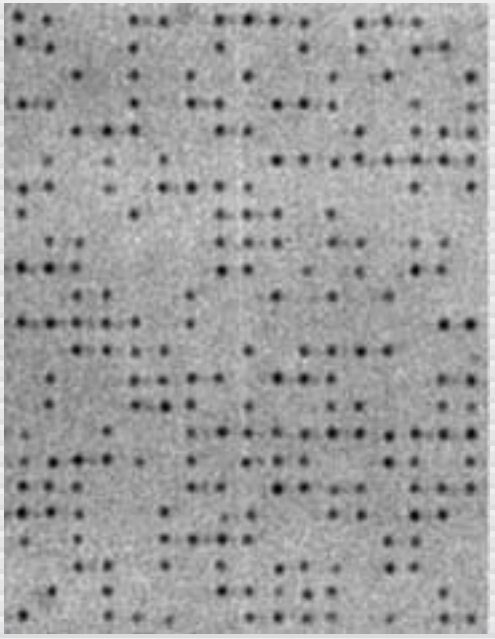

***Opt. Lett.* 21, 2023 (1996)**

Processing with fs pulses

2 x 2 μm array

fused silica, 0.65 NA

0.5 μJ, 100 fs, 800 nm

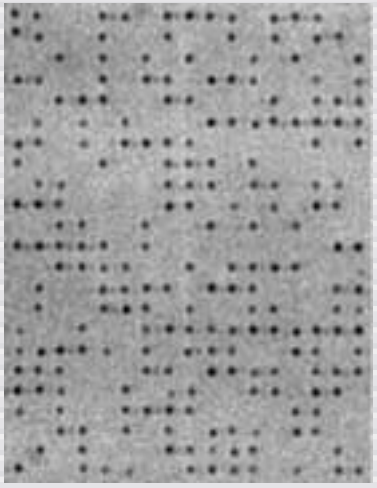

***Opt. Lett.* 21, 2023 (1996)**

Processing with fs pulses

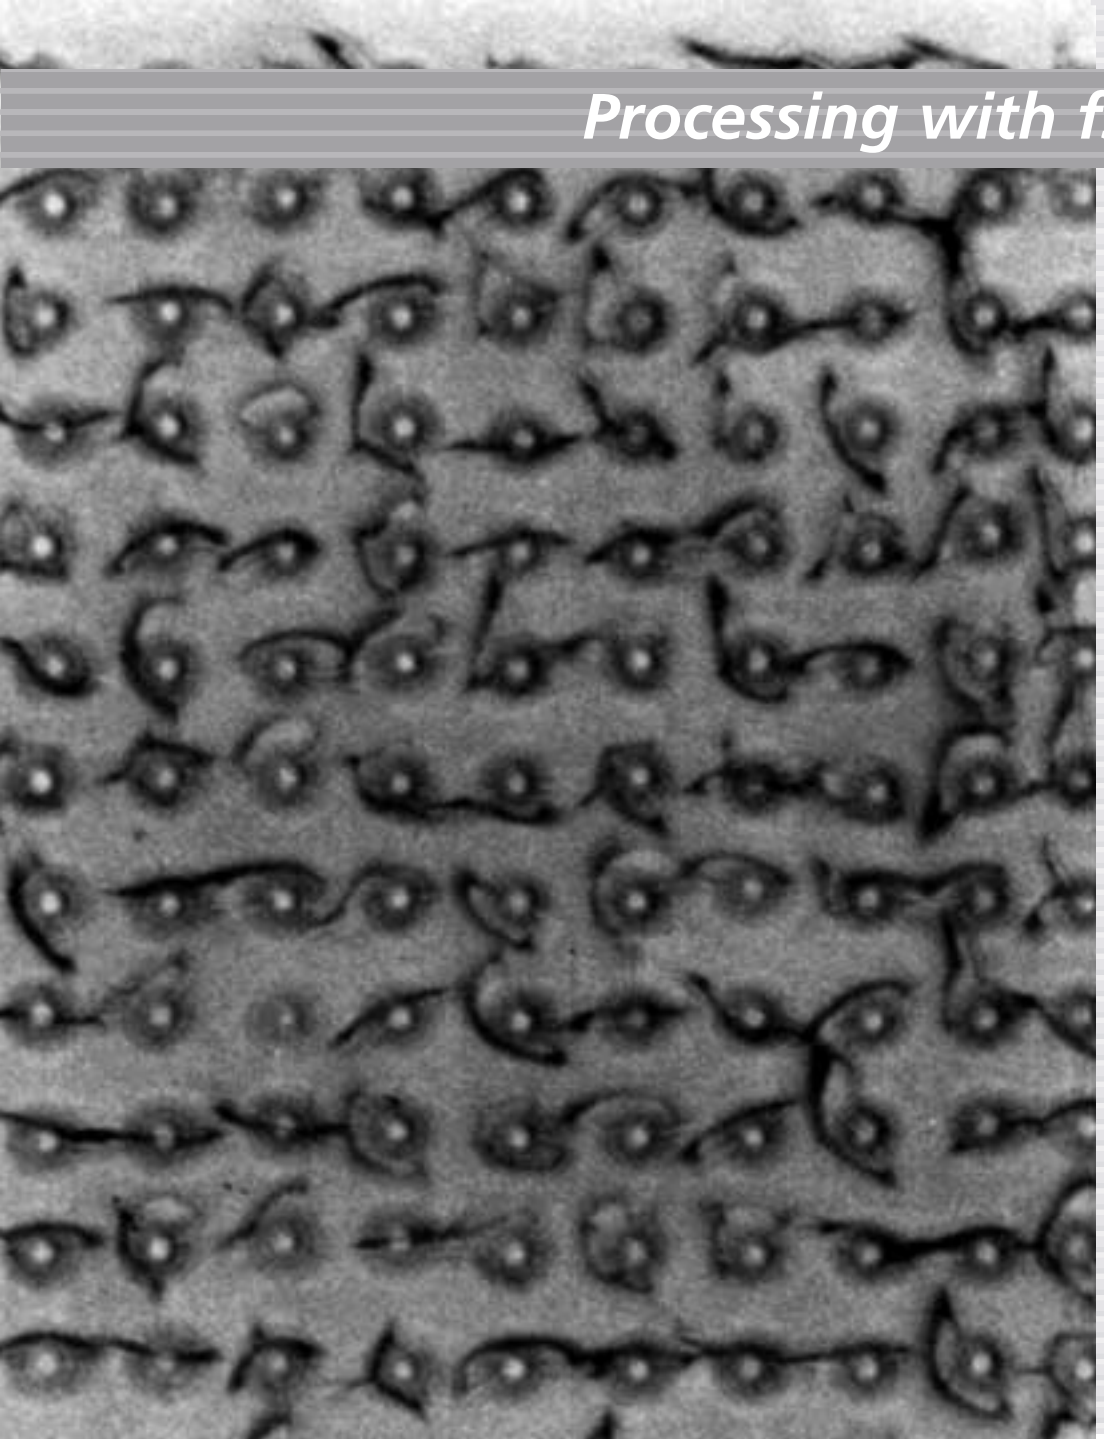

200 ps
9 µJ

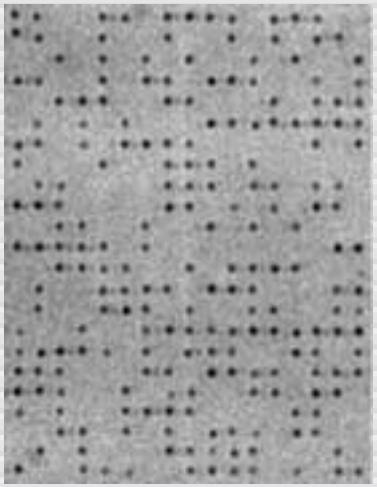

100 fs
0.5 µJ

Processing with fs pulses

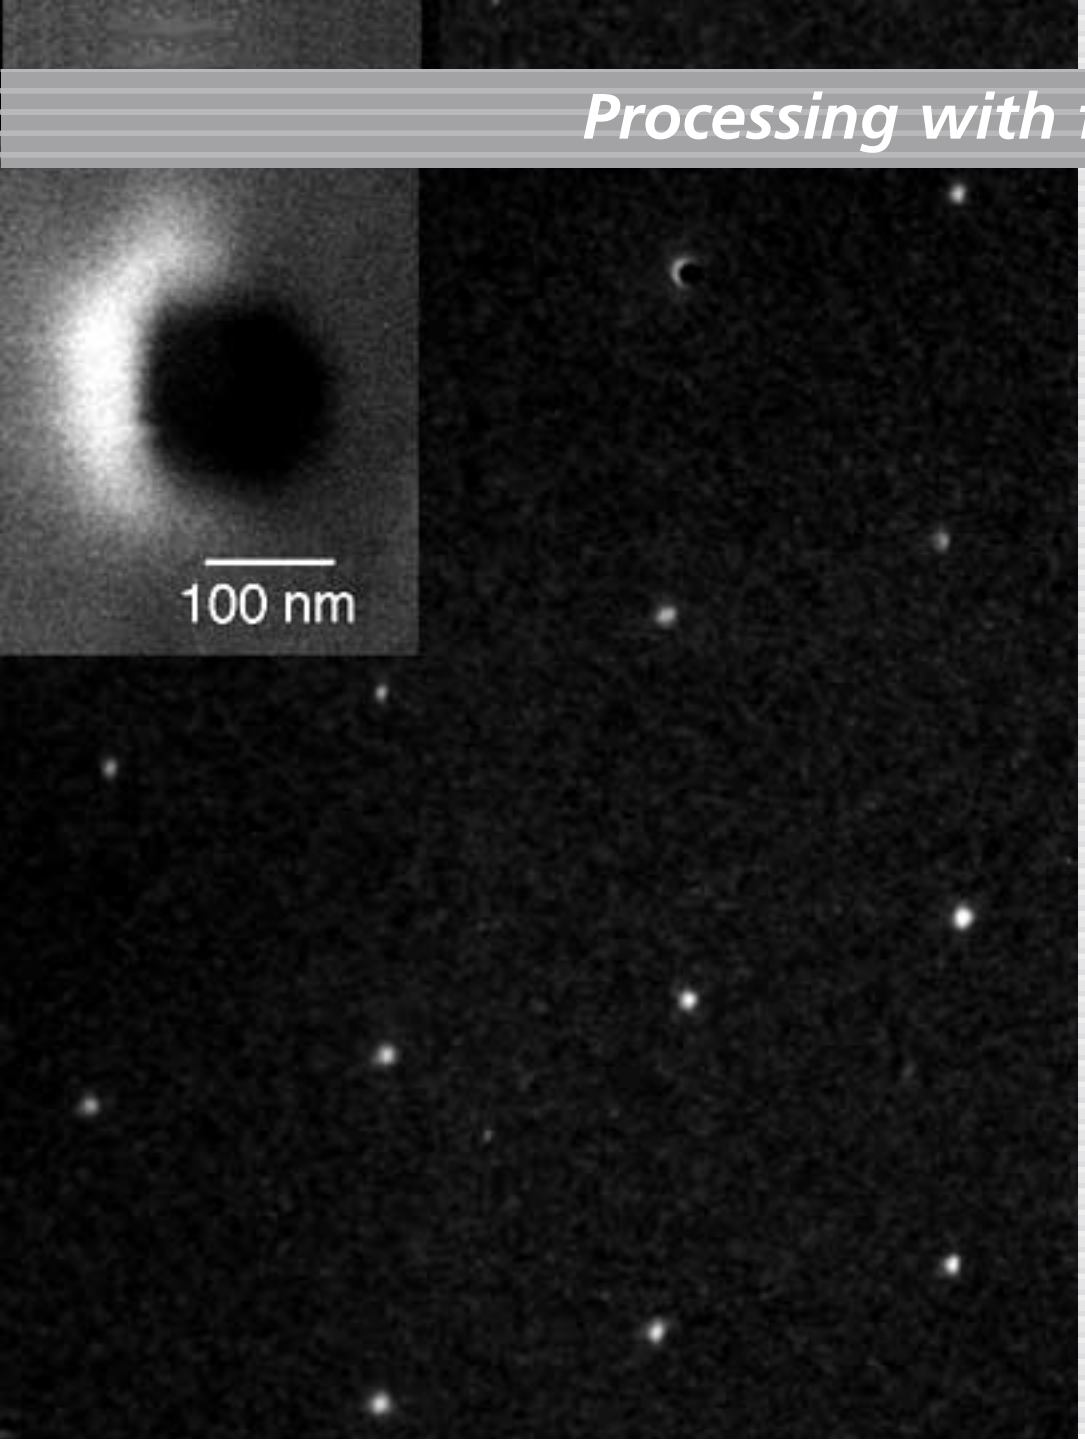

5 x 5 μm array

fused silica, 0.65 NA

0.5 μJ, 100 fs, 800 nm

***Opt. Lett.* 21, 2023 (1996)**

Processing with fs pulses

Points to keep in mind:

- **fs laser processing works**
- **focusing very important**
- **no collateral damage**

Outline

- Processing with fs pulses
- **Role of focusing**
- Low-energy processing

Role of focusing

Dark-field scattering

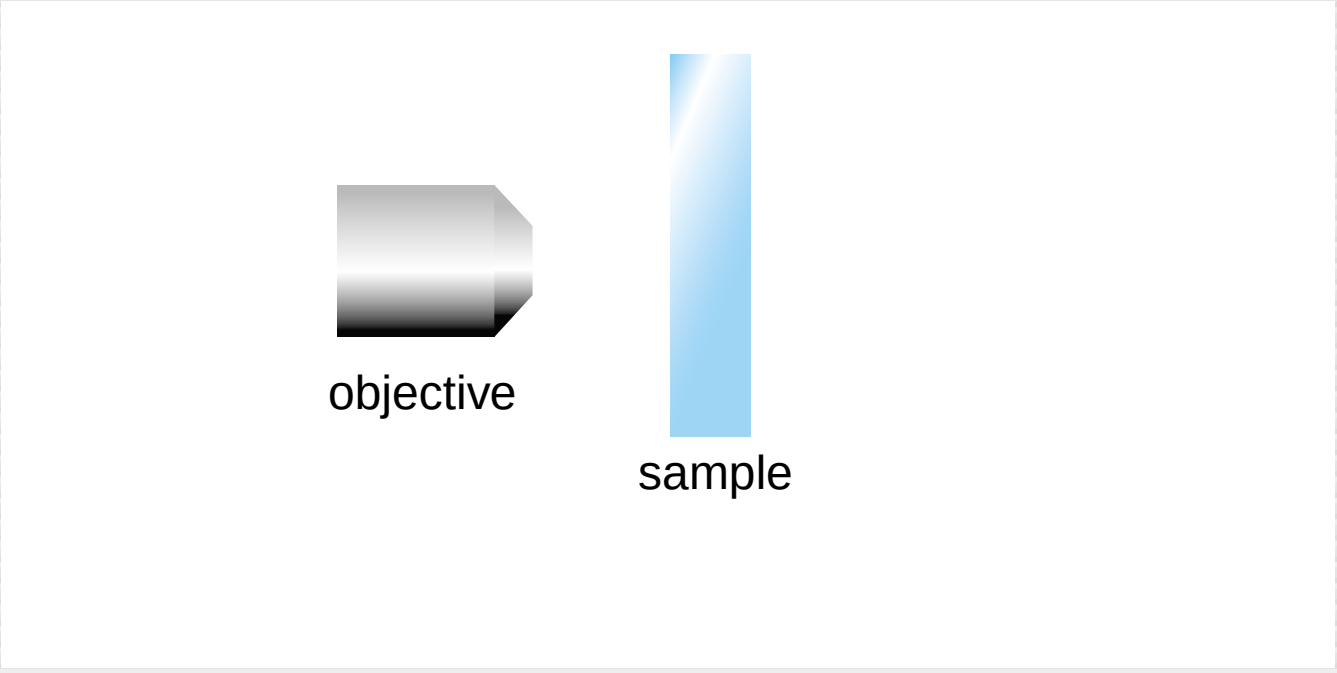

Role of focusing

block probe beam…

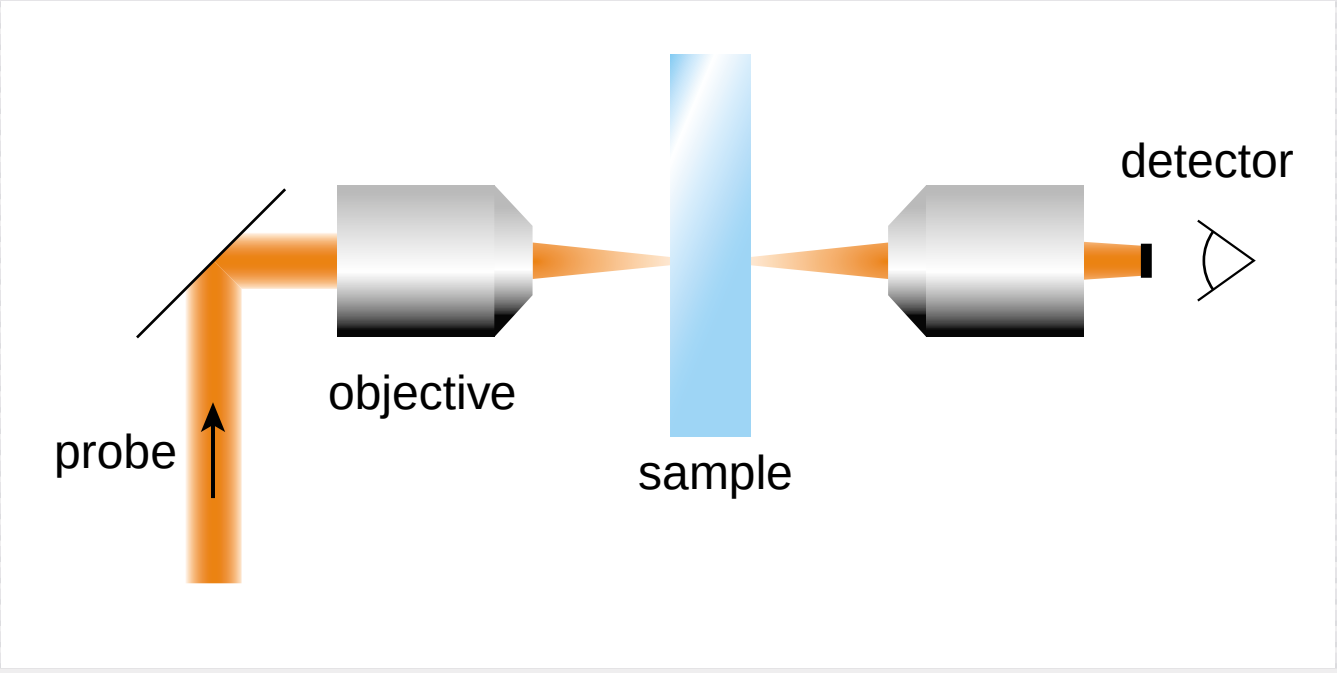

Role of focusing

… bring in pump beam…

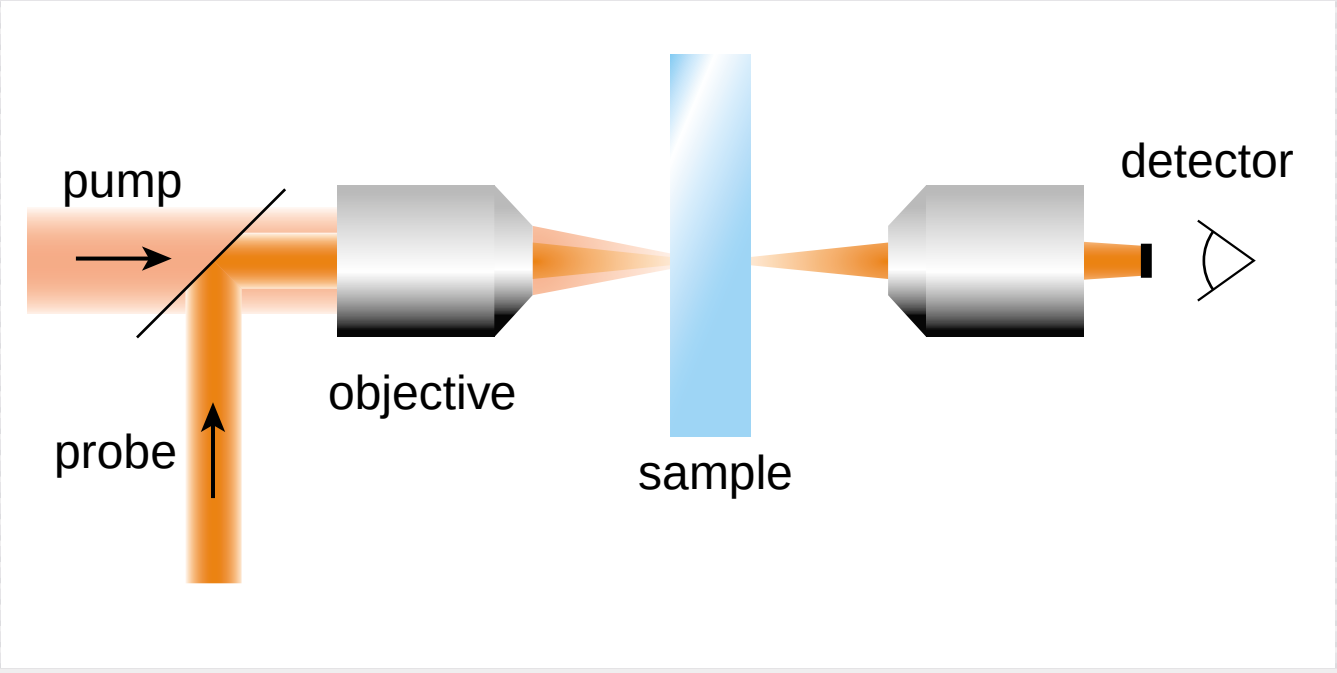

Role of focusing

… damage scatters probe beam

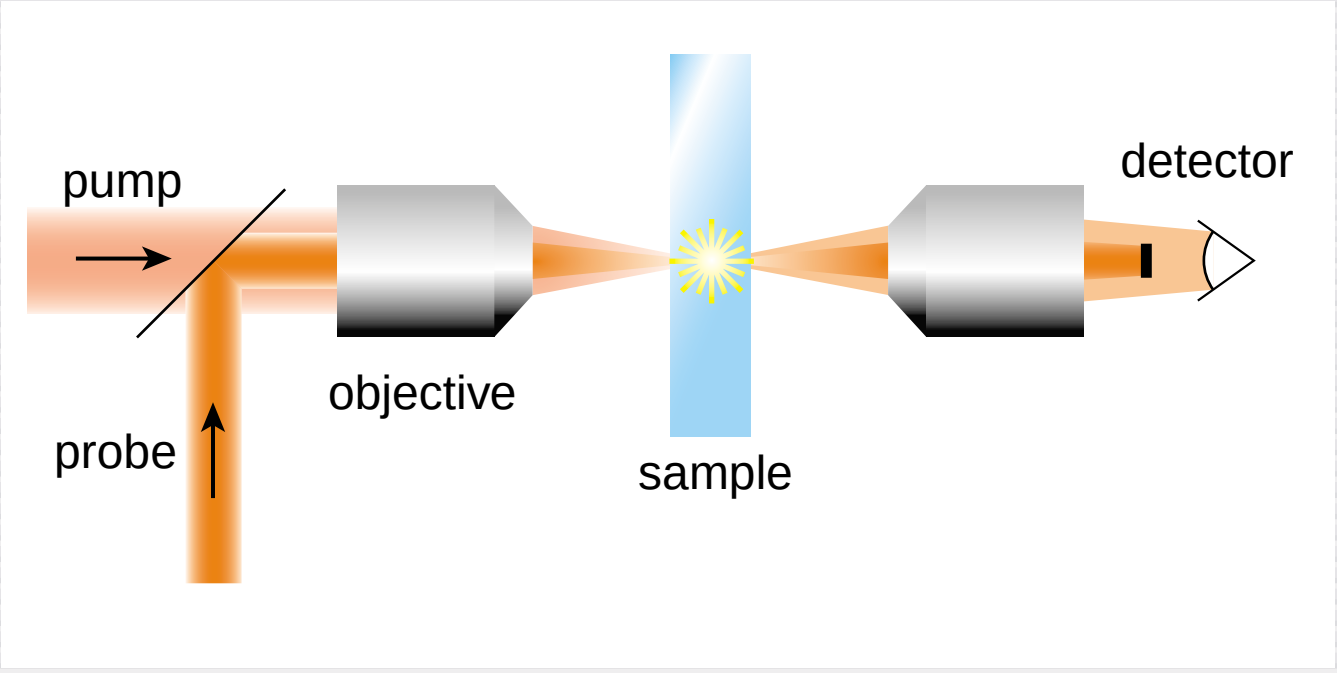

Role of focusing

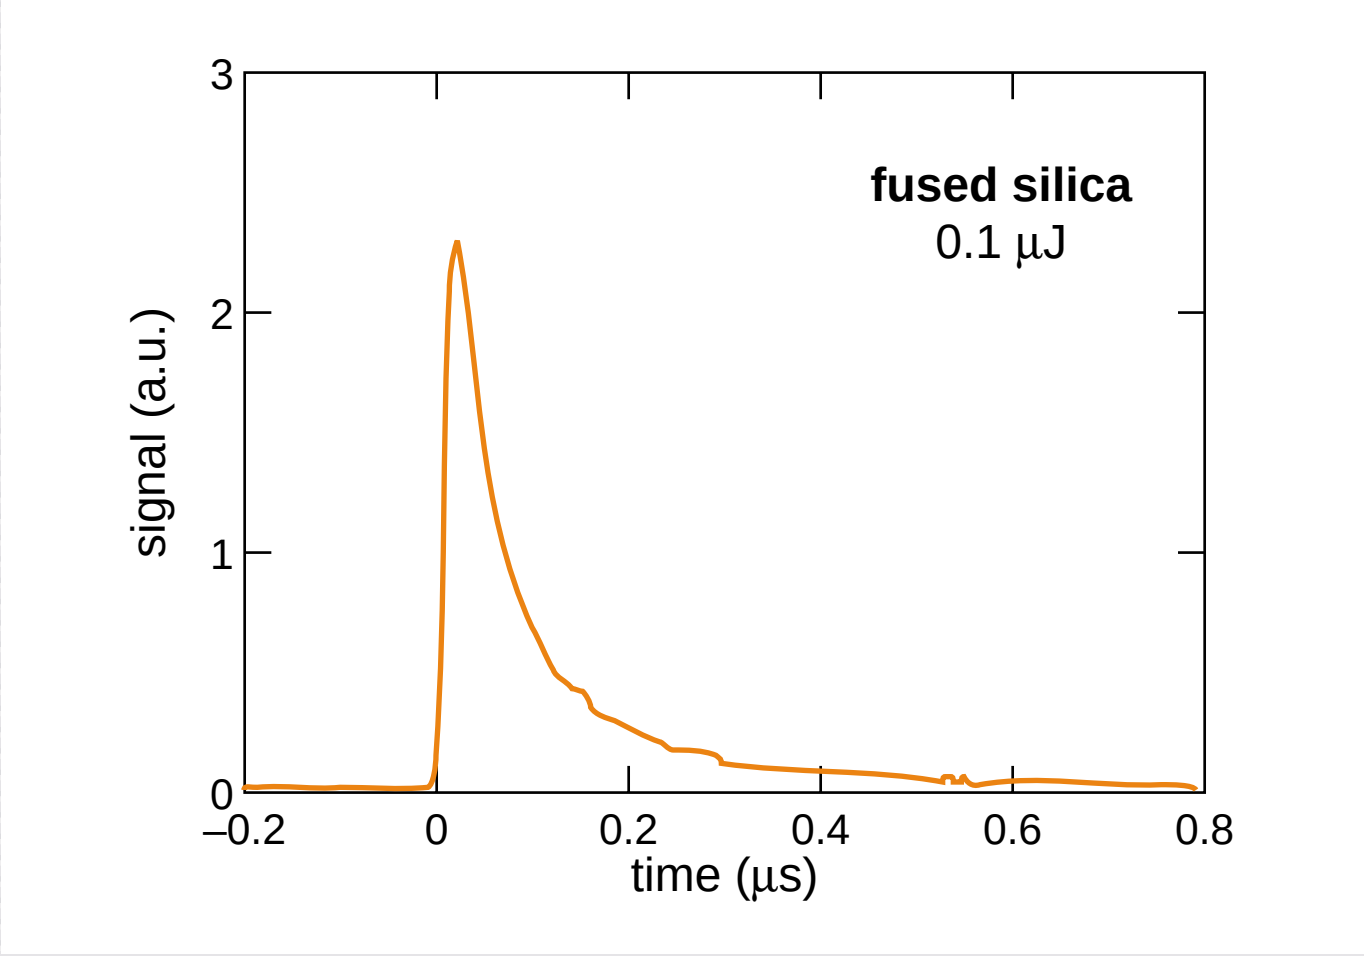

Role of focusing

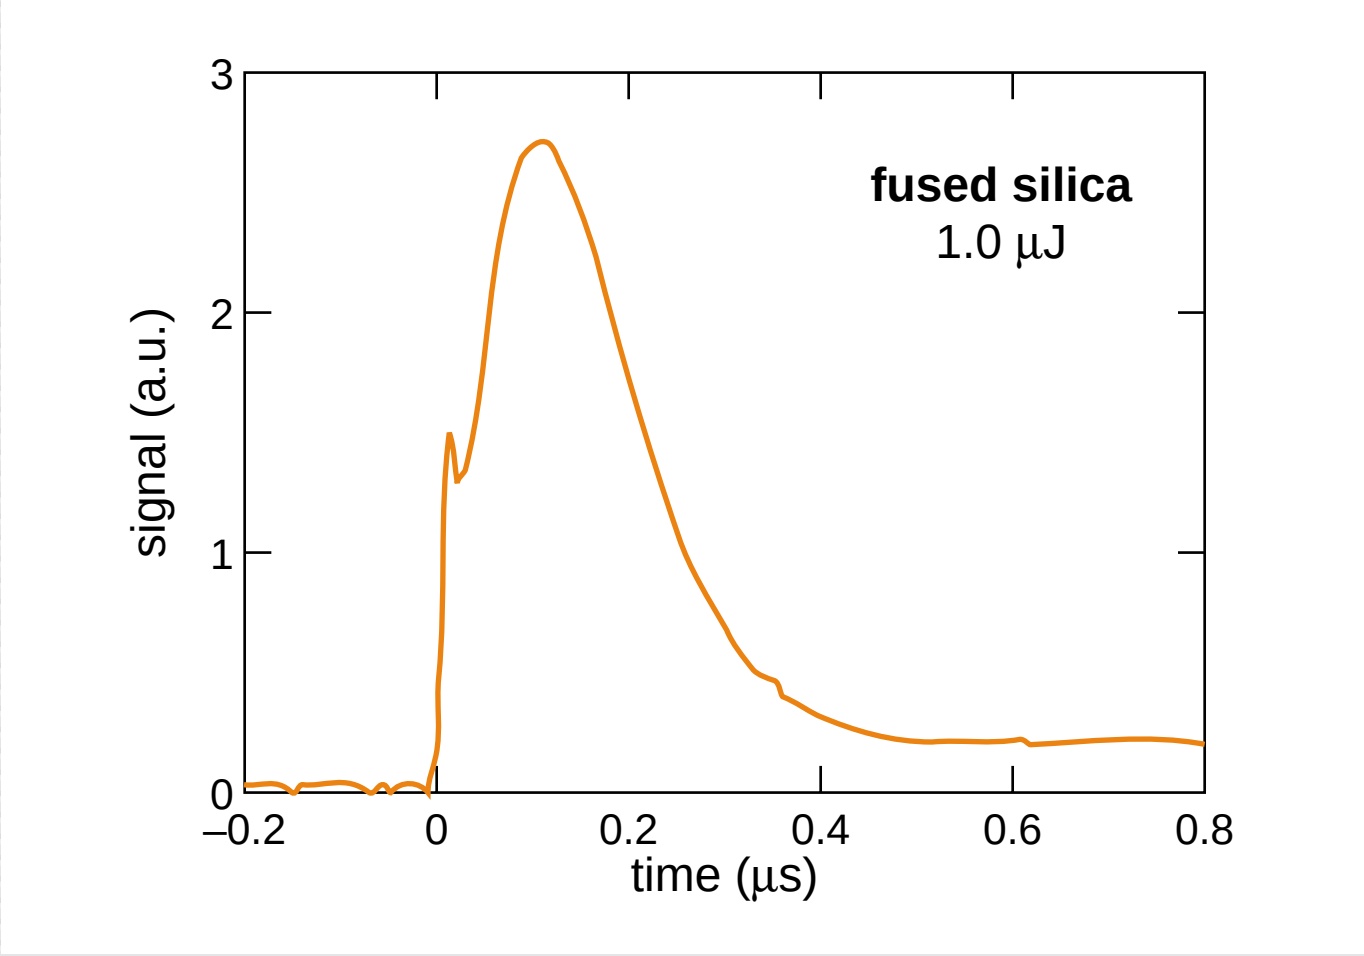

Role of focusing

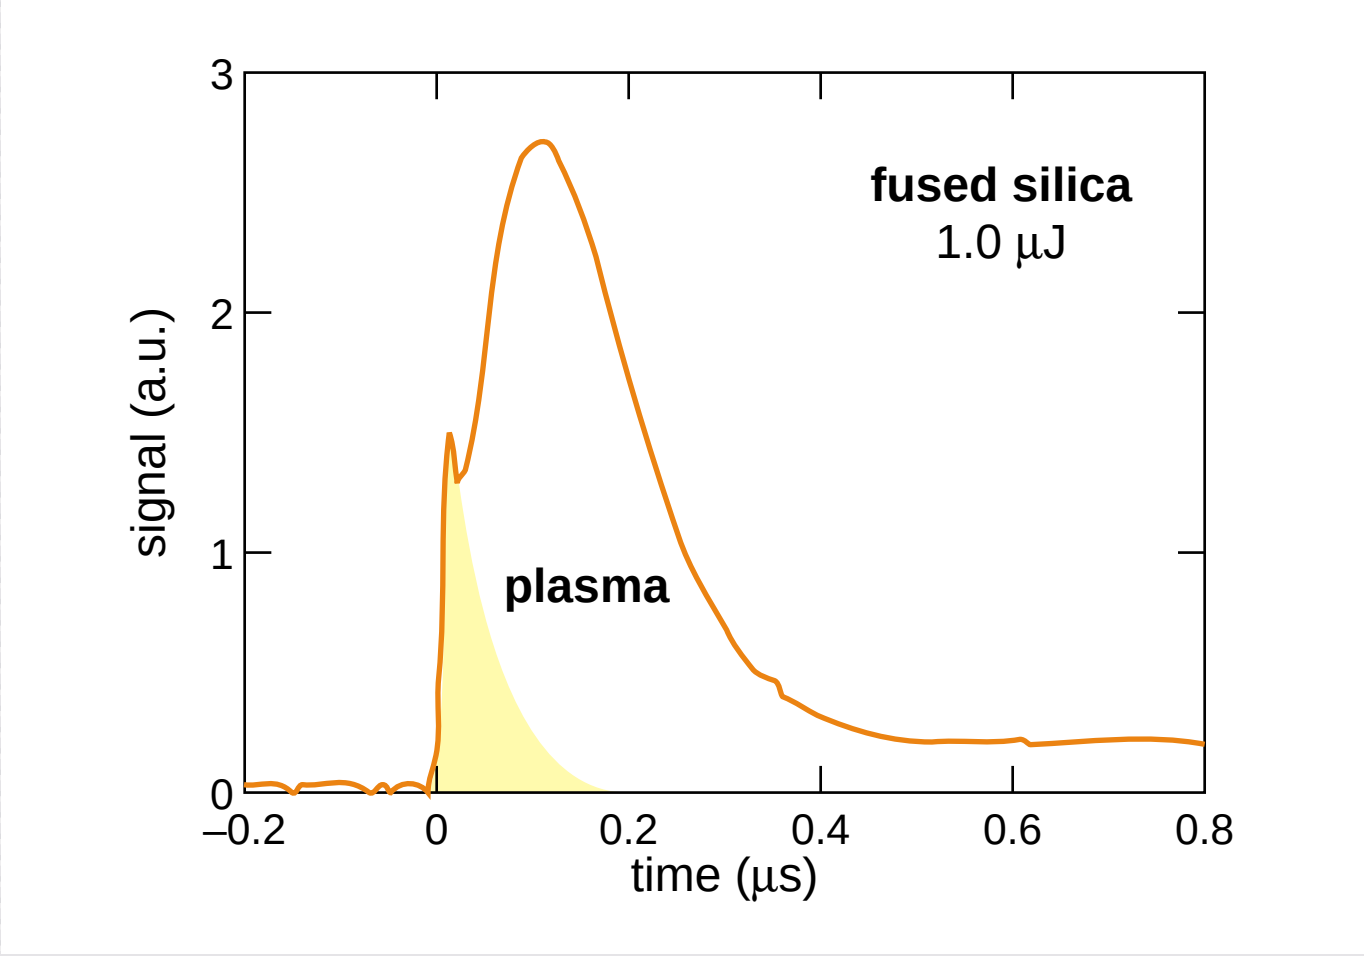

Role of focusing

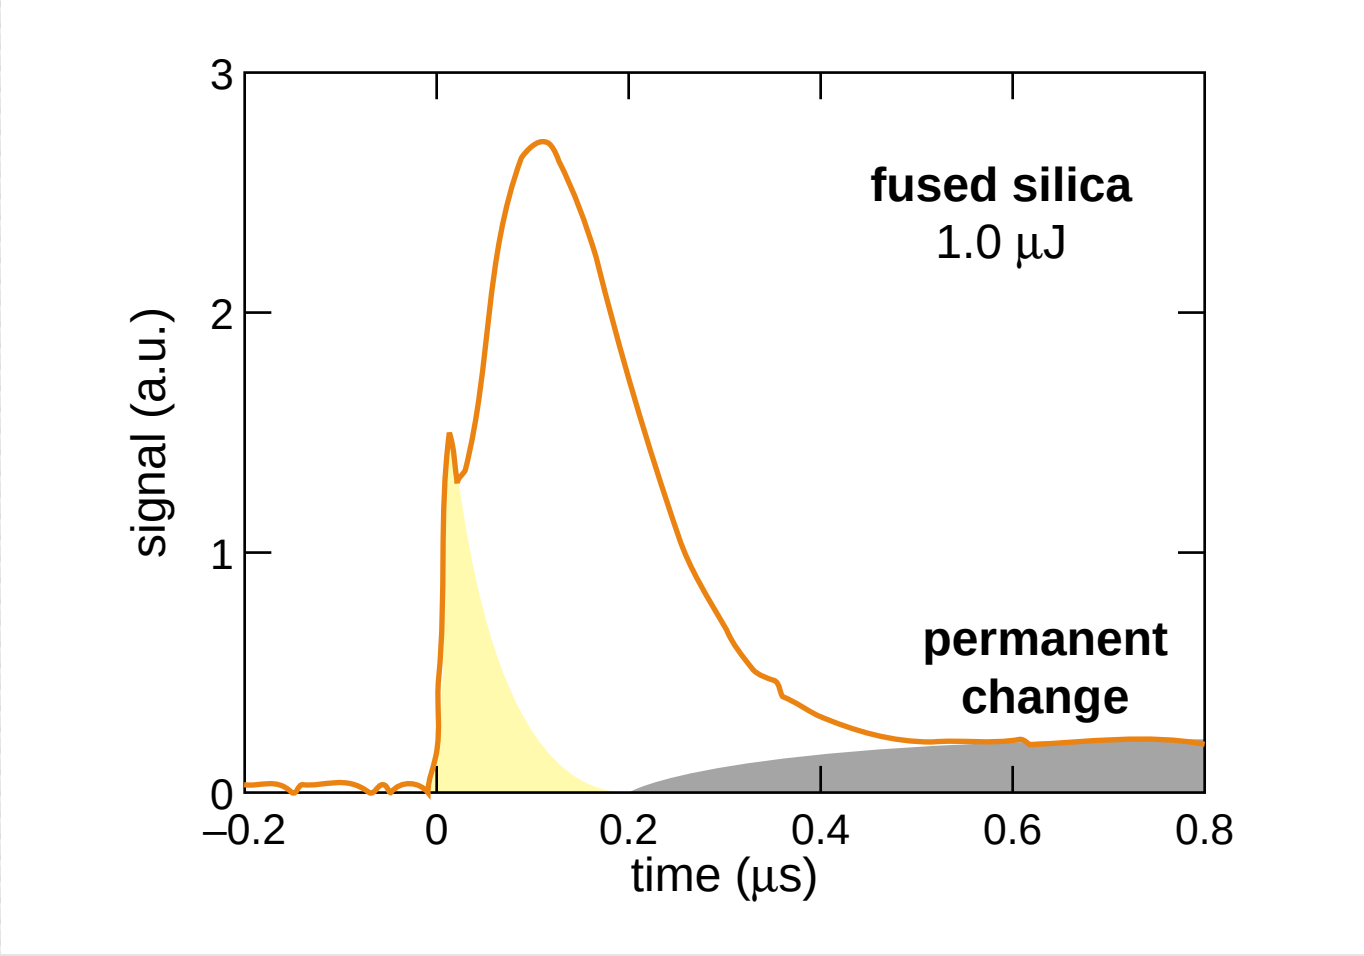

Role of focusing

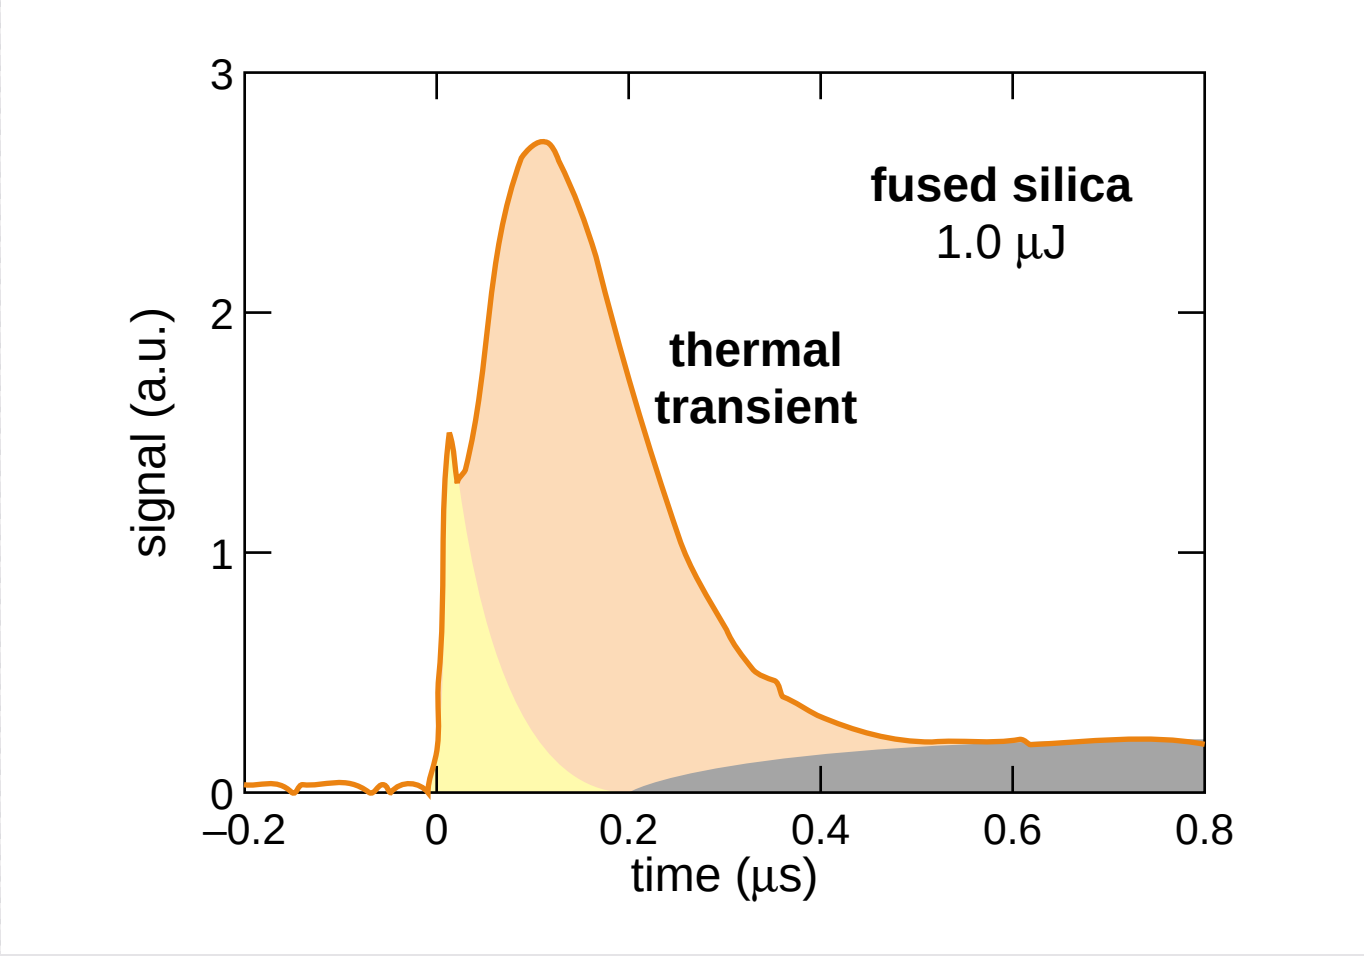

Role of focusing

vary numerical aperture in Corning 0211

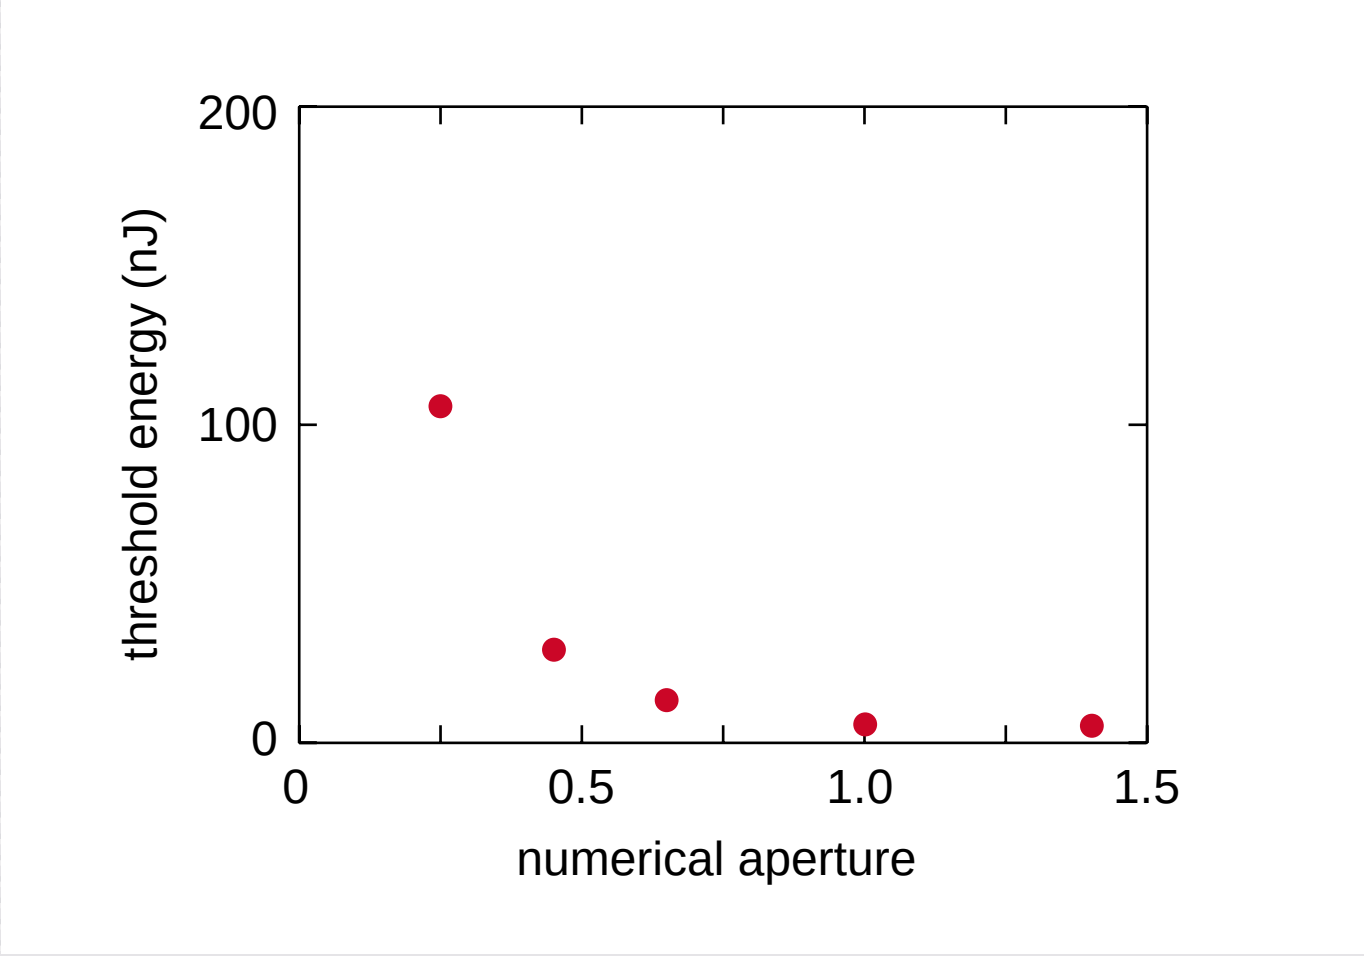

Role of focusing

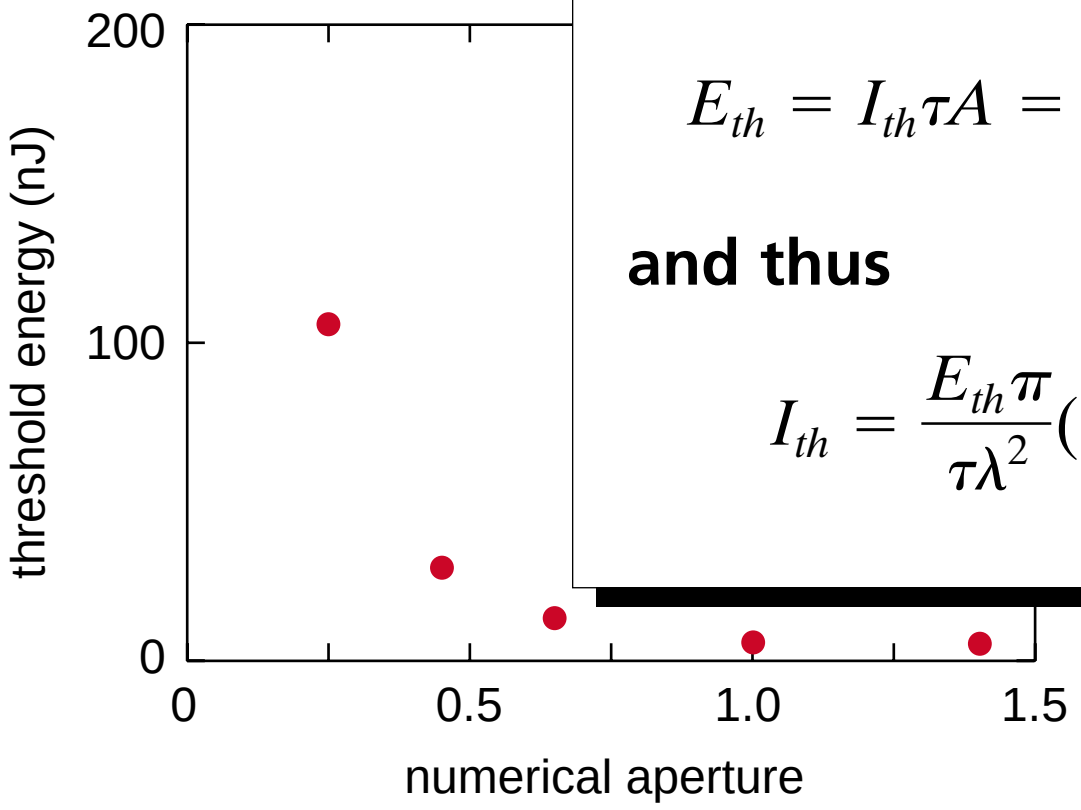

spot size determined by numerical aperture:

$$E_{th} = I_{th}\tau A = \frac{I_{th}\tau\lambda^2}{\pi(\mathrm{NA})^2}$$

and thus

$$I_{th} = \frac{E_{th}\pi}{\tau\lambda^2}(\mathrm{NA})^2$$

Role of focusing

fit gives threshold intensity: I_{th} = 2.5 x 10^{17} W/m^2

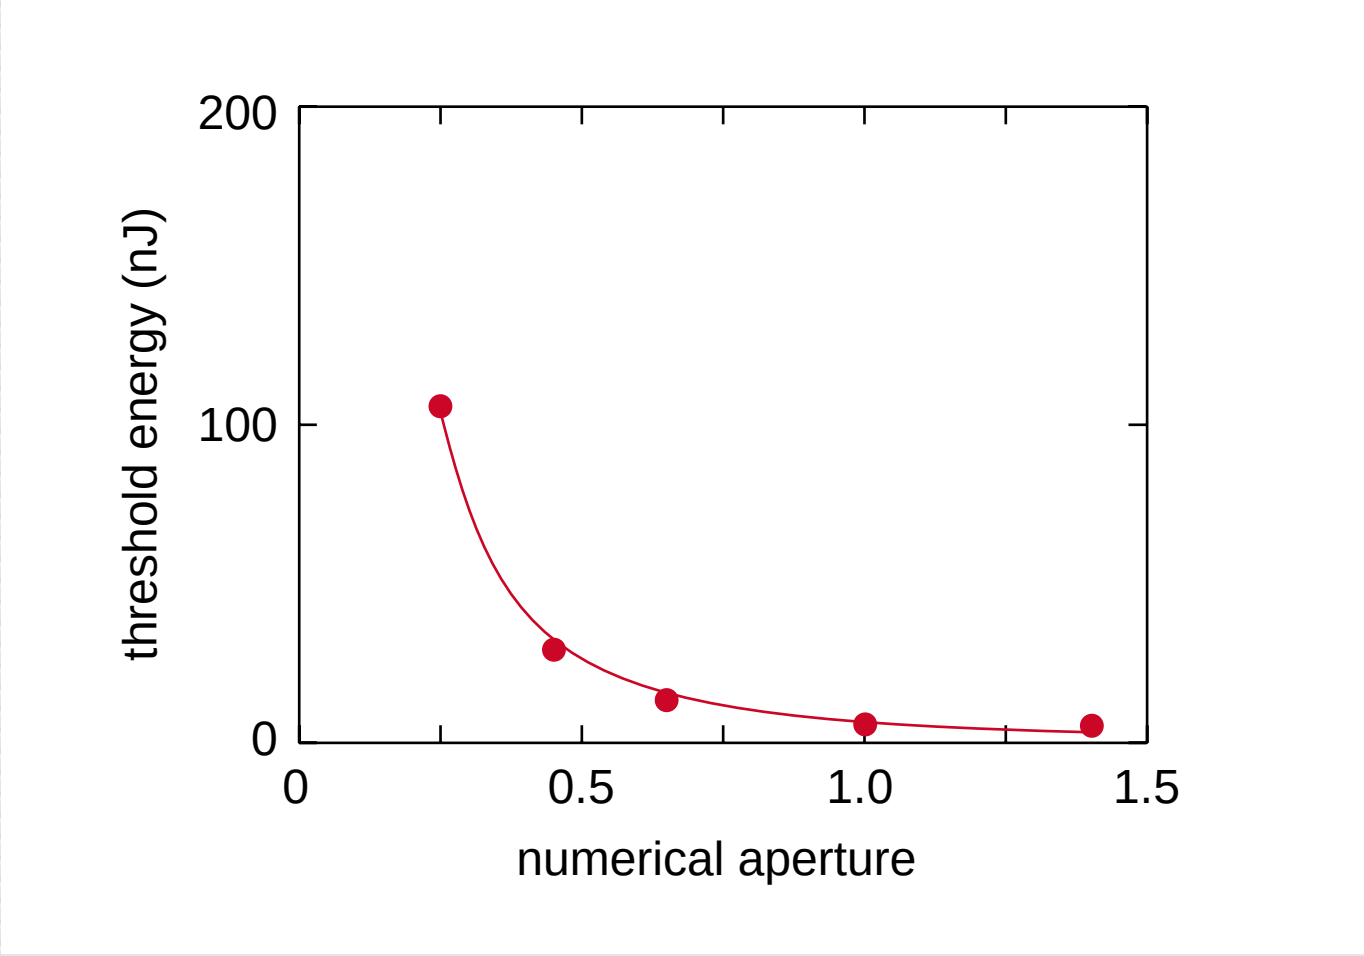

Role of focusing

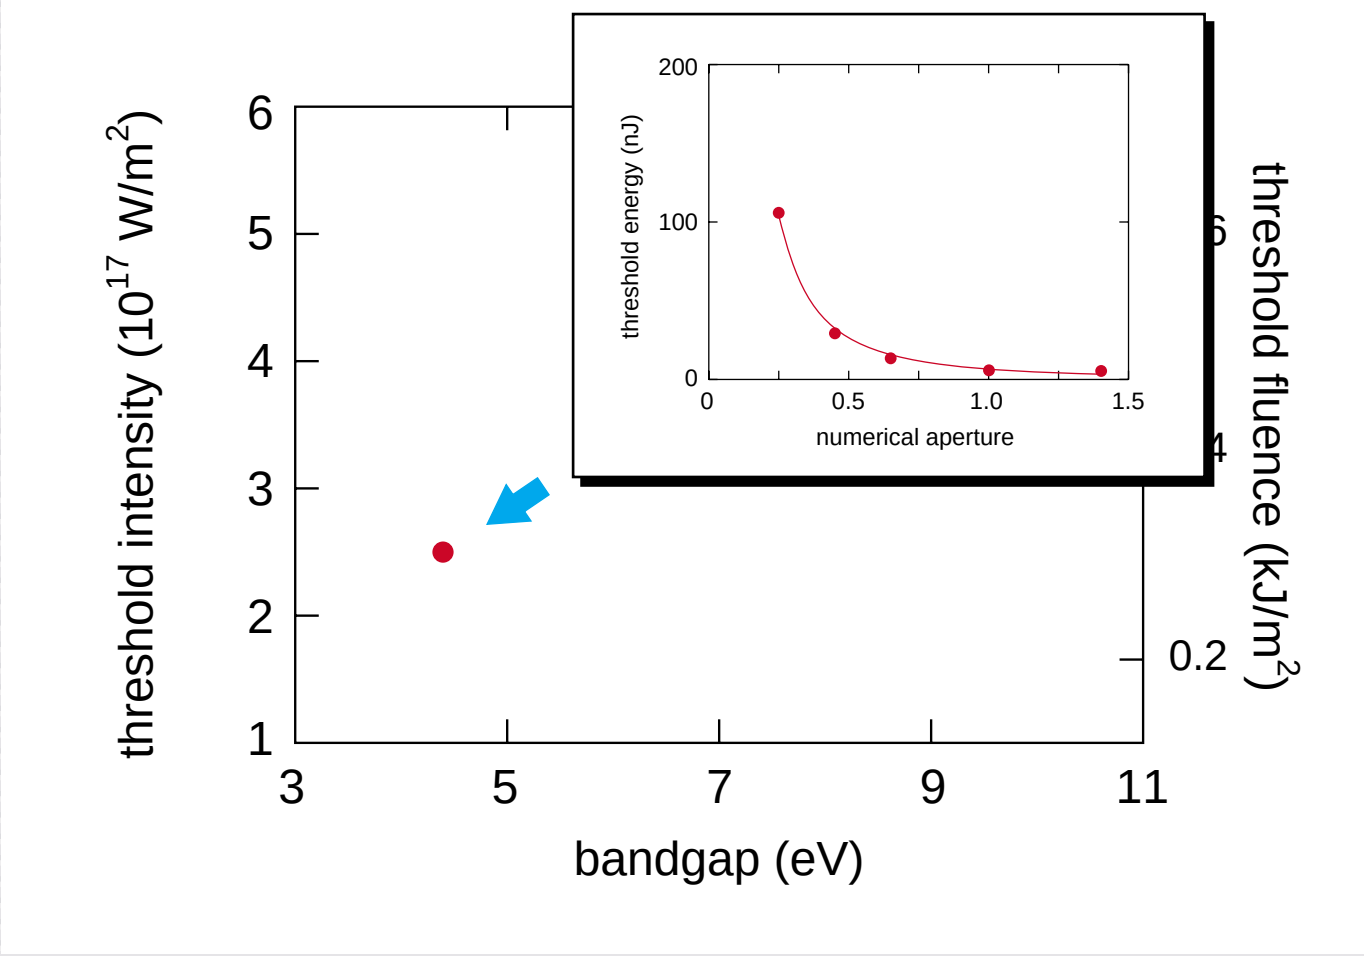

Role of focusing

vary material…

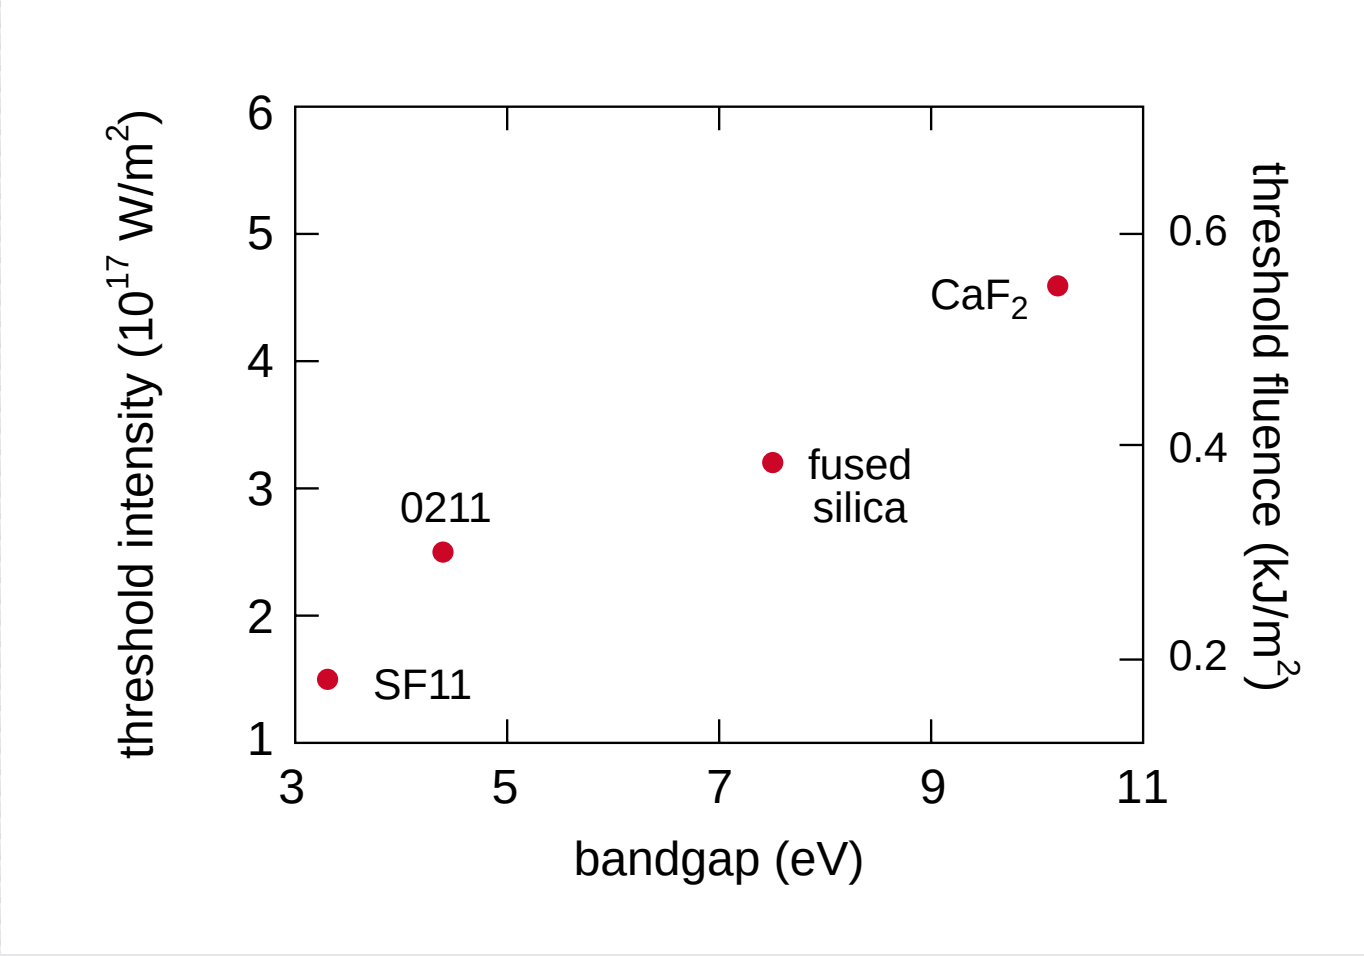

Role of focusing

threshold varies with bandgap

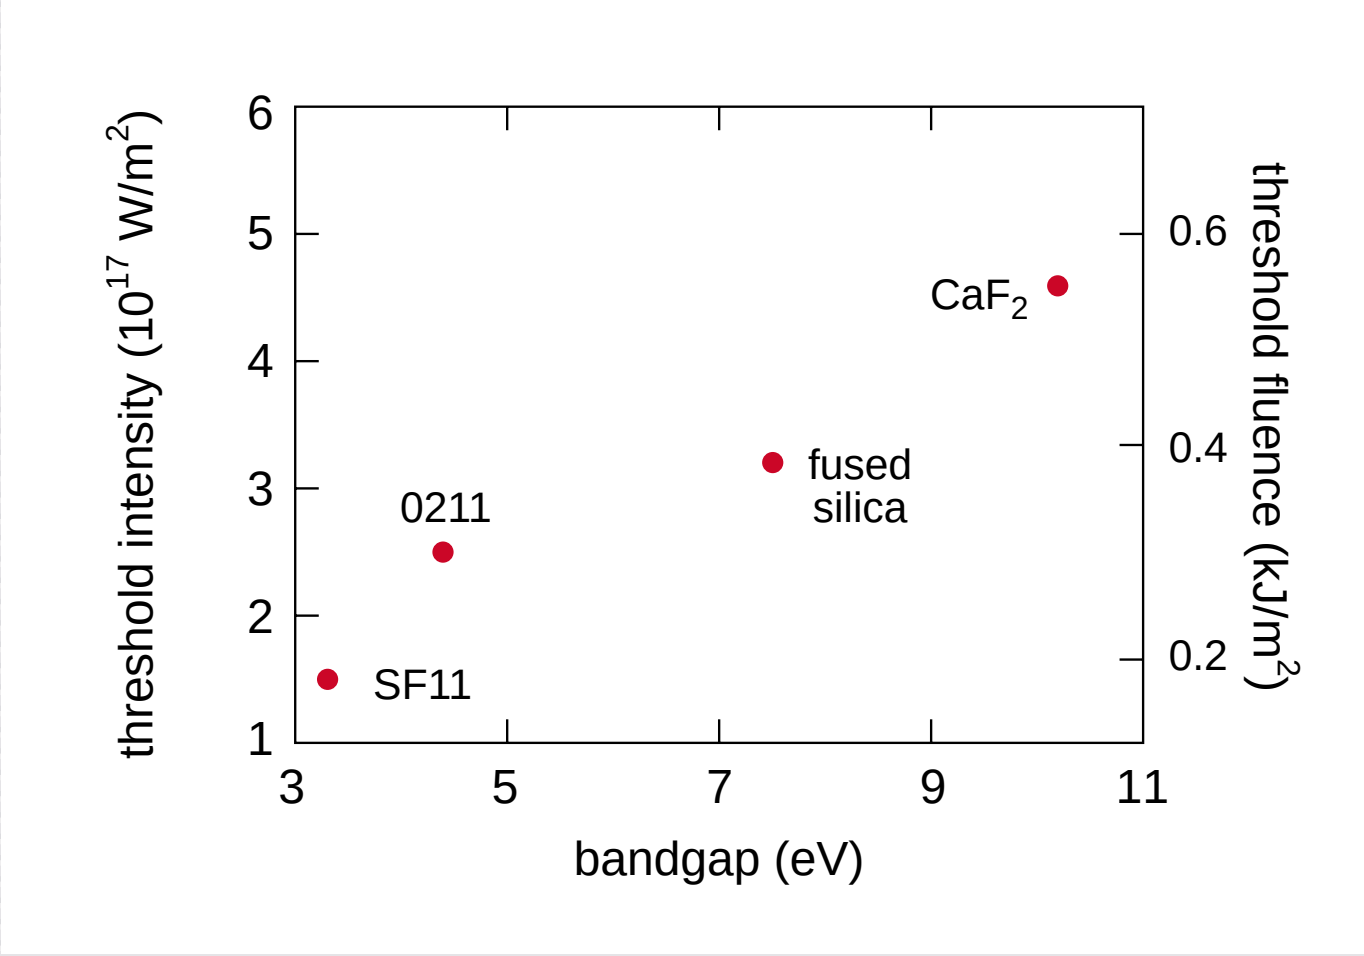

Role of focusing

Points to keep in mind:

- **threshold critically dependent on NA**
- **surprisingly little material dependence**
- **avalanche ionization important**

Outline

- Processing with fs pulses
- Role of focusing
- **Low-energy processing**

Low-energy processing

threshold decreases with increasing numerical aperture

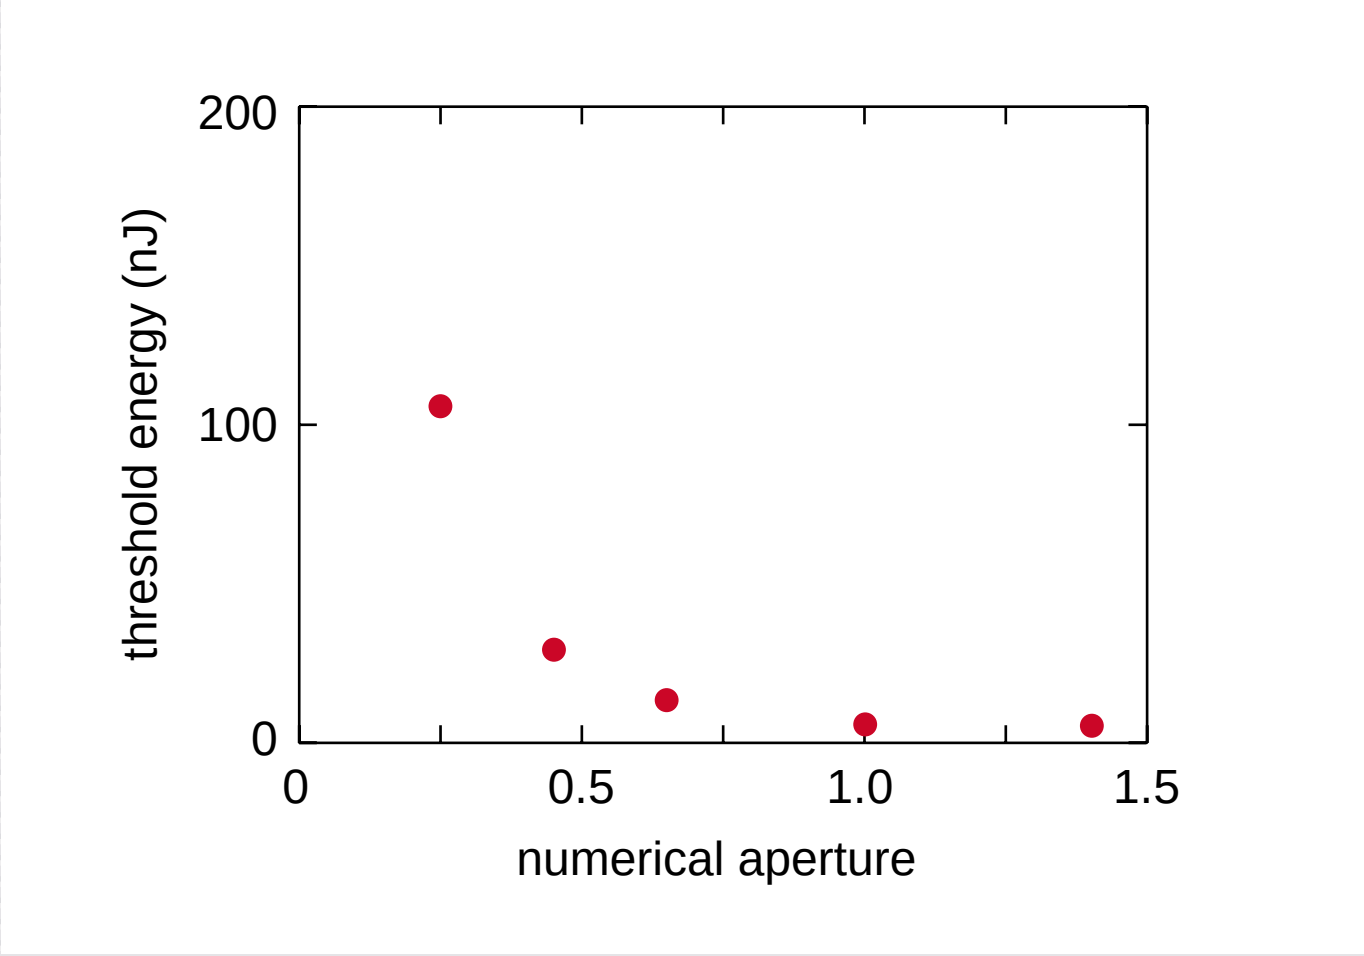

Low-energy processing

less than 10 nJ at high numerical aperture!

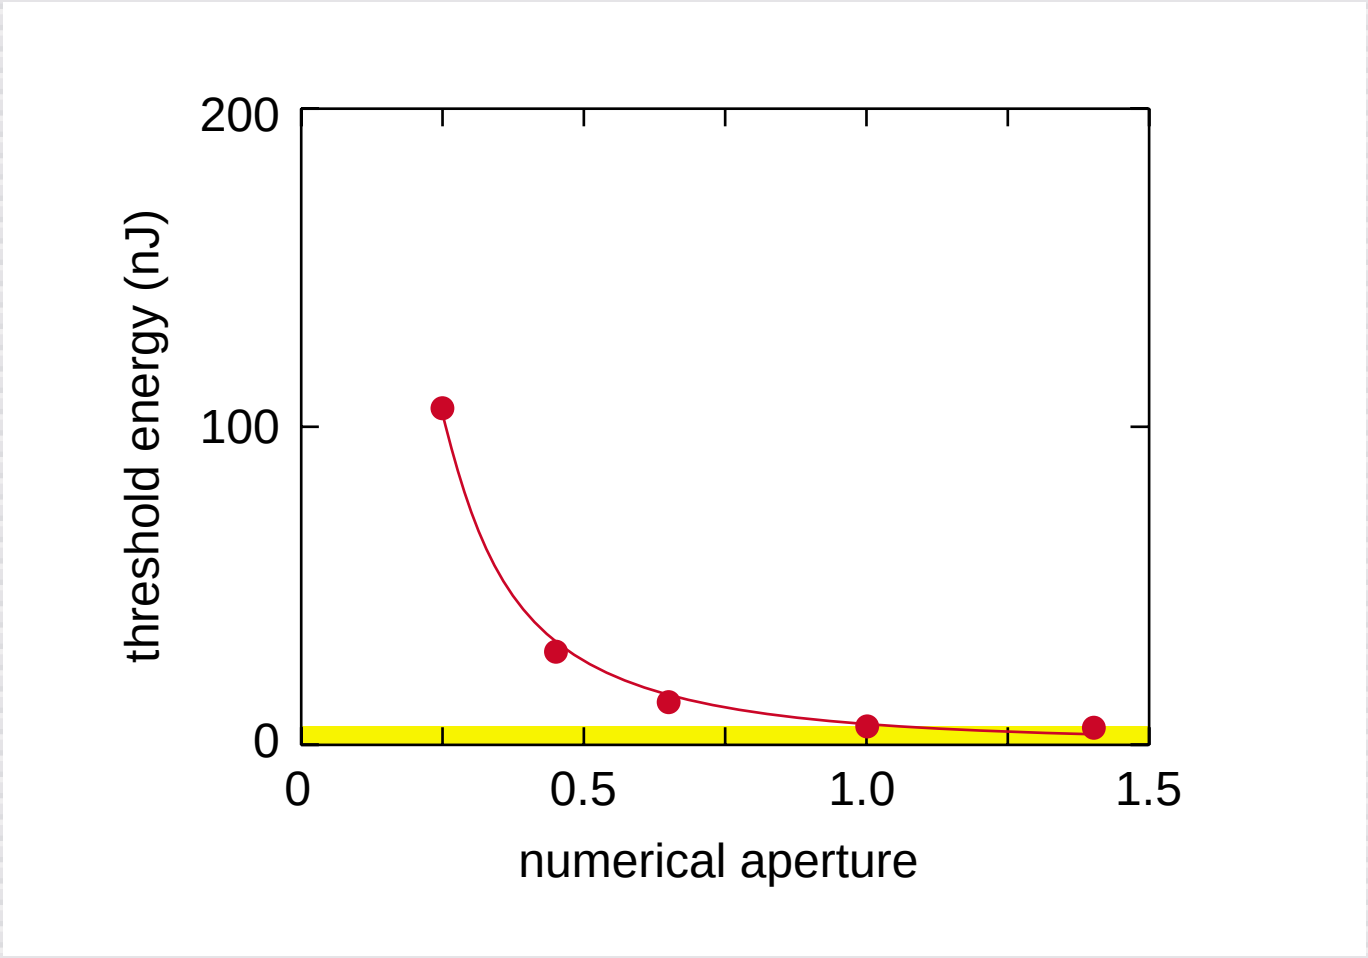

Low-energy processing

amplified laser: 1 kHz, 1 mJ

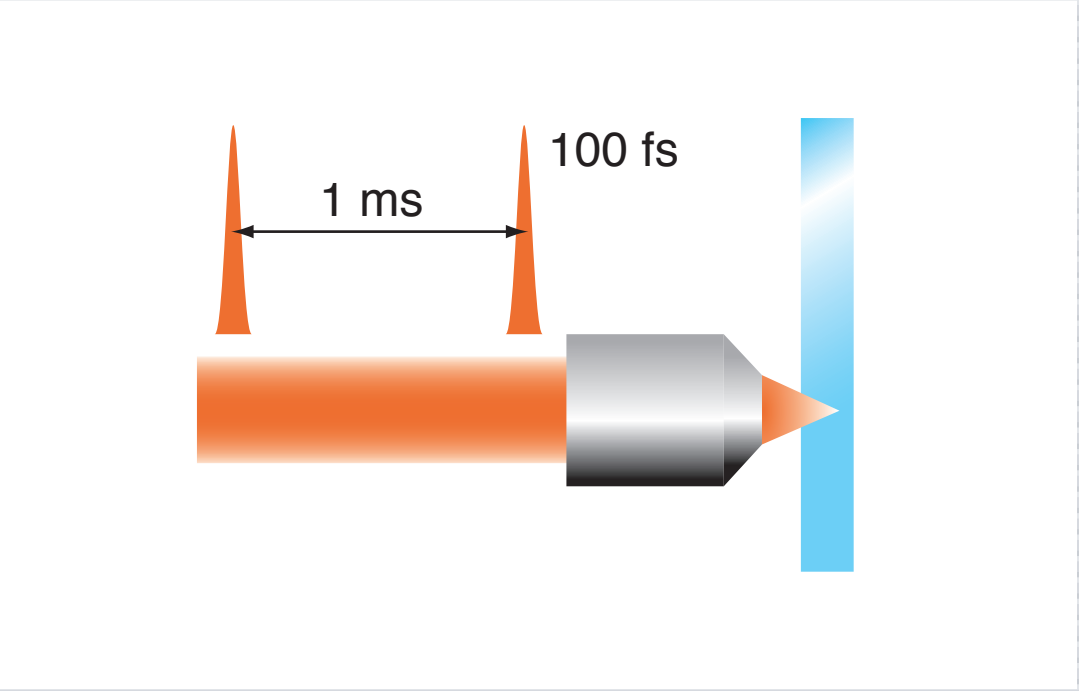

heat diffusion time: $\tau_{diff} \approx 1\ \mu s$

Low-energy processing

long cavity oscillator: 25 MHz, 25 nJ

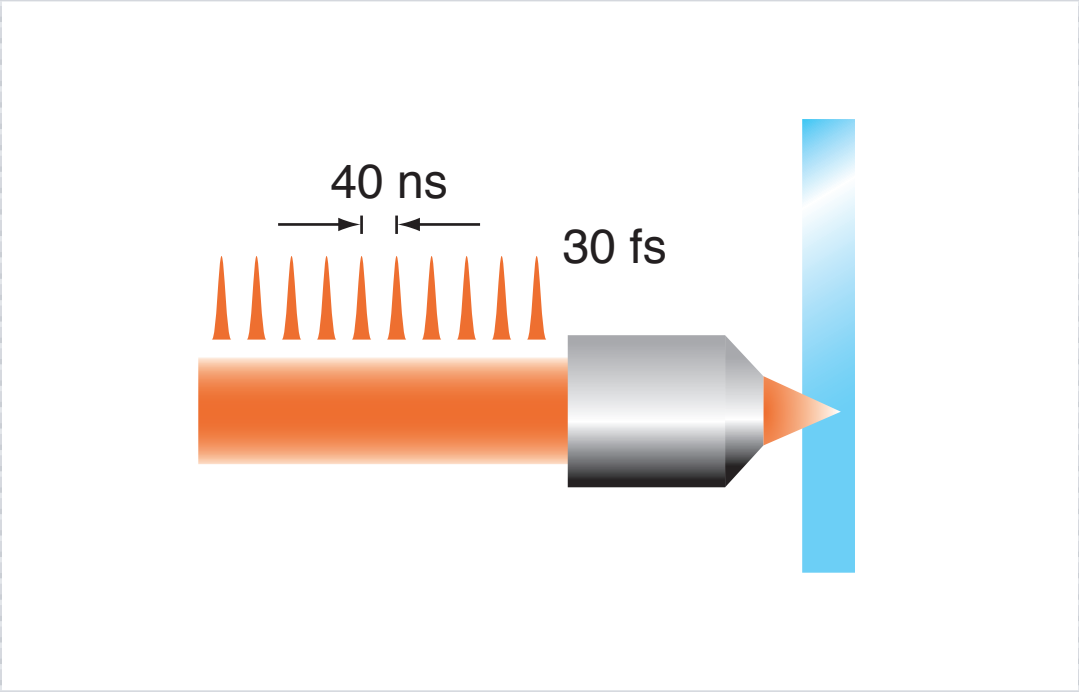

heat diffusion time: $\tau_{diff} \approx 1\ \mu s$

Low-energy processing

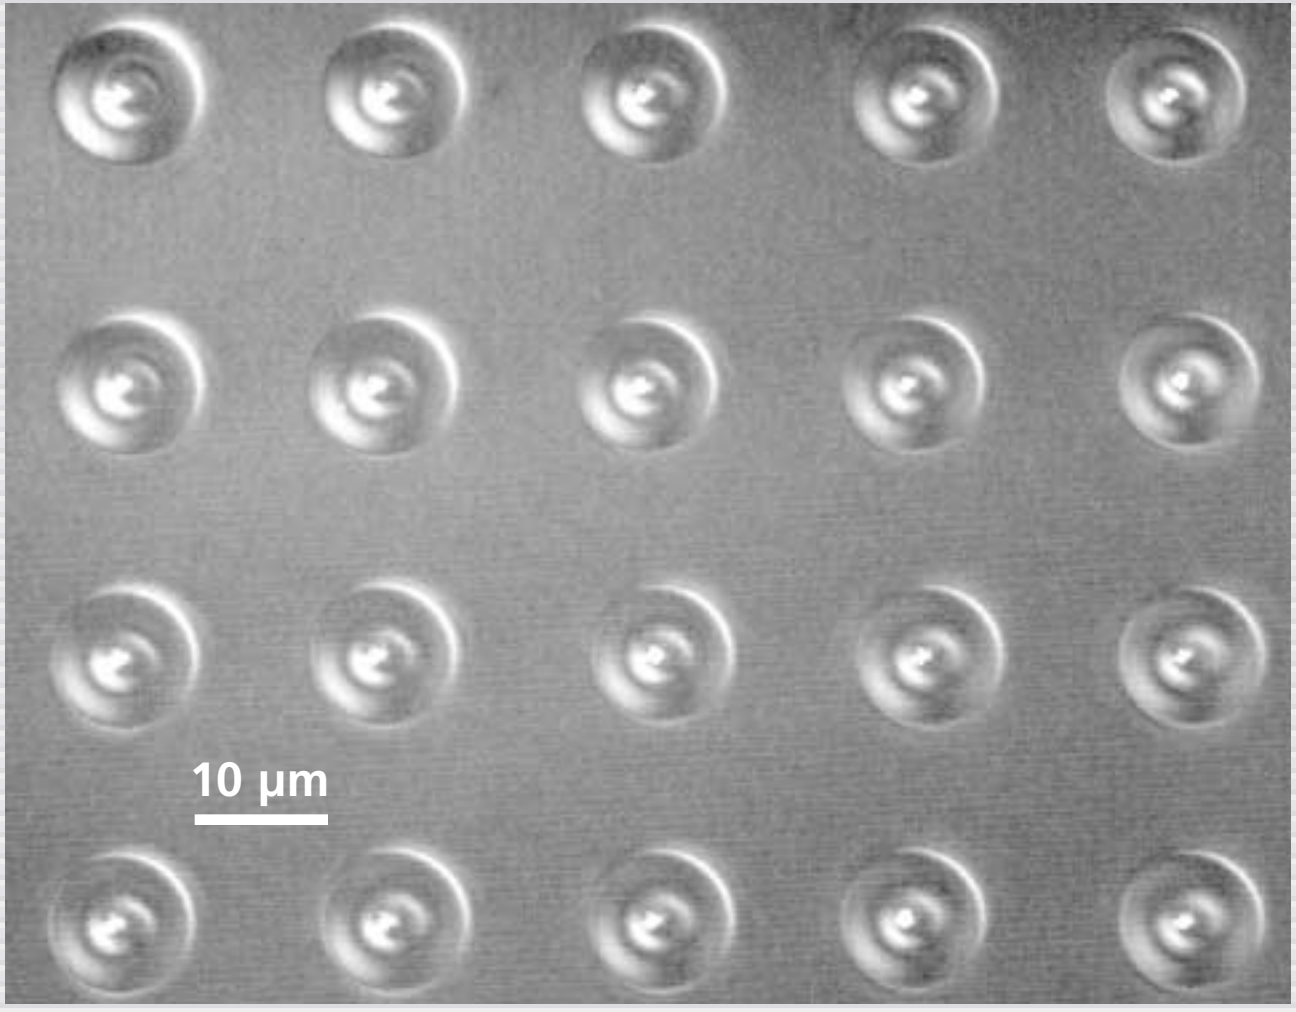

Low-energy processing

high repetition-rate micromachining:

- **structural changes exceed focal volume**
- **spherical structures**
- **density change caused by melting**

Low-energy processing

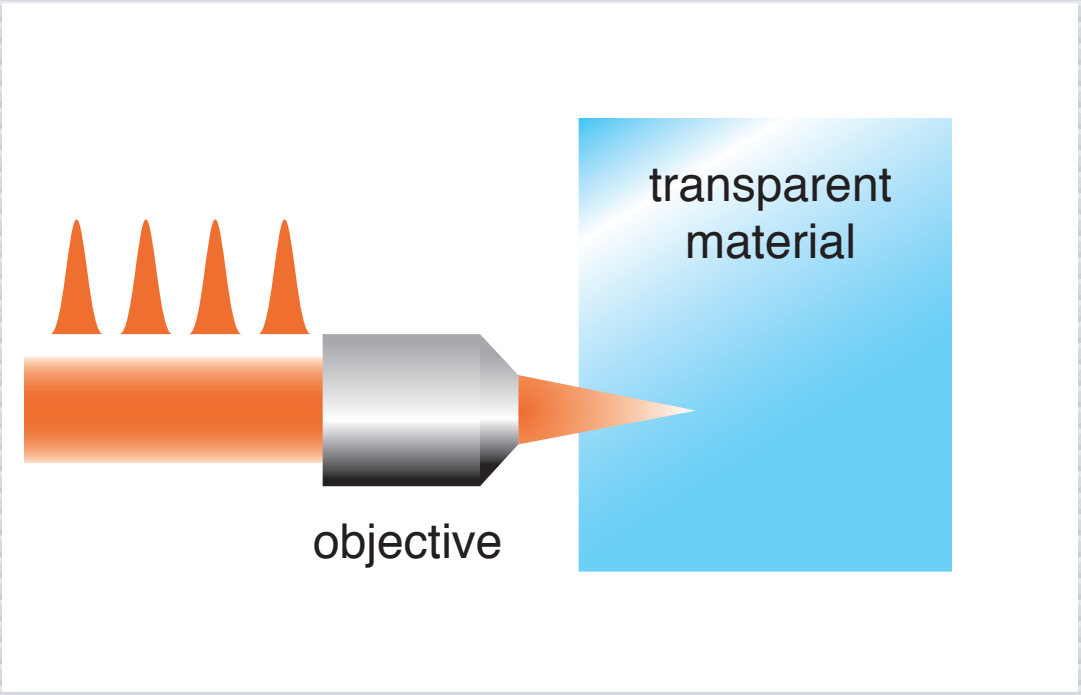

cumulative energy deposition

Low-energy processing

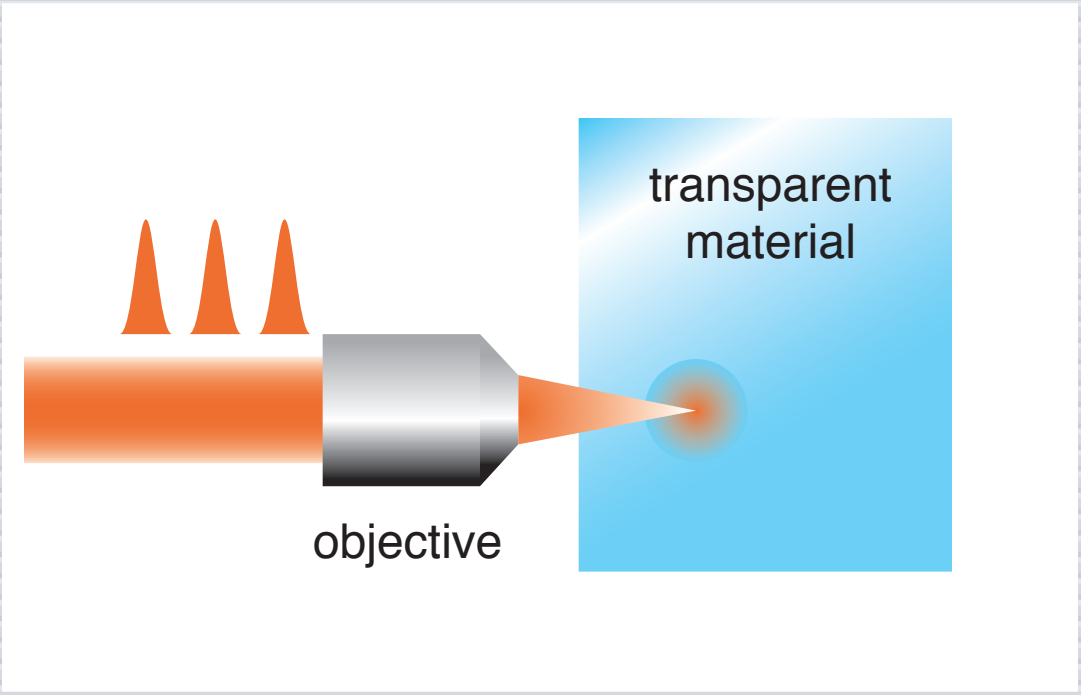

cumulative energy deposition

Low-energy processing

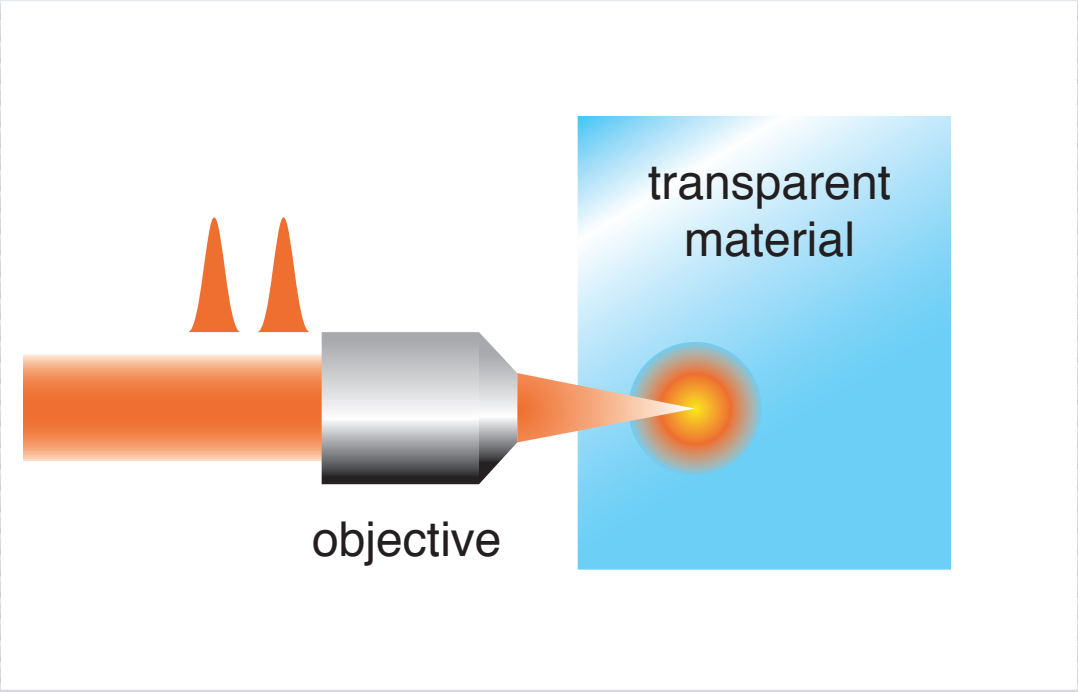

cumulative energy deposition

Low-energy processing

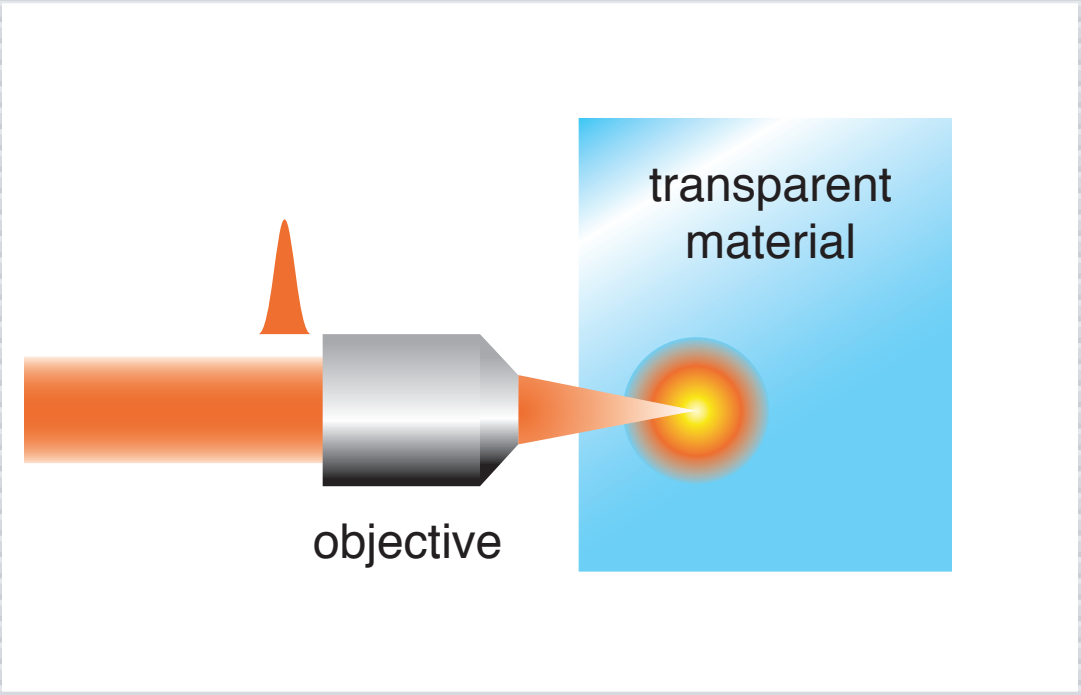

cumulative energy deposition

Low-energy processing

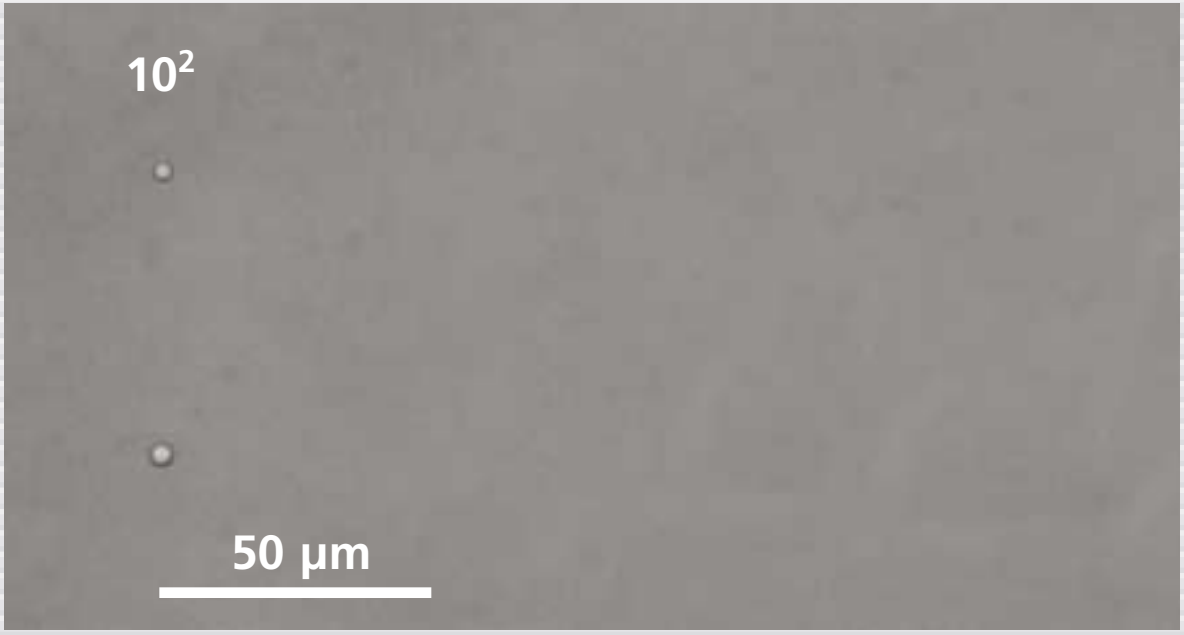

Low-energy processing

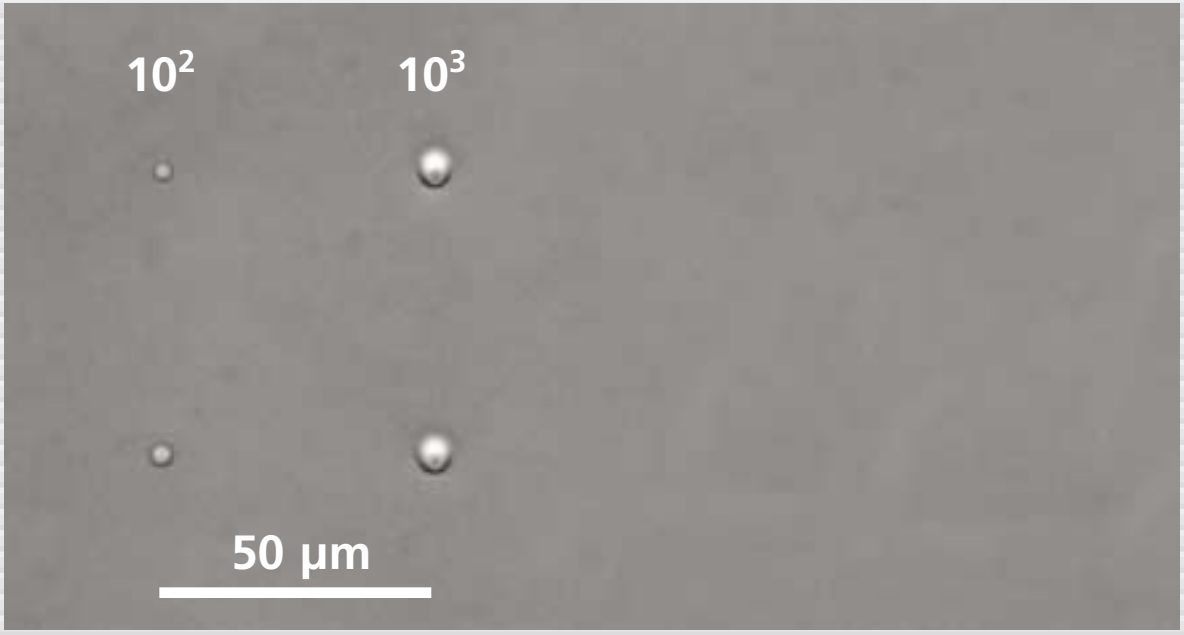

Low-energy processing

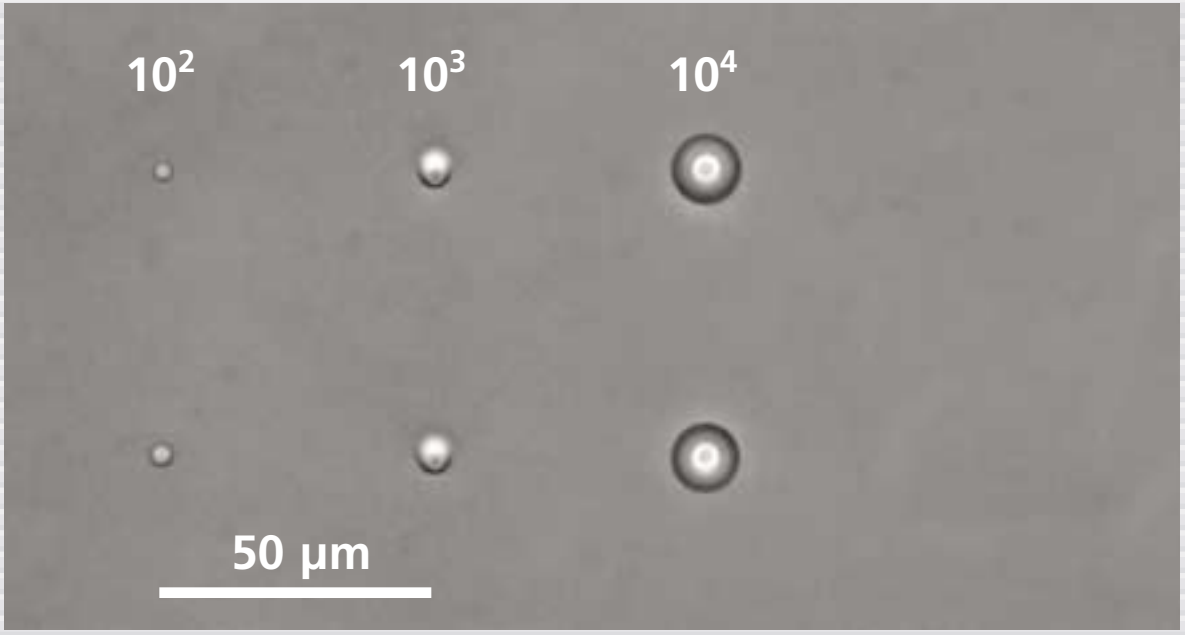

Low-energy processing

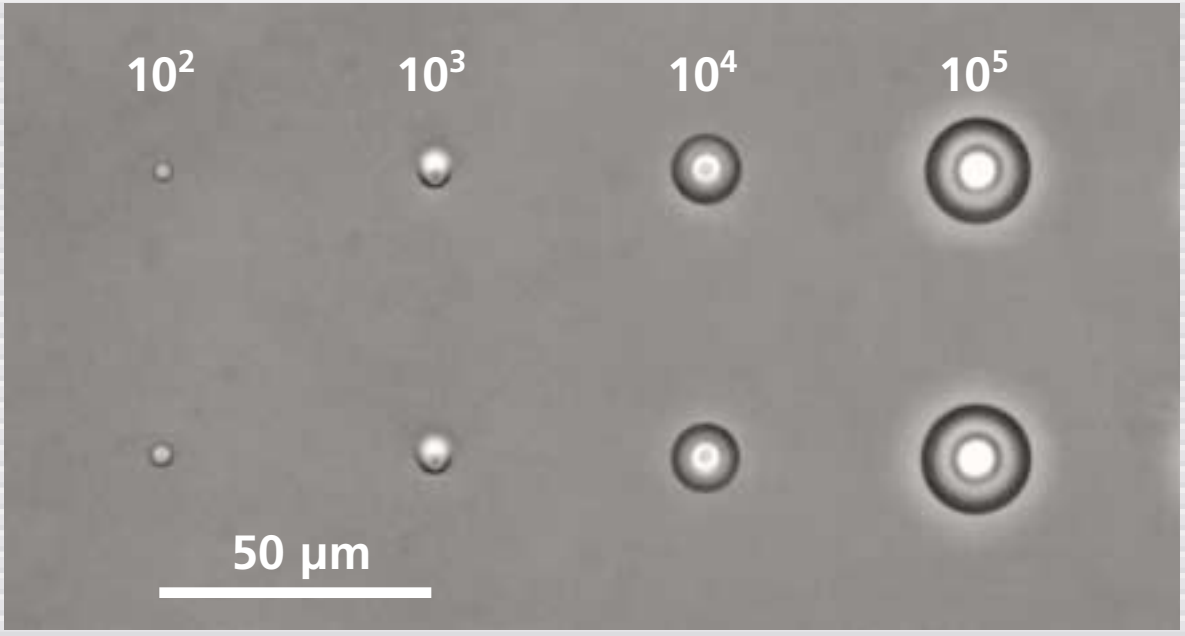

Low-energy processing

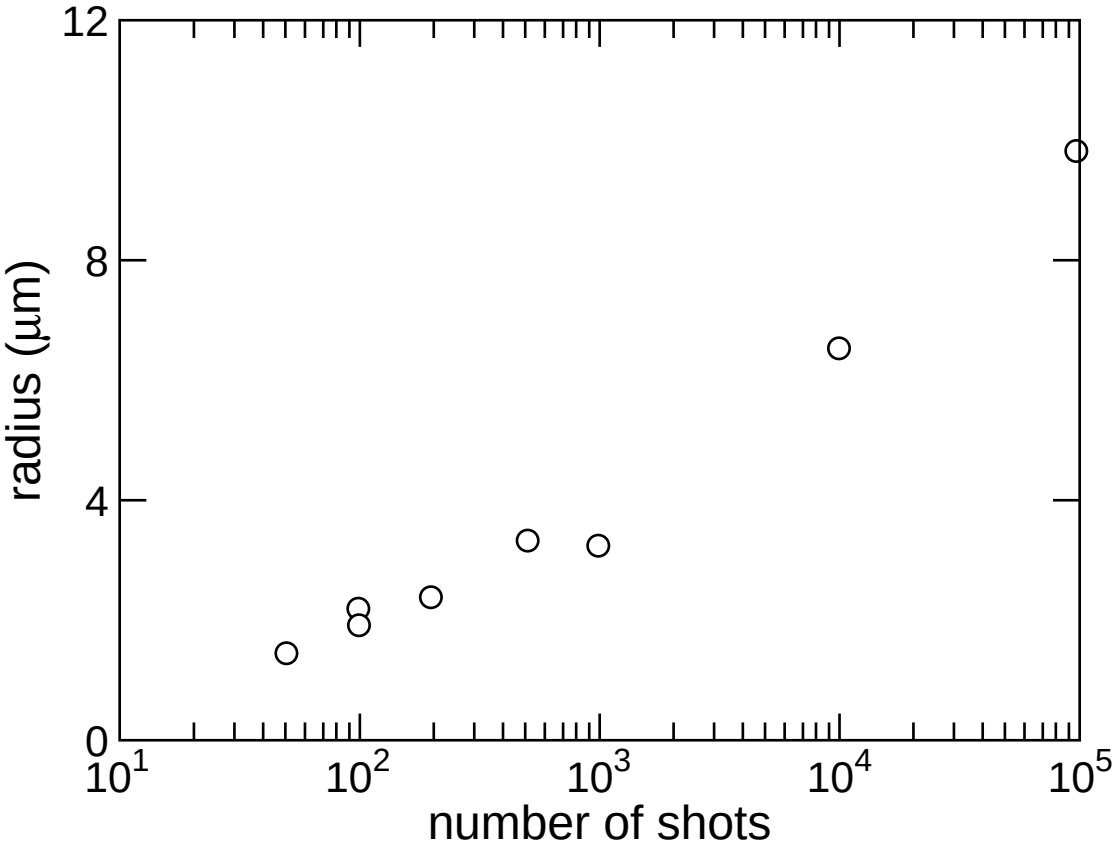

Low-energy processing

amplified laser **oscillator**

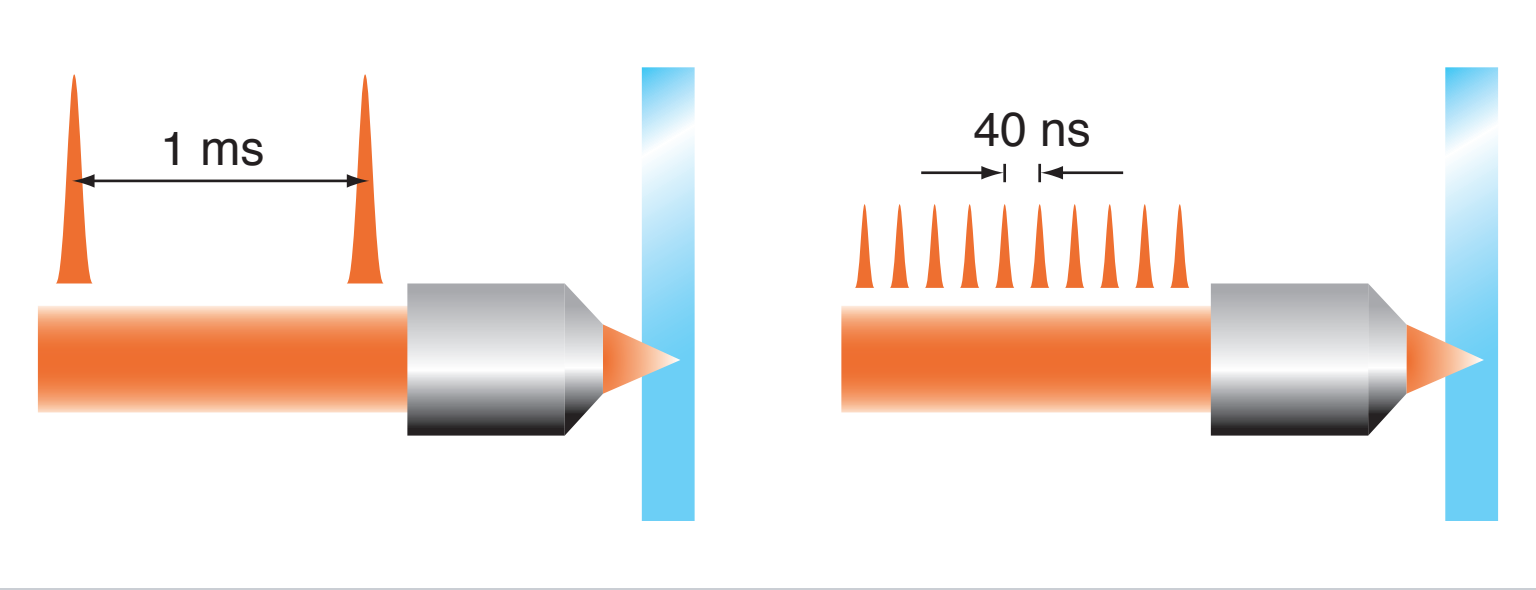

repetitive **cumulative**

Low-energy processing

repetition-rate dependence

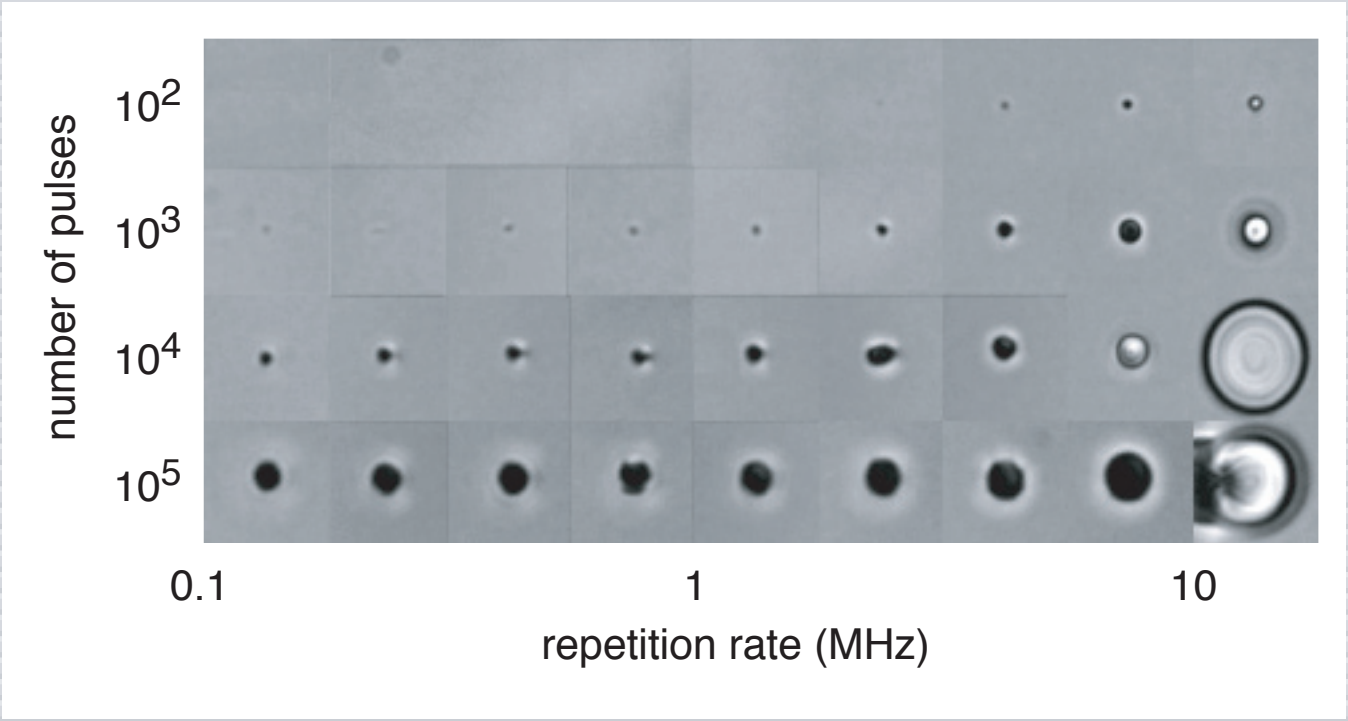

As_2S_3, 100 fs, 7 nJ

Low-energy processing

repetition-rate dependence

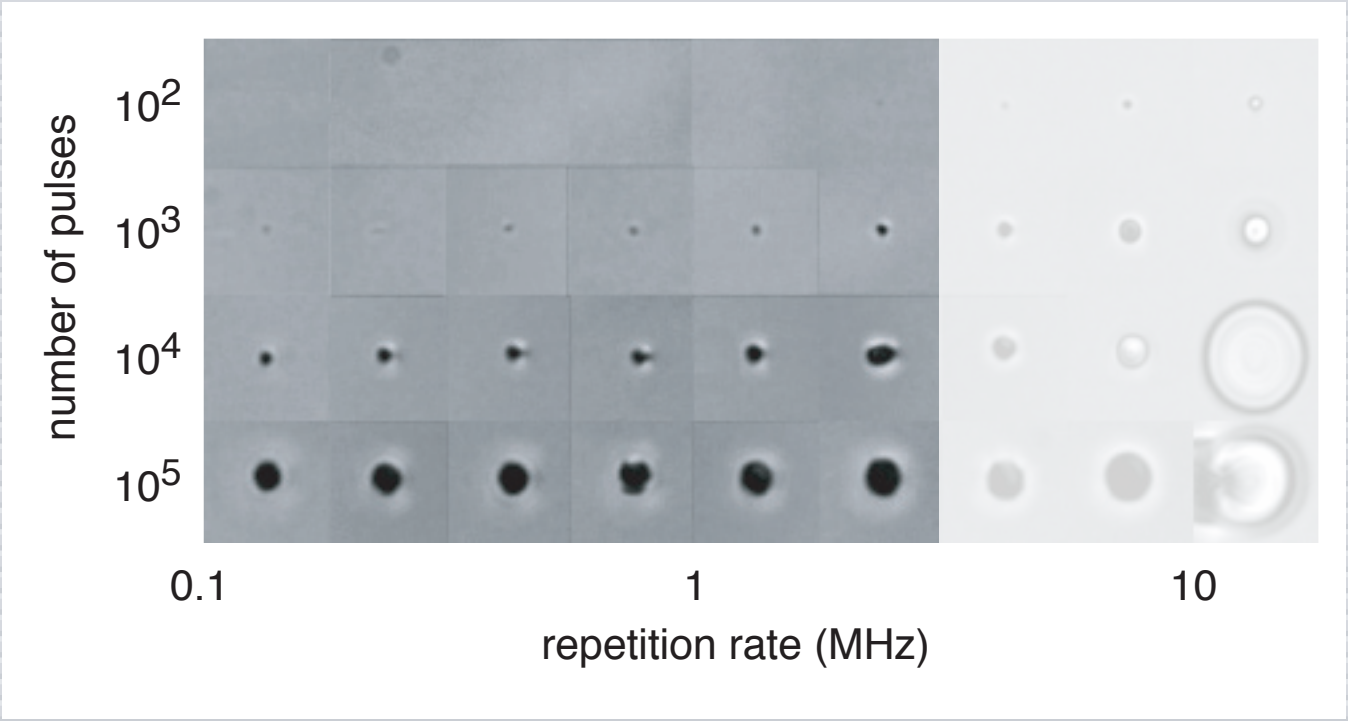

As_2S_3, 100 fs, 7 nJ

Low-energy processing

repetition-rate dependence

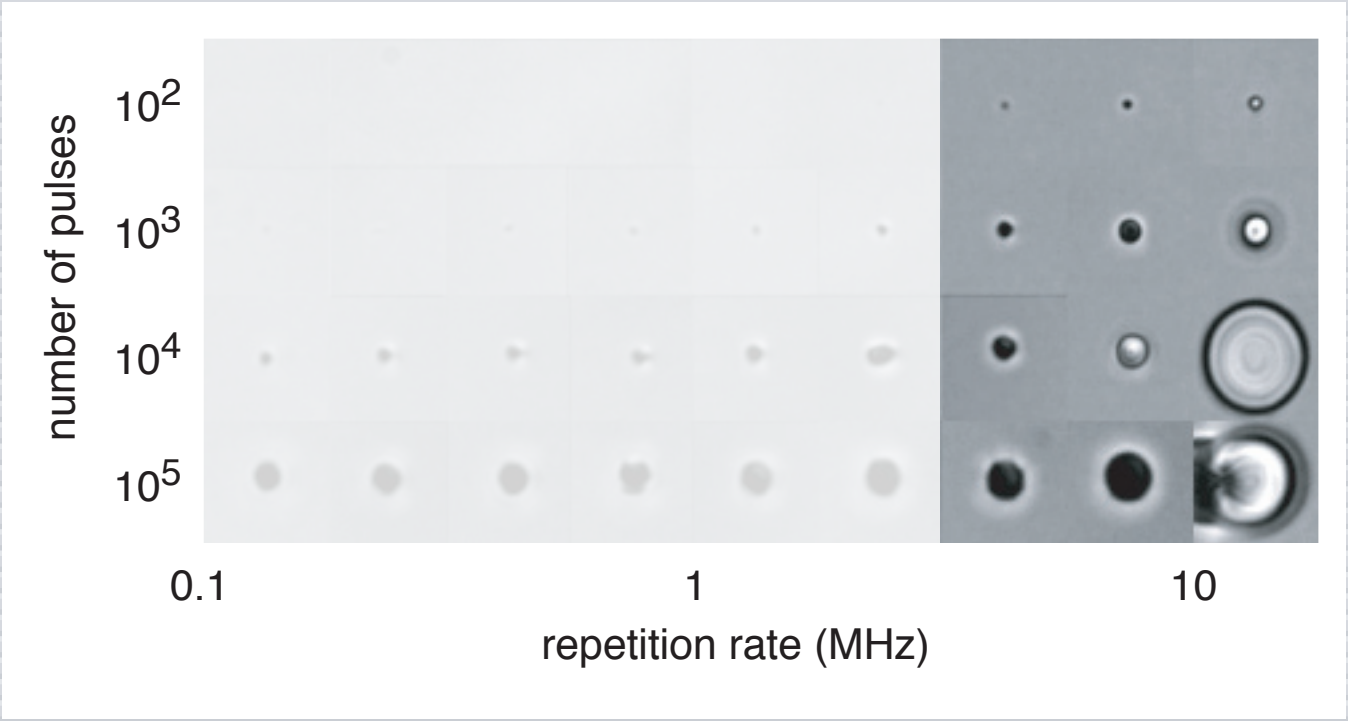

As_2S_3, 100 fs, 7 nJ

Low-energy processing

repetition-rate dependence

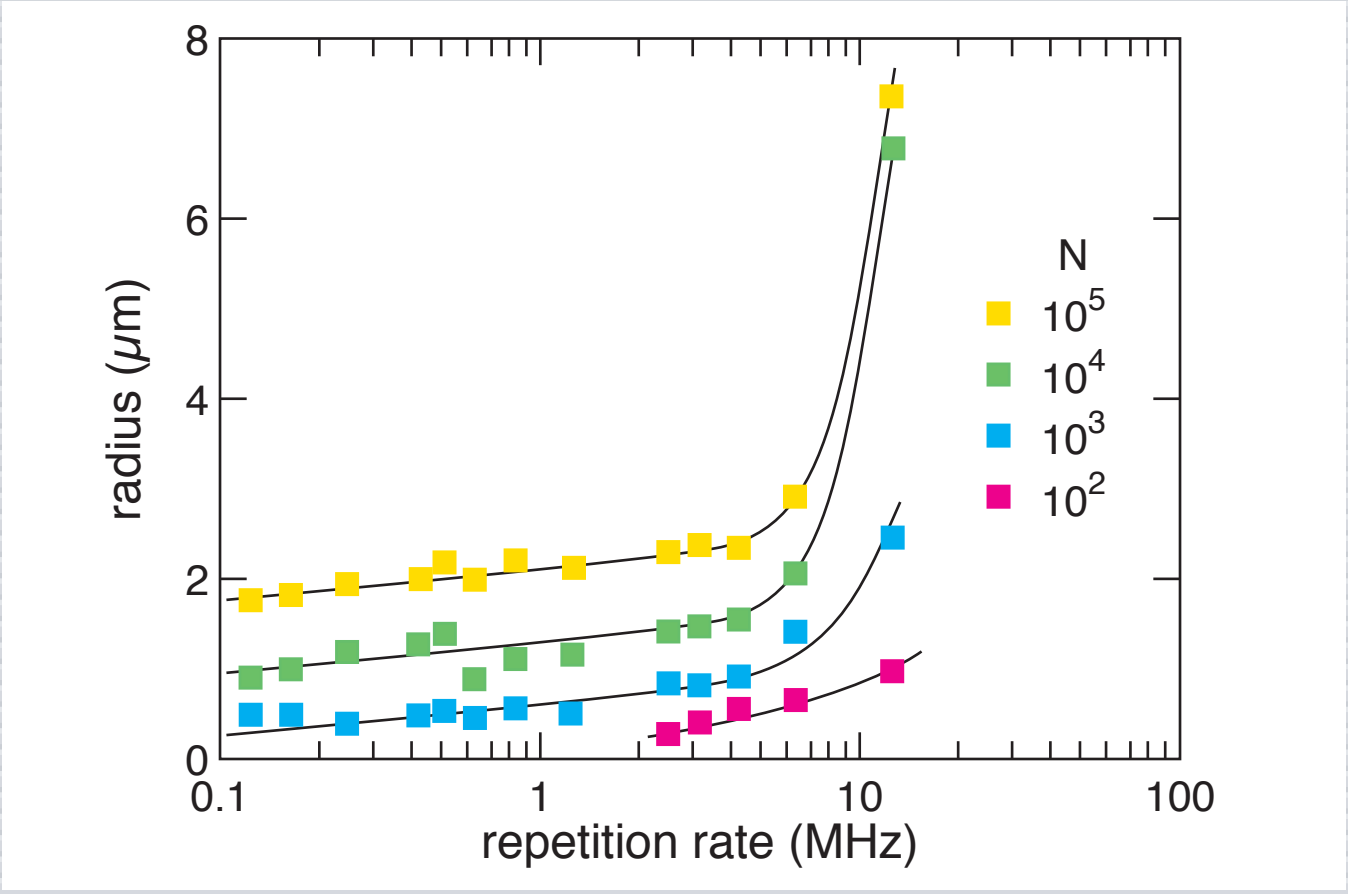

As_2S_3, 100 fs, 7 nJ

waveguide machining

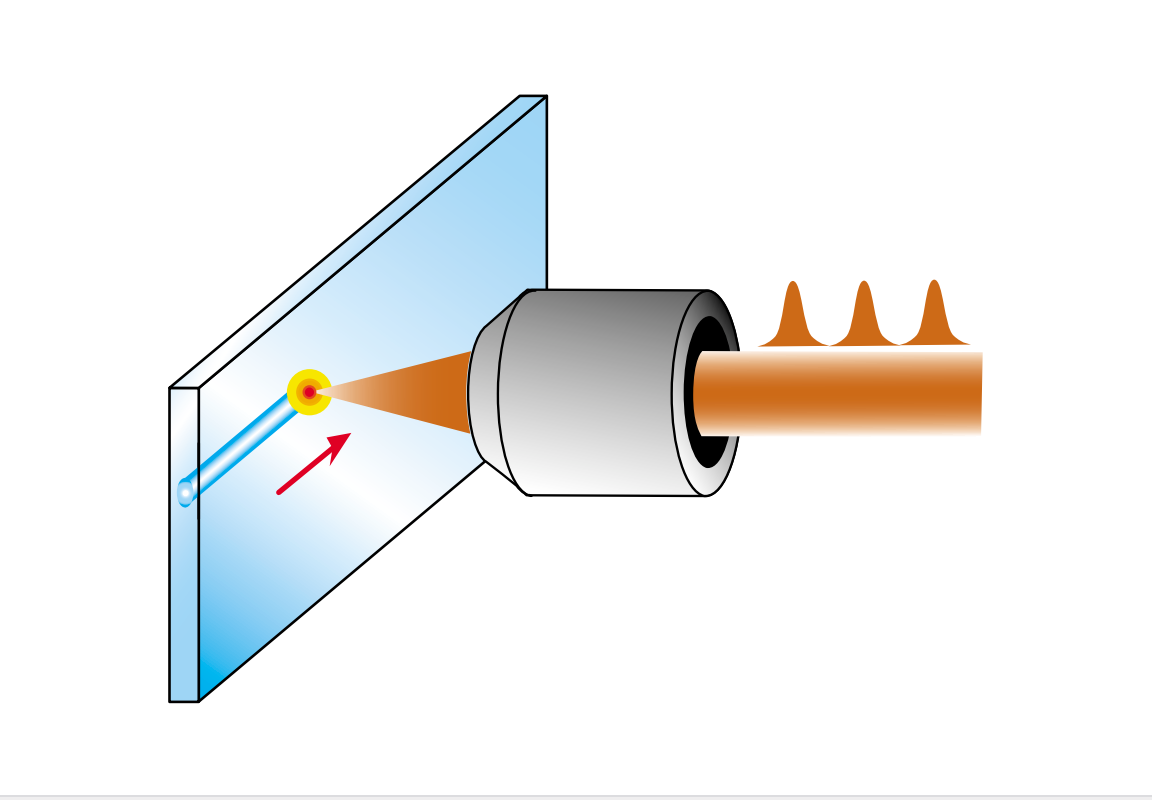

waveguide machining

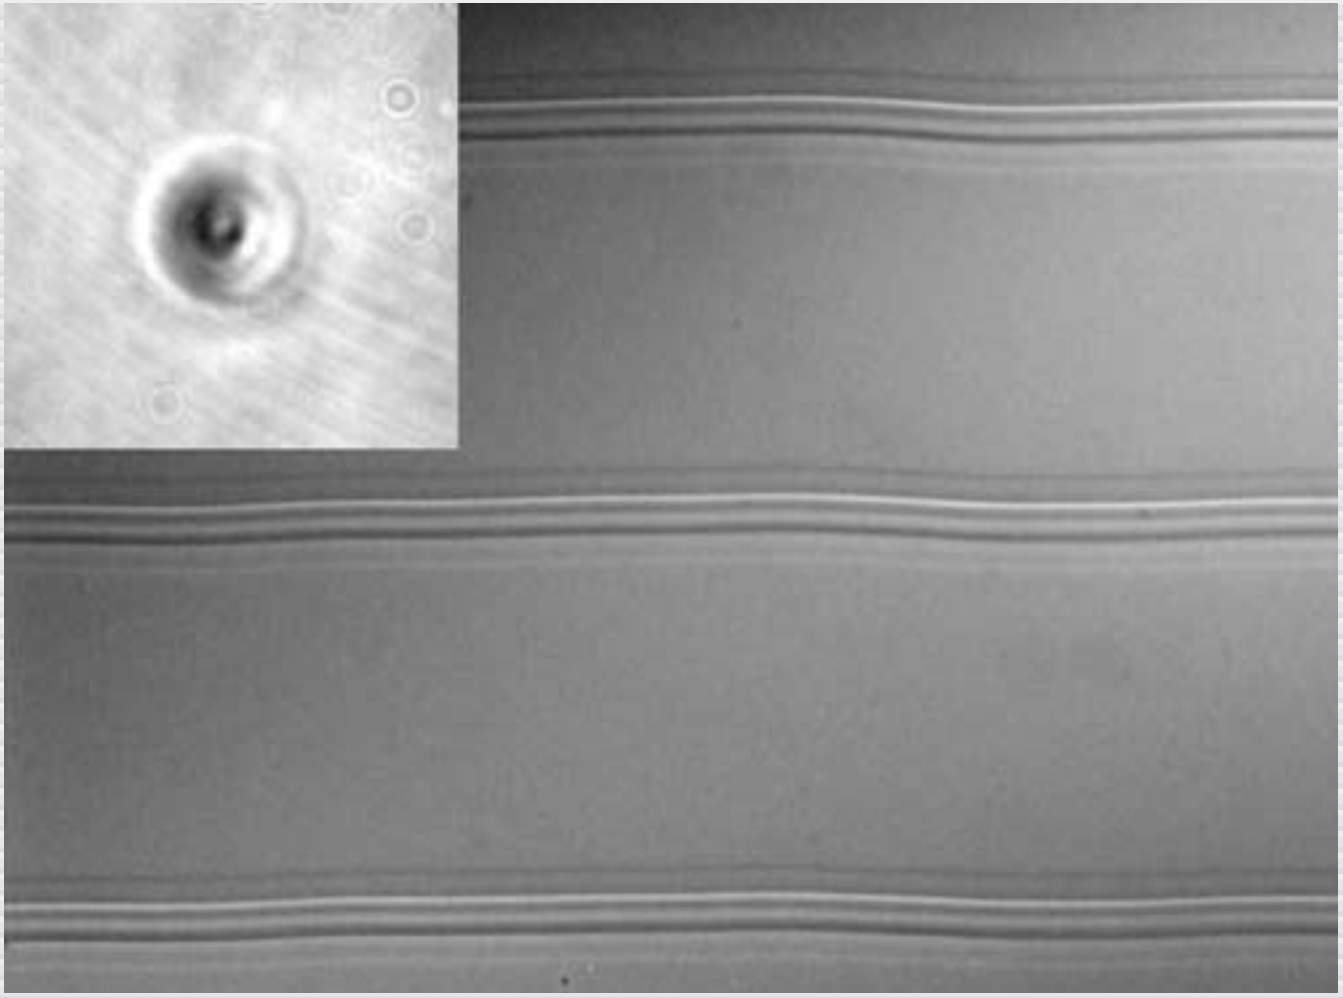

waveguide mode analysis

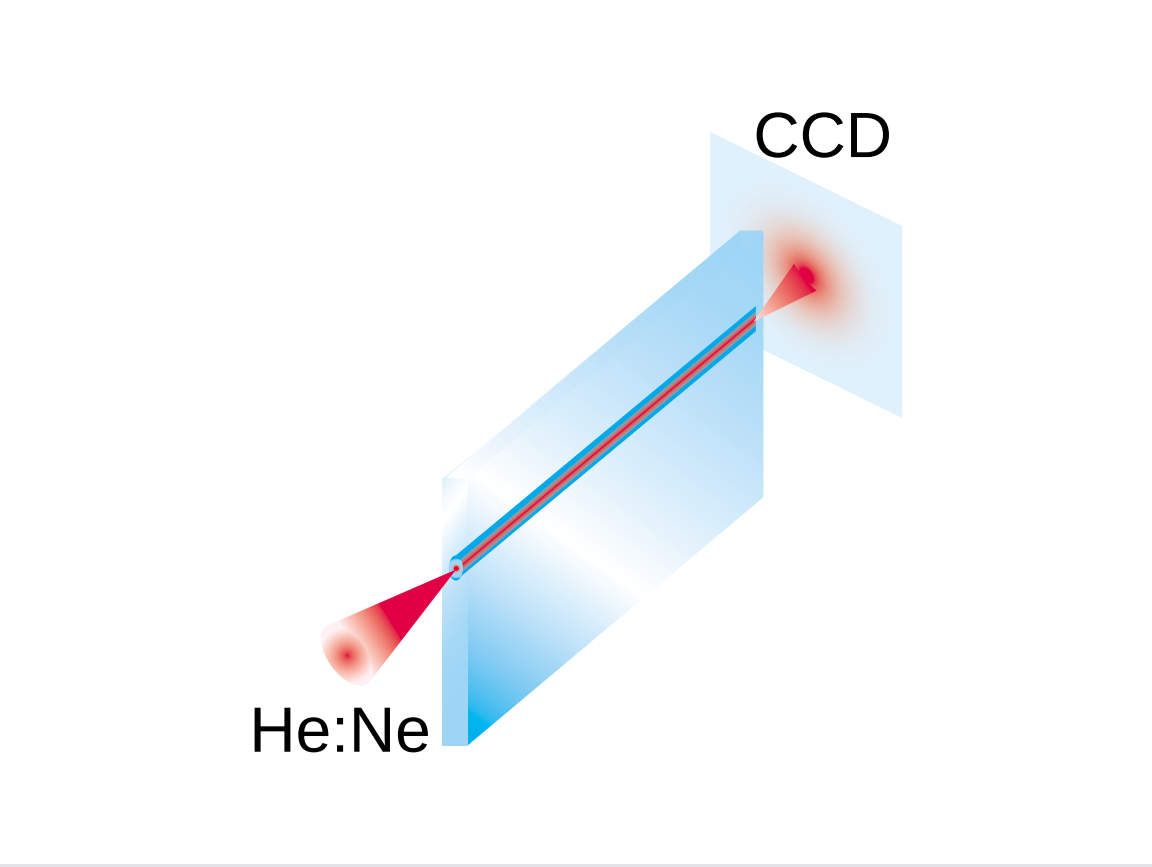

Low-energy processing

near field mode

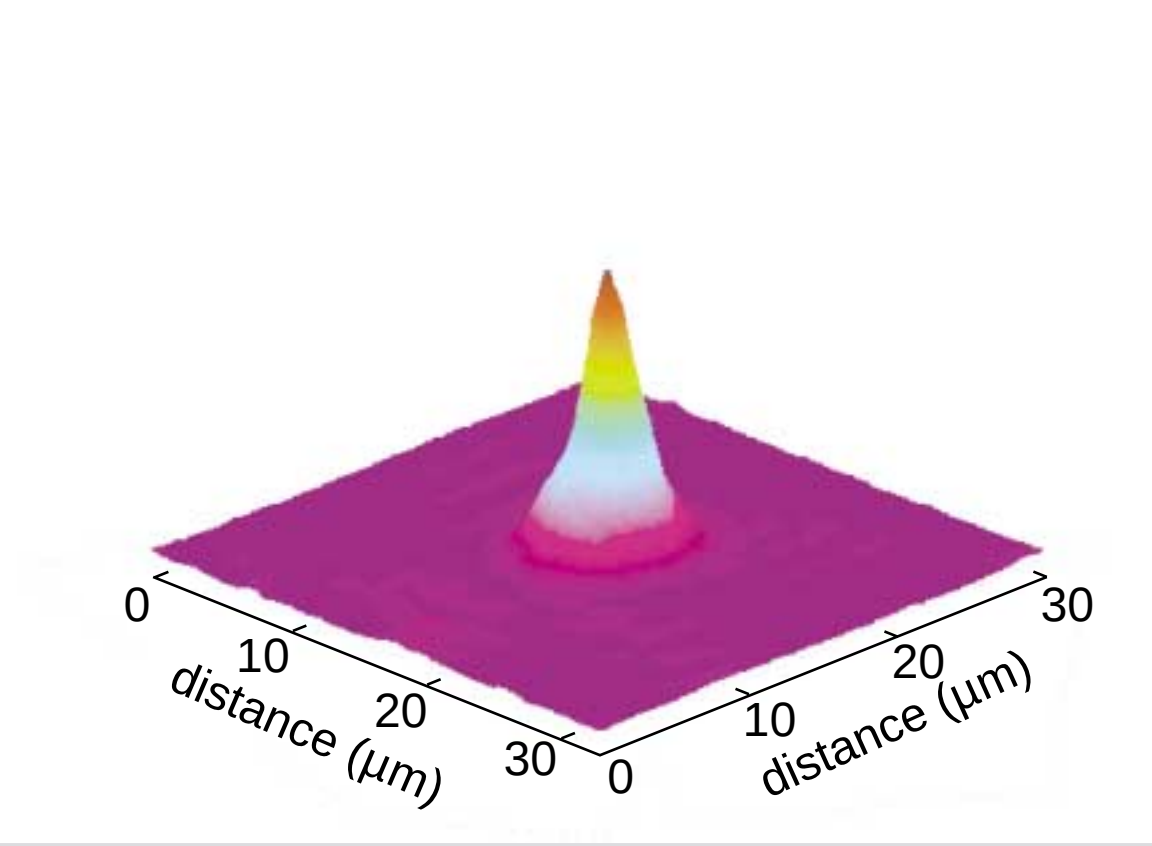

near field mode

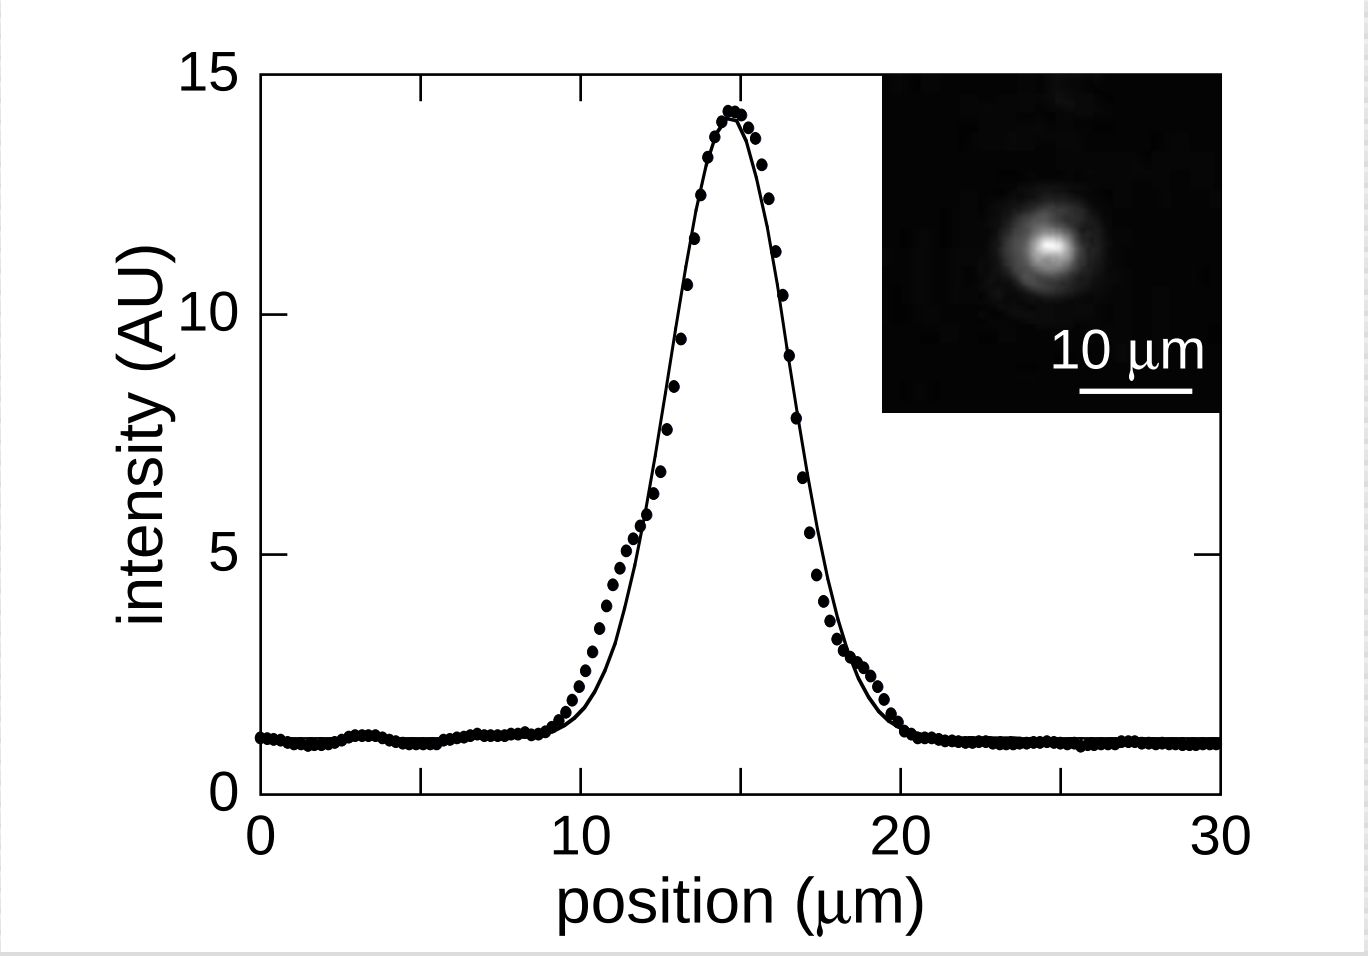

Low-energy processing

refractive index profiles and near field mode at 633 nm

5 mm/s

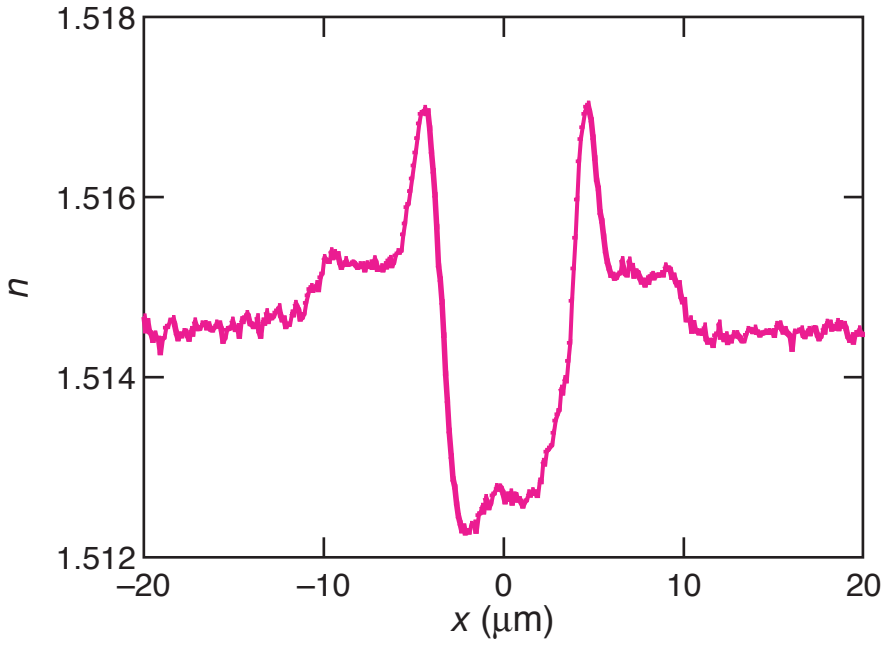

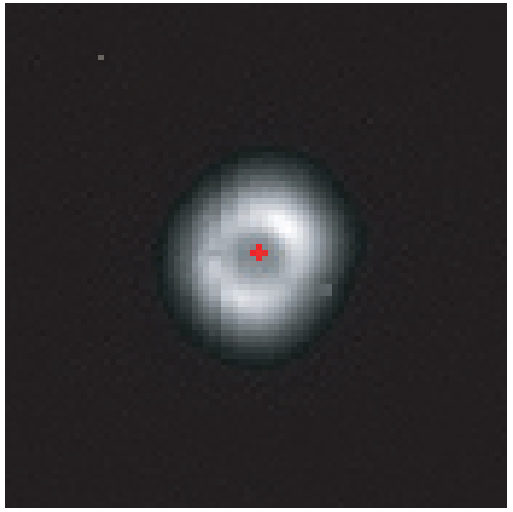

Sagitta, Inc.

refractive index profiles and near field mode at 633 nm

10 mm/s

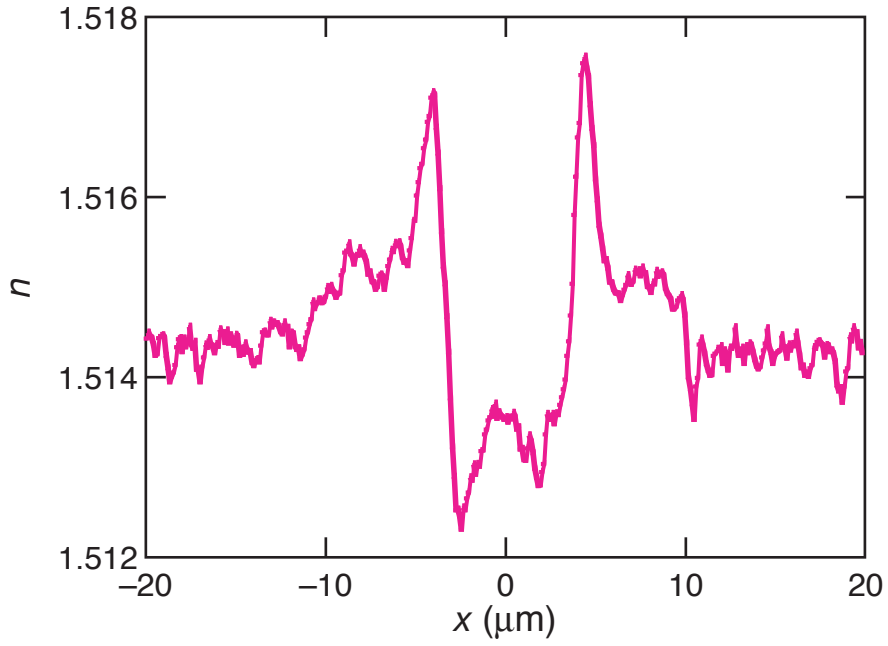

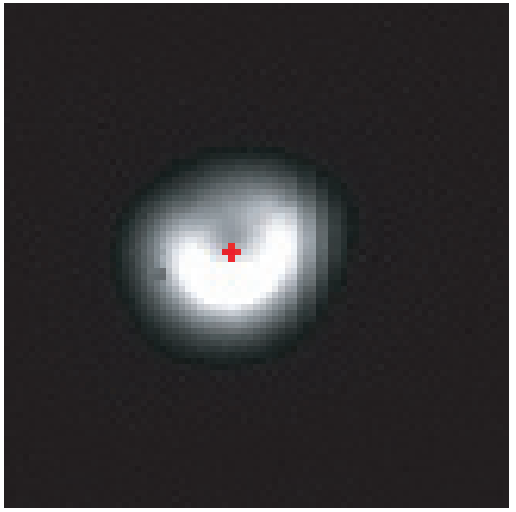

Sagitta, Inc.

Low-energy processing

refractive index profiles and near field mode at 633 nm

20 mm/s

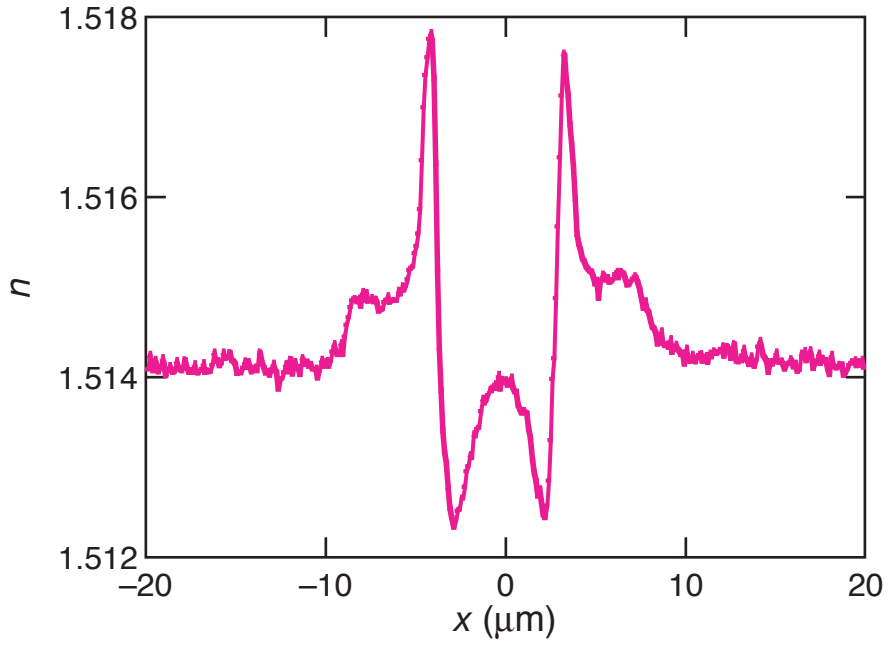

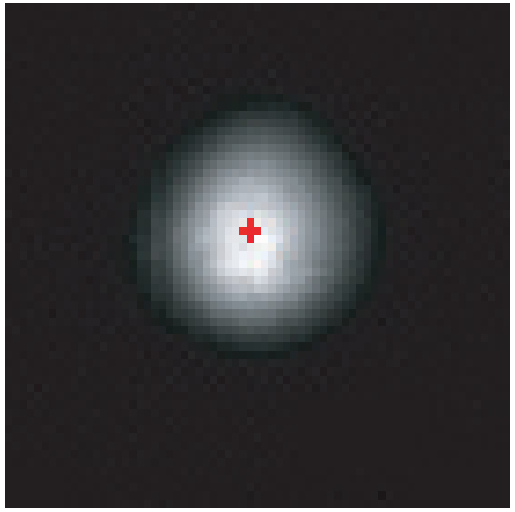

Sagitta, Inc.

curved waveguides

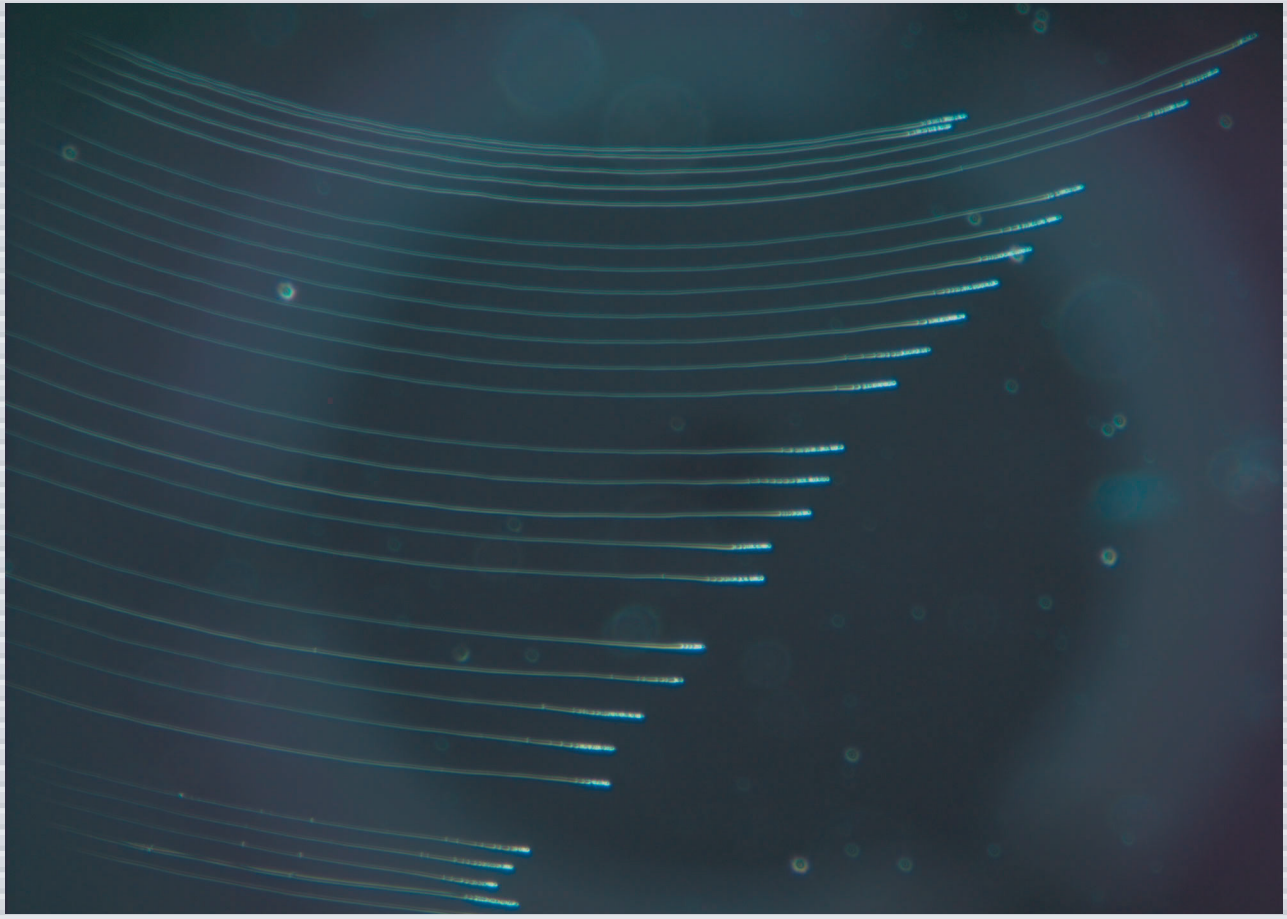

3D wave splitter

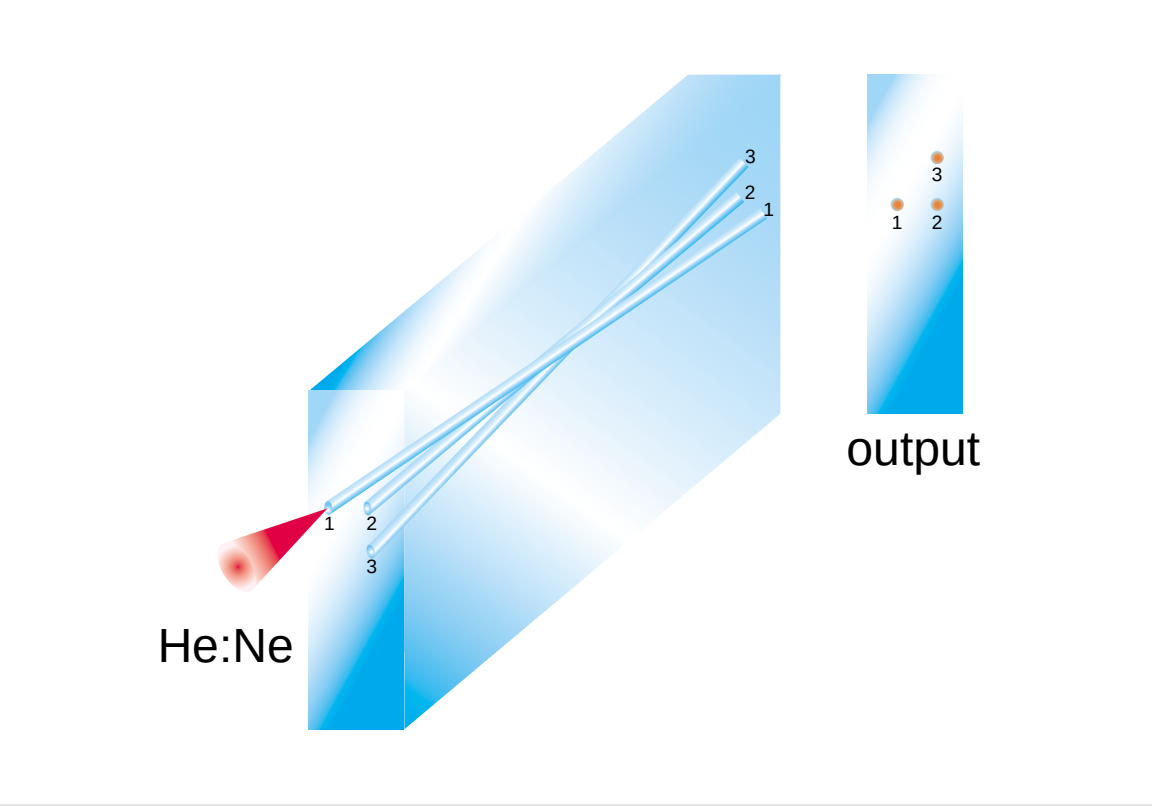

Bragg grating

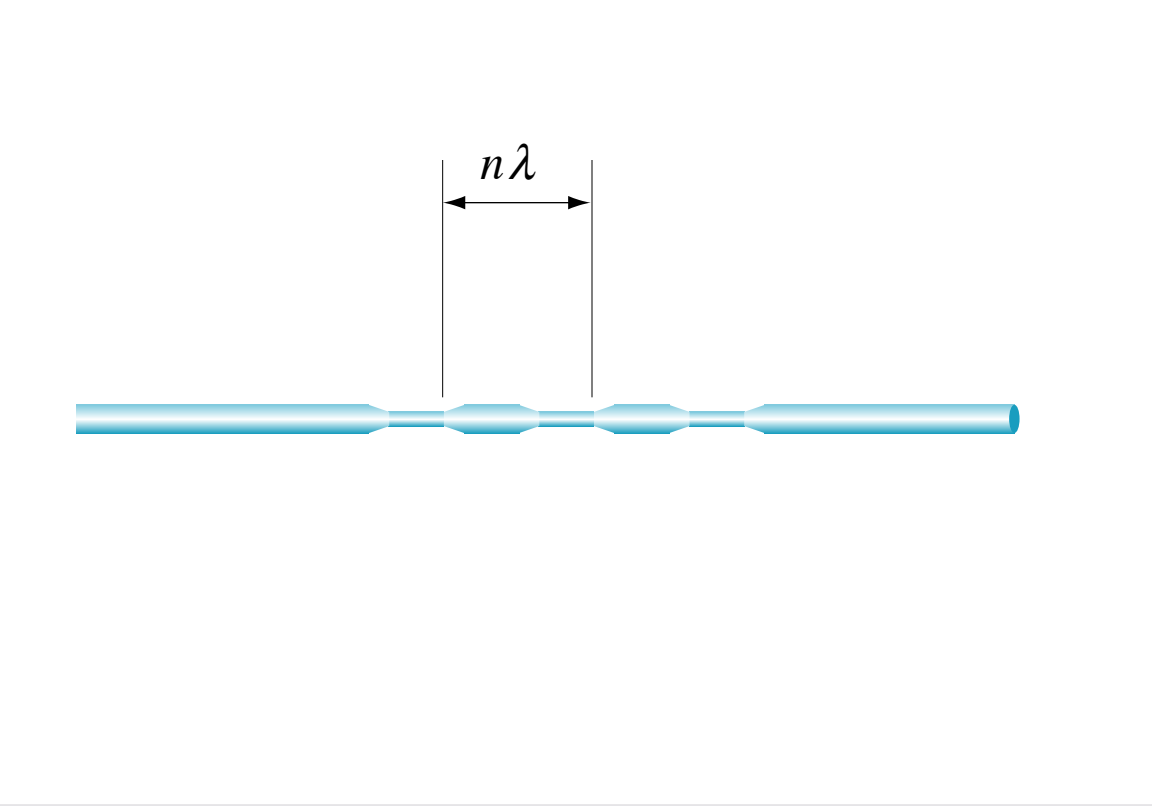

Bragg grating

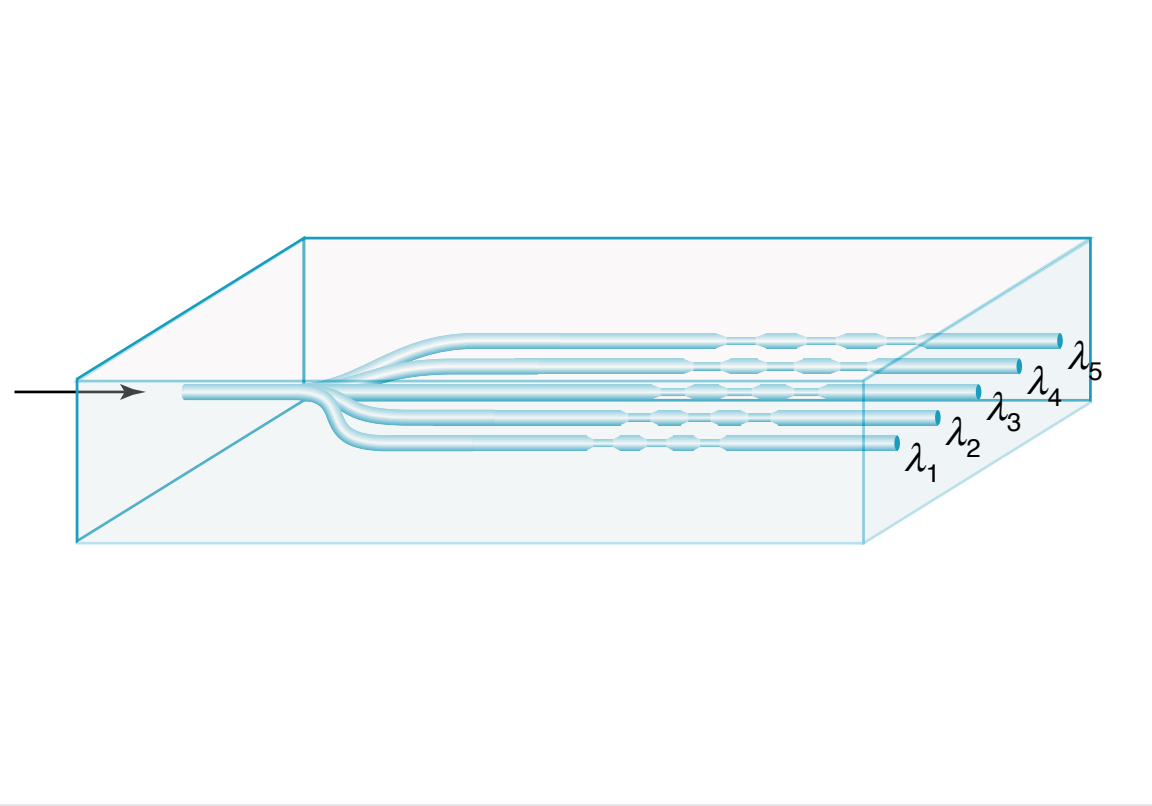

monolithic amplifier

laser active glass

epi-fluorescence microscope

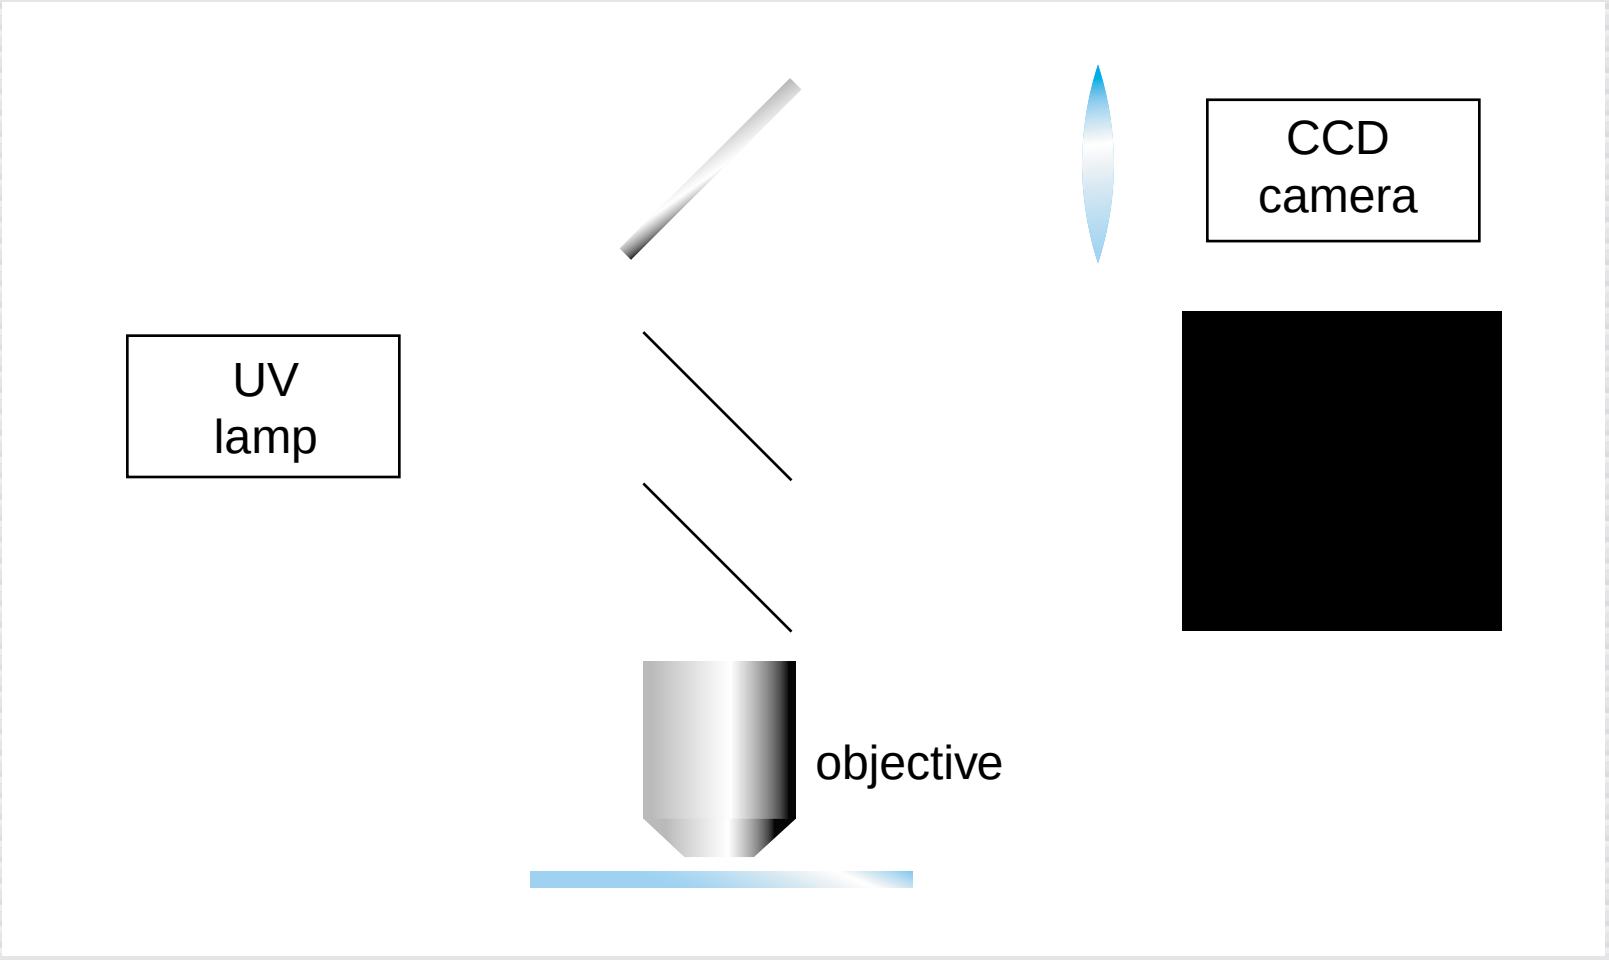

mount fluorescently tagged sample

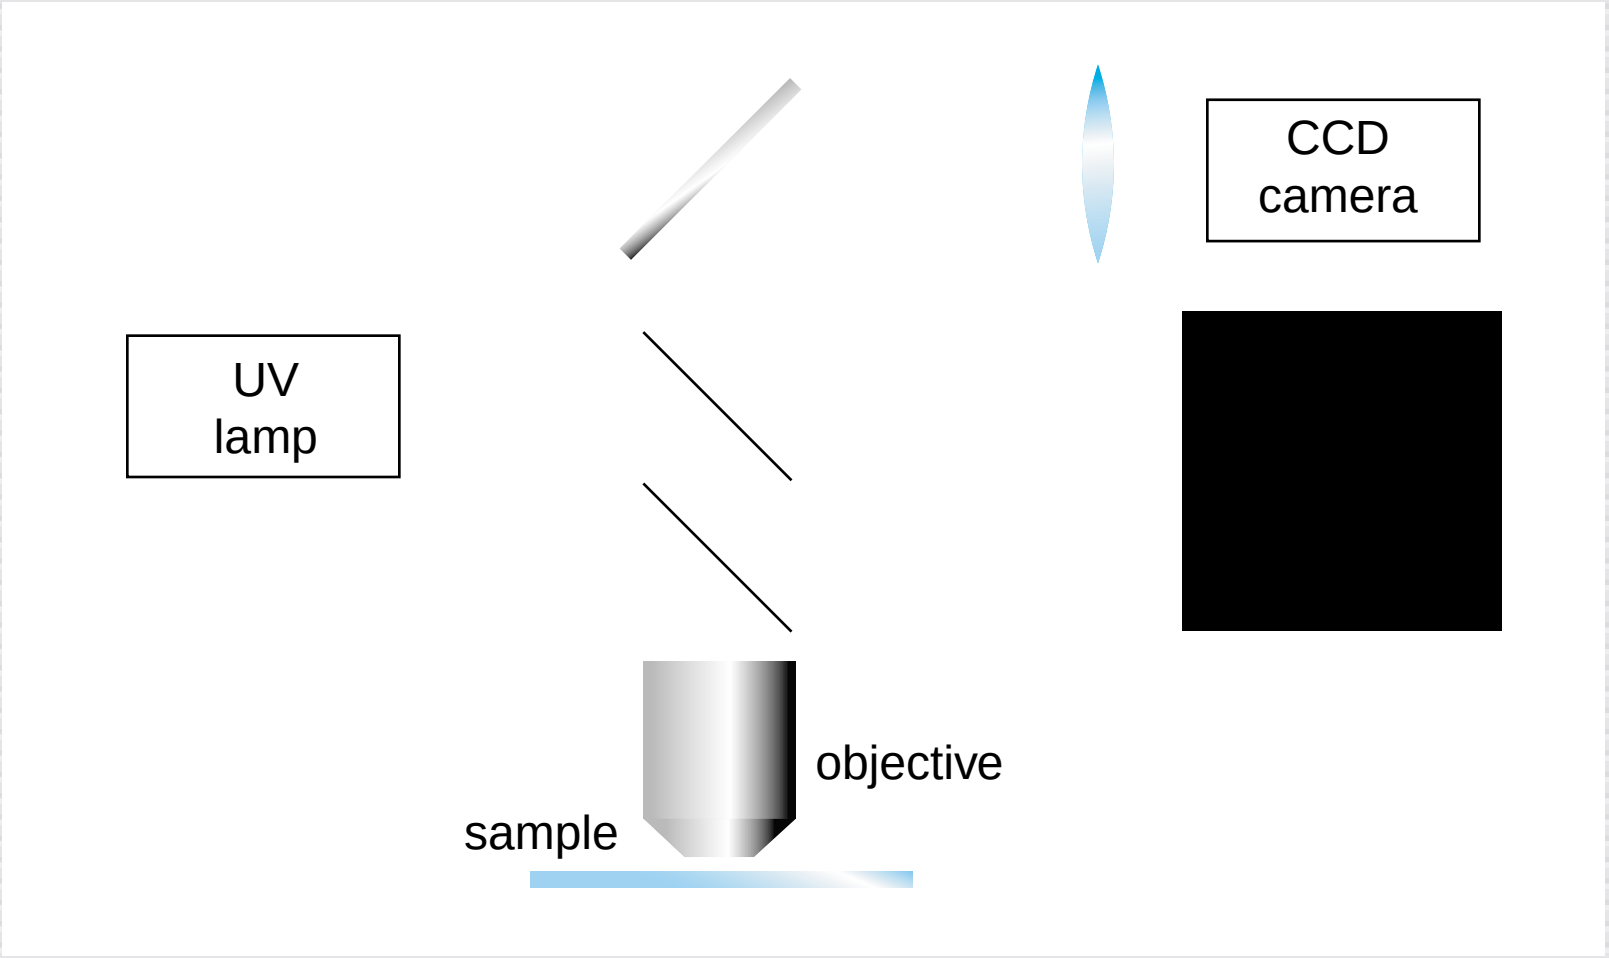

UV illumination…

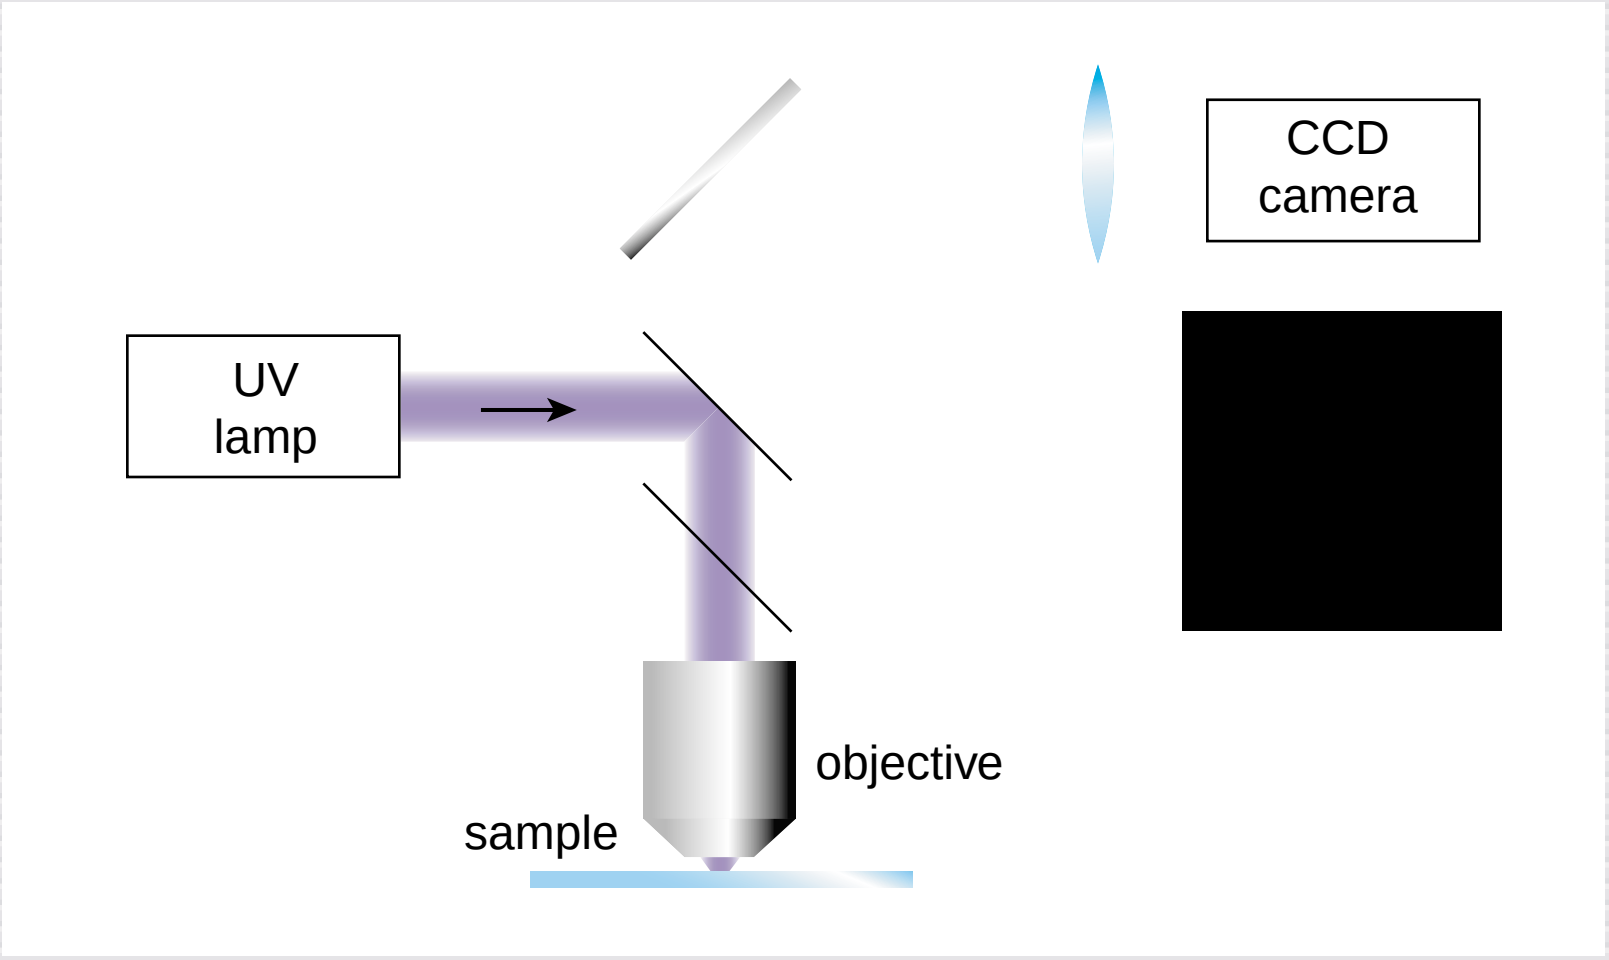

… causes fluorescence

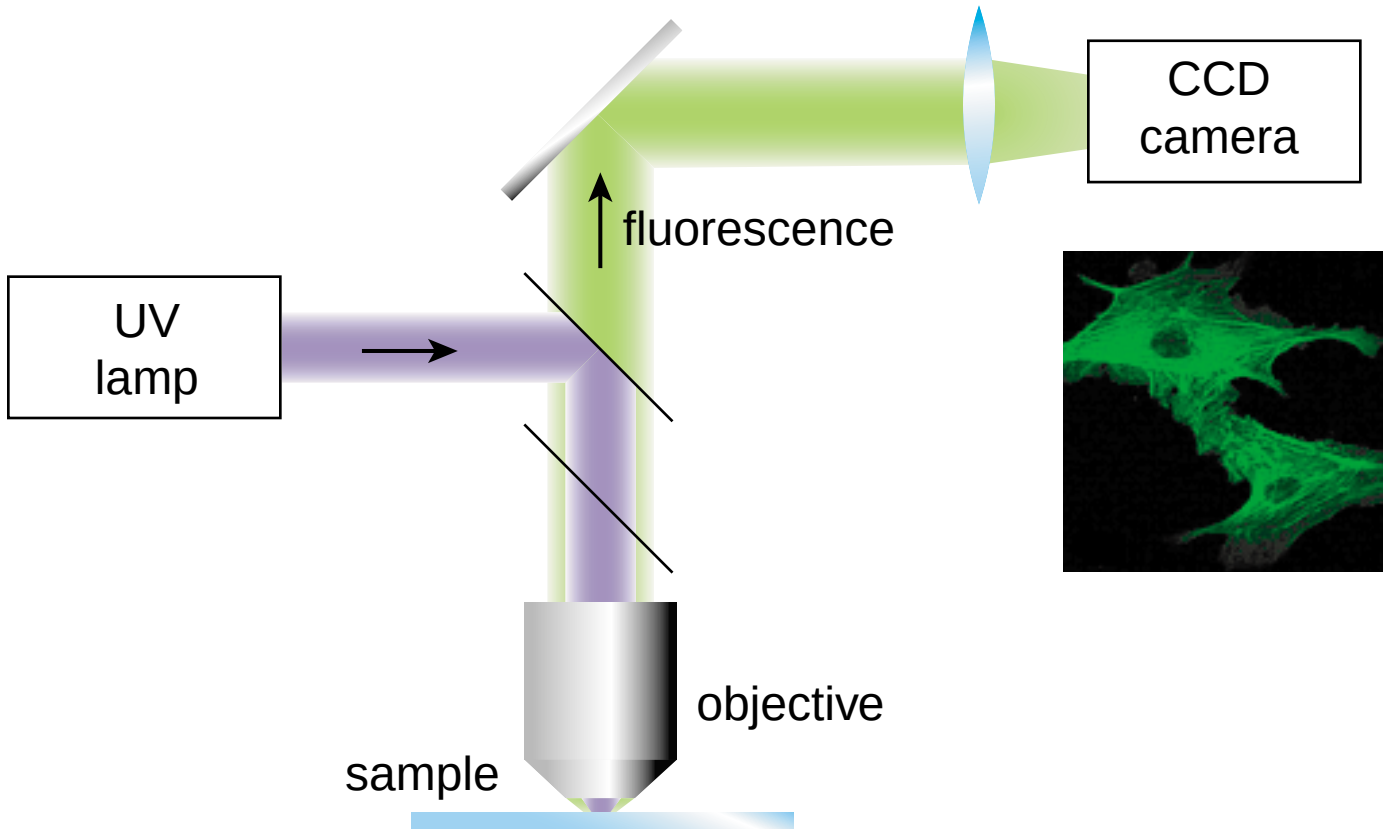

process with fs laser beam

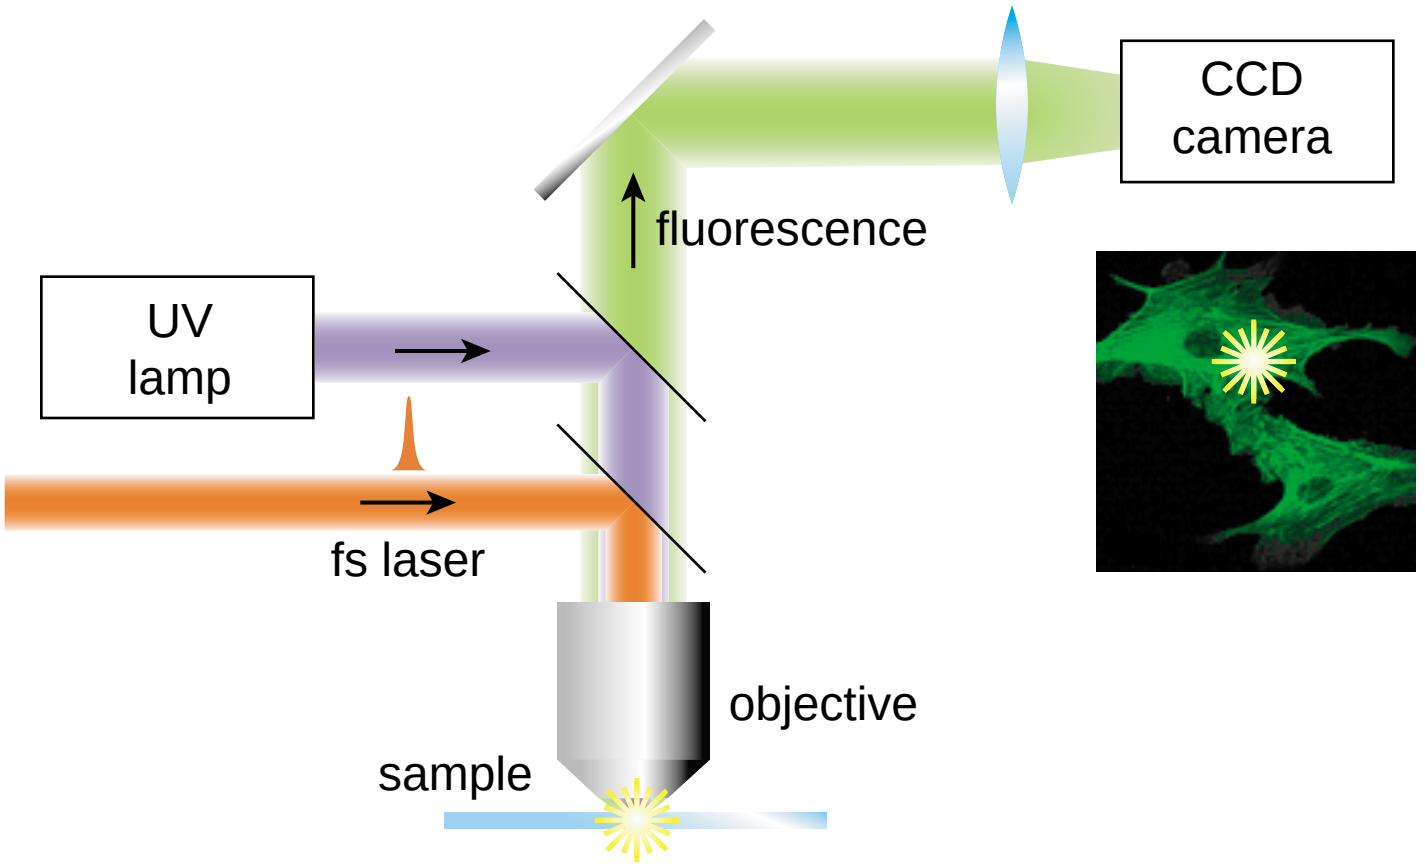

Low-energy processing

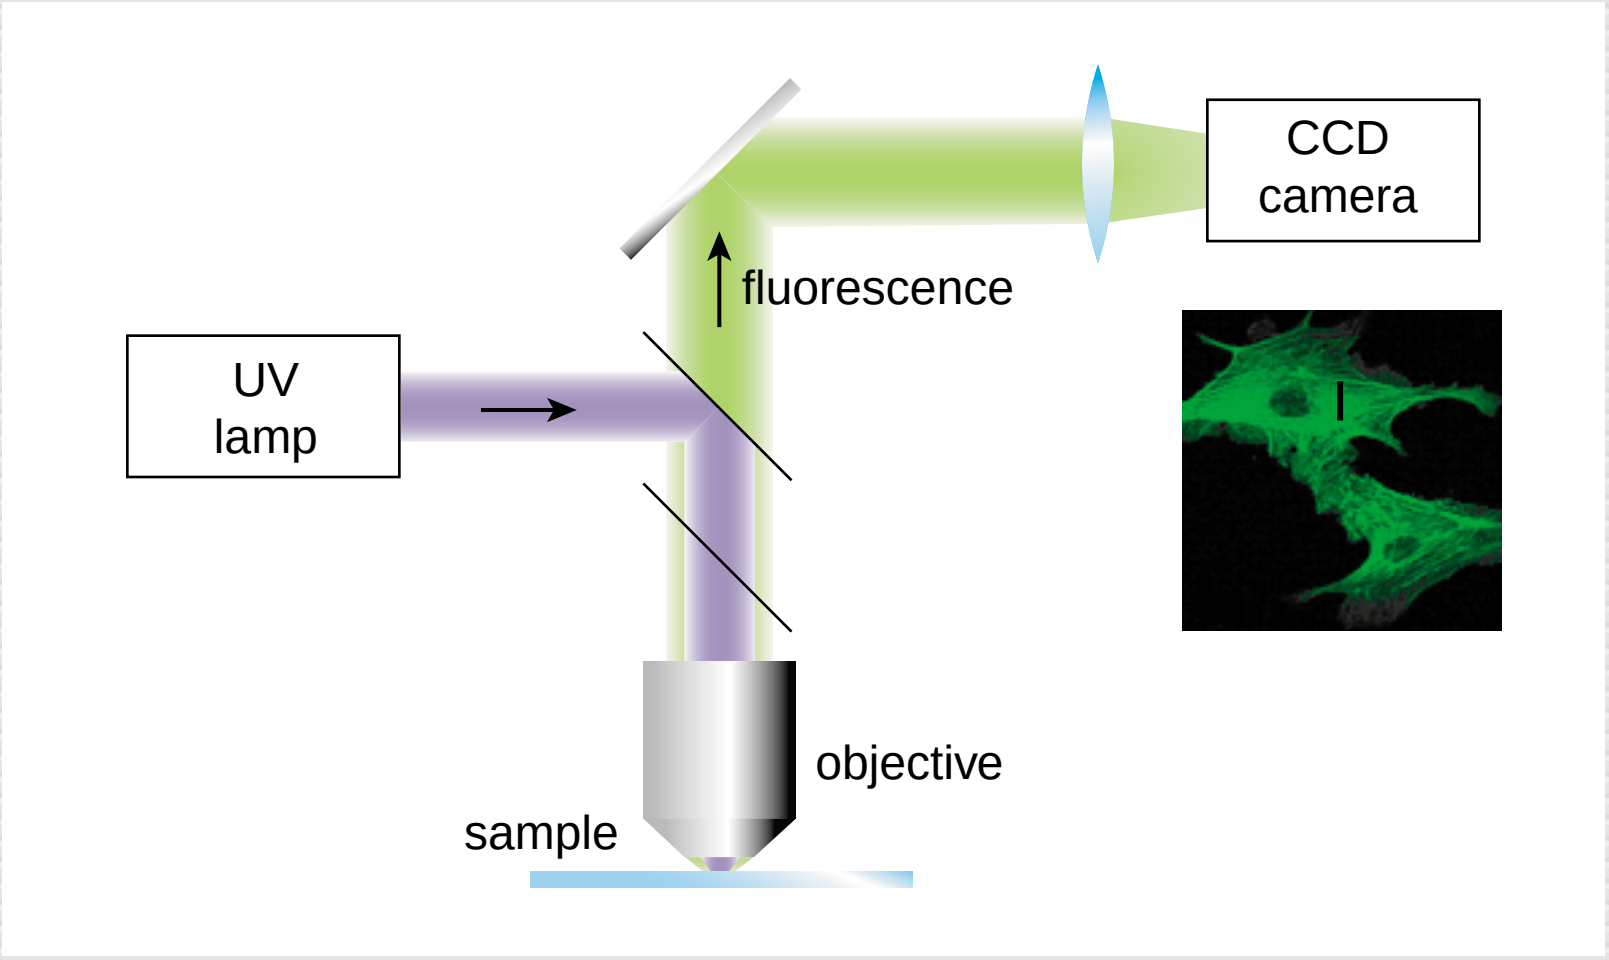

Low-energy processing

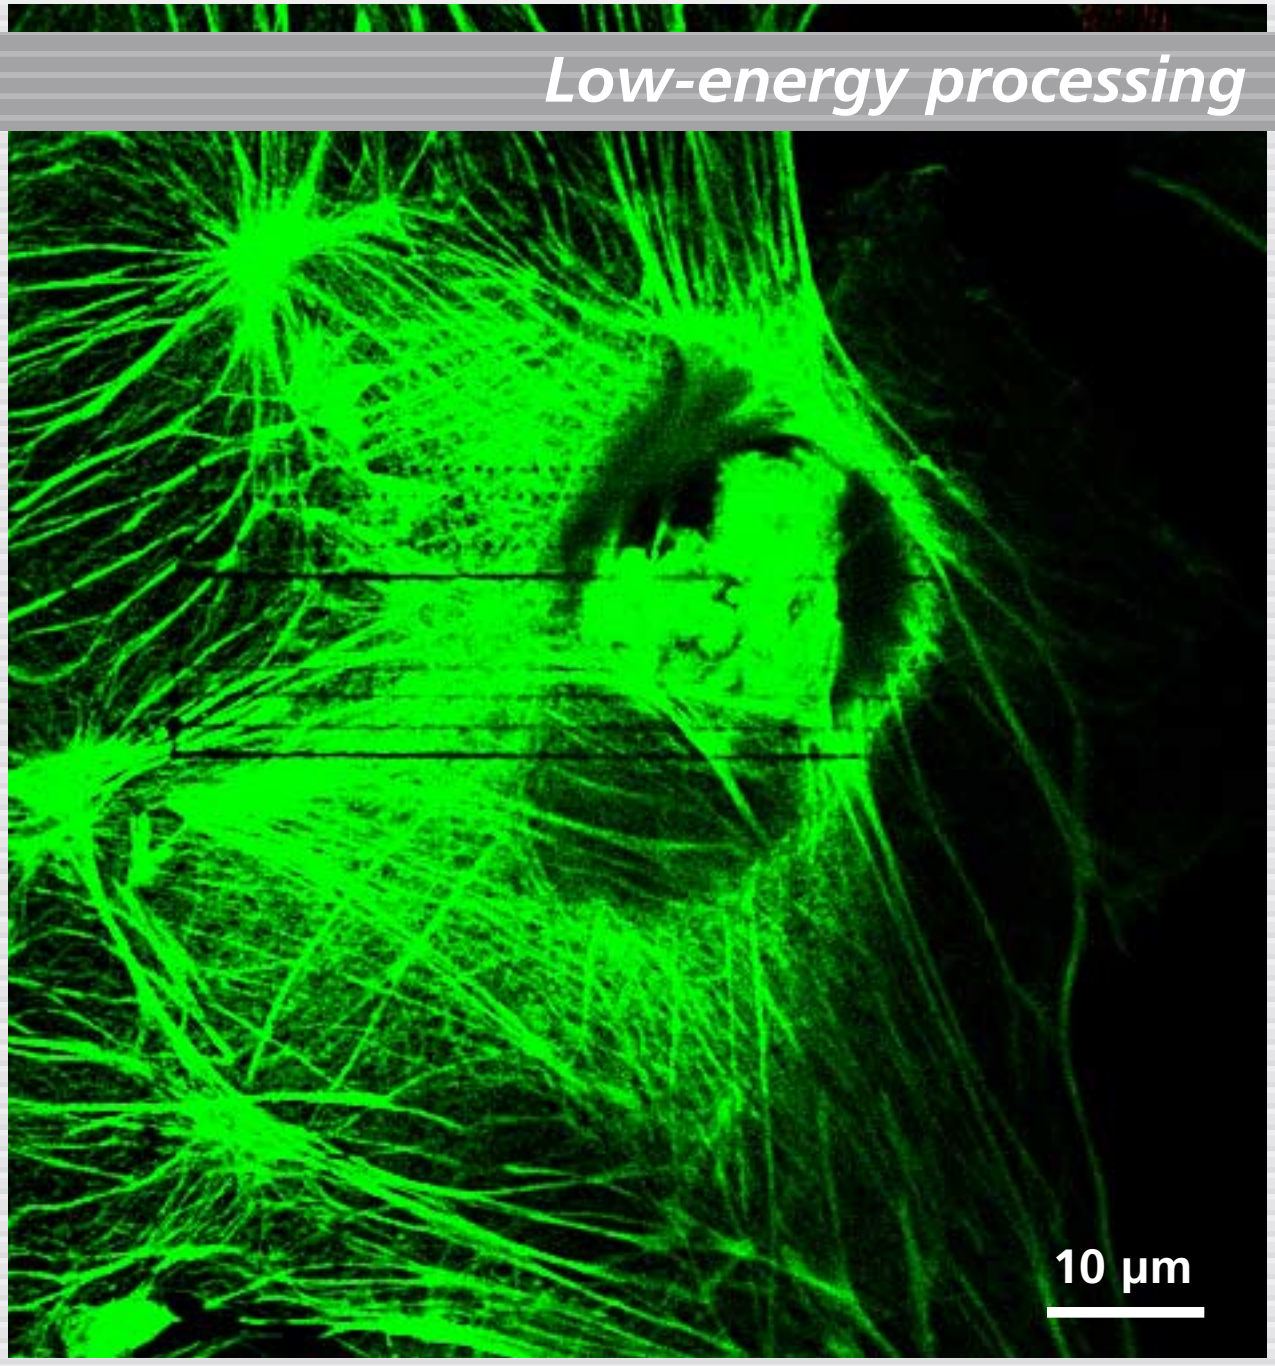

Low-energy processing

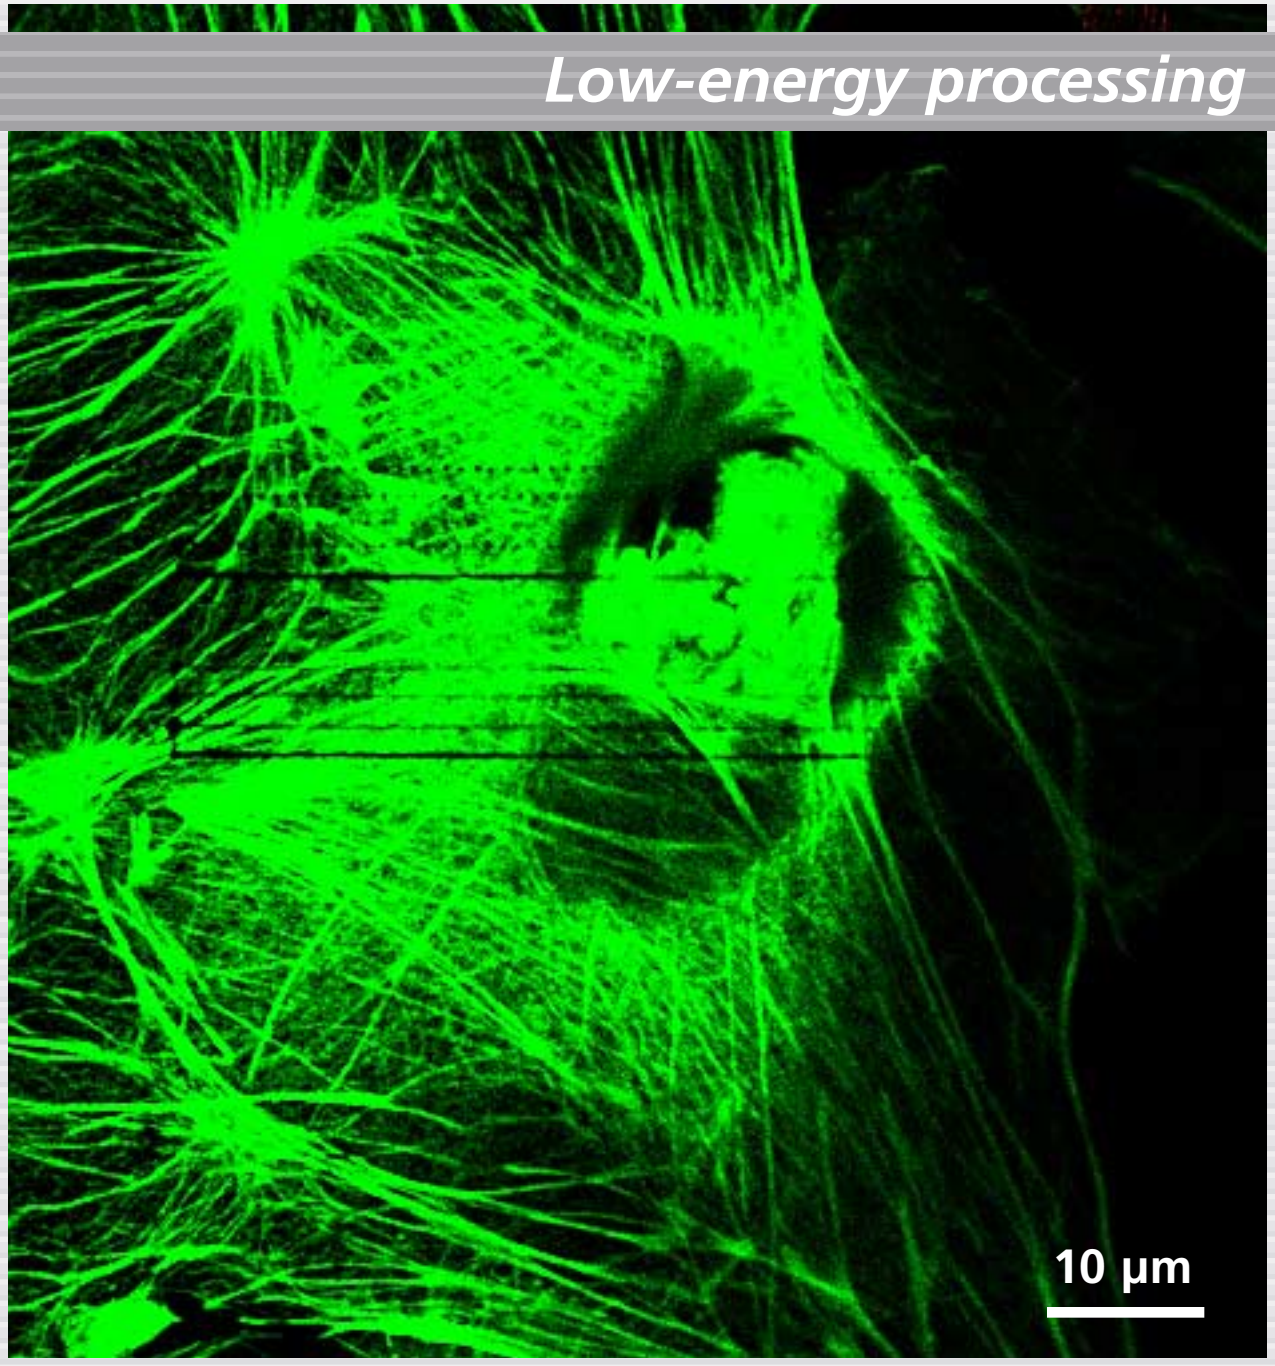

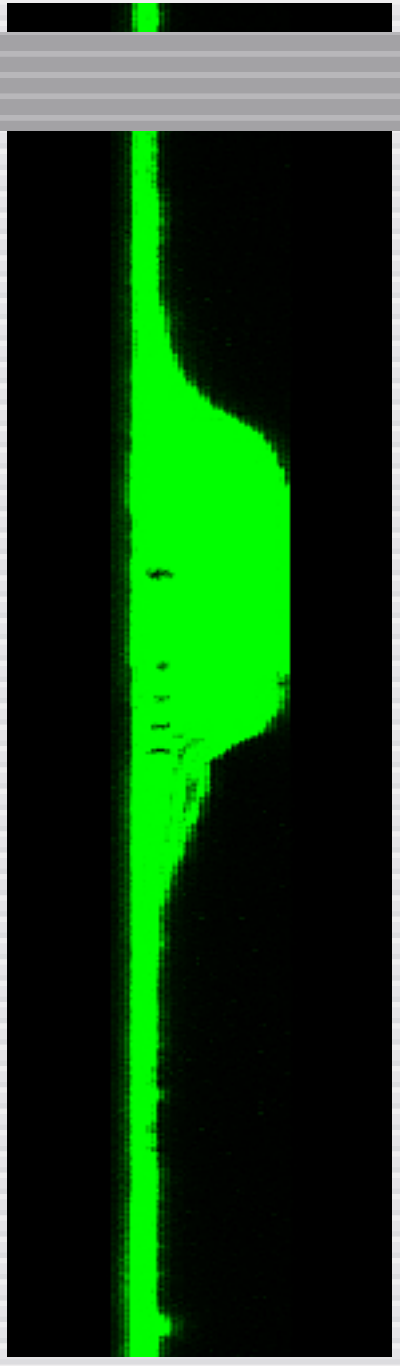

Low-energy processing

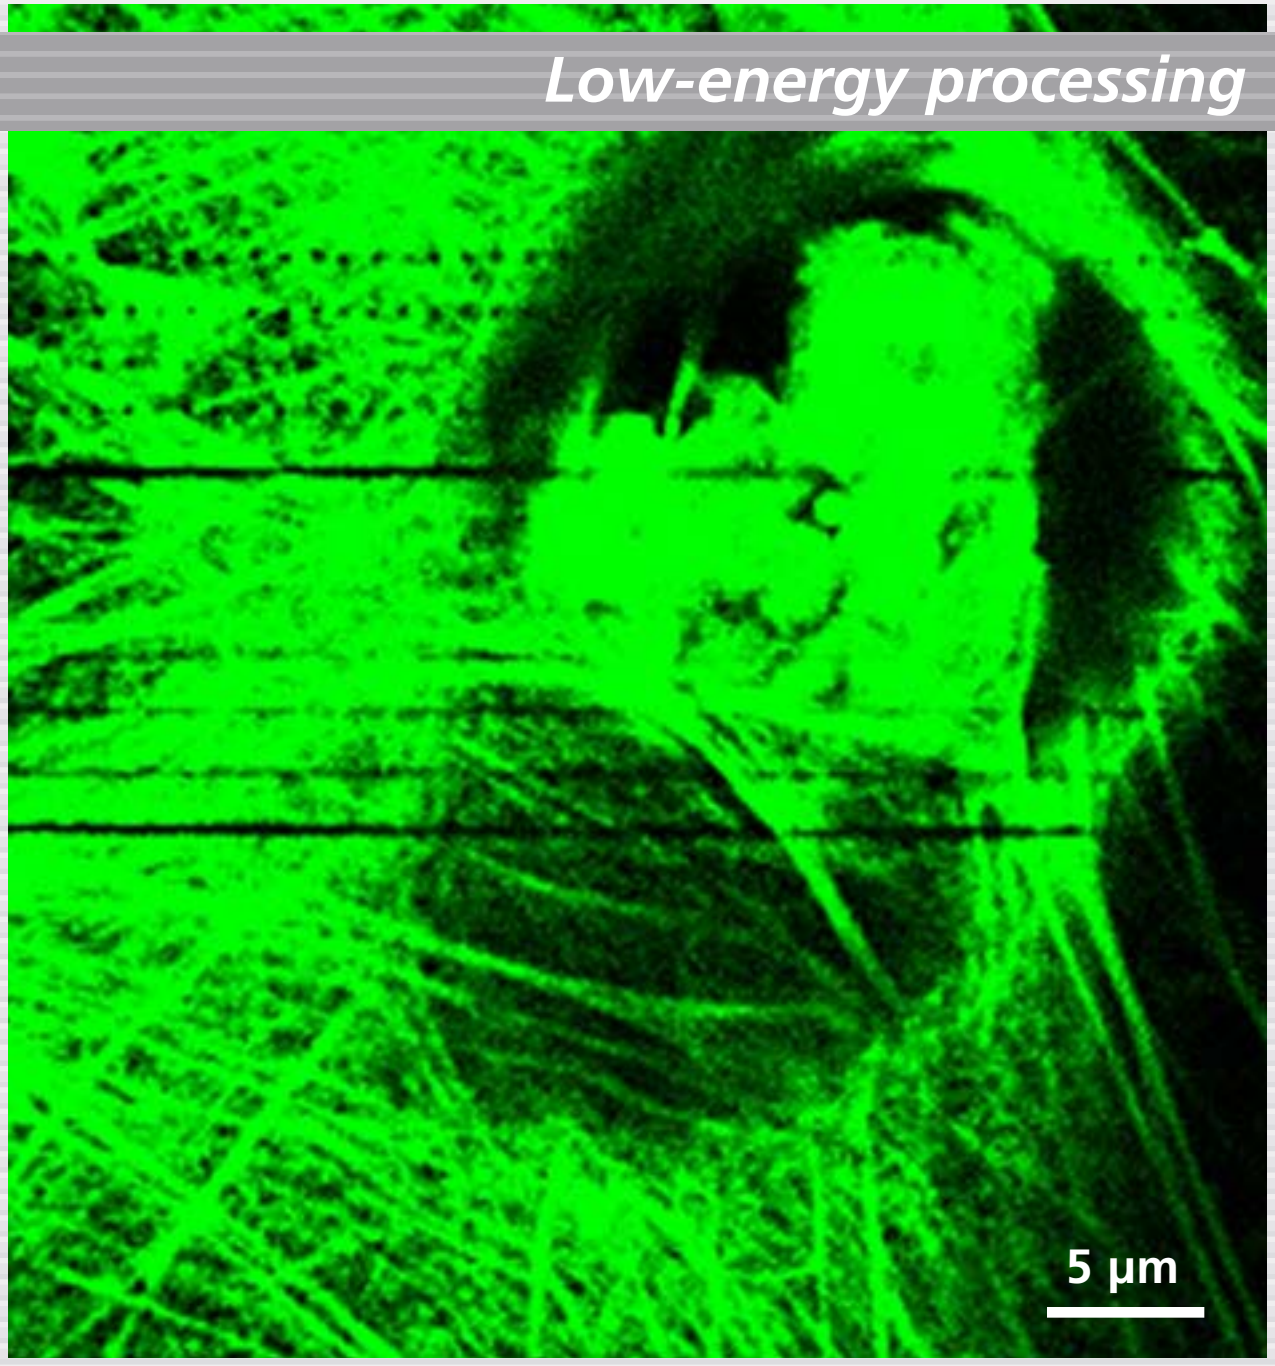

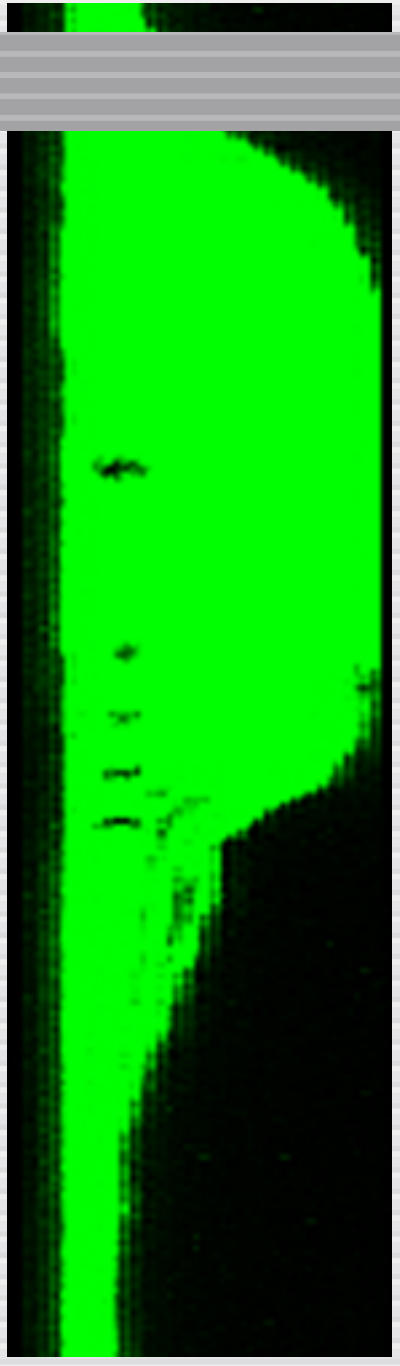

Low-energy processing

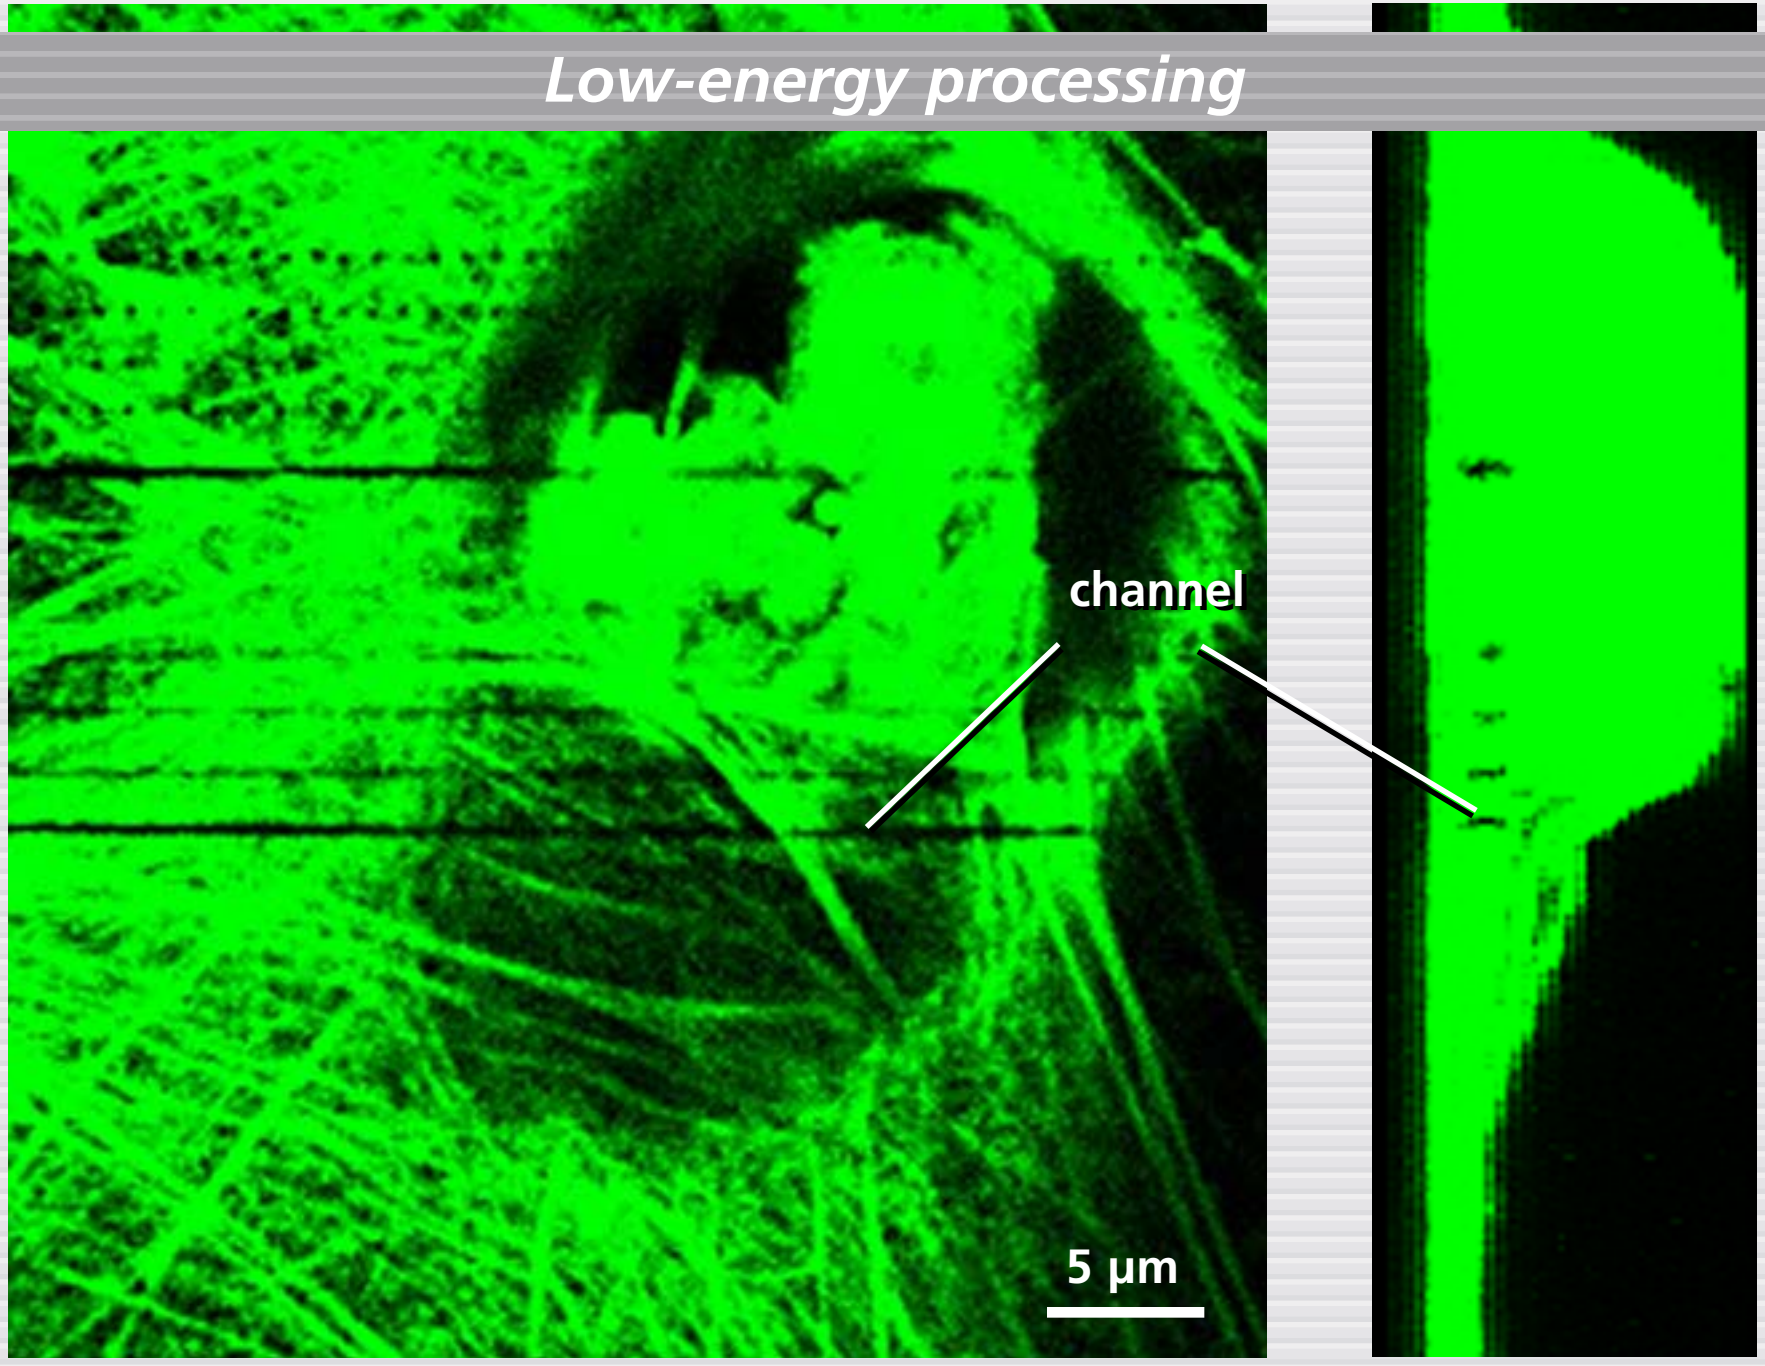

Low-energy processing

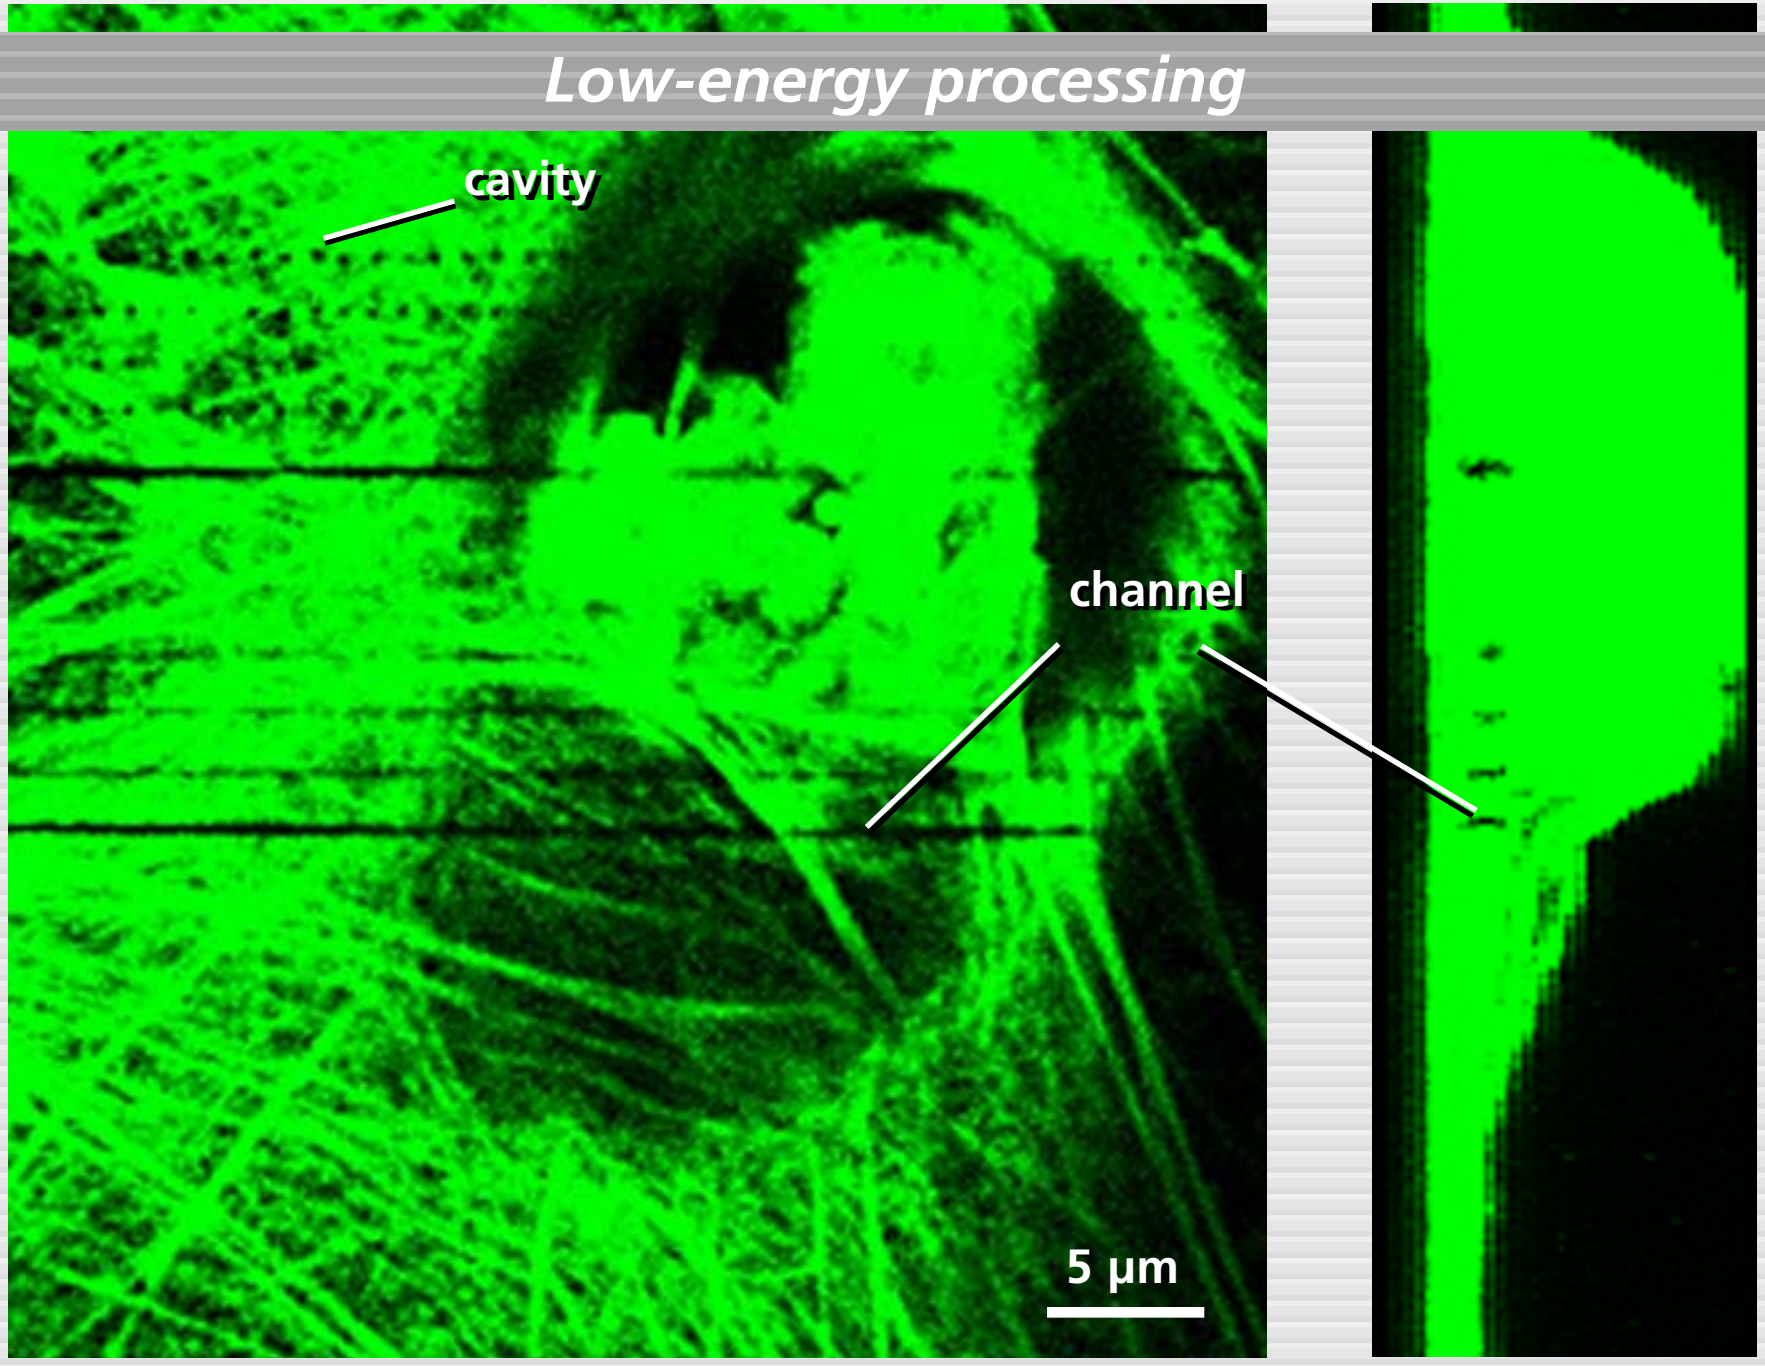

Low-energy processing

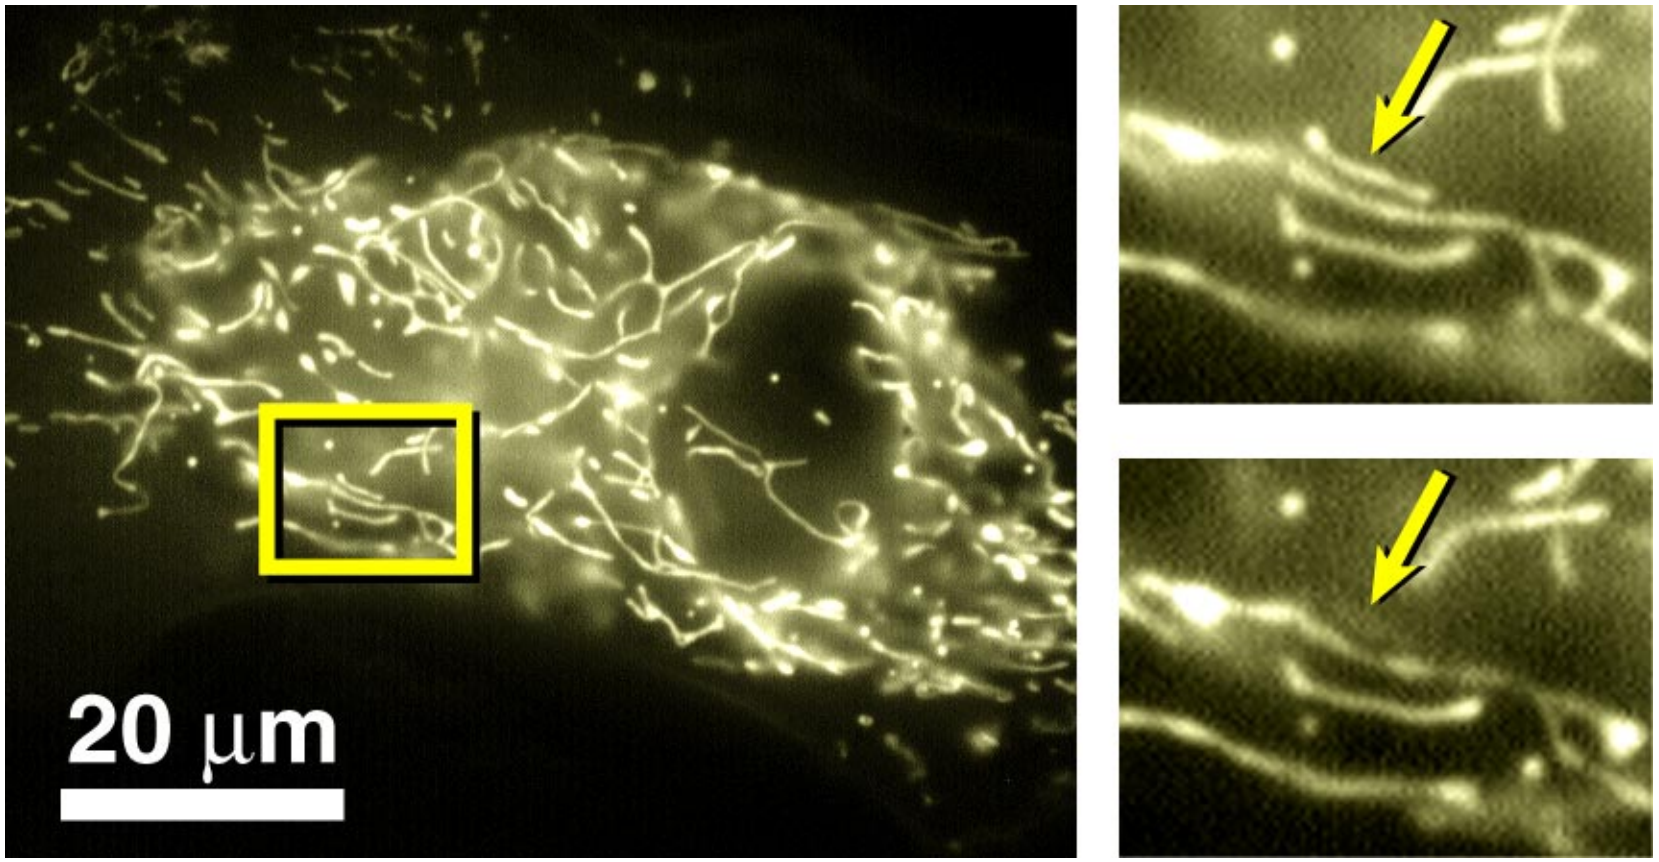

Ethydium bromide test

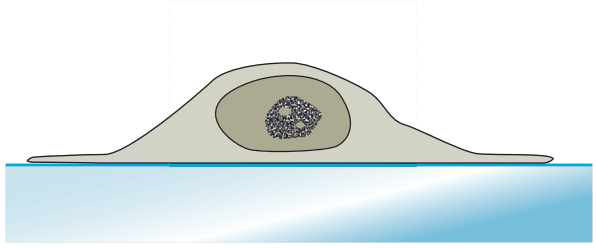

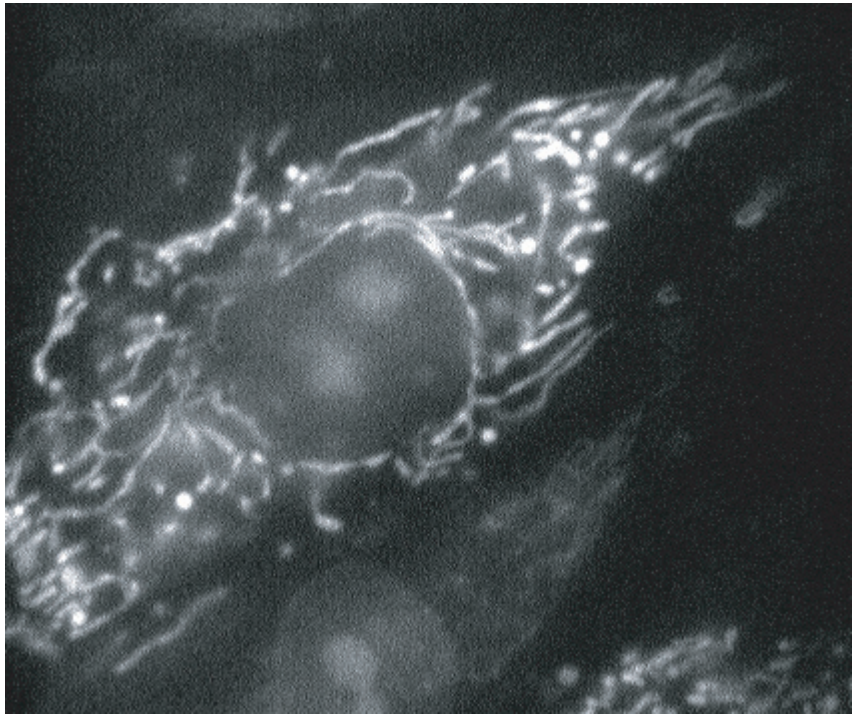

Ethydium bromide test

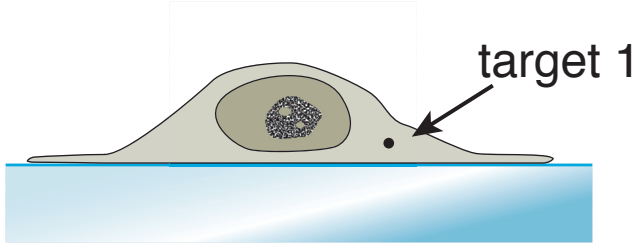

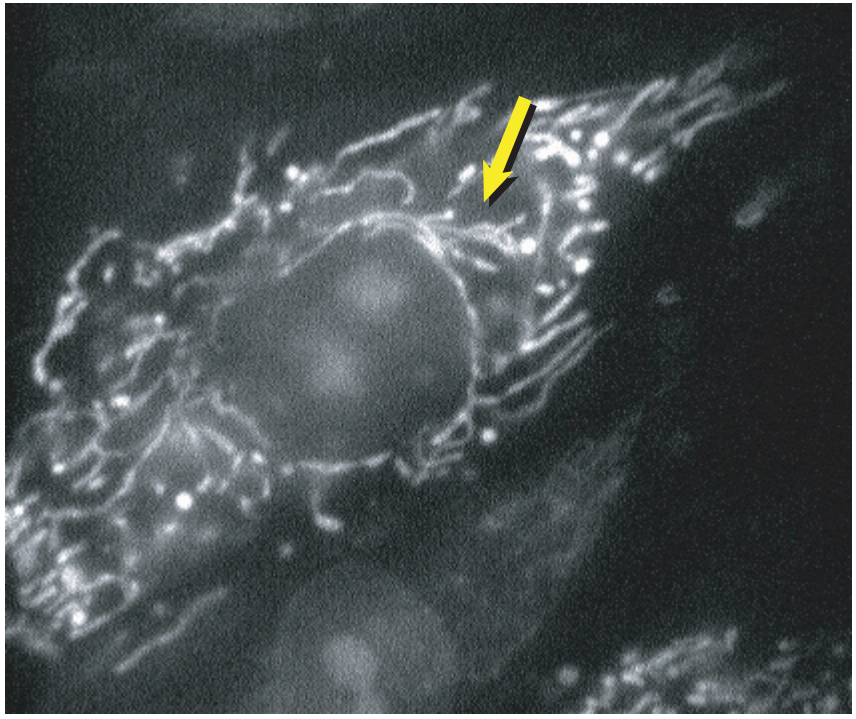

Ethydium bromide test

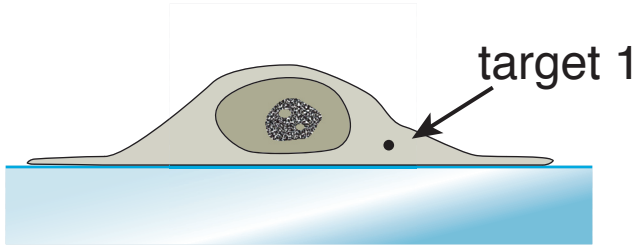

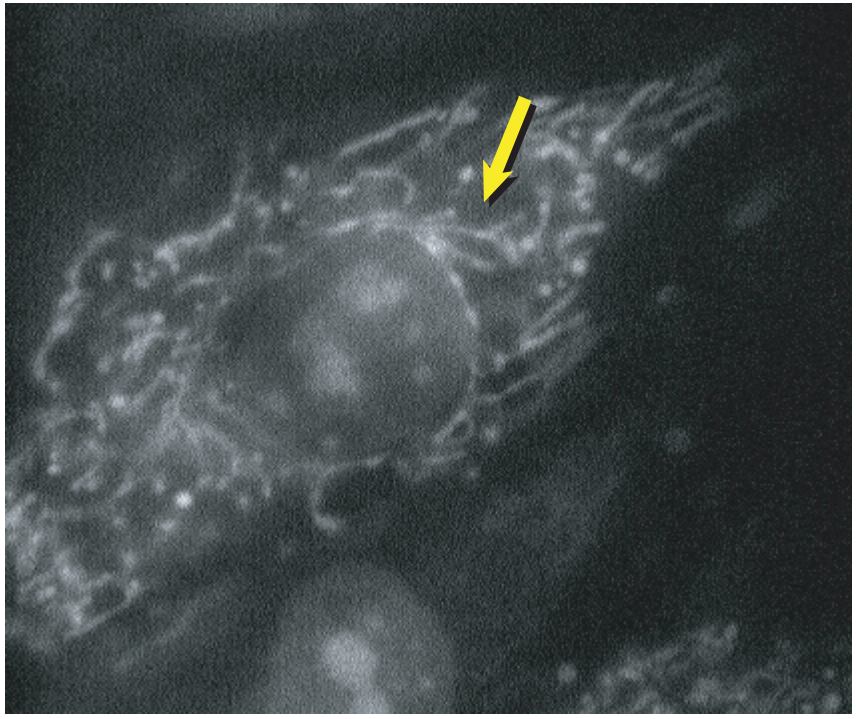

Ethydium bromide test

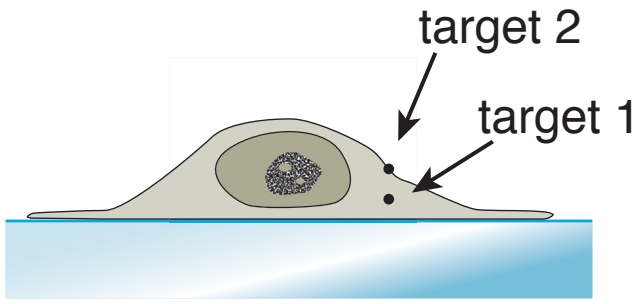

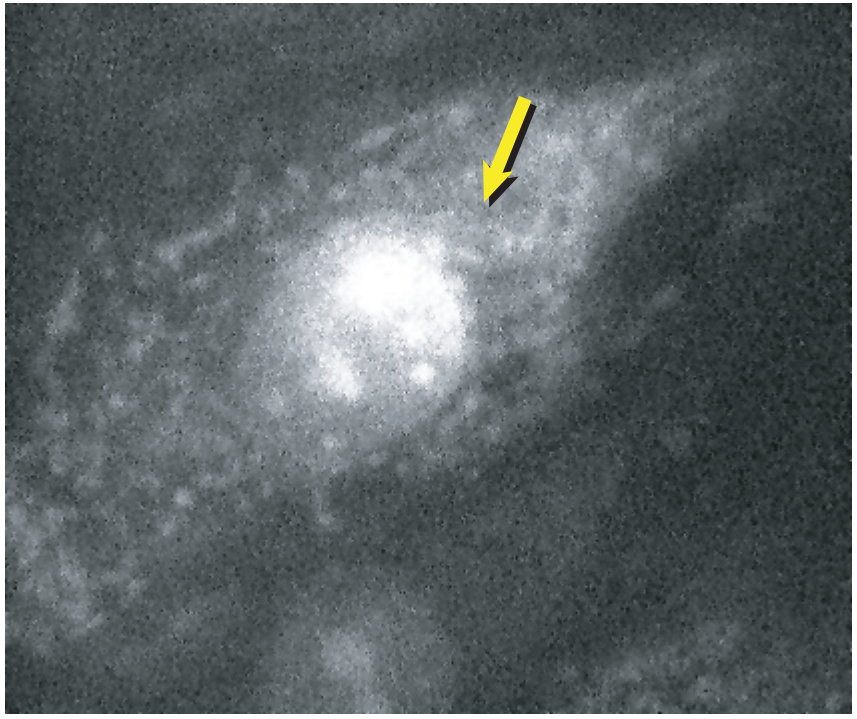

Nanoneurosurgery

Caenorhabditis Elegans

Juergen Berger & Ralph Sommer
Max-Planck Institute for Developmental Biology

Nanoneurosurgery

Caenorhabditis Elegans

- **simple model organism**

Nanoneurosurgery

Caenorhabditis Elegans

- **simple model organism**
- **similarities to higher organism**

Caenorhabditis Elegans

- **simple model organism**
- **similarities to higher organism**
- **genome fully sequenced**

Nanoneurosurgery

Caenorhabditis Elegans

- **simple model organism**
- **similarities to higher organism**
- **genome fully sequenced**
- **easy to handle**

Nanoneurosurgery

- **80 µm x 1 mm**

Nanoneurosurgery

Caenorhabditis Elegans

- **80 µm x 1 mm**
- **about 1300 cells**

Caenorhabditis Elegans

- **80 µm x 1 mm**
- **about 1300 cells**
- **302 neurons**

Caenorhabditis Elegans

- 80 µm x 1 mm
- about 1300 cells
- 302 neurons
- invariant wiring diagram

Caenorhabditis Elegans

- 80 µm x 1 mm
- about 1300 cells
- 302 neurons
- invariant wiring diagram
- neuronal system completely encodes behavior

Nanoneurosurgery

Caenorhabditis Elegans

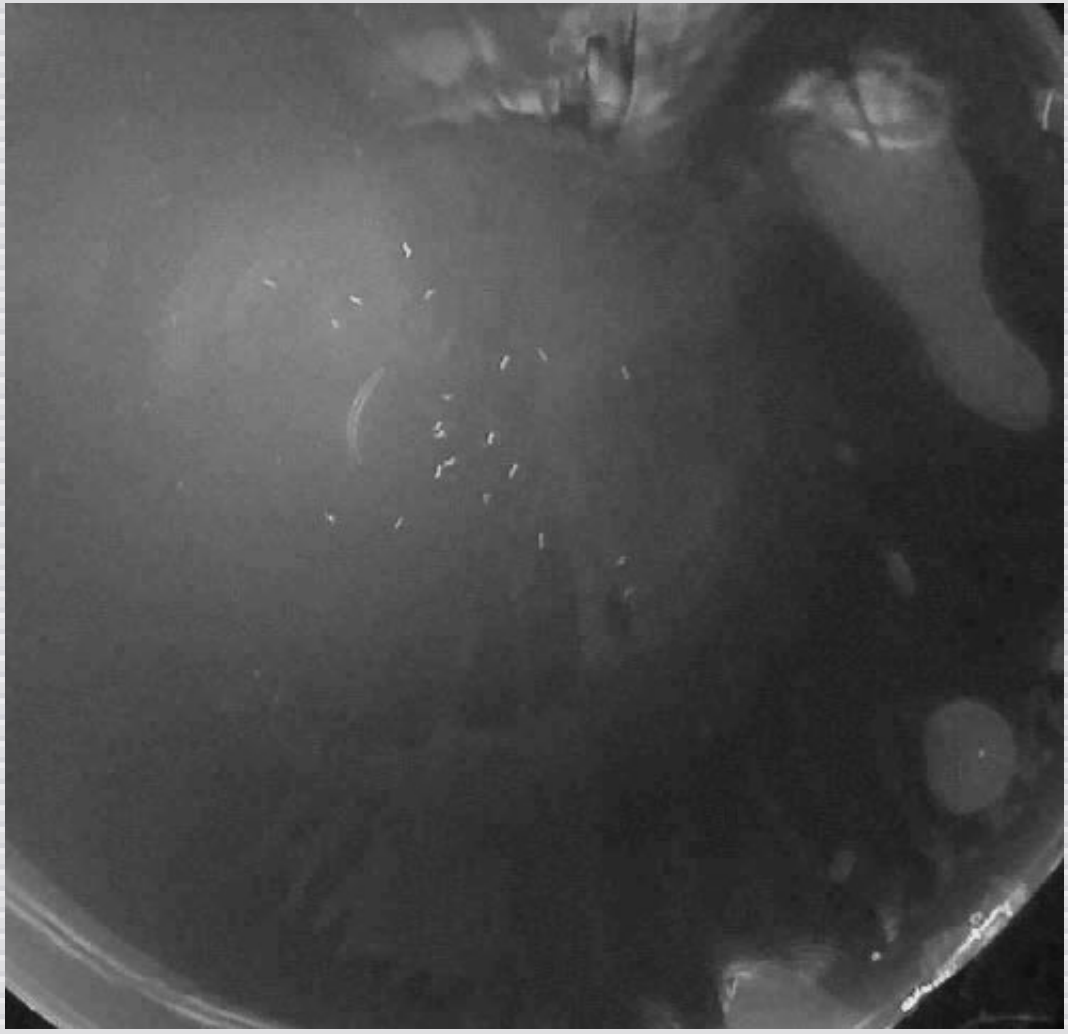

Nanoneurosurgery

Caenorhabditis Elegans

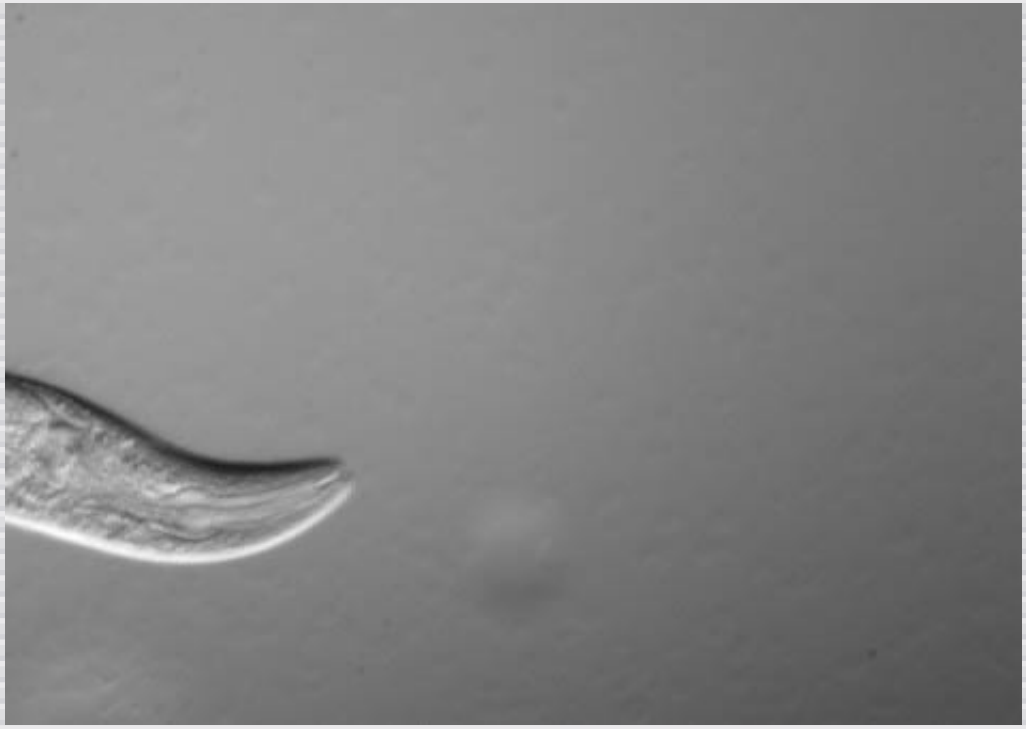

Bob Goldstein, UNC Chapel Hill

Nanoneurosurgery

Caenorhabditis Elegans

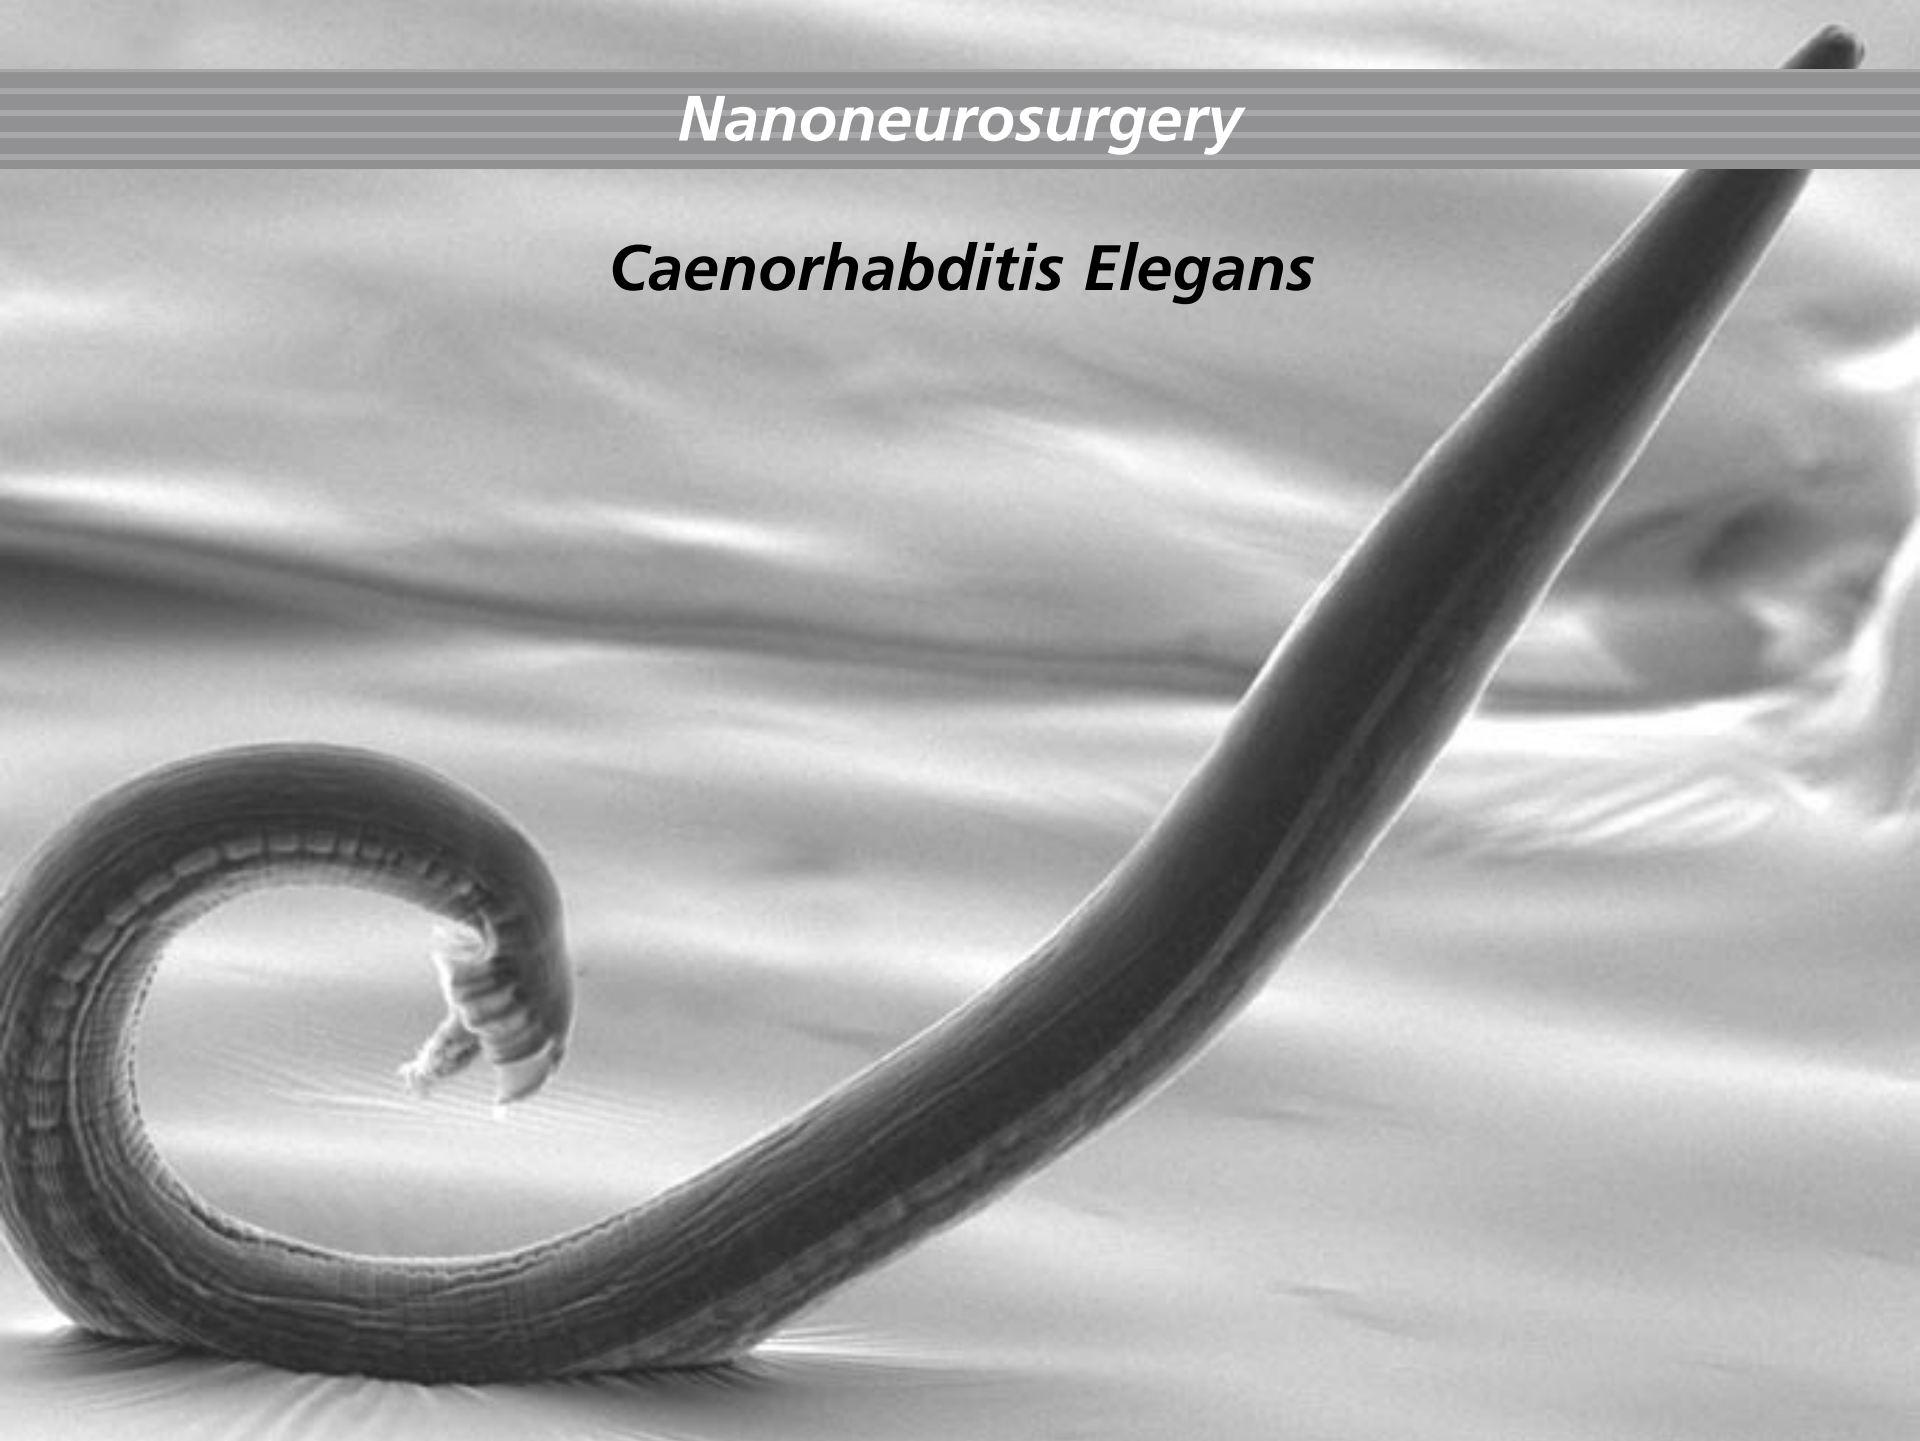

Nanoneurosurgery

ASH neurons

- responsible for osmotic avoidance
- ciliary projections extend through skin
- one on each side

make ASH neurons express GFP

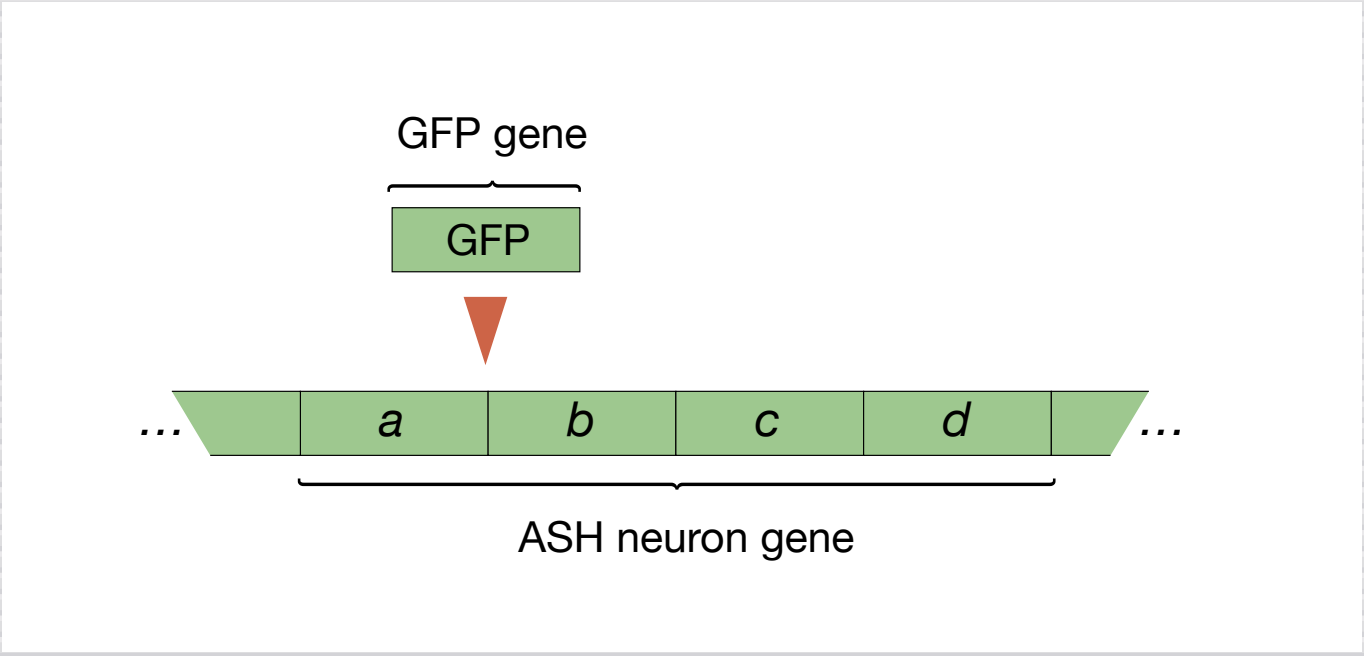

GFP: absorbs UV, emits green

Nanoneurosurgery

cutting an axon

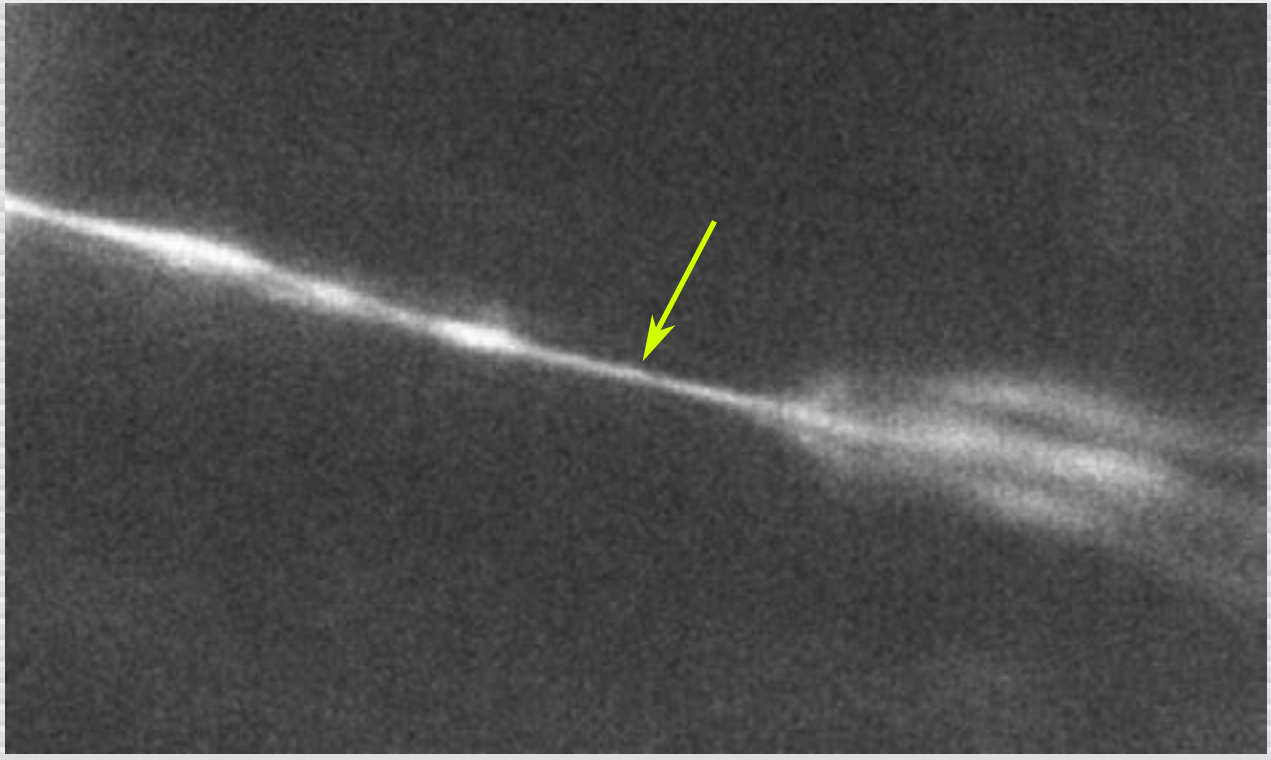

cutting an axon

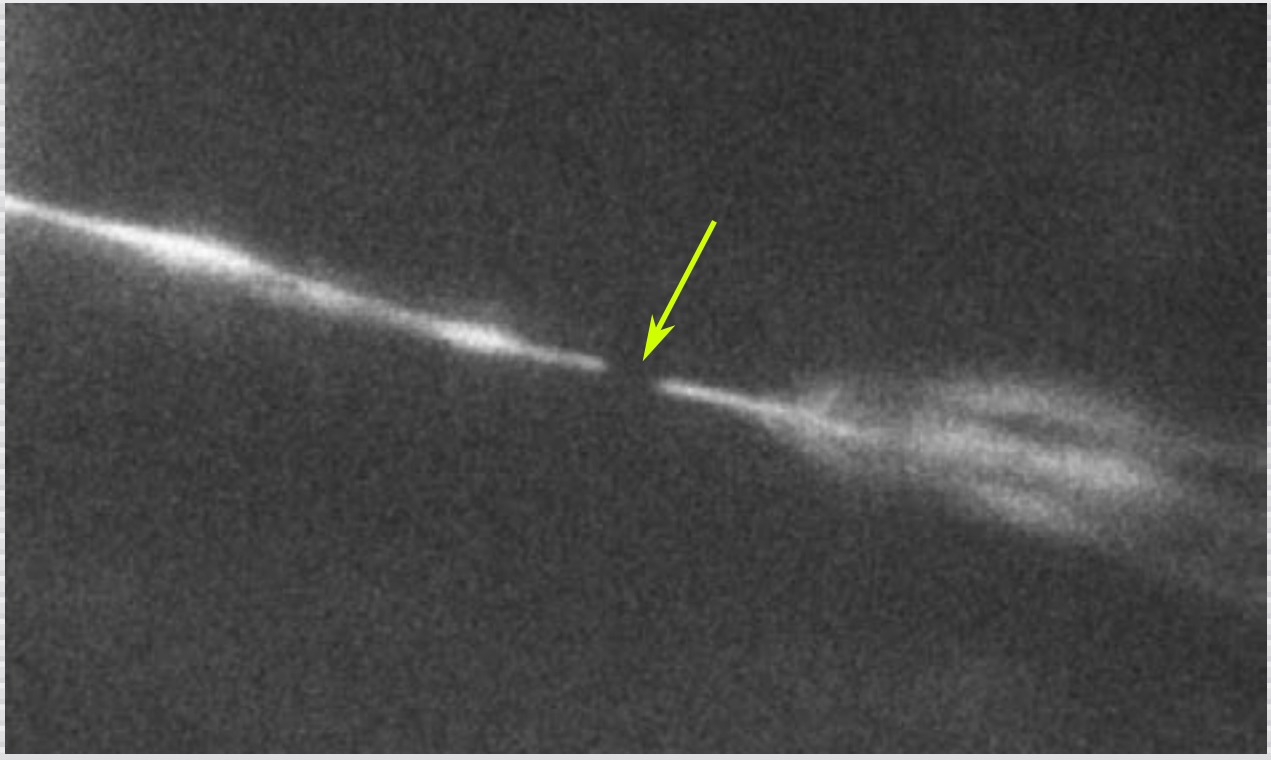

pearling instability

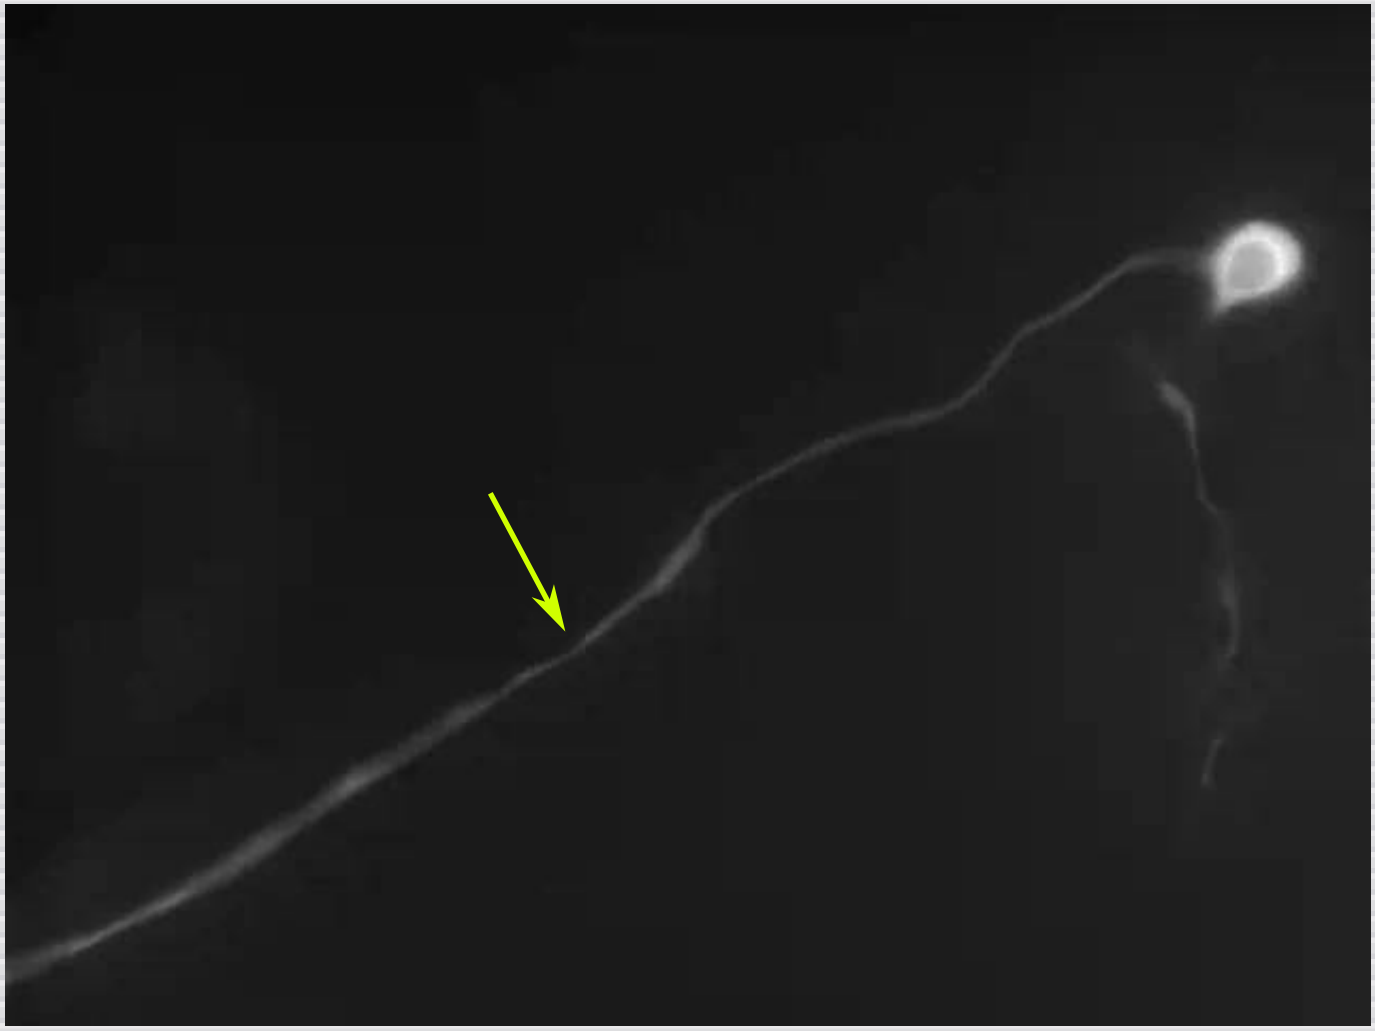

pearling instability

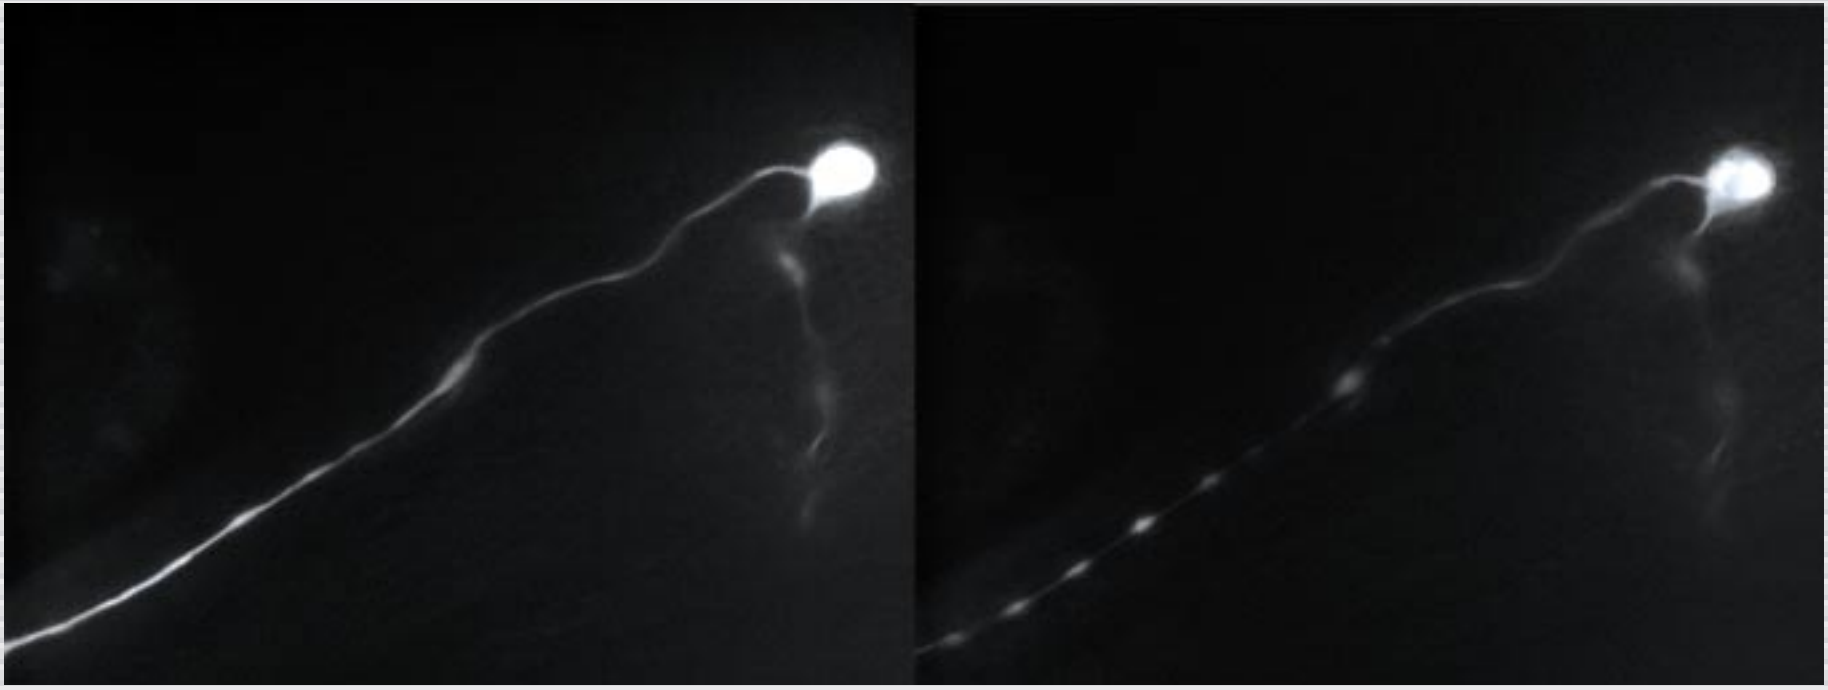

Summary

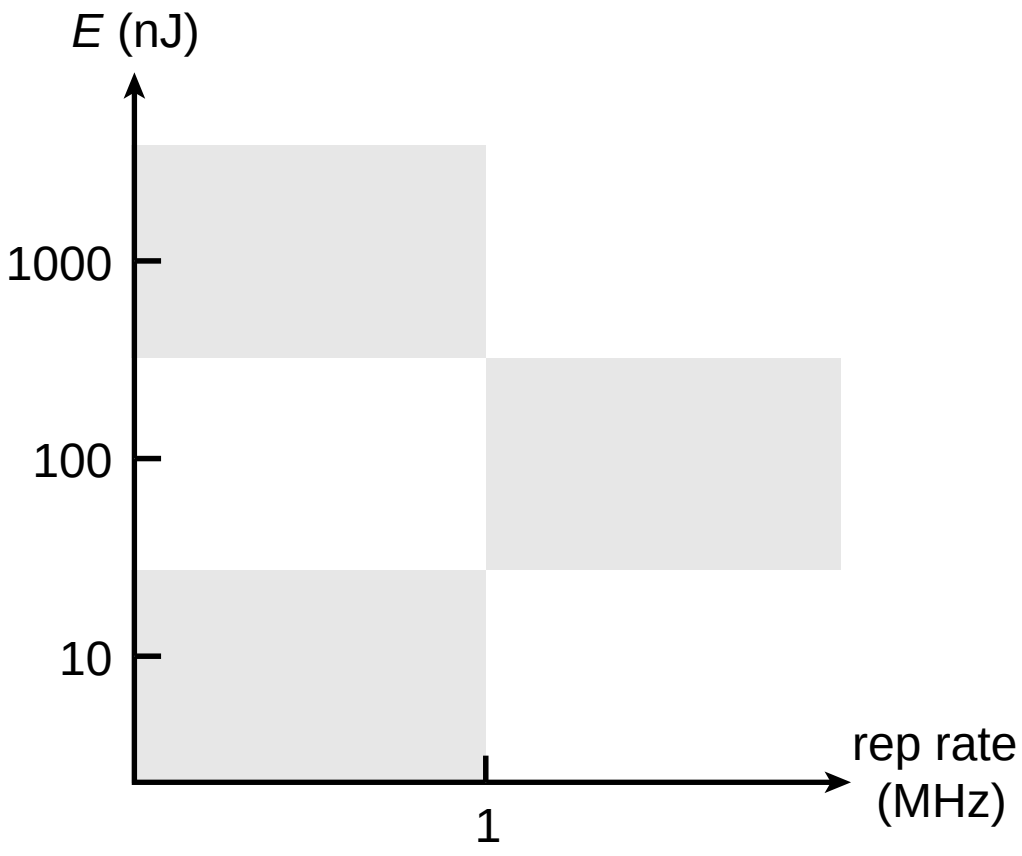

Summary

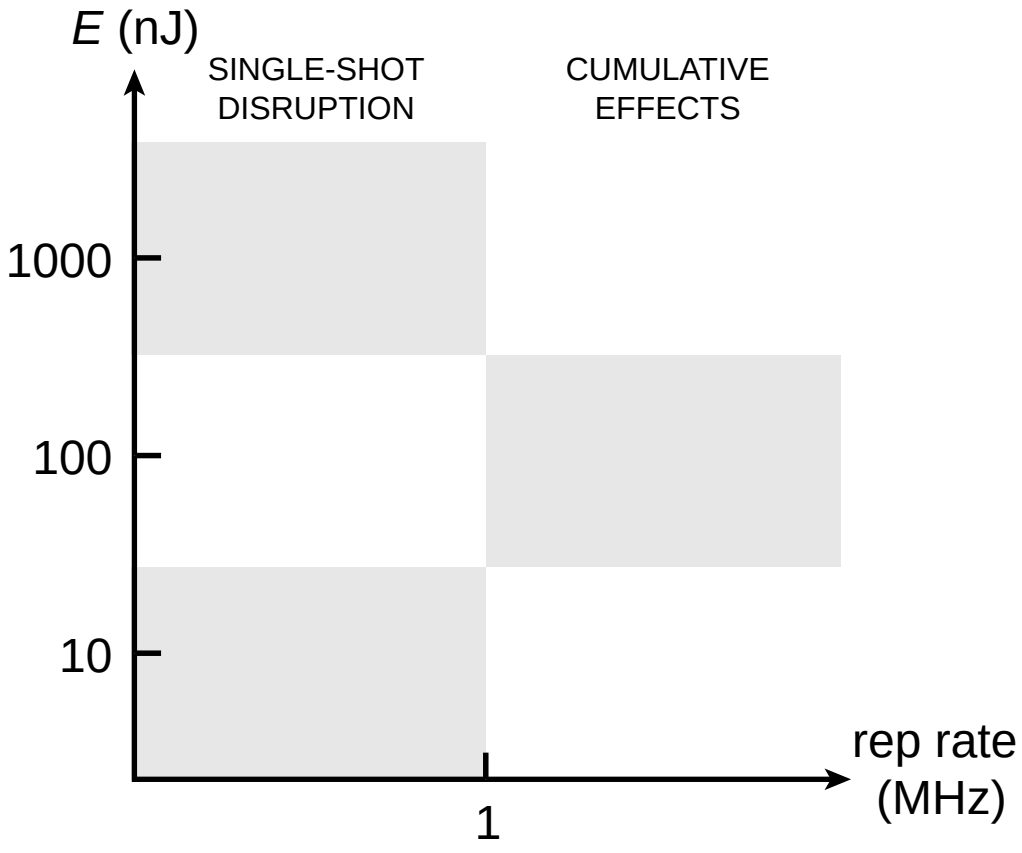
E (nJ)
SINGLE-SHOT DISRUPTION
CUMULATIVE EFFECTS
1000
100
10
1
rep rate (MHz)

Summary

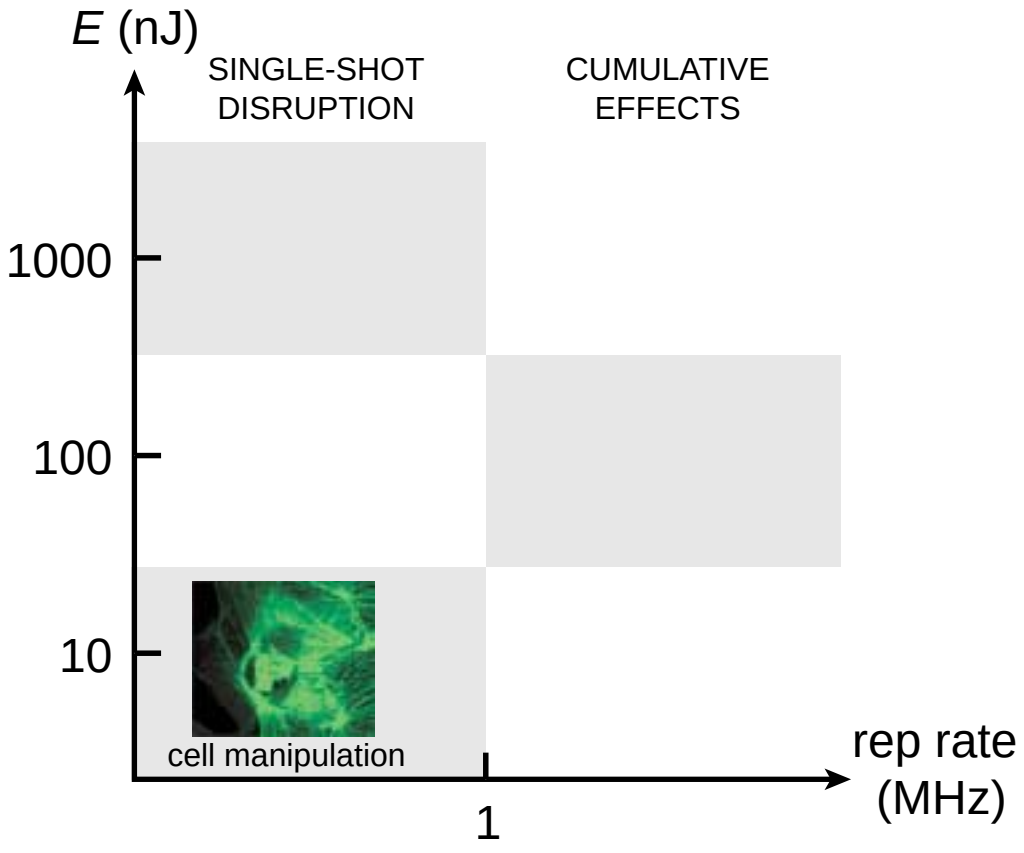
E (nJ)
SINGLE-SHOT DISRUPTION
CUMULATIVE EFFECTS
1000
100
10
cell manipulation
1
rep rate (MHz)

Summary

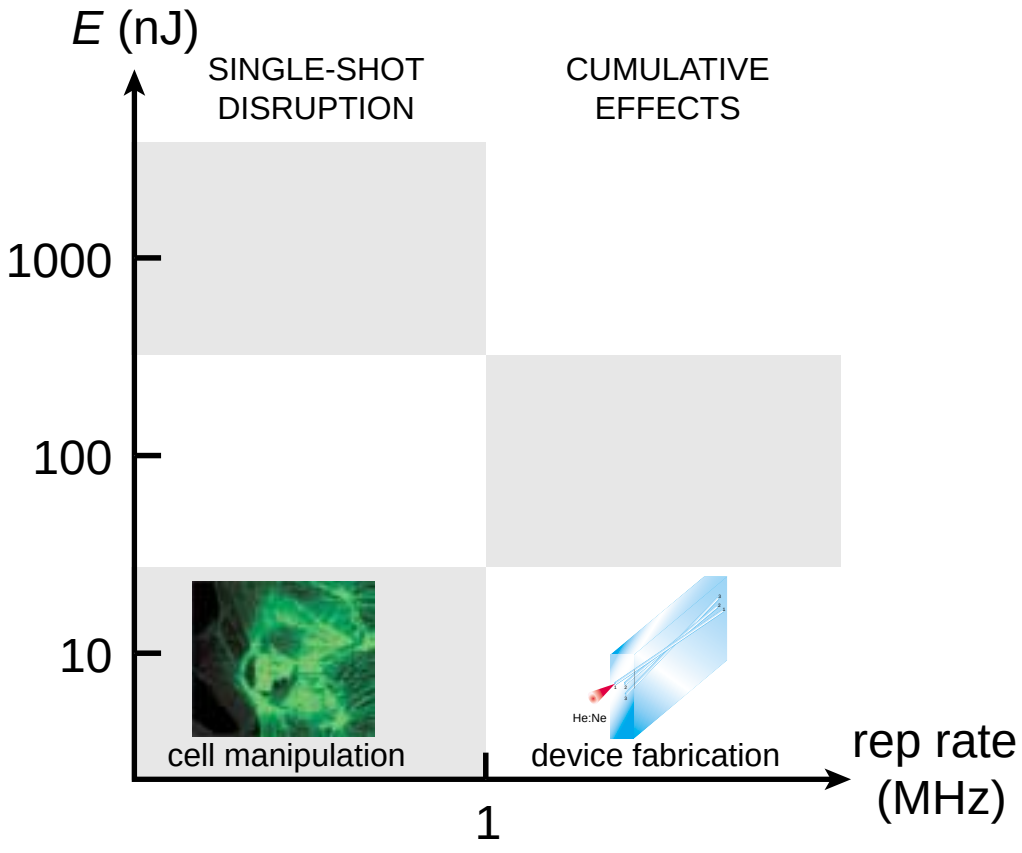
E (nJ)
SINGLE-SHOT DISRUPTION
CUMULATIVE EFFECTS
1000
100
10
cell manipulation
He:Ne
device fabrication
1
rep rate (MHz)

Summary

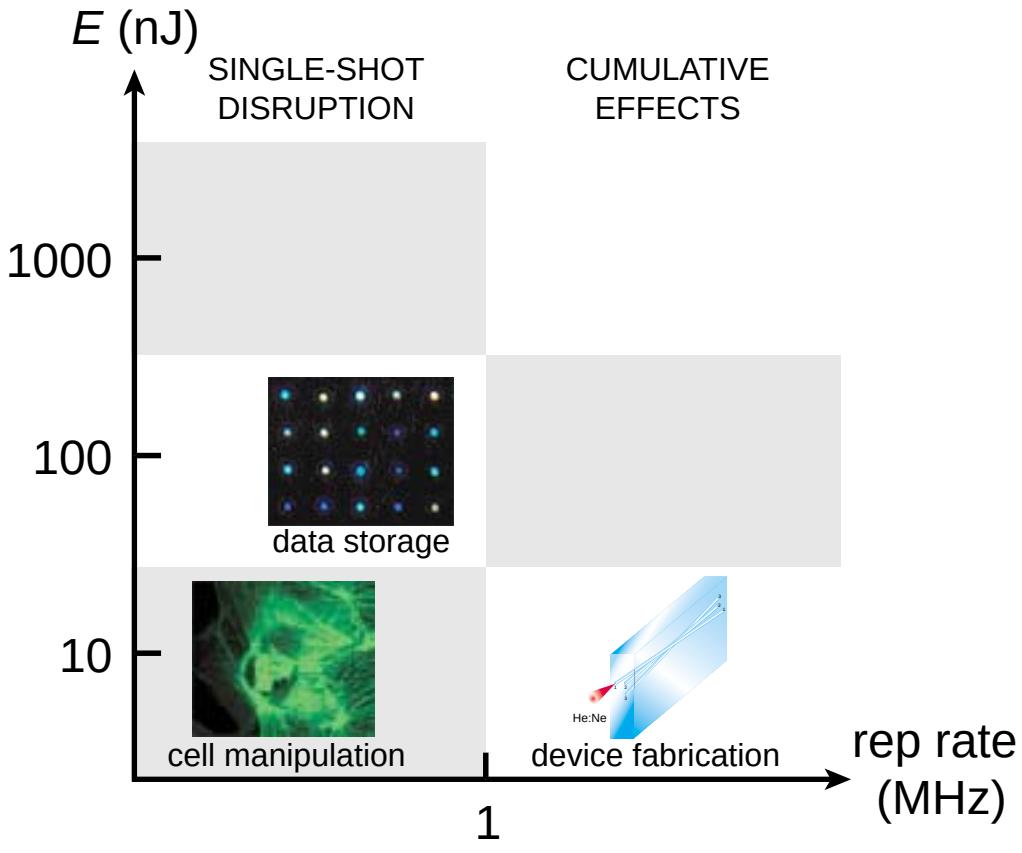
E (nJ)
SINGLE-SHOT DISRUPTION
CUMULATIVE EFFECTS
1000
100
10
data storage
cell manipulation
He:Ne
device fabrication
1
rep rate (MHz)

Summary

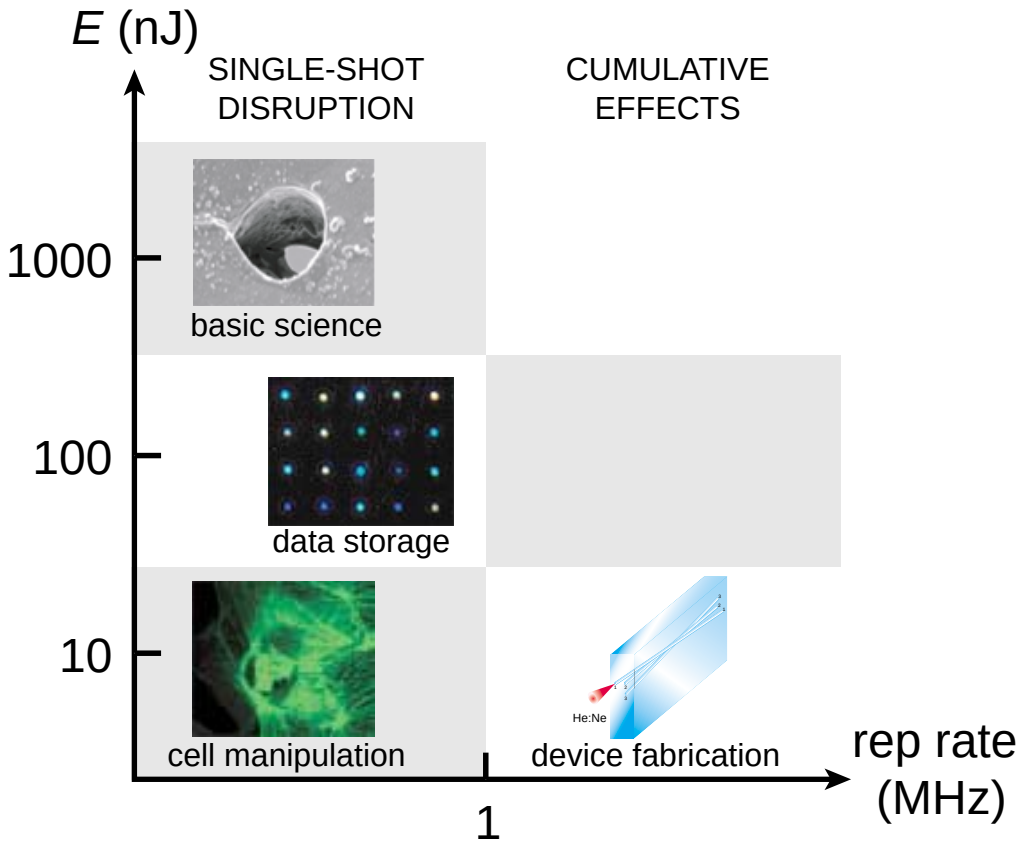
E (nJ)
SINGLE-SHOT DISRUPTION
CUMULATIVE EFFECTS
1000
100
10
basic science
data storage
cell manipulation
He:Ne
device fabrication
1
rep rate (MHz)

Conclusion

- **wiring optoelectronics circuits of the future**
- **manipulating the machinery of life**

GORDON McKAY
LABORATORY OF
APPLIED SCIENCE

Funding: National Science Foundation
Harvard Office of Technology and Trademark Licensing

Acknowledgments:
Prof. Nico Bloembergen (Harvard University)
Willie Leight (Yale University)
Yossi Chai (Sagitta, Inc.)

For a copy of this talk and additional information, see:

http://mazur-www.harvard.edu

Low-energy processing

bleaching or disruption?

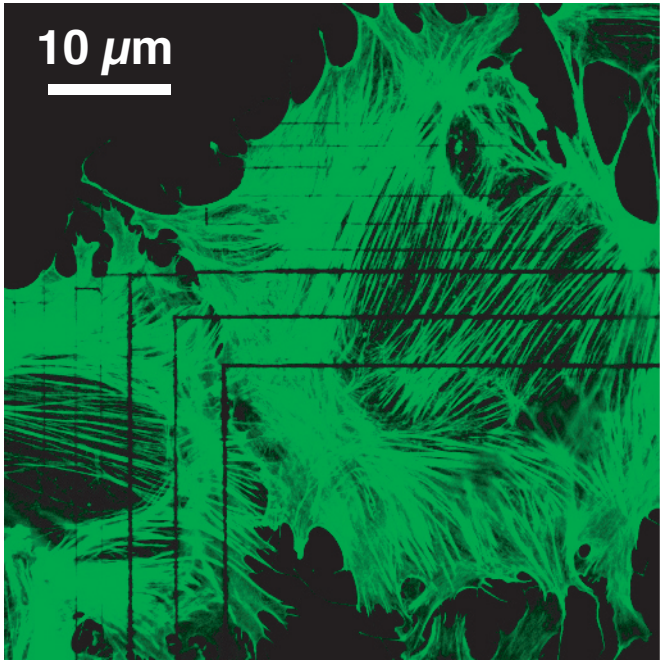

Low-energy processing
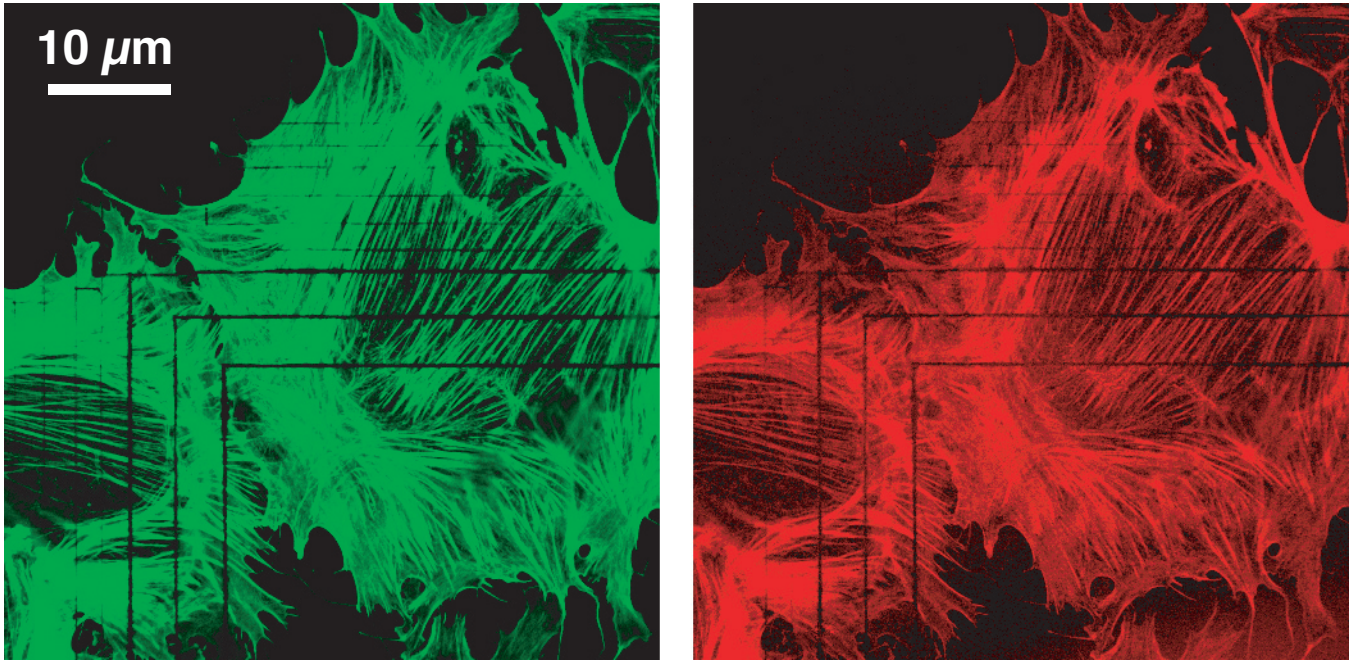
bleaching or disruption?