

# Less is more: Extreme optics with zero index



Wednesday Night Research Seminar  
Harvard University  
Cambridge, MA, 2 December 2015



# Less is more: Extreme optics with zero index





@eric\_mazur


Wednesday Night Research Seminar  
Harvard University  
Cambridge, MA, 2 December 2015





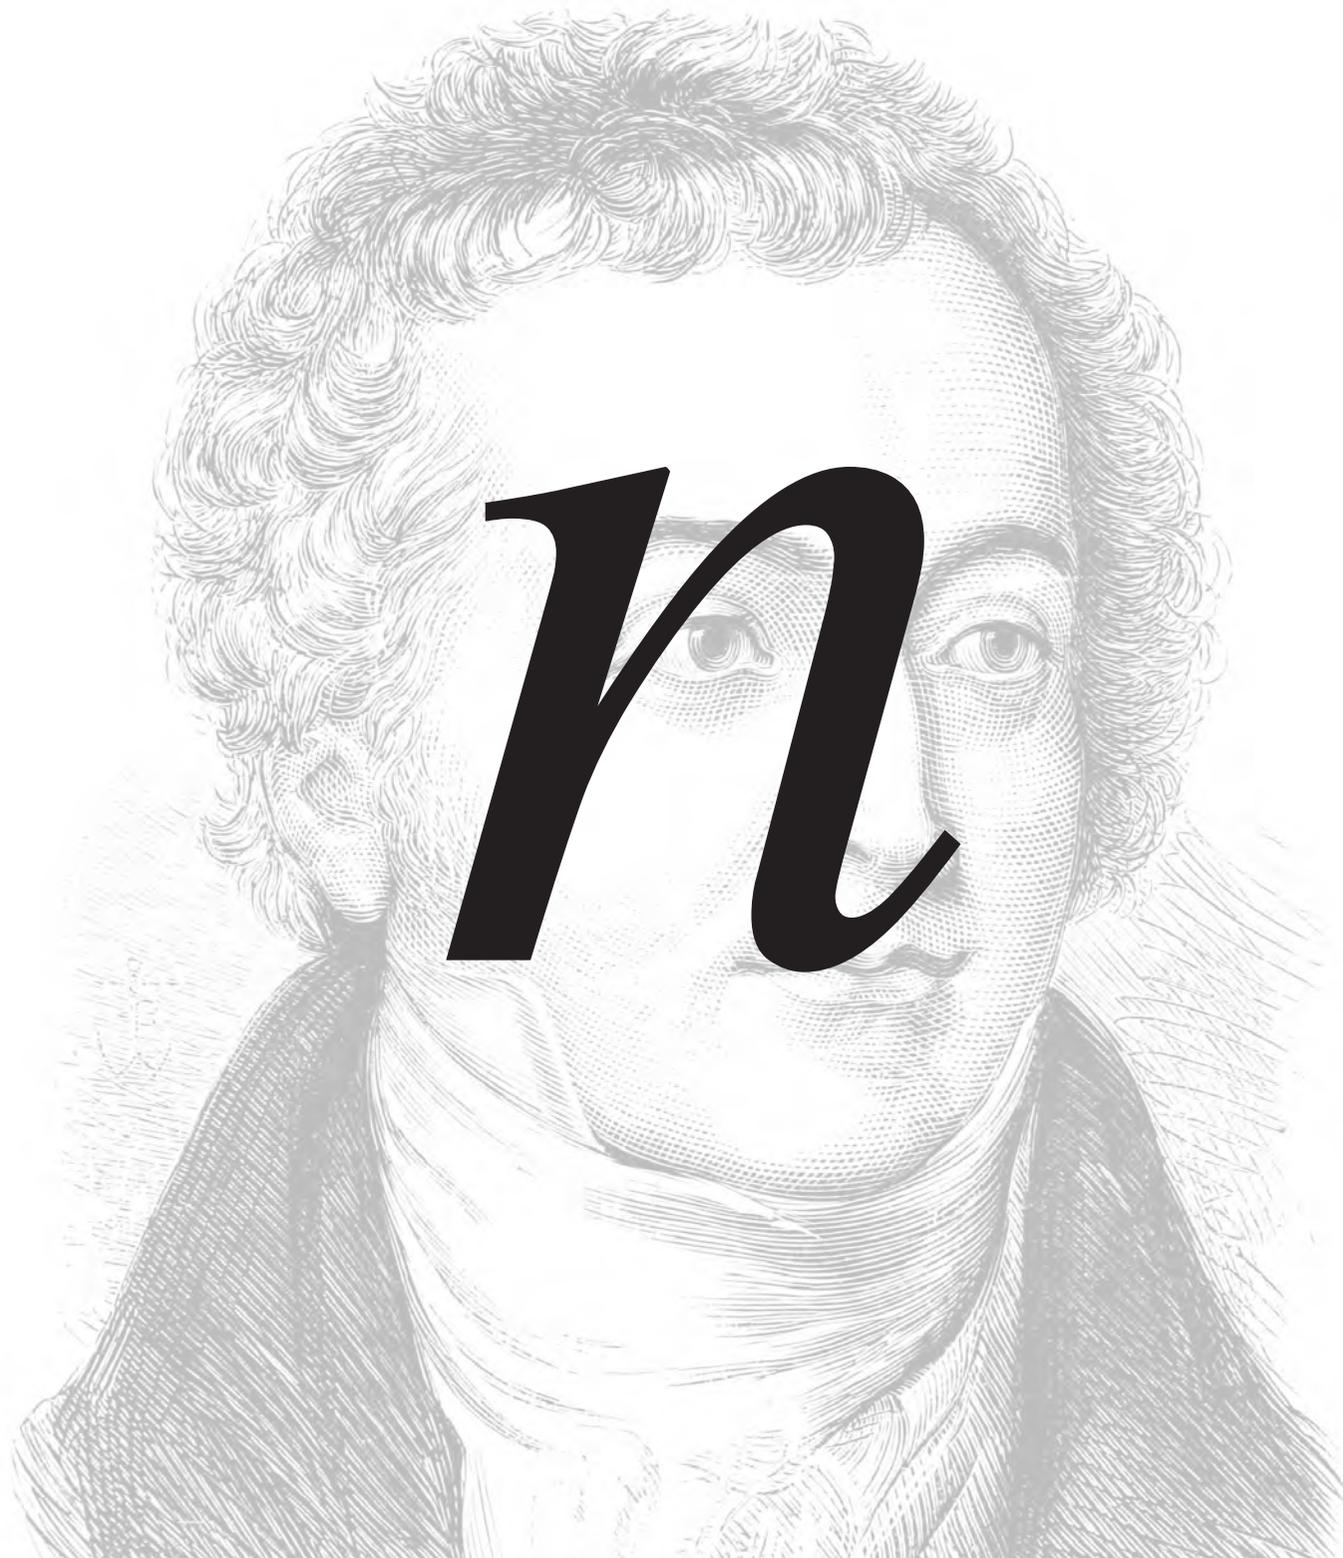


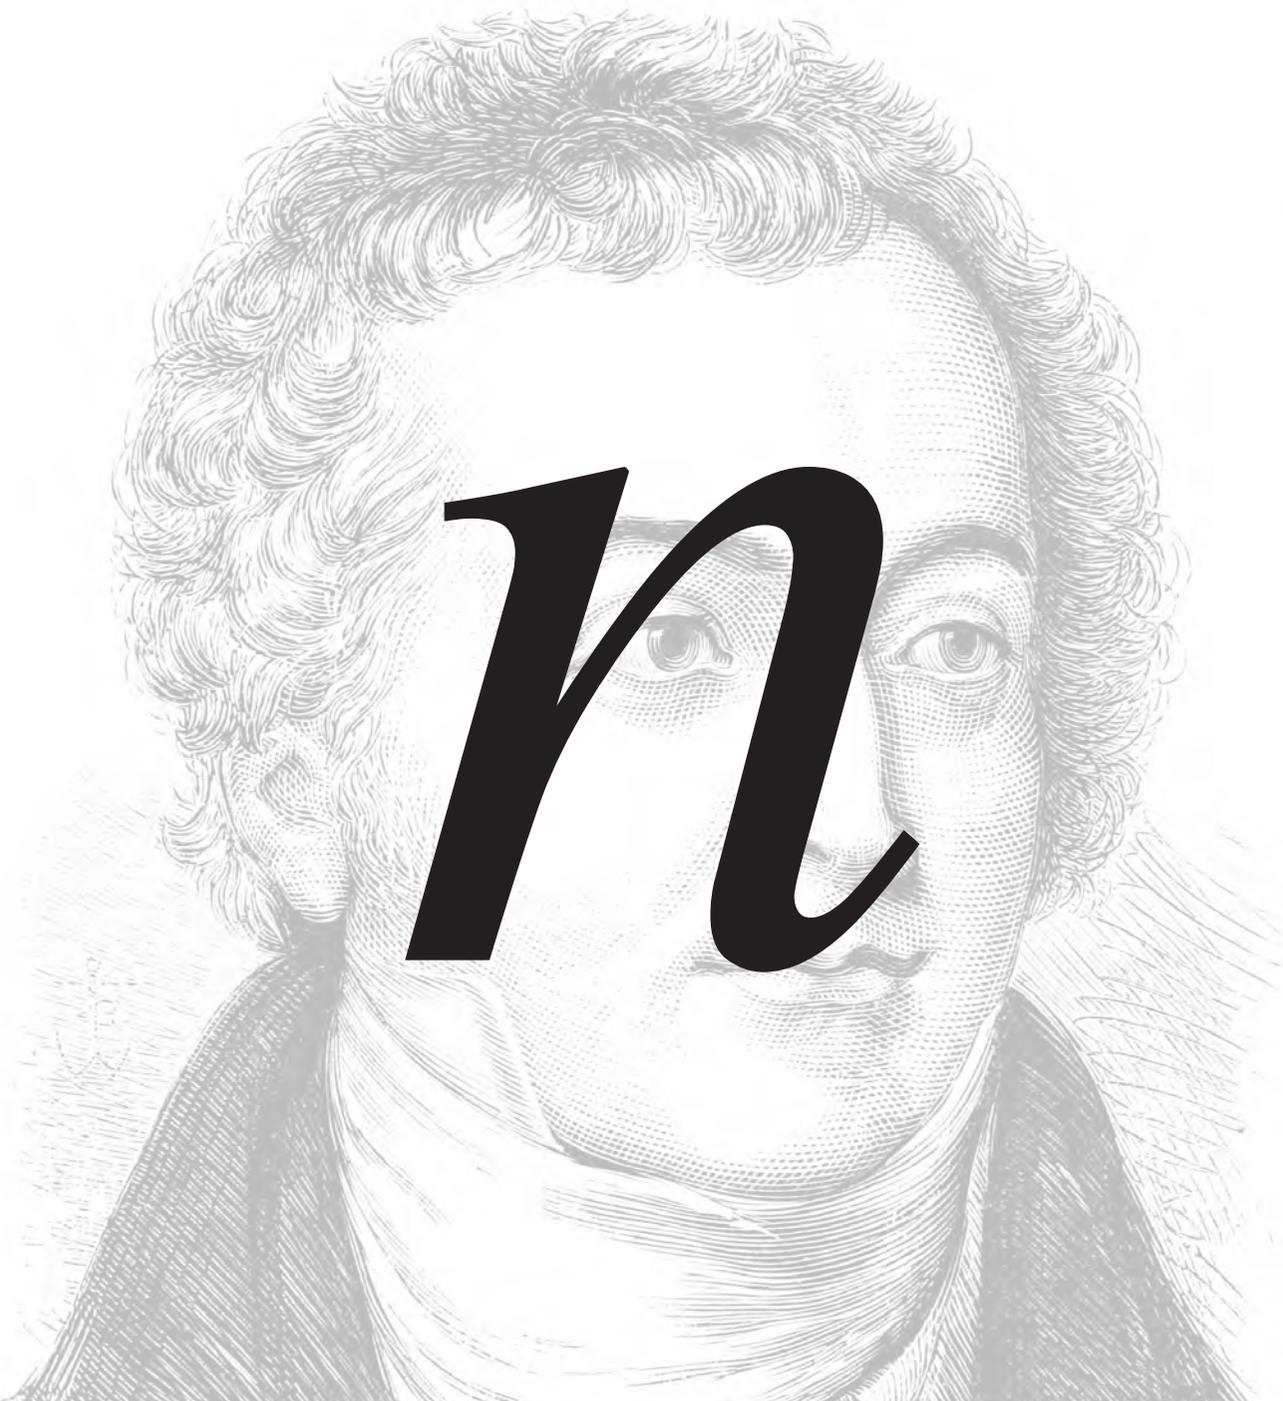

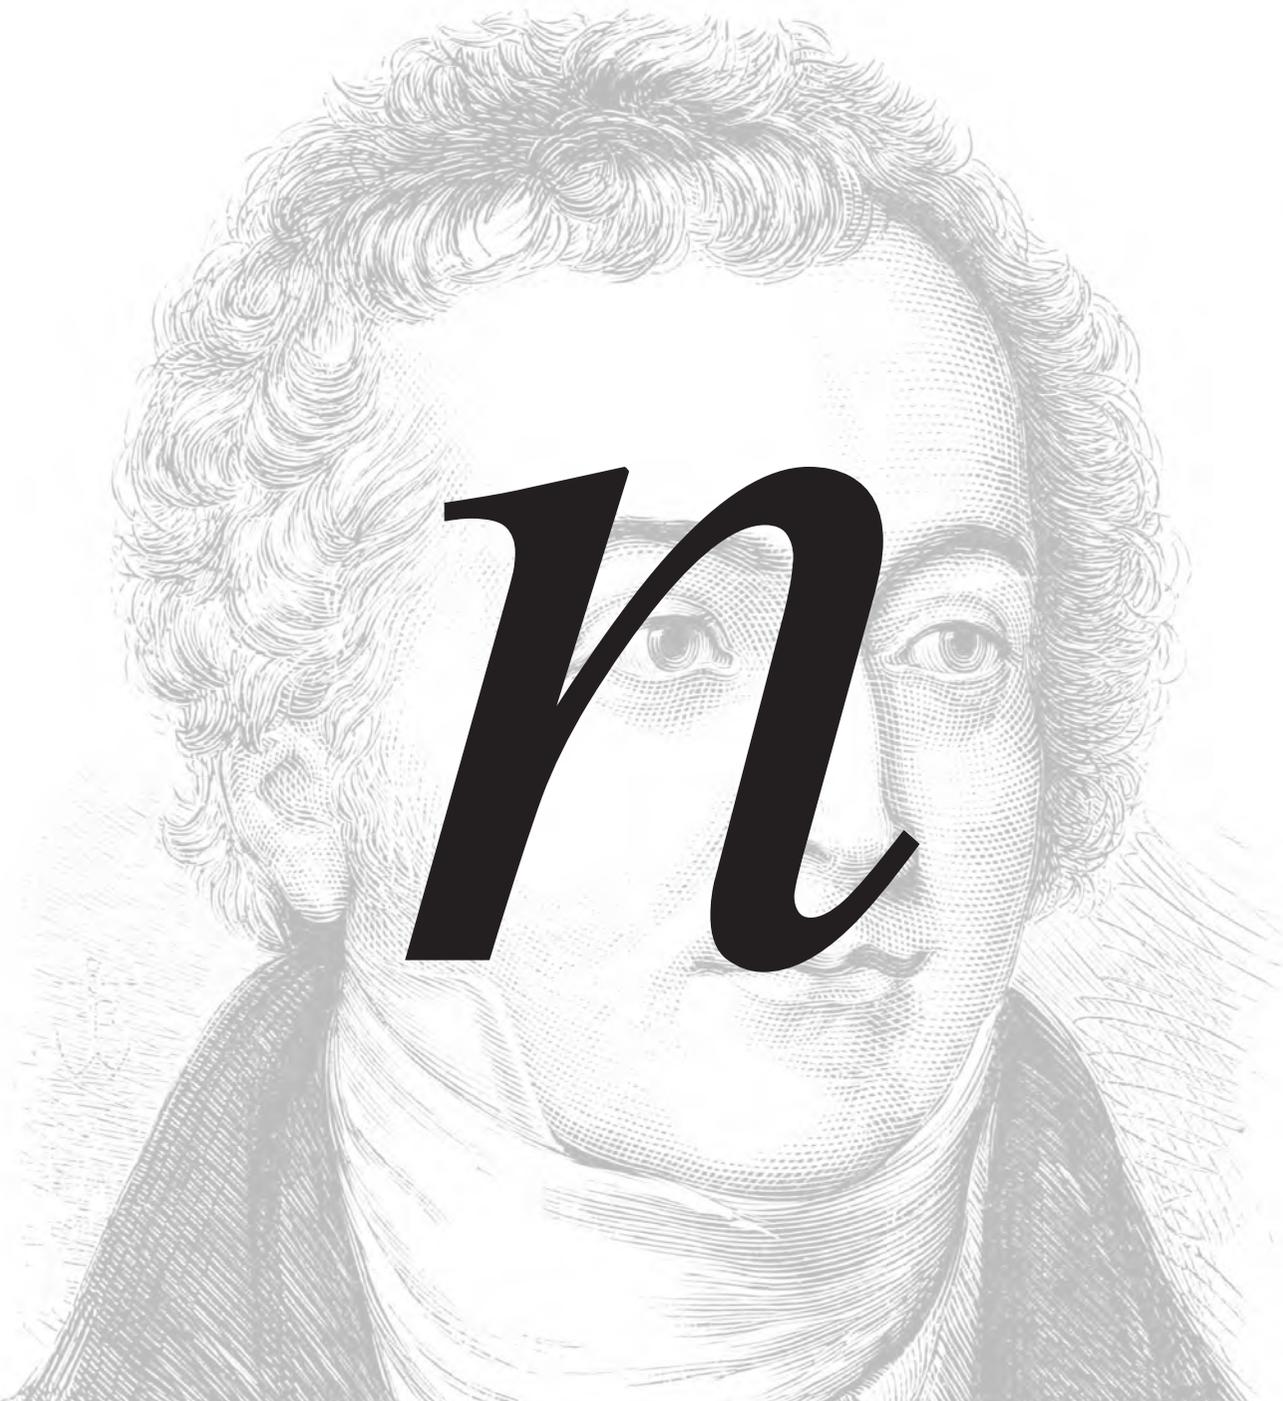

1 index

2 zero index

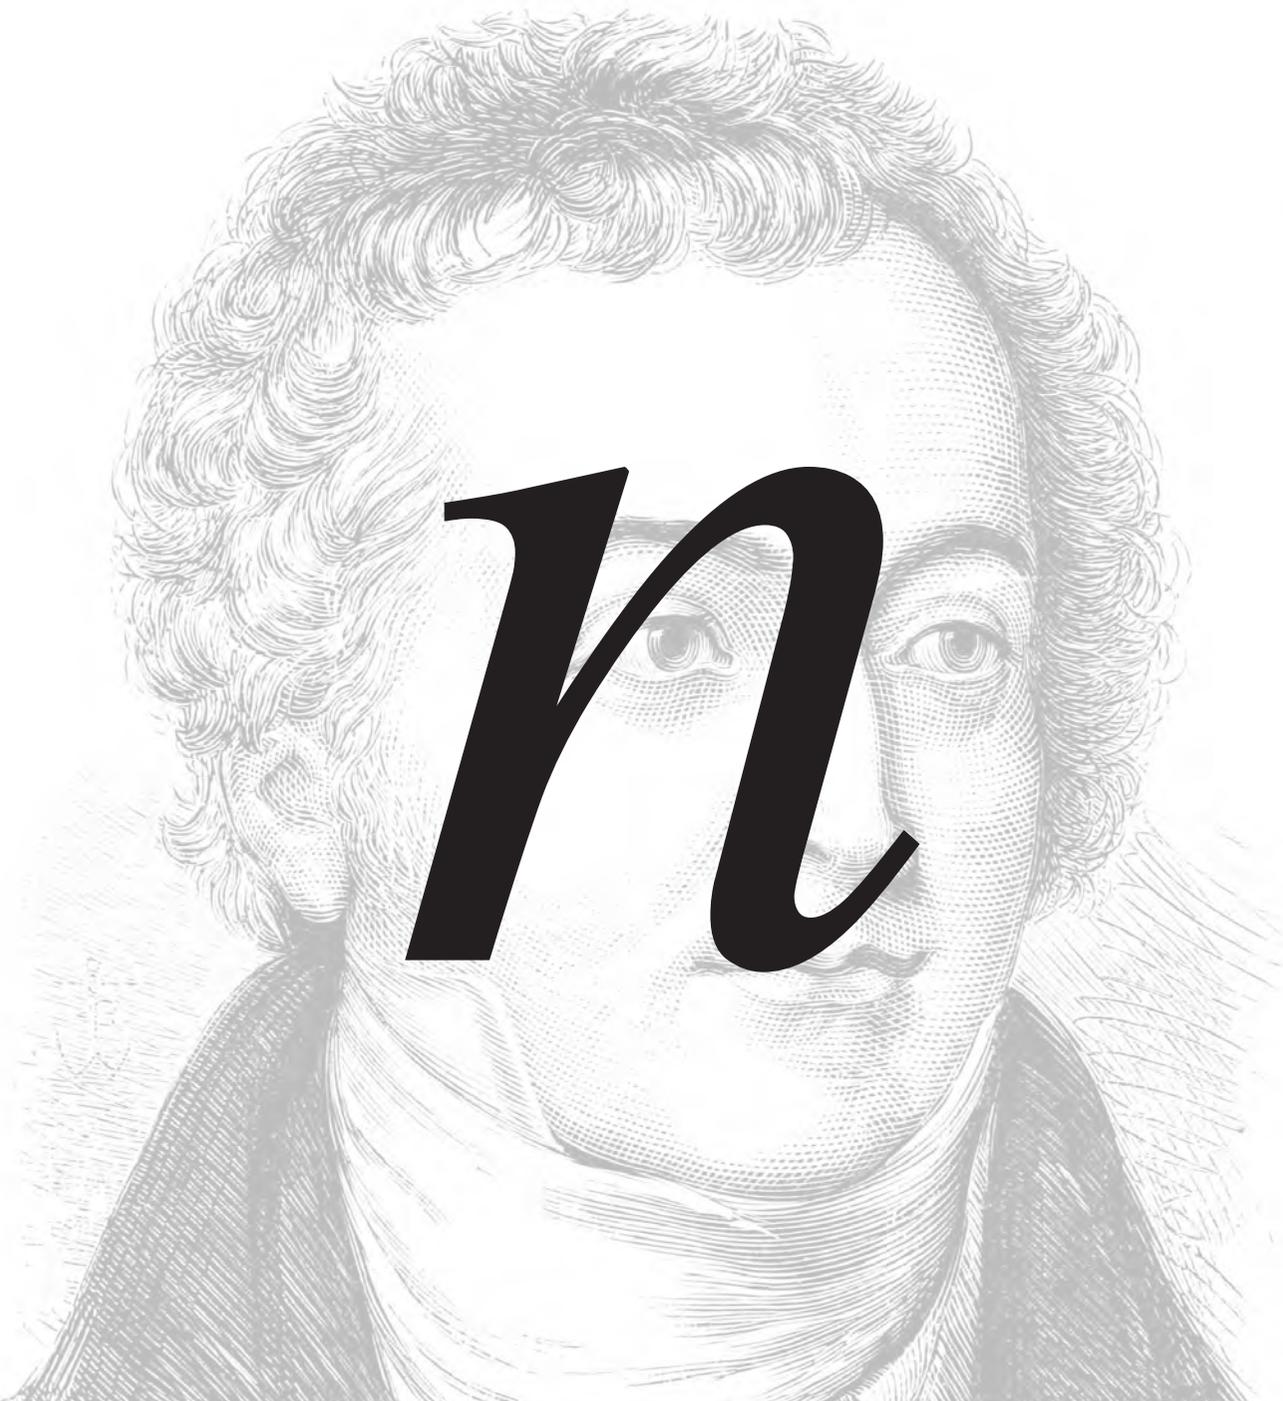

**1** index

**2** zero index

**3** experiments

# Propagation of EM wave

# Propagation of EM wave

governed by wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

# Propagation of EM wave

governed by wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

Solution:

$$\vec{E} = \vec{E}_o e^{i(kx - \omega t)}$$

# Propagation of EM wave

governed by wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

Solution:

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)}$$

where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c$$

# Propagation of EM wave

governed by wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

Solution:

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)}$$

where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c$$

and

$$n = \sqrt{\epsilon\mu} .$$

# Propagation of EM wave

governed by wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

Solution:

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)}$$

where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c$$


and

$$n = \sqrt{\epsilon\mu} .$$


In dispersive media  $n = n(\omega)$  .

# Dielectric constant


## Lorentz oscillator

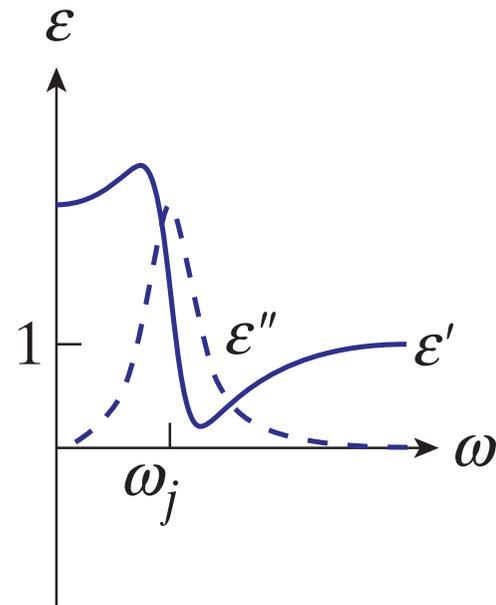


# Dielectric constant

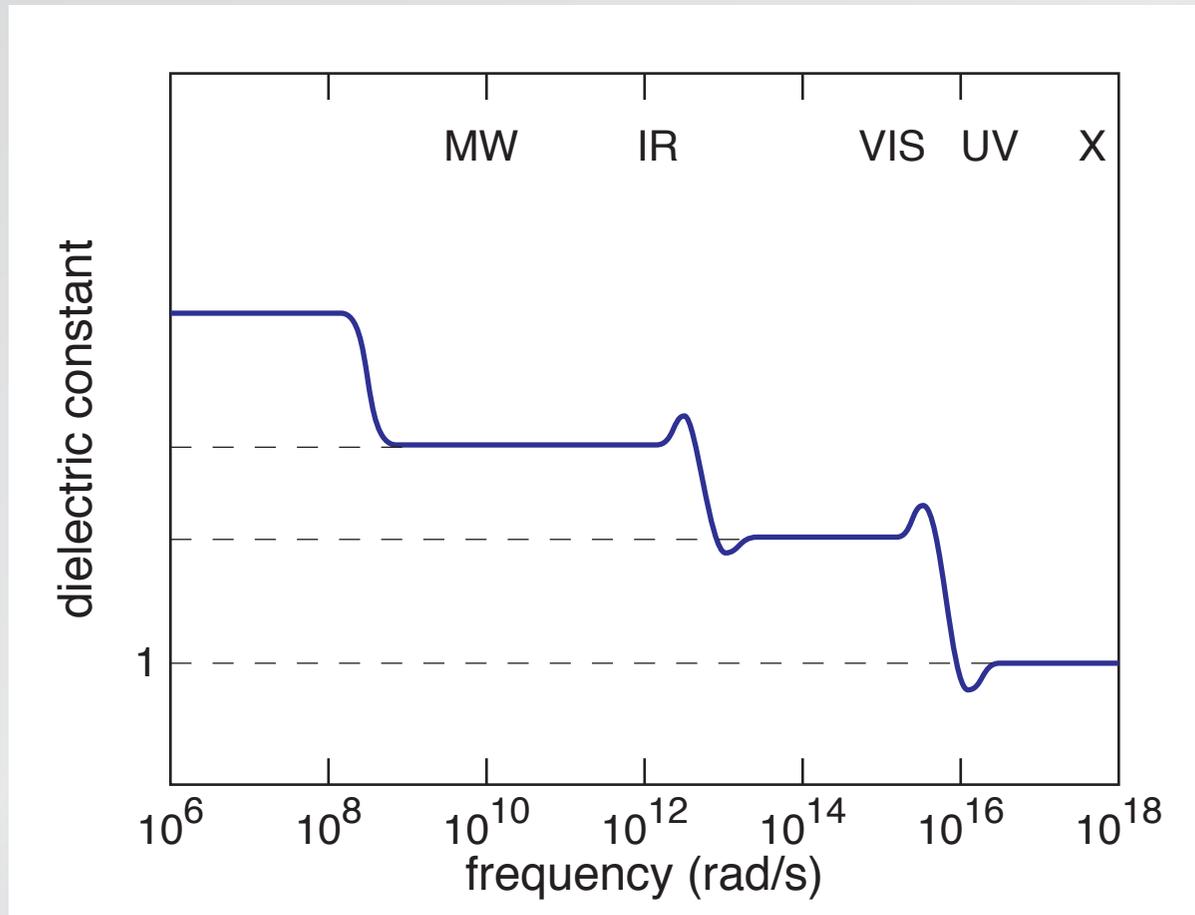


# Dielectric constant

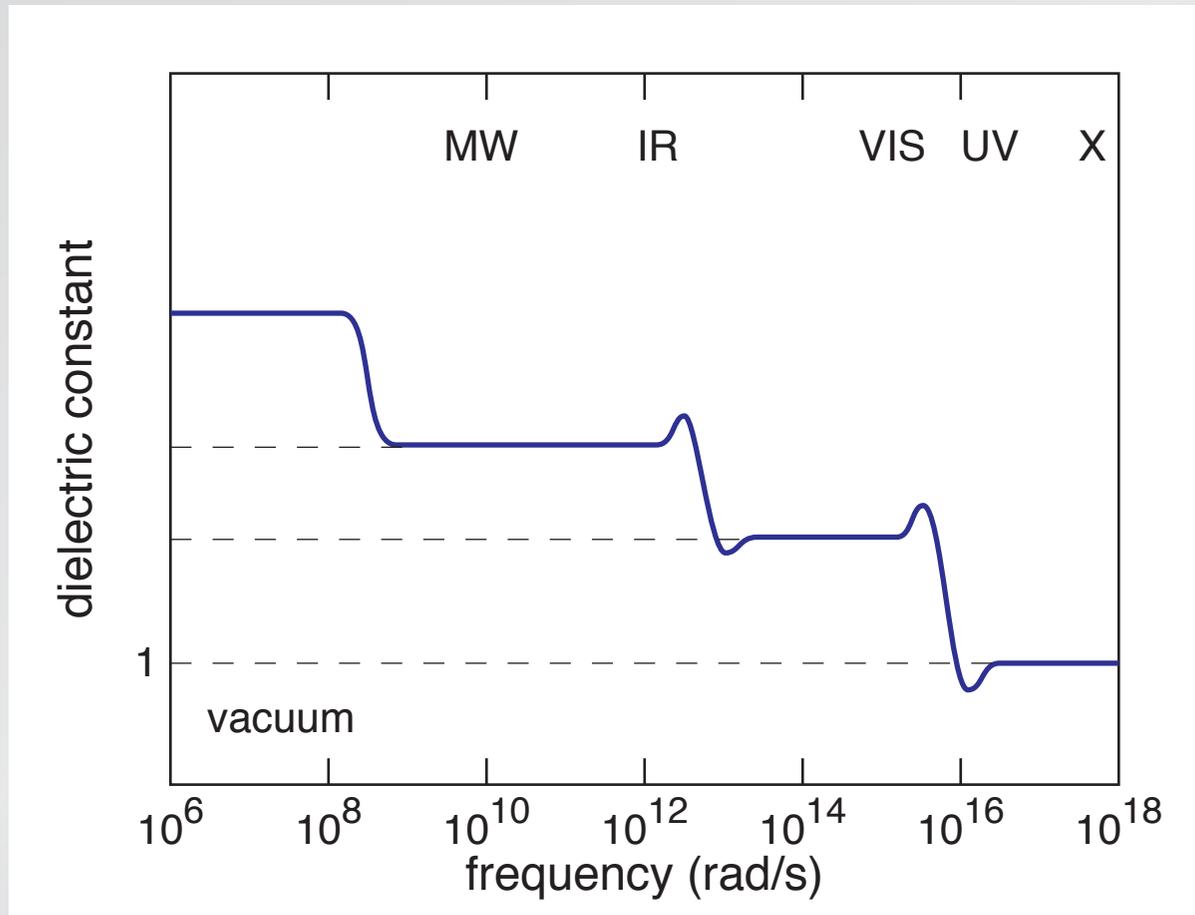


# Dielectric constant

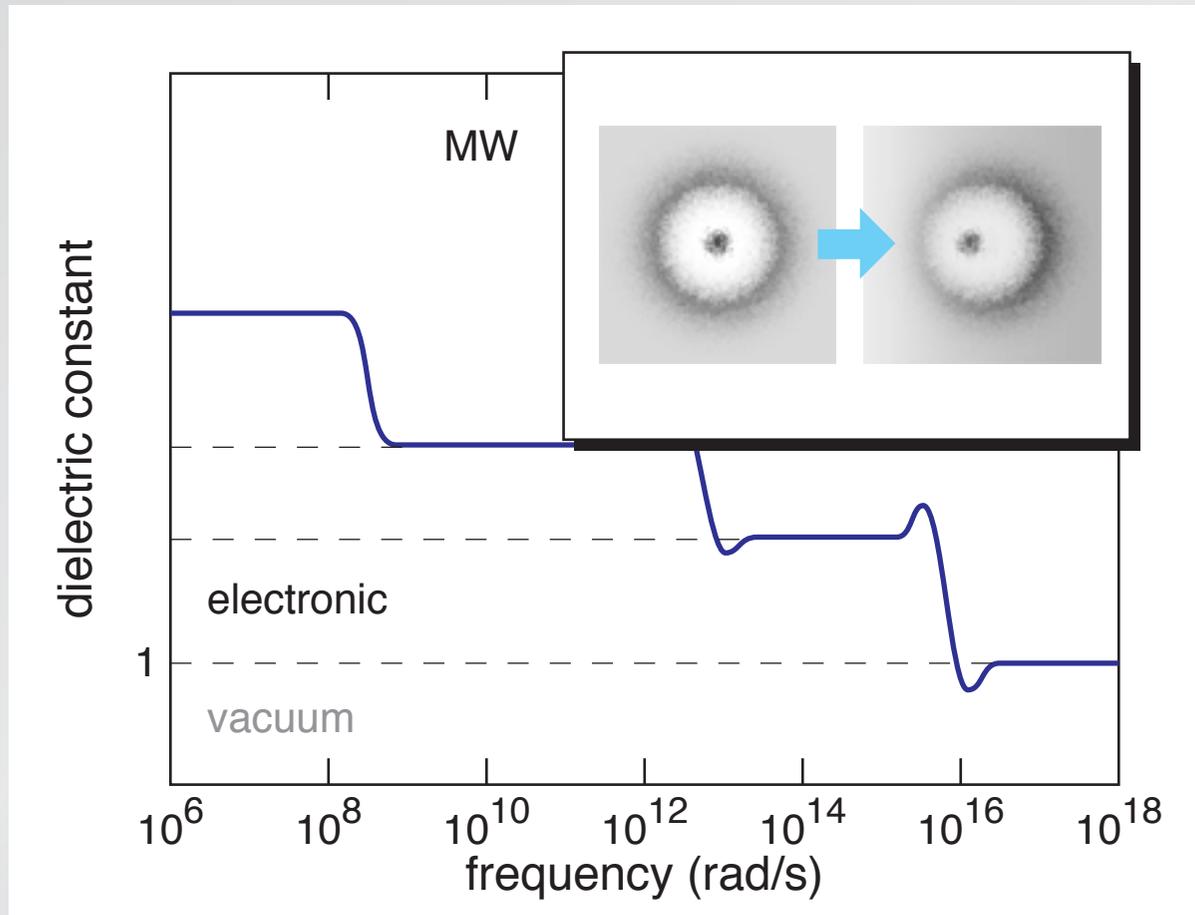


# Dielectric constant

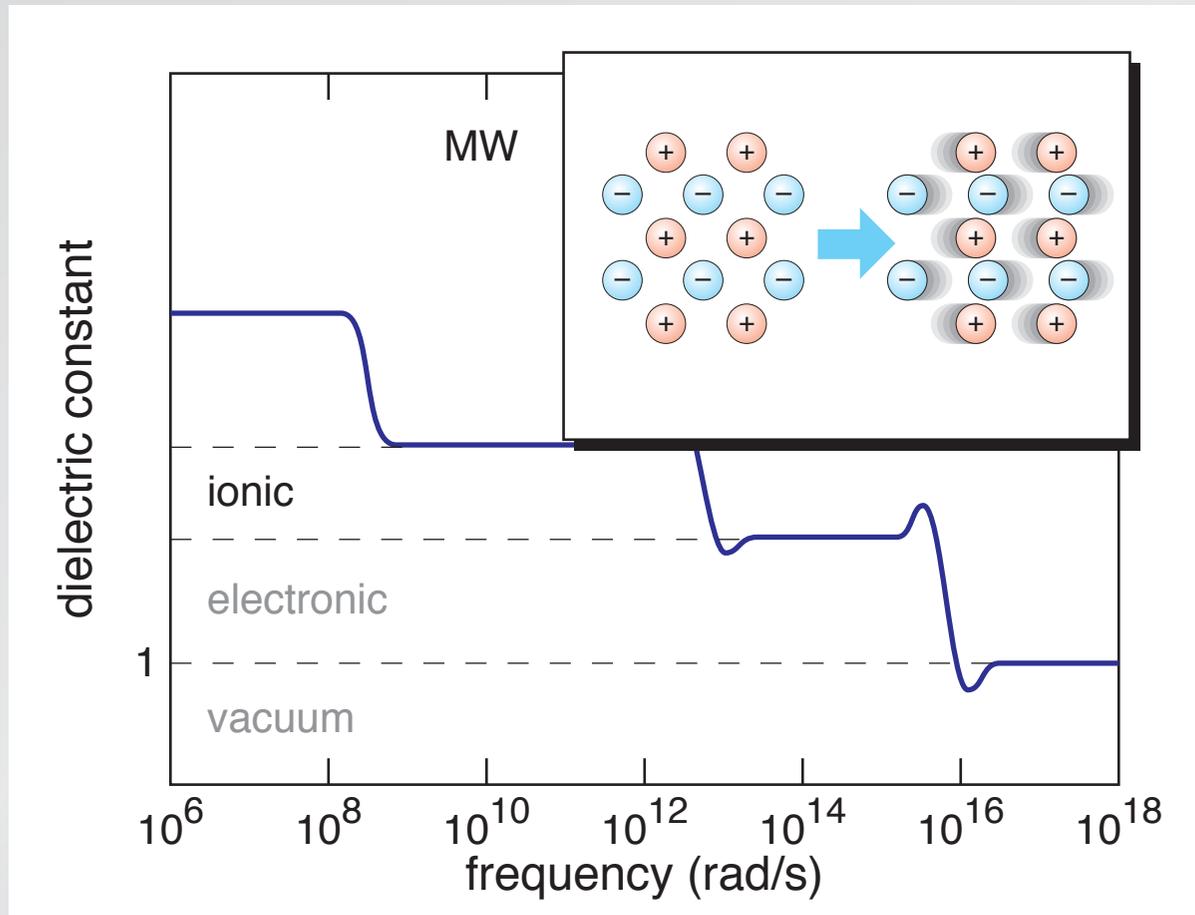


# Dielectric constant

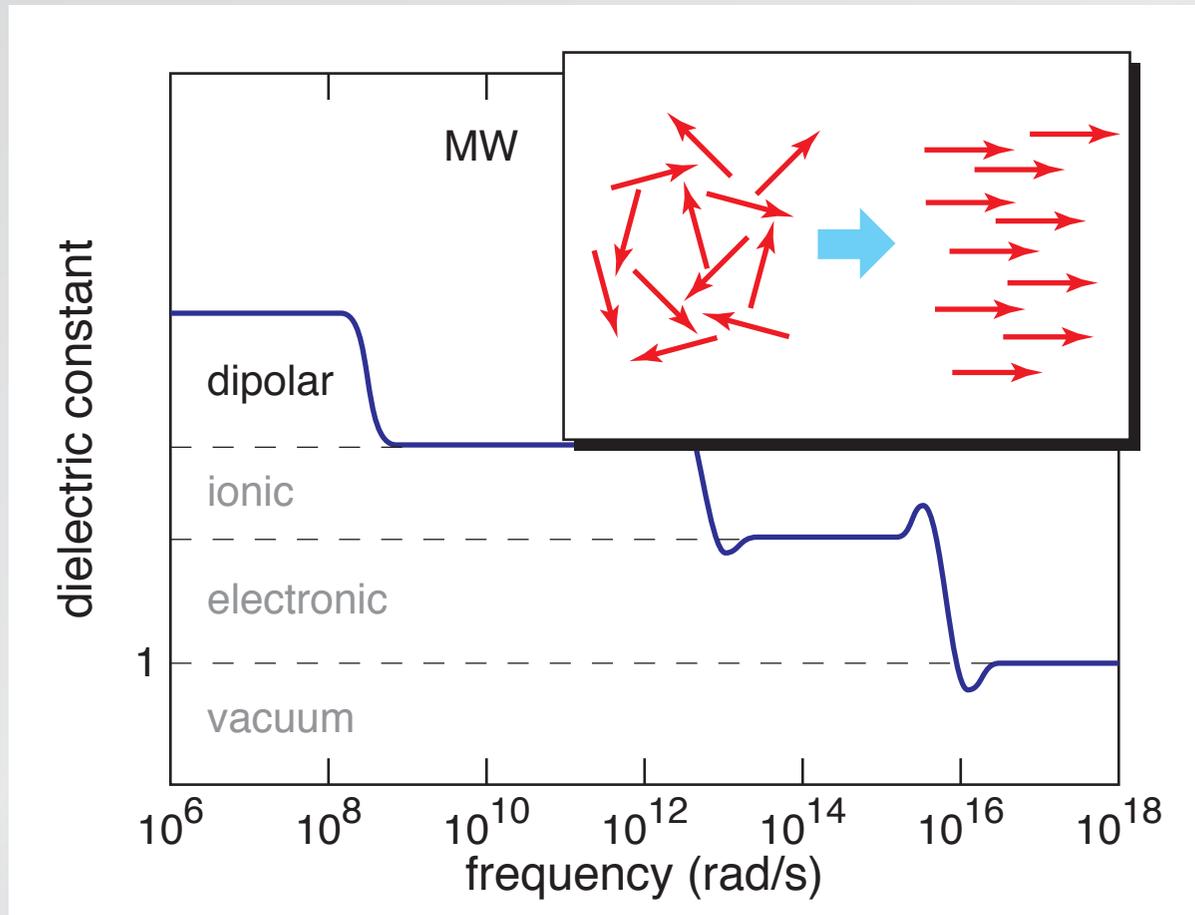

# Dielectric constant

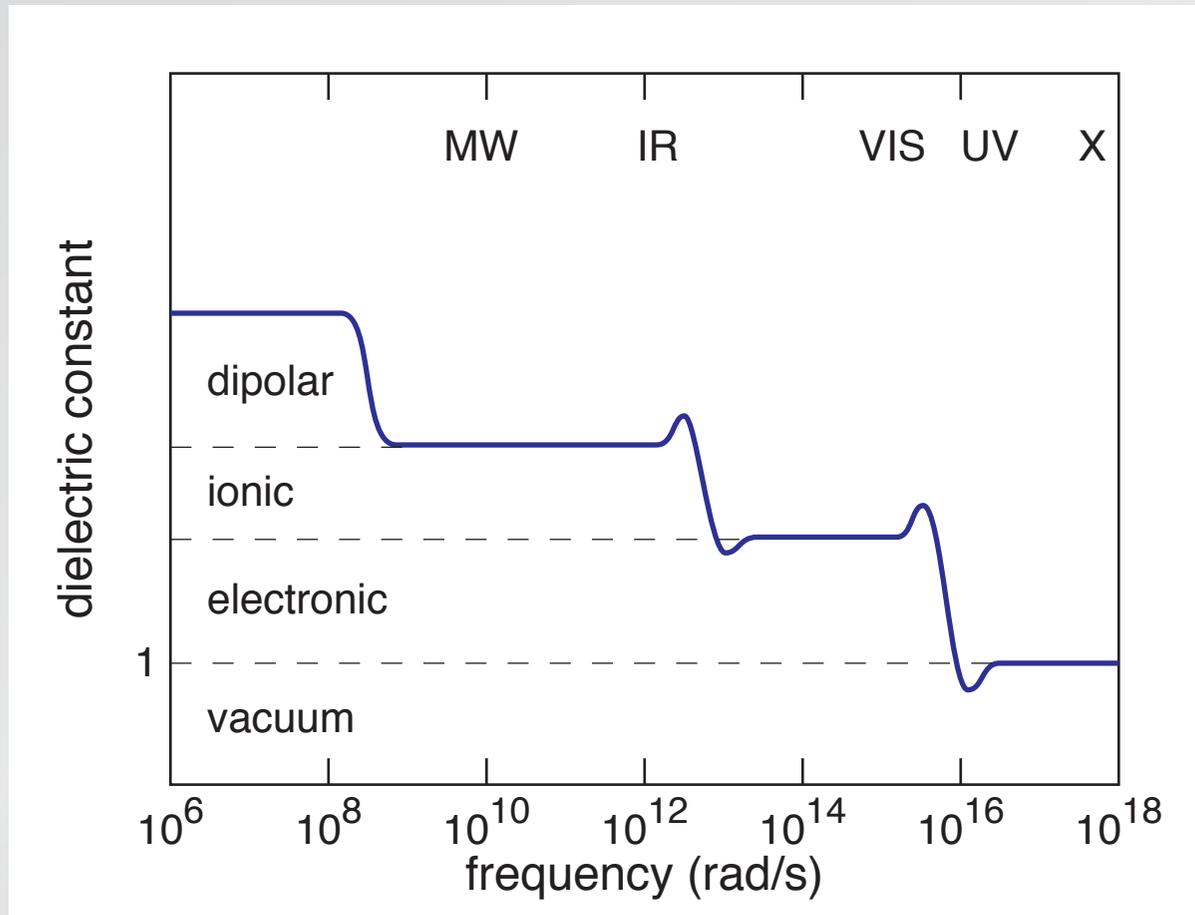


# Lorentz and Drude models

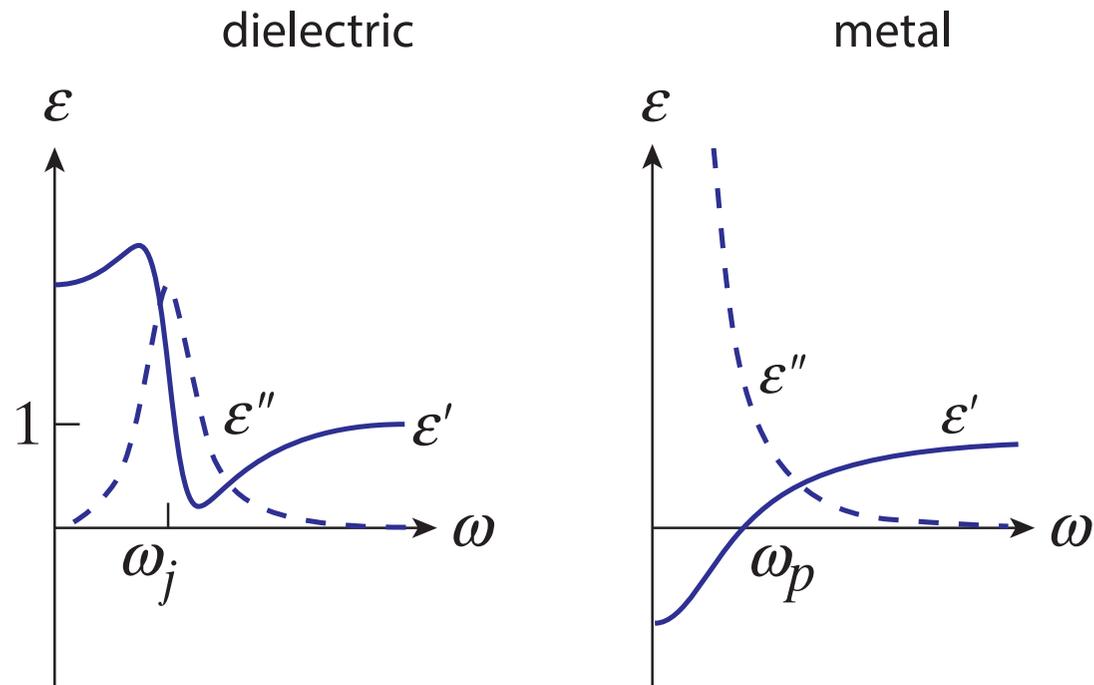


# Lorentz and Drude models

for a strong (dielectric) resonance  $\epsilon$  can become negative

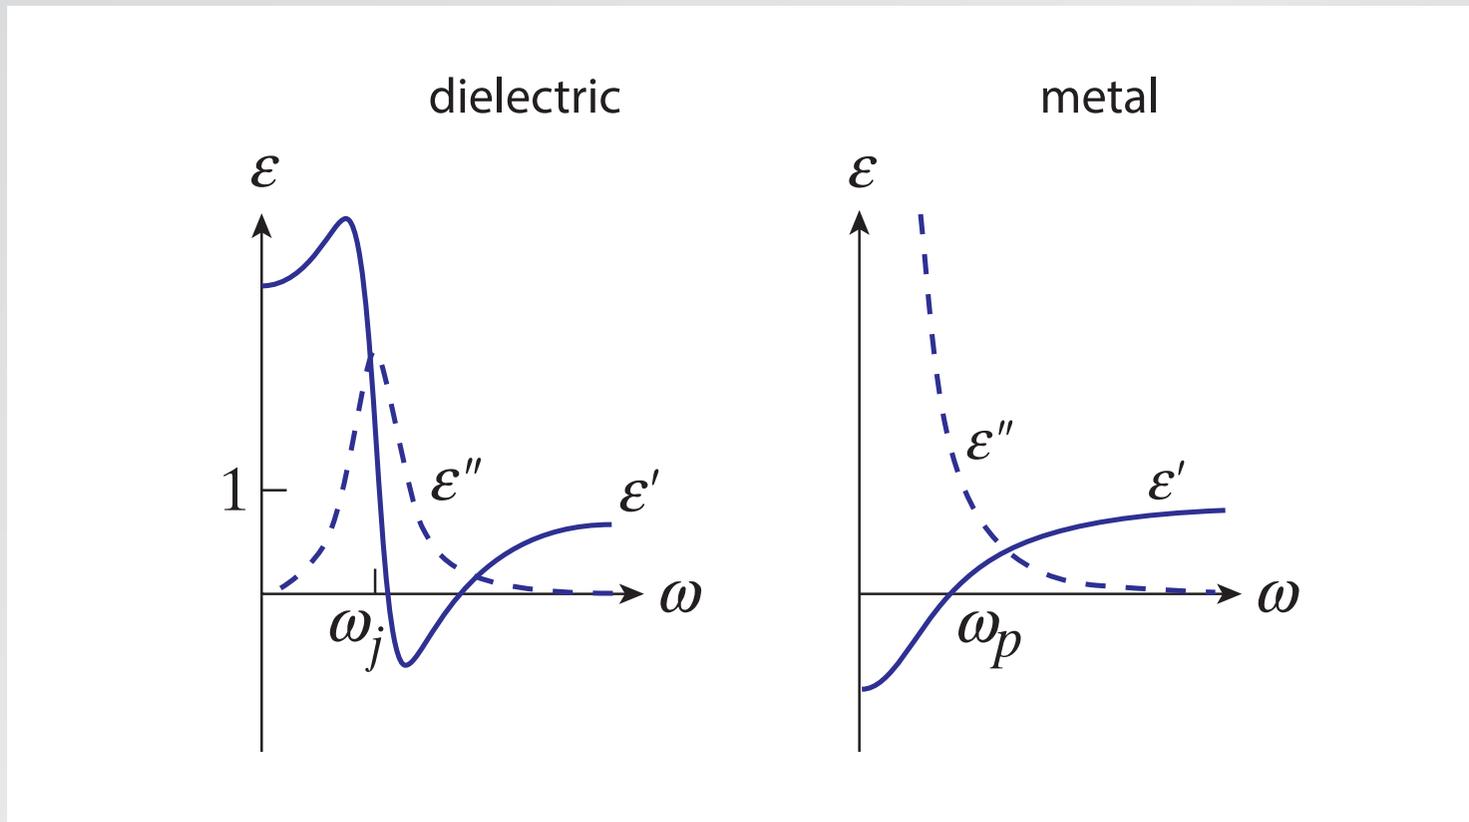


# Lorentz and Drude models

valence electrons in dielectric then behave like a plasma

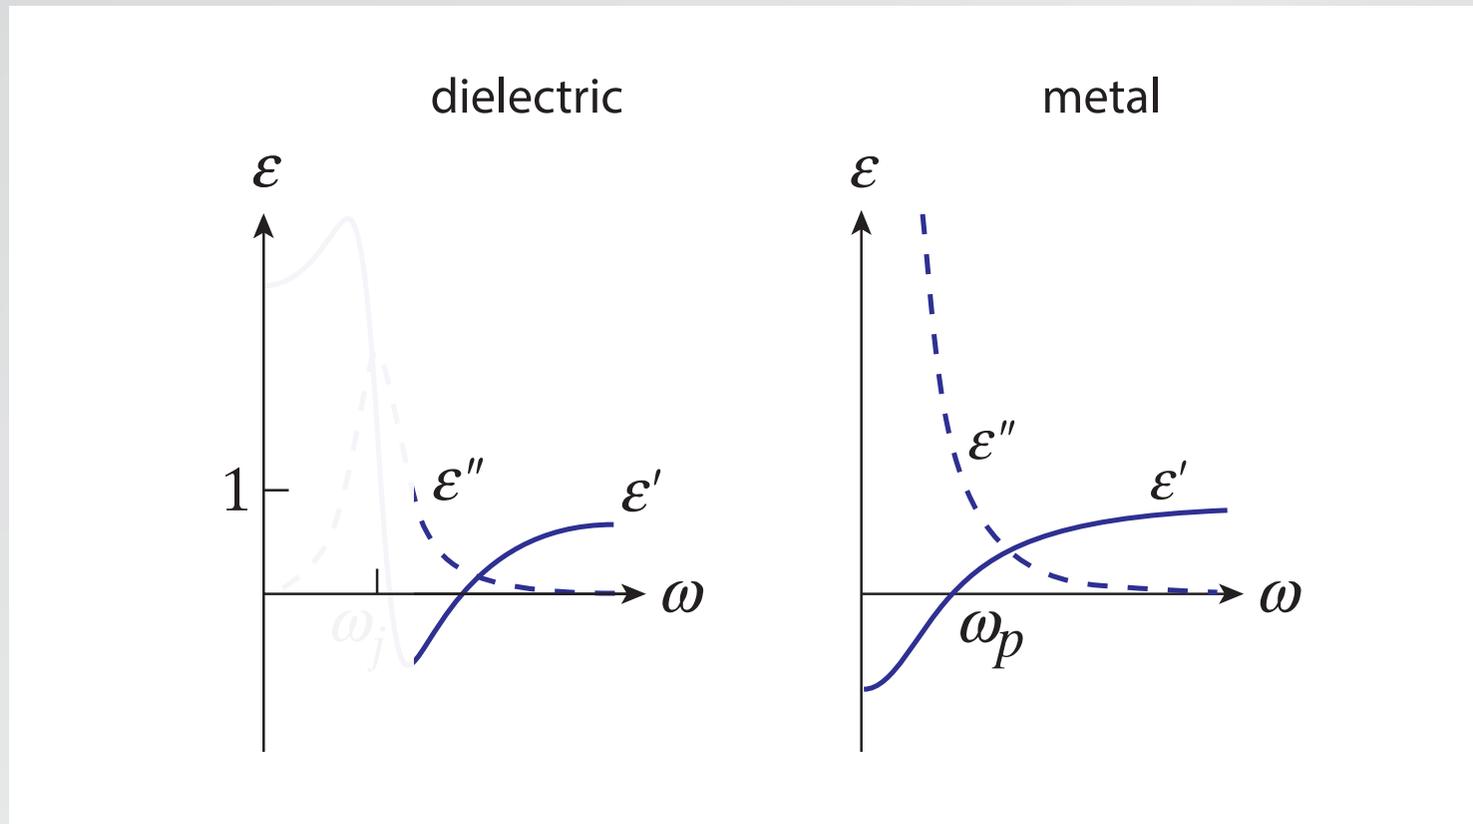


# Lorentz and Drude models

with plasma frequency above the resonance

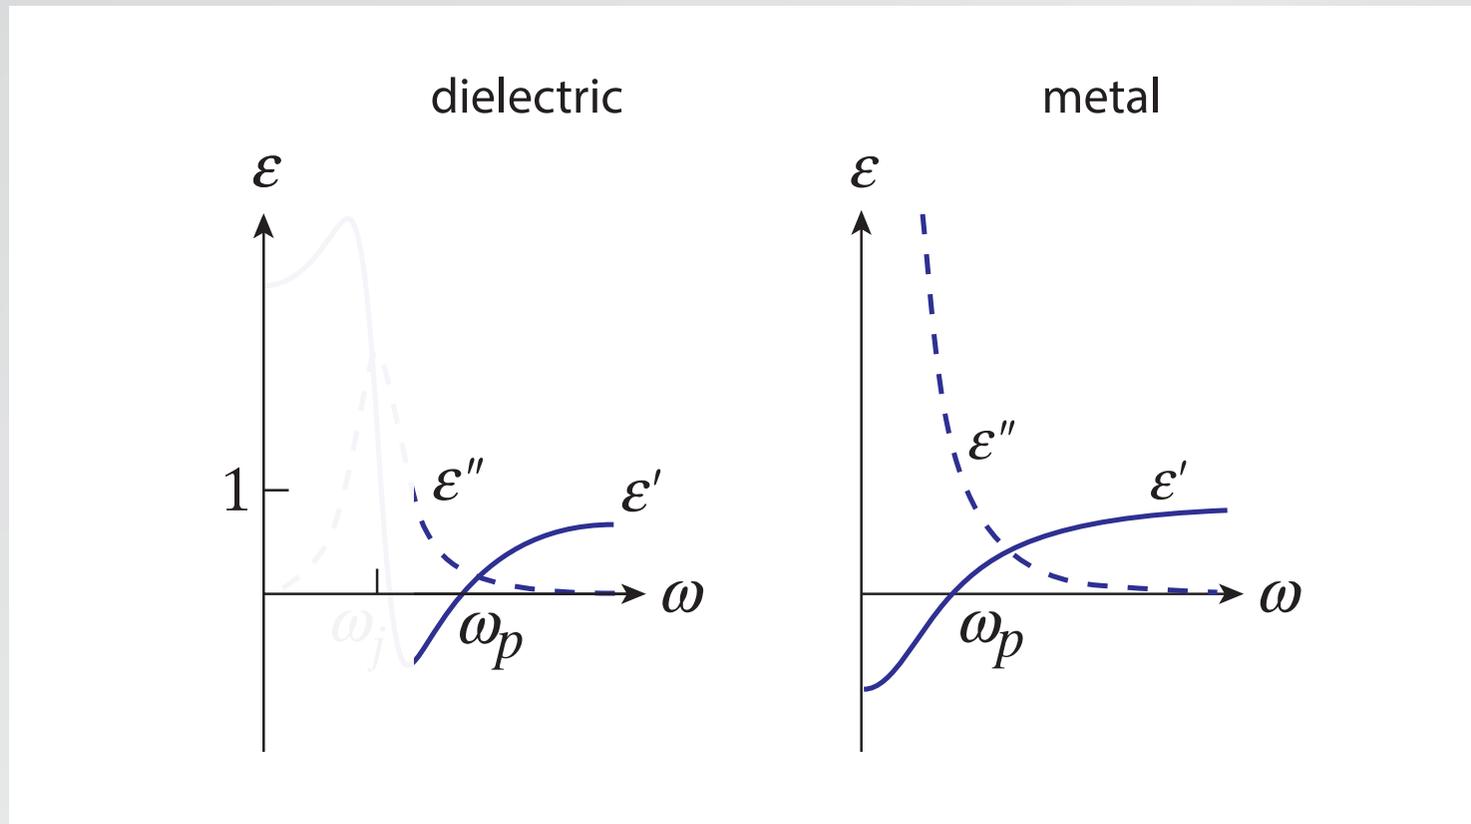

# Lorentz and Drude models

(and far below the UV region)

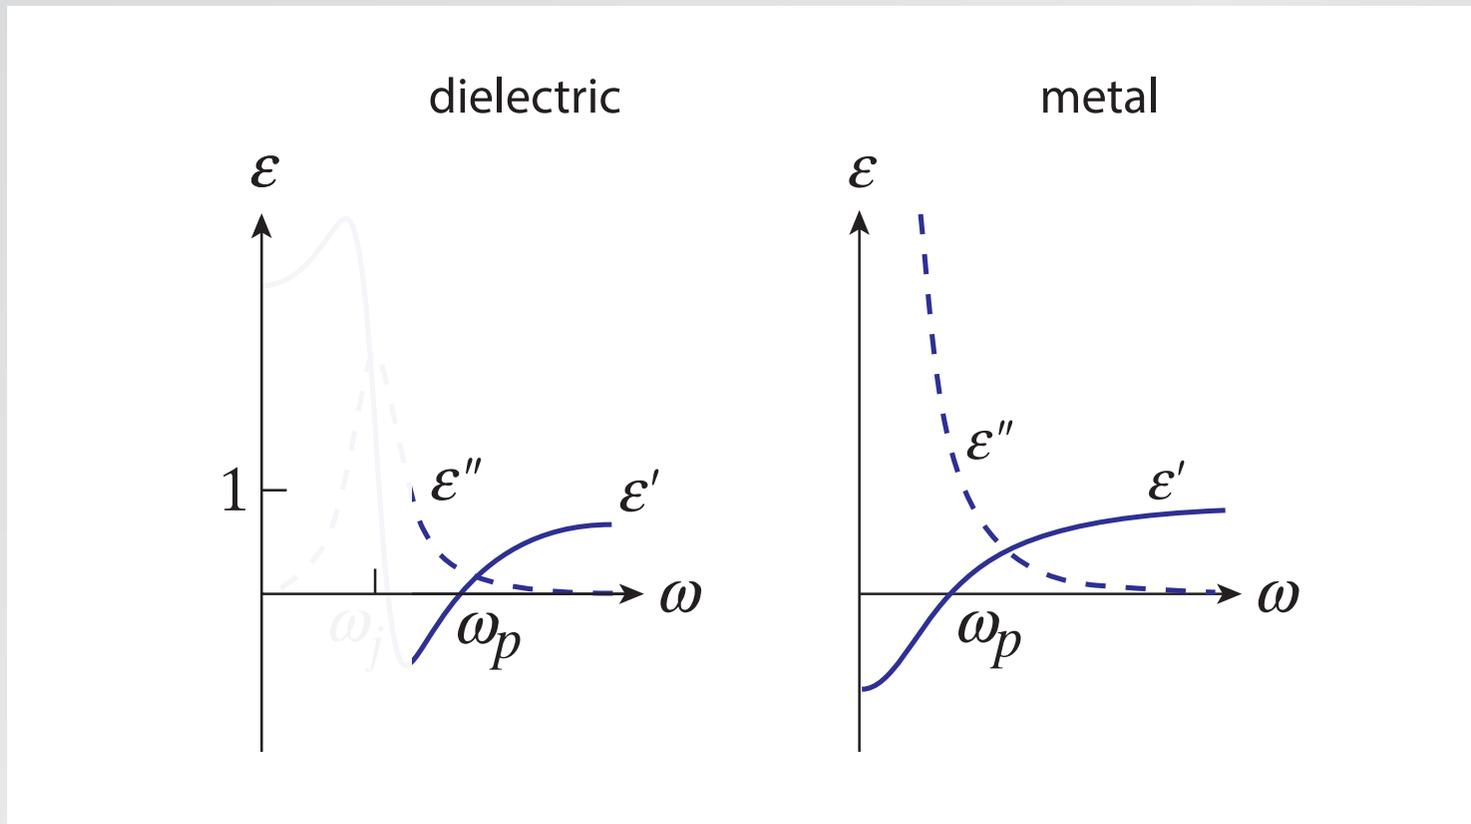


Index also determined by magnetic response

$$n = \sqrt{\epsilon\mu}$$


Index also determined by magnetic response

$$n = \sqrt{\epsilon \mu}$$

and magnetic response shows similar resonances

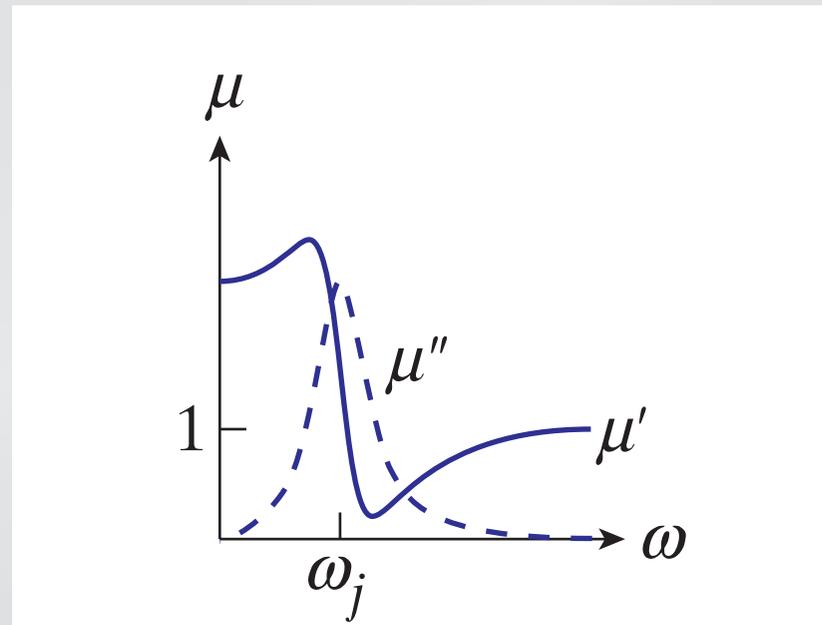


# Magnetic response

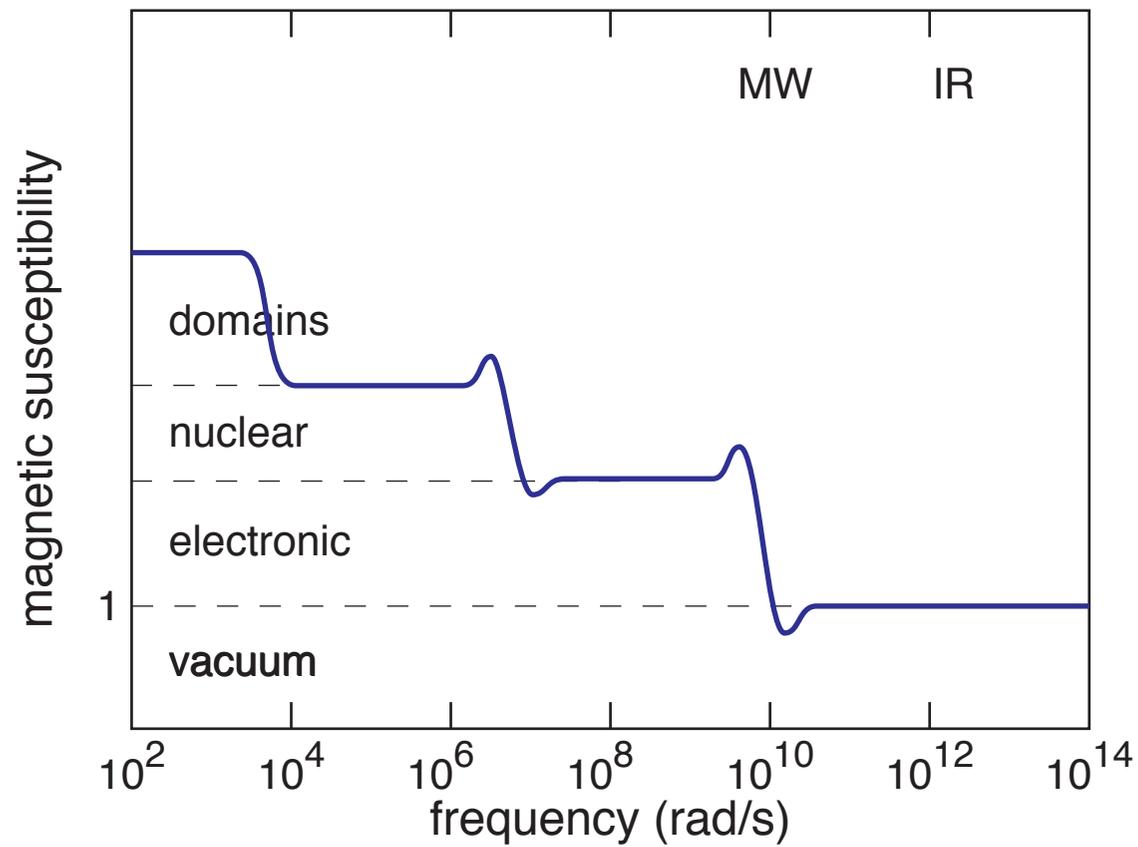


# Magnetic response

but magnetic resonances occur below optical frequencies

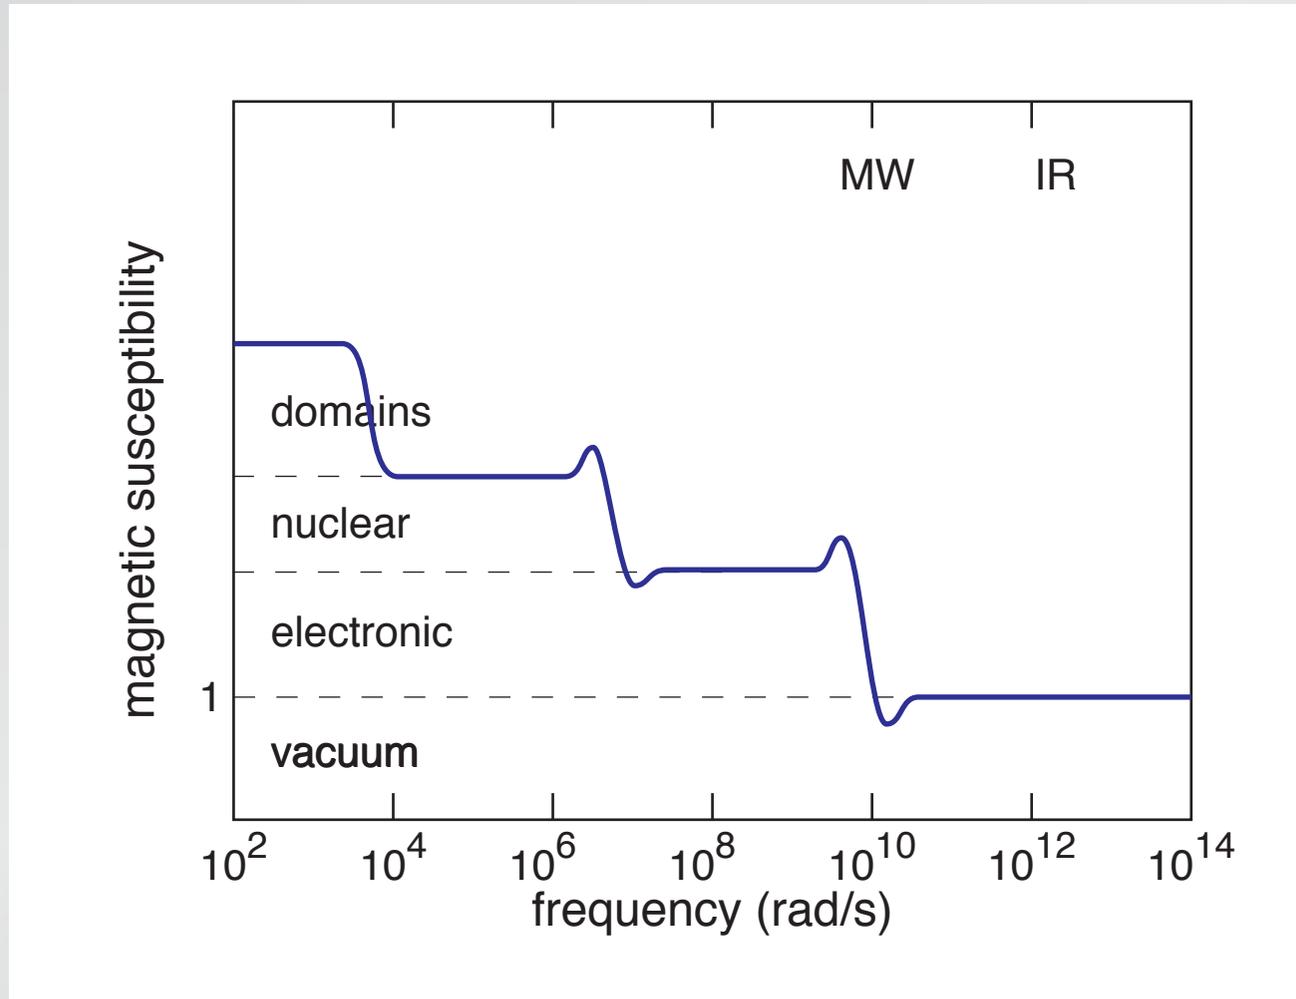

# Magnetic response

so, in optical regime,  $\mu \approx 1$

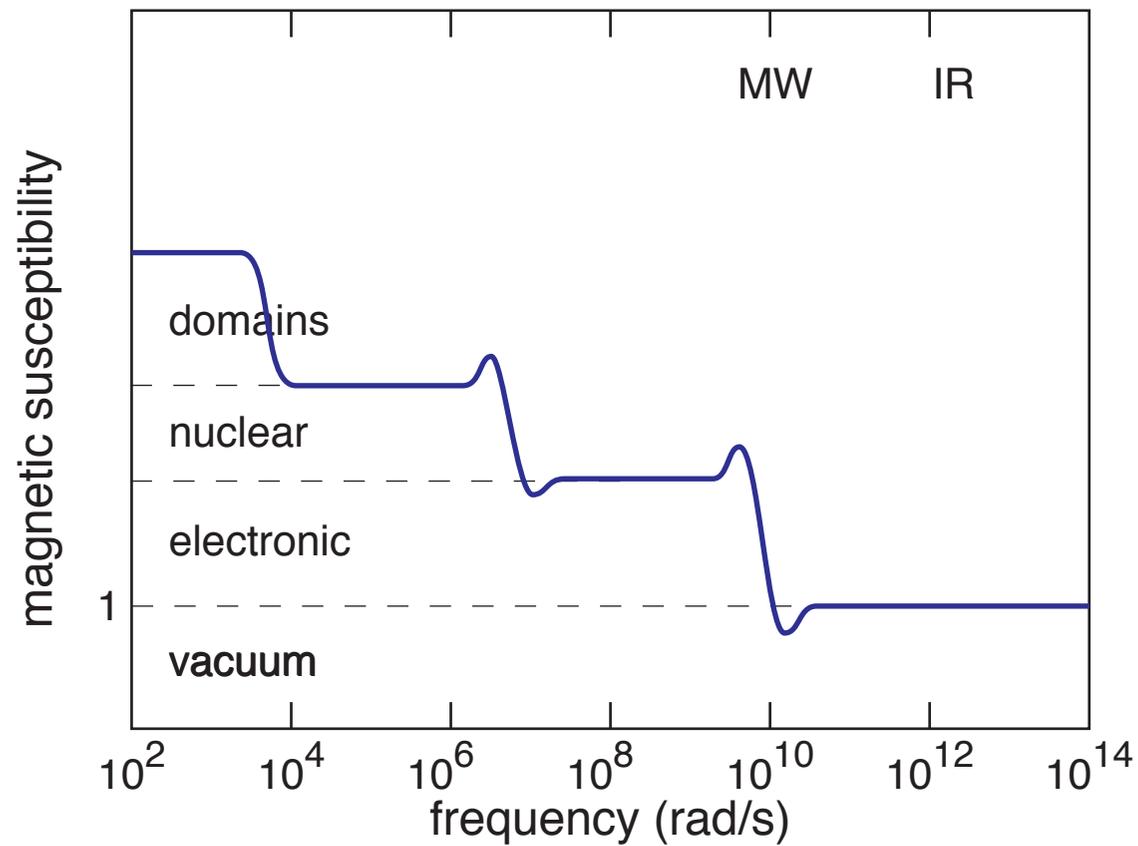

## Index of refraction

$$n = \sqrt{\epsilon\mu}$$

Both  $\epsilon$  and  $\mu$  are complex and their real parts can be negative.

## Index of refraction

$$n = \sqrt{\epsilon\mu}$$

Both  $\epsilon$  and  $\mu$  are complex and their real parts can be negative.


What happens when  $\text{Re}\epsilon$  and/or  $\text{Re}\mu$  is negative?

Write complex quantities as

$$\varepsilon = |\varepsilon| e^{i\theta} \quad \mu = |\mu| e^{i\phi}$$

Write complex quantities as

$$\varepsilon = |\varepsilon| e^{i\theta} \quad \mu = |\mu| e^{i\phi}$$

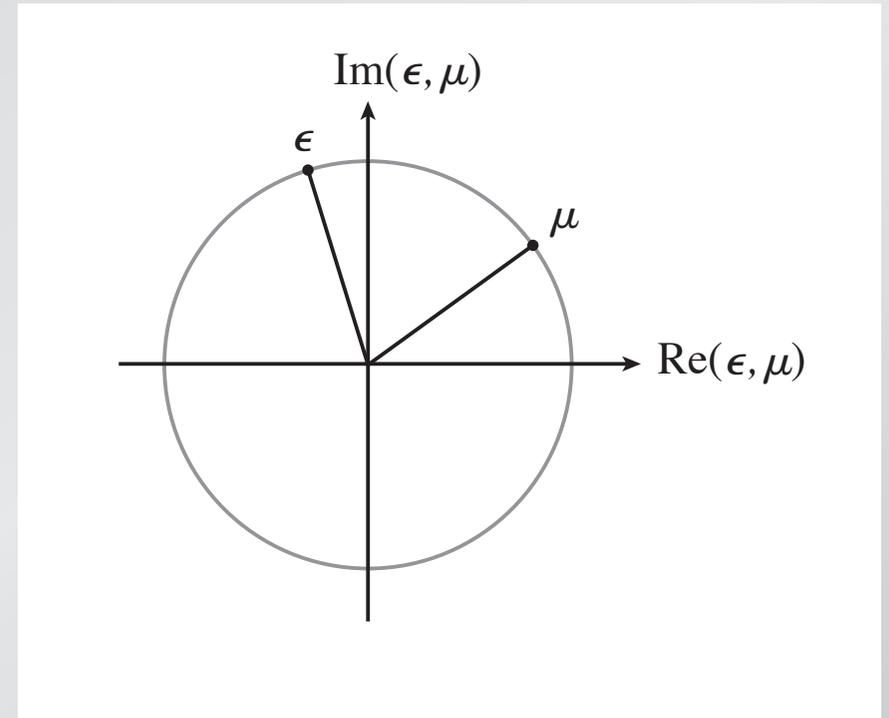


Write complex quantities as

$$\varepsilon = |\varepsilon| e^{i\theta} \quad \mu = |\mu| e^{i\phi}$$

Index

$$n = \sqrt{|\varepsilon||\mu|} e^{i\frac{\theta+\phi}{2}}$$

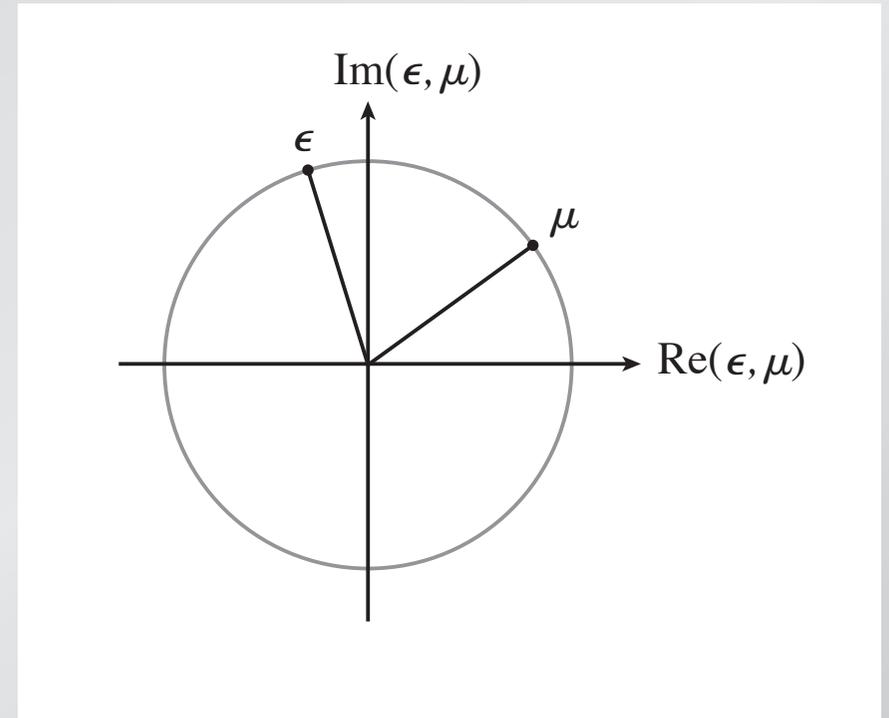


Write complex quantities as

$$\varepsilon = |\varepsilon| e^{i\theta} \quad \mu = |\mu| e^{i\phi}$$


Index

$$n = \sqrt{|\varepsilon||\mu|} e^{i\frac{\theta+\phi}{2}}$$

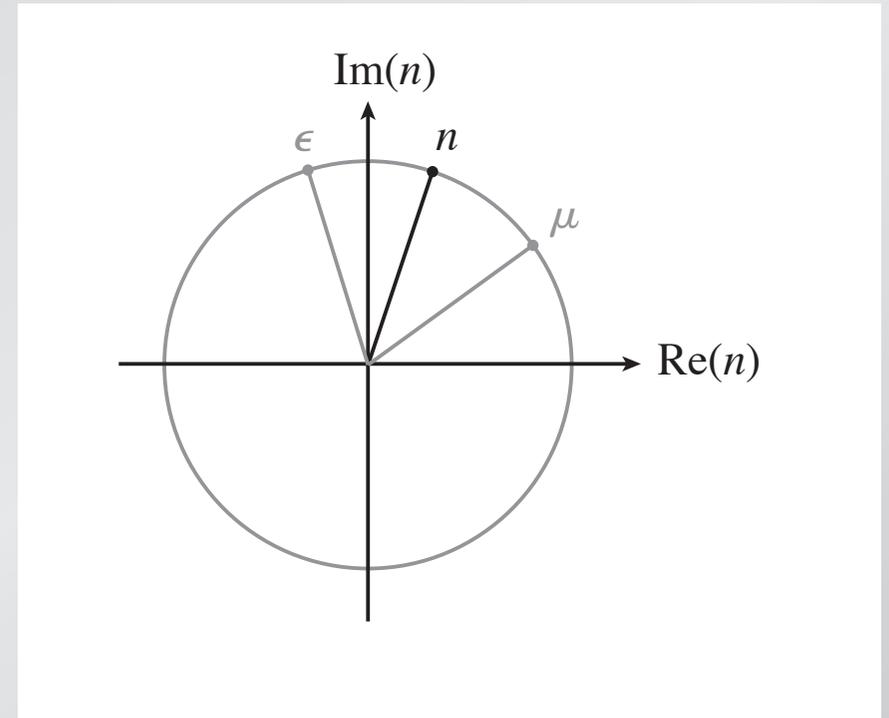


**Q: Is this the only possible solution?**

- 1. yes**
- 2. no, there's one more**
- 3. there are many more**
- 4. it depends**

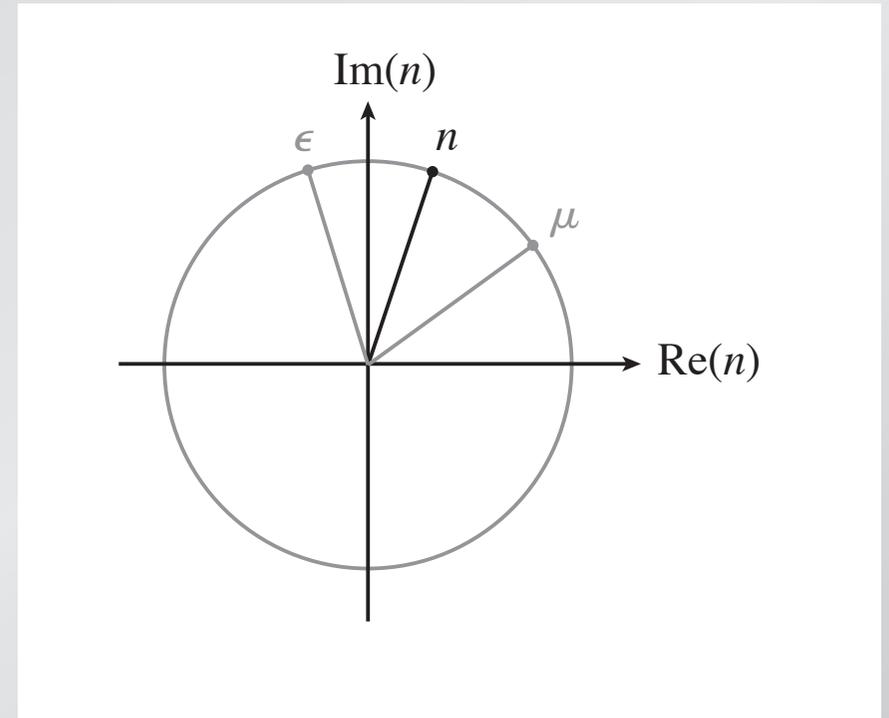


There *is* another root...

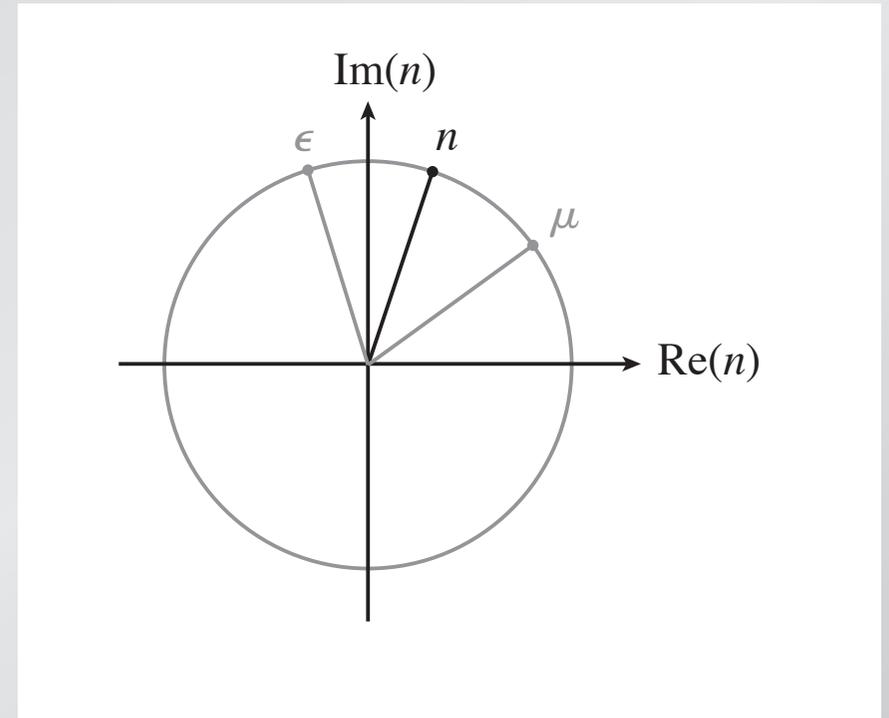

There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

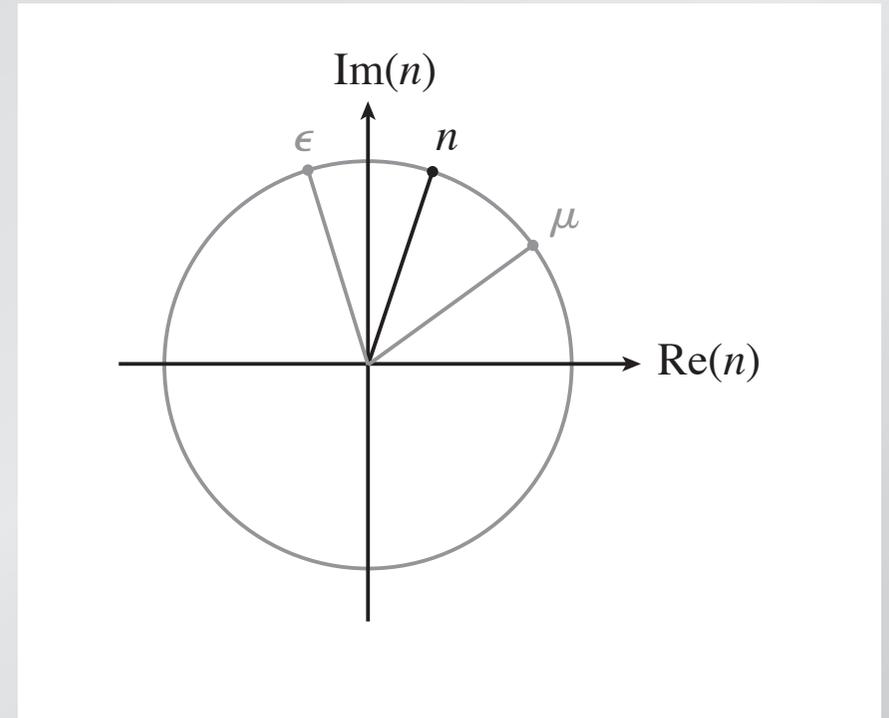


There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so

$$n = \sqrt{|\varepsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

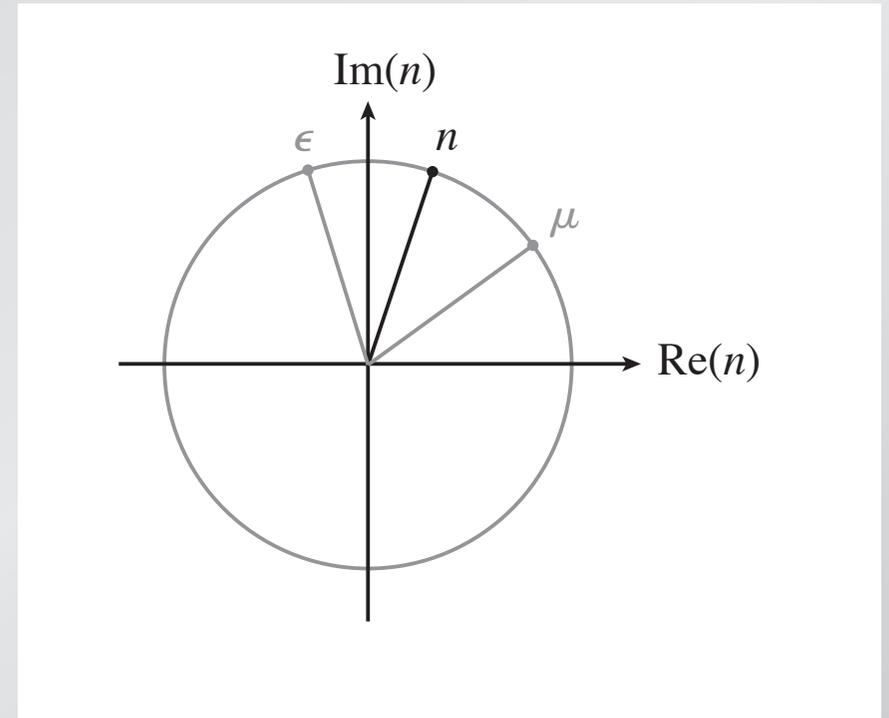


There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so

$$n = \sqrt{|\varepsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

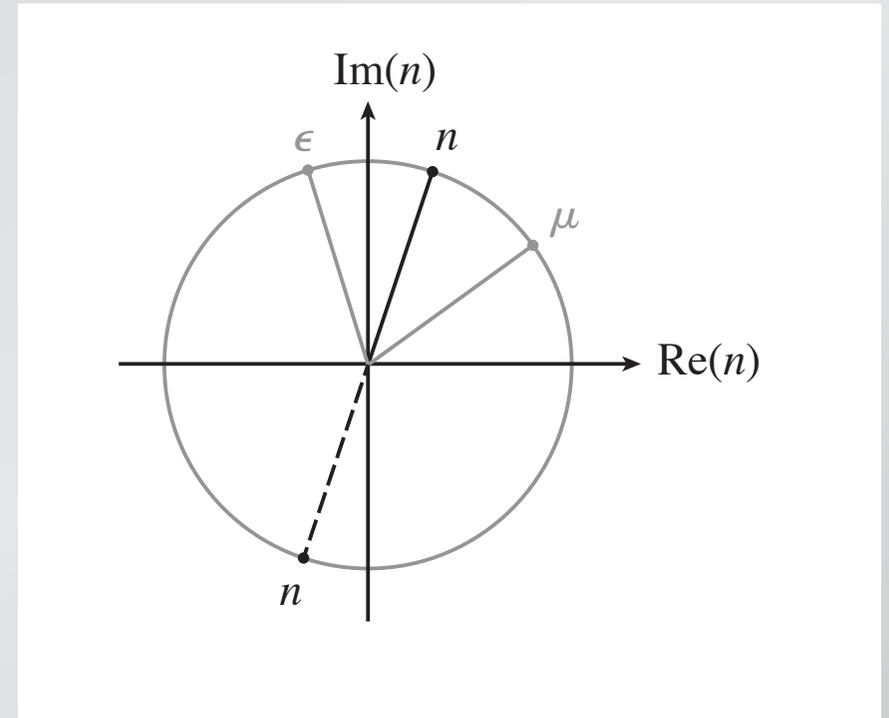

There *is* another root...

Can add  $2\pi$  to exponent


$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so

$$n = \sqrt{|\epsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

but...

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

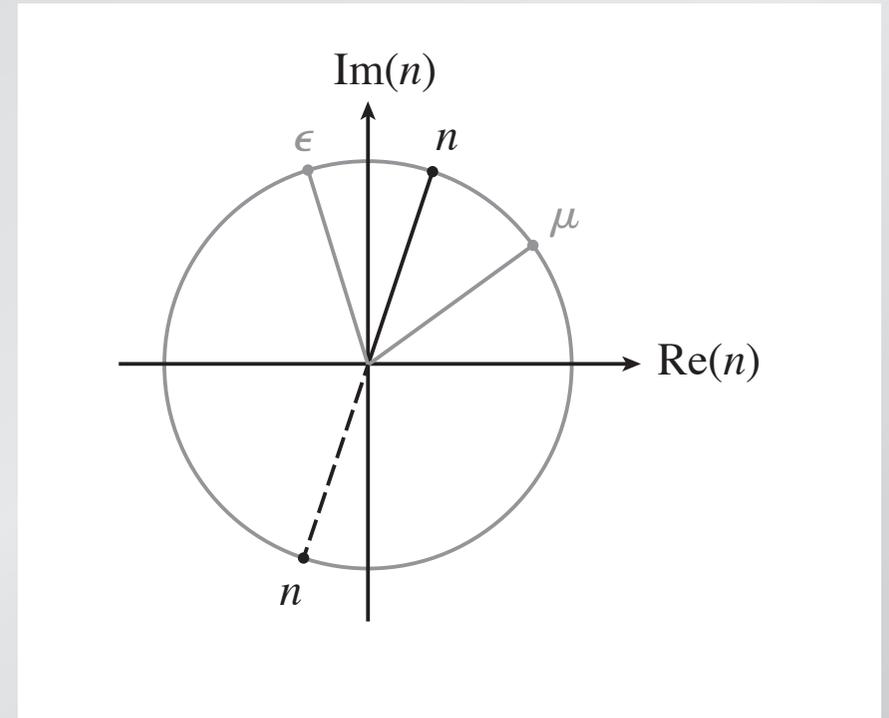

There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so


$$n = \sqrt{|\epsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

but...

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

and

$$E = E_o e^{i(kx-\omega t)} = E_o e^{-k''x} e^{i(k'x-\omega t)}$$

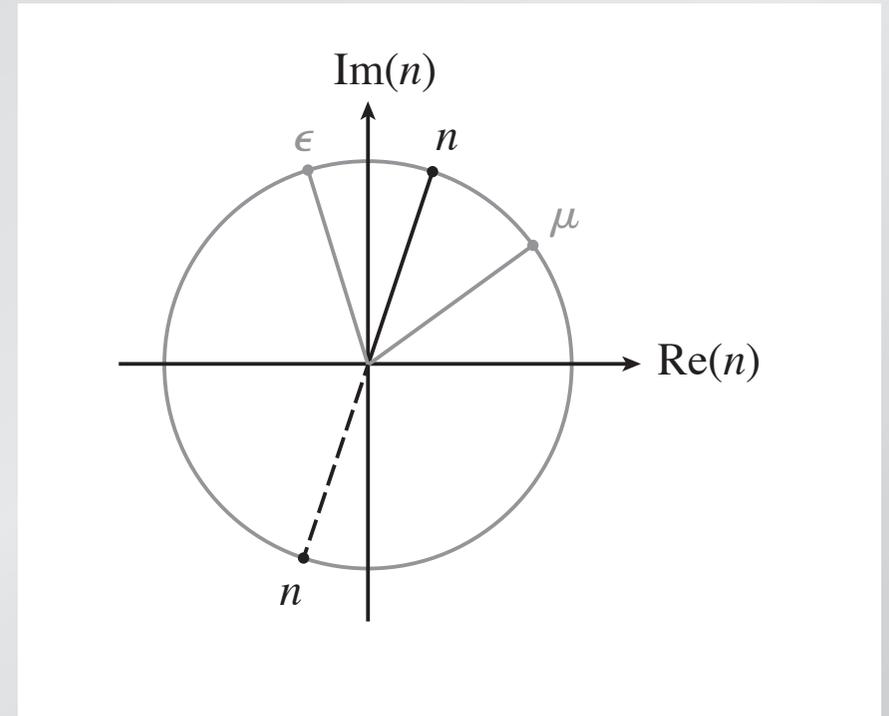

There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so


$$n = \sqrt{|\epsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

but...

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

and

$$E = E_o e^{i(kx-\omega t)} = E_o e^{-k''x} e^{i(k'x-\omega t)}$$

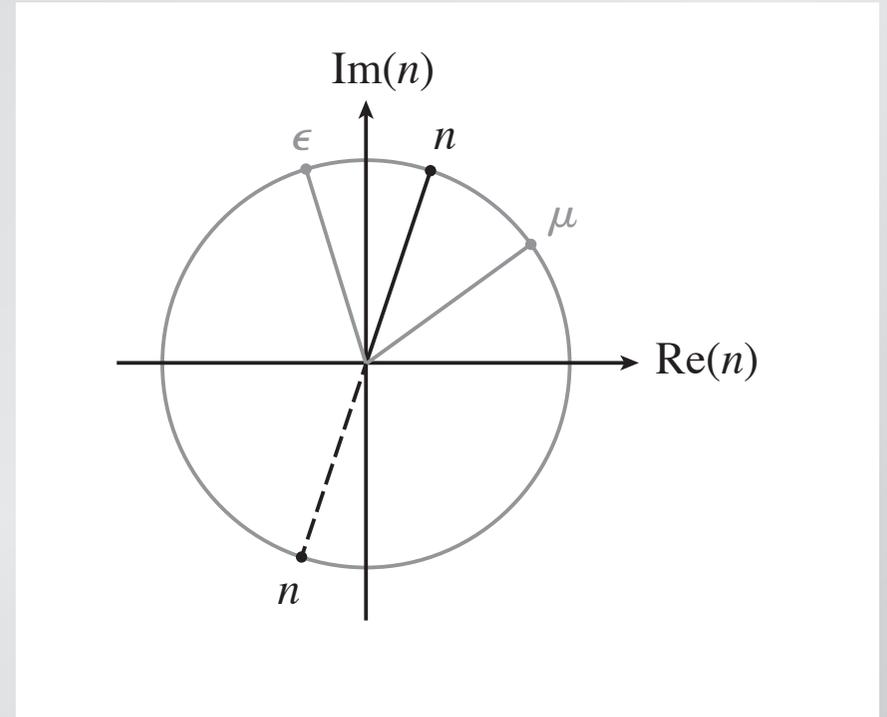

There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so


$$n = \sqrt{|\epsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

but...

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

and

$$E = E_o e^{i(kx-\omega t)} = E_o e^{-k''x} e^{i(k'x-\omega t)}$$

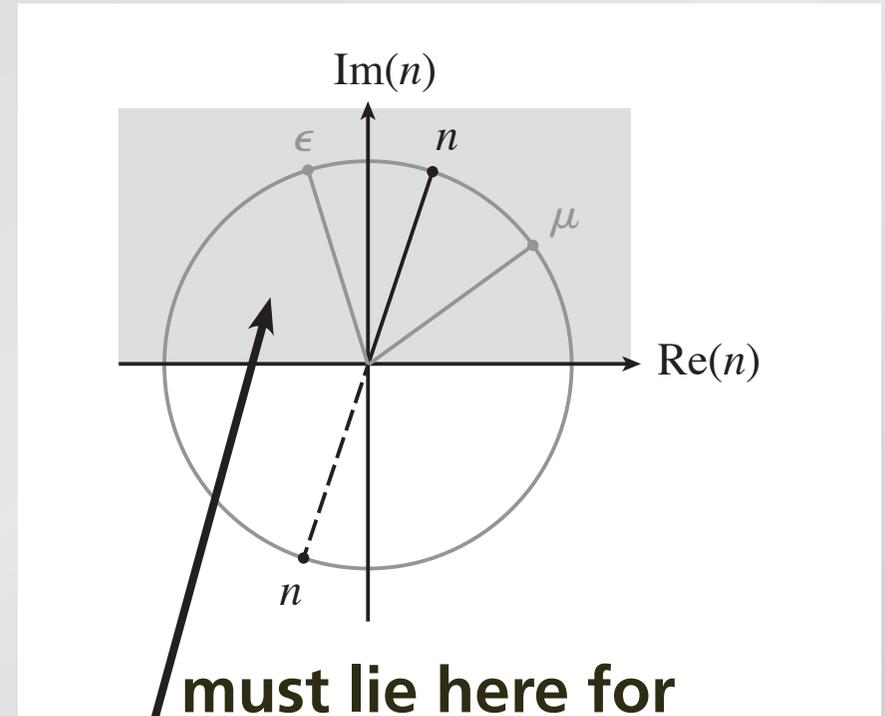

must lie here for  
passive material

There *is* another root...

Can add  $2\pi$  to exponent

$$e^{+i(\theta+\phi)} = e^{+i[\theta+\phi+2\pi]}$$

and so


$$n = \sqrt{|\epsilon||\mu|} e^{i\left[\frac{\theta+\phi}{2}+\pi\right]}$$

but...

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

and

$$E = E_o e^{i(kx-\omega t)} = E_o e^{-k''x} e^{i(k'x-\omega t)}$$

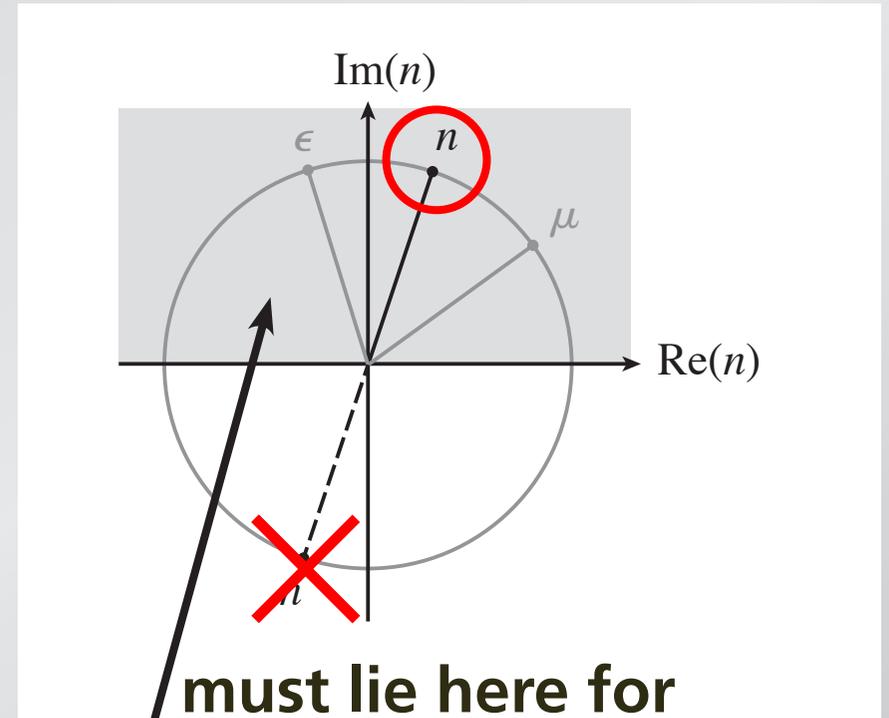

must lie here for  
passive material


Q: Is this the only possible solution?

1. yes ✓

2. no, there's one more


3. there are many more

4. it depends

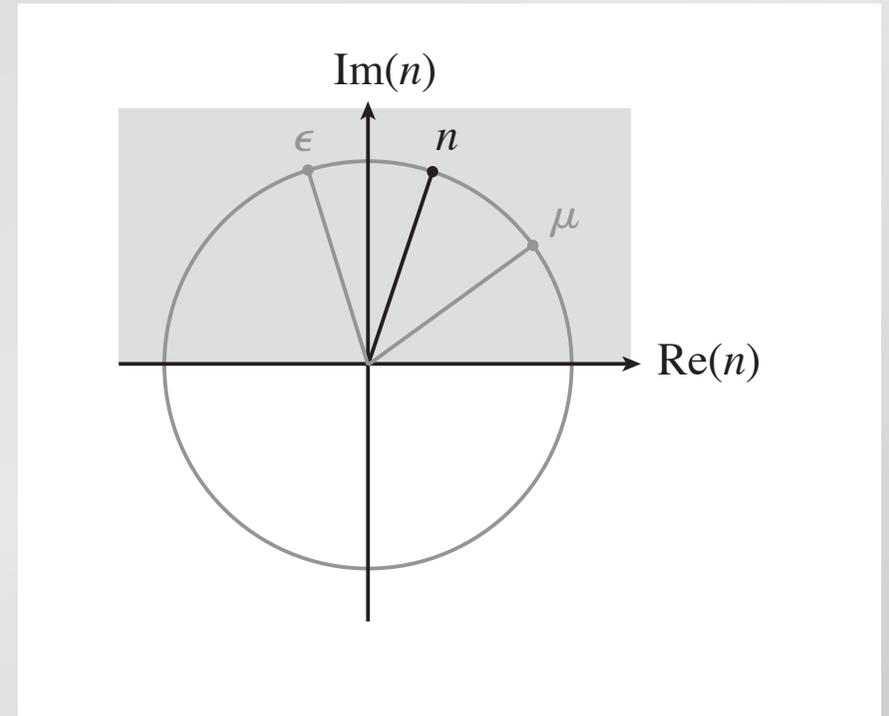


To find  $n$  (passive materials):

1. Draw line that bisects  $\epsilon$  and  $\mu$
2. Choose upper branch

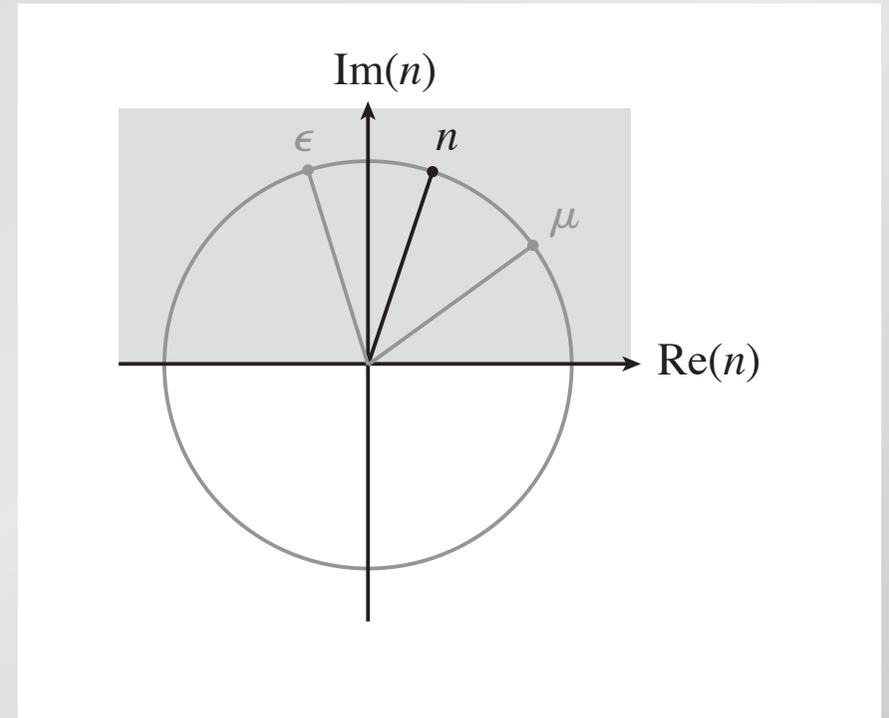


For certain values of  $\epsilon$  and  $\mu$   
we can get a *negative*  $\text{Re}(n)$ !

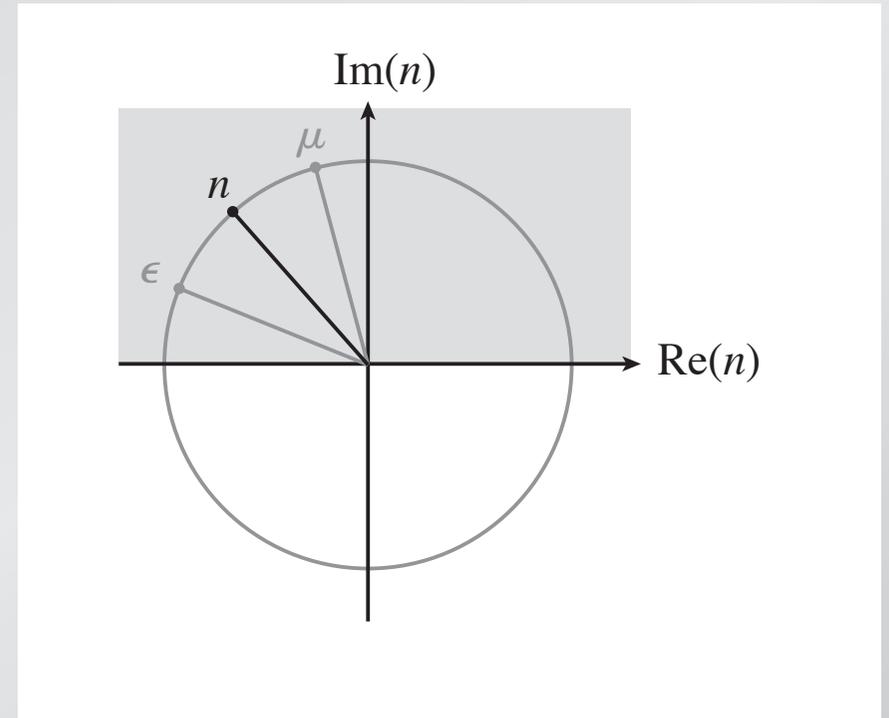

**Q: Must both  $\text{Re}\epsilon < 0$  and  $\text{Re}\mu < 0$   
to get a negative index?**

**1. yes**


**2. no**

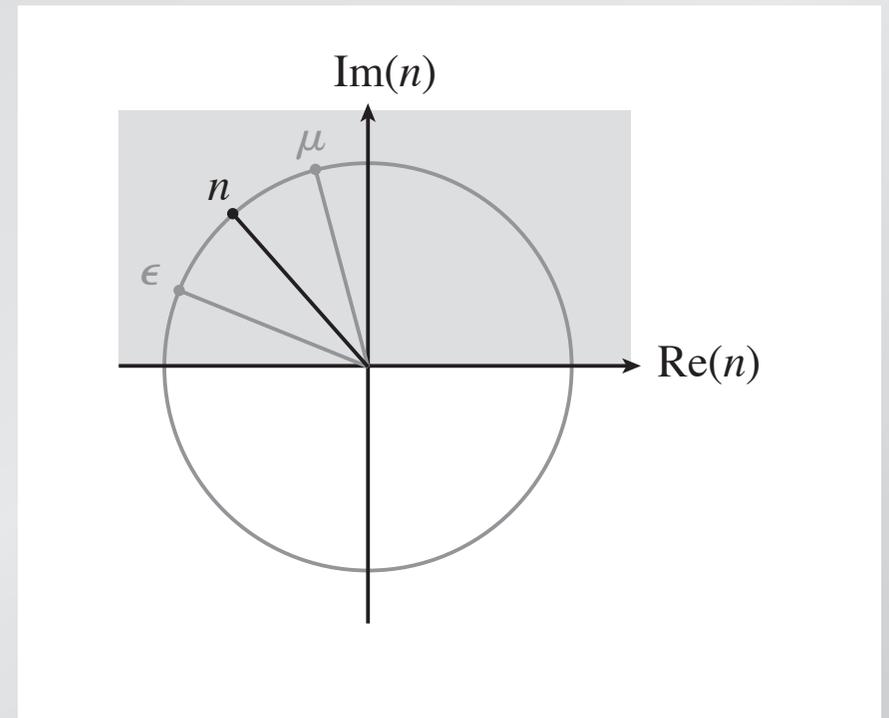


**Q: Must both  $\text{Re}\epsilon < 0$  and  $\text{Re}\mu < 0$   
to get a negative index?**

1. yes

2. no ✓

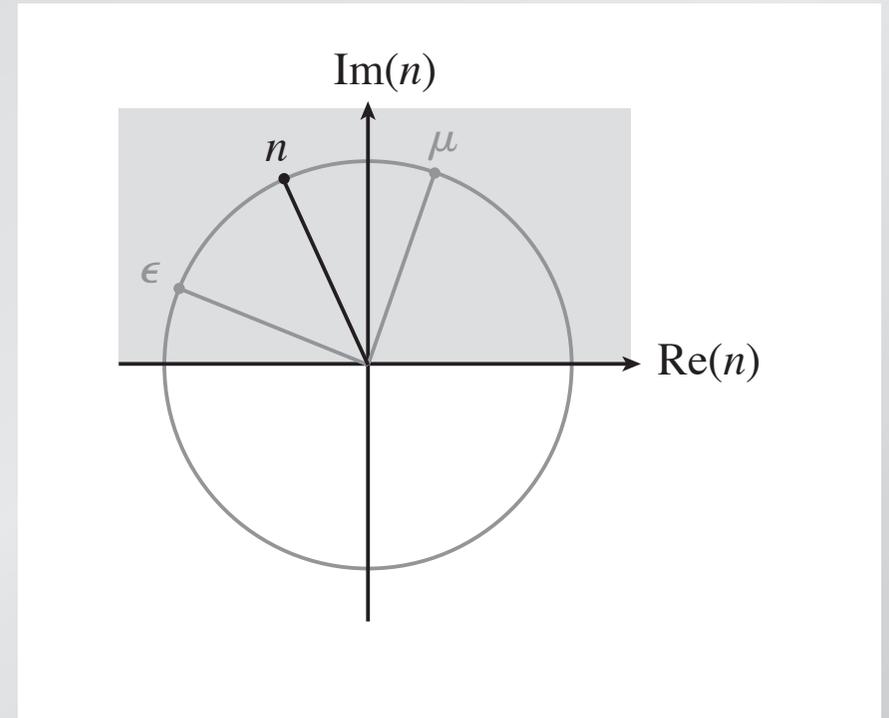

**Note: need magnetic response  
to achieve  $n \leq 0$ !**

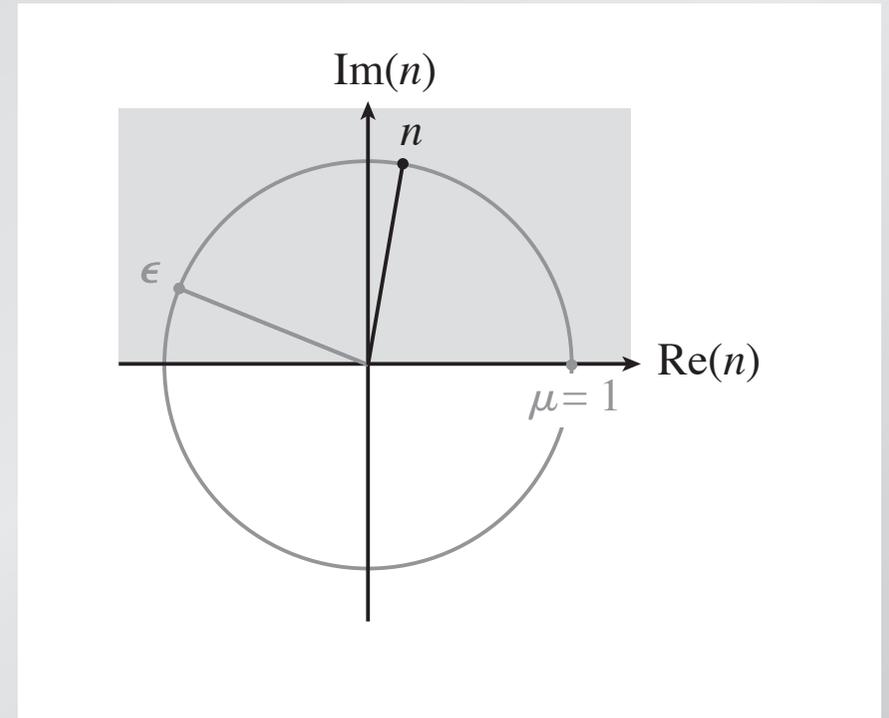

Now remember

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

Now remember

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$

Spatial and temporal dependence of wave component

$$E = E_o e^{i(kx - \omega t)} = E_o e^{-k''x} e^{i(k'x - \omega t)}$$


**Now remember**

$$k = \frac{2\pi n}{\lambda_o} = \frac{2\pi(n' + in'')}{\lambda_o} = k' + ik''$$


**Spatial and temporal dependence of wave component**

$$E = E_o e^{i(kx - \omega t)} = E_o e^{-k''x} e^{i(k'x - \omega t)}$$


**When  $\text{Re}(n) < 0$ ,  $k' < 0$ , and so phase velocity reversed!**

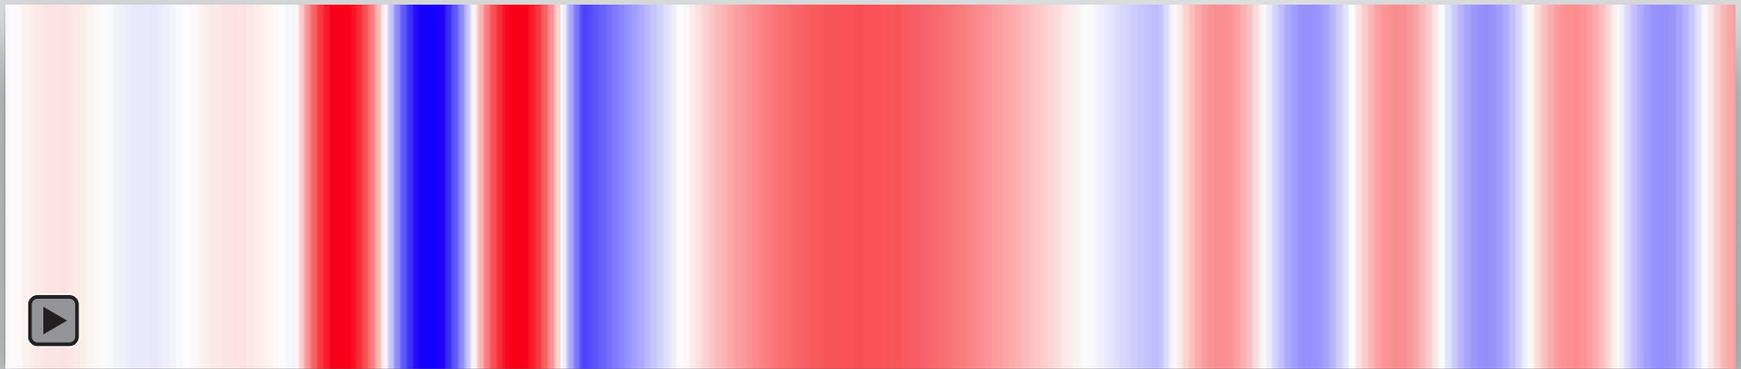

**When  $\text{Re}(n) < 0$ ,  $k' < 0$ , and so phase velocity reversed!**

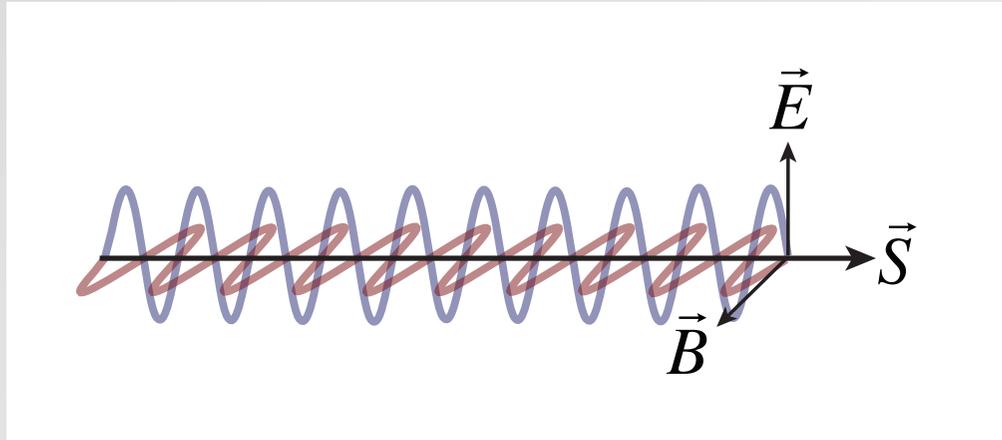


When  $\text{Re}(n) < 0$ ,  $k' < 0$ , and so phase velocity reversed!

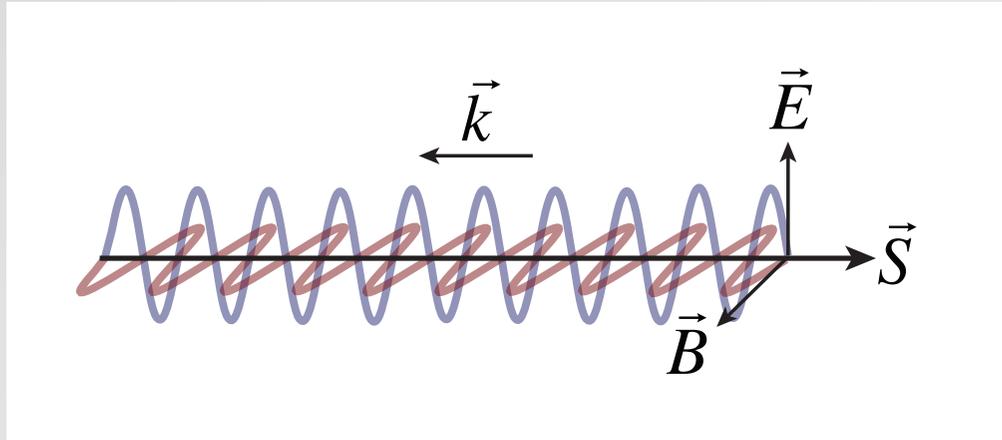


When  $\text{Re}(n) < 0$ ,  $k' < 0$ , and so phase velocity reversed!


## classification of (non-lossy) materials

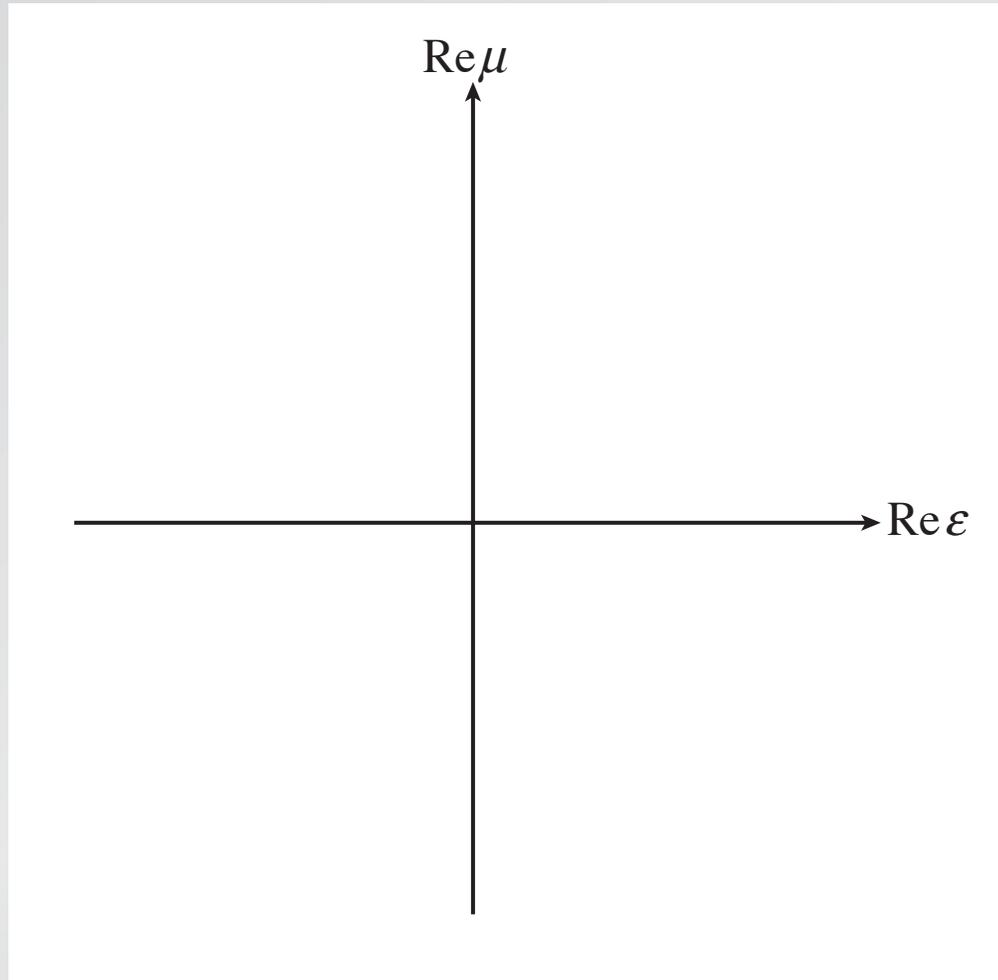


# classification of (non-lossy) materials

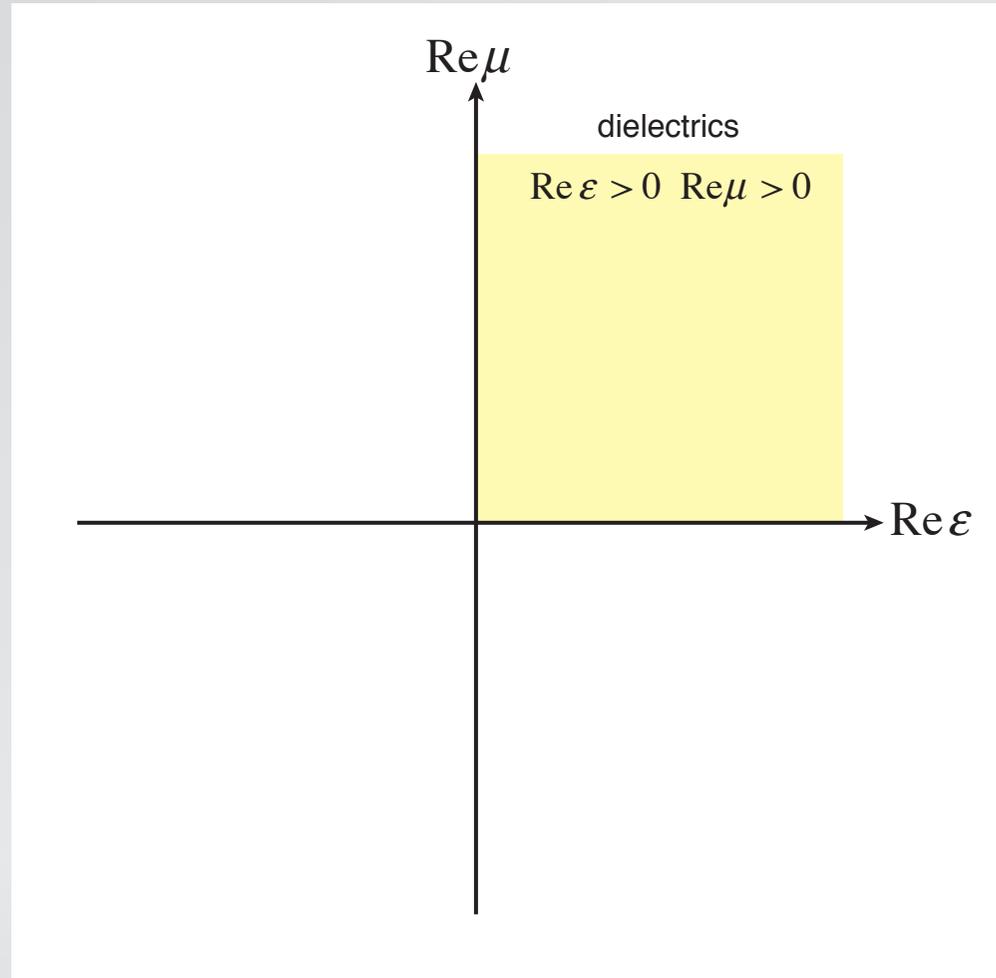


# classification of (non-lossy) materials

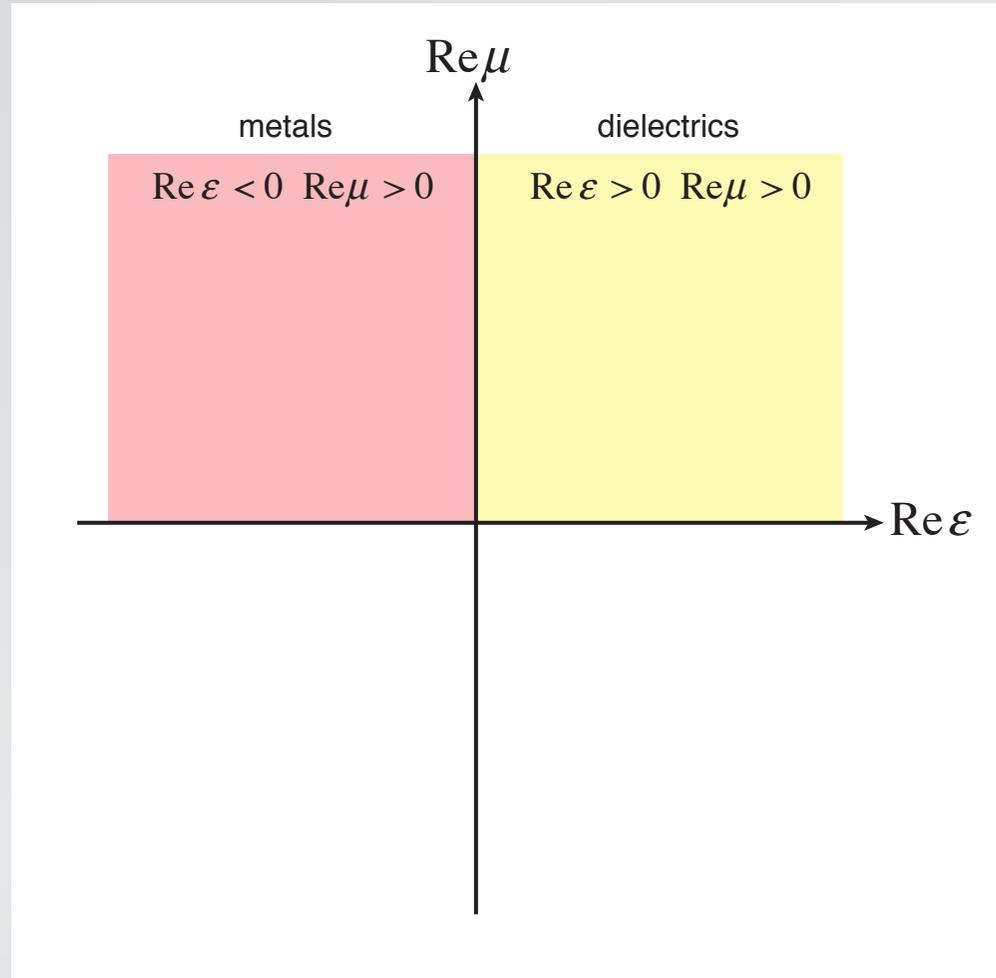


# classification of (non-lossy) materials

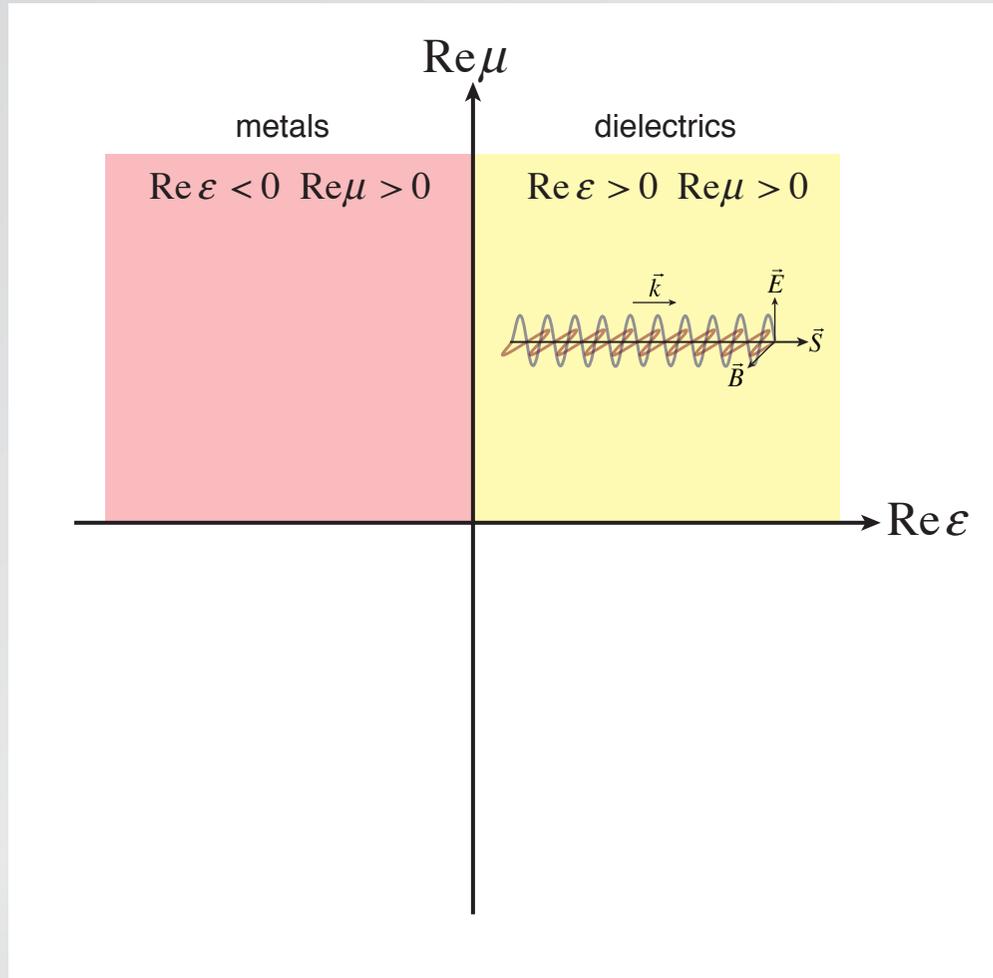


# classification of (non-lossy) materials

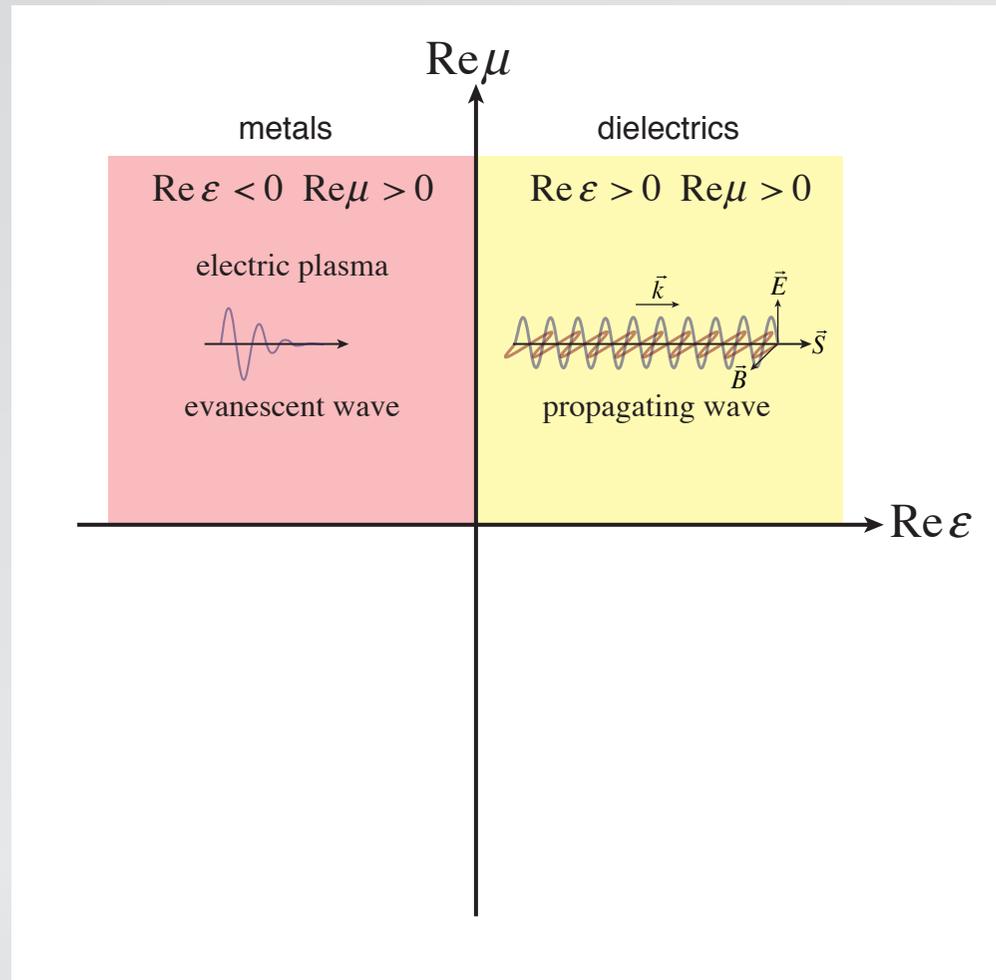


# classification of (non-lossy) materials

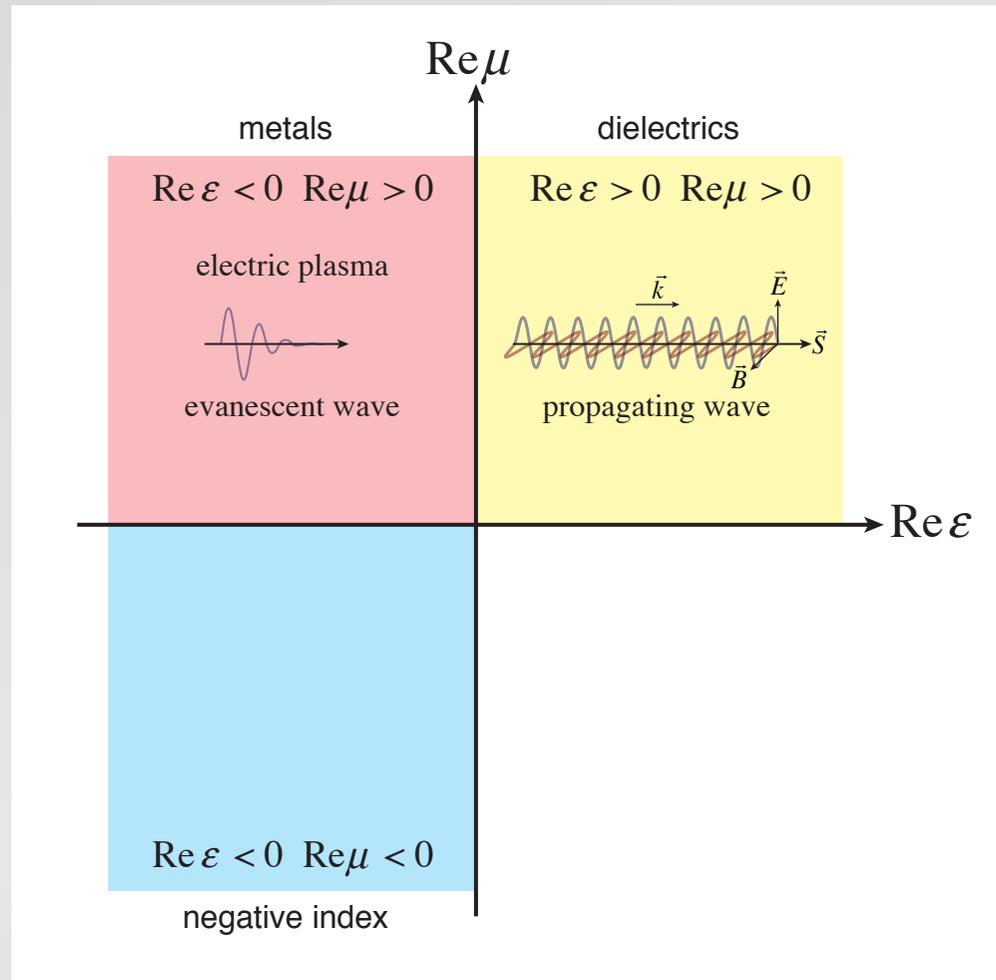


# classification of (non-lossy) materials

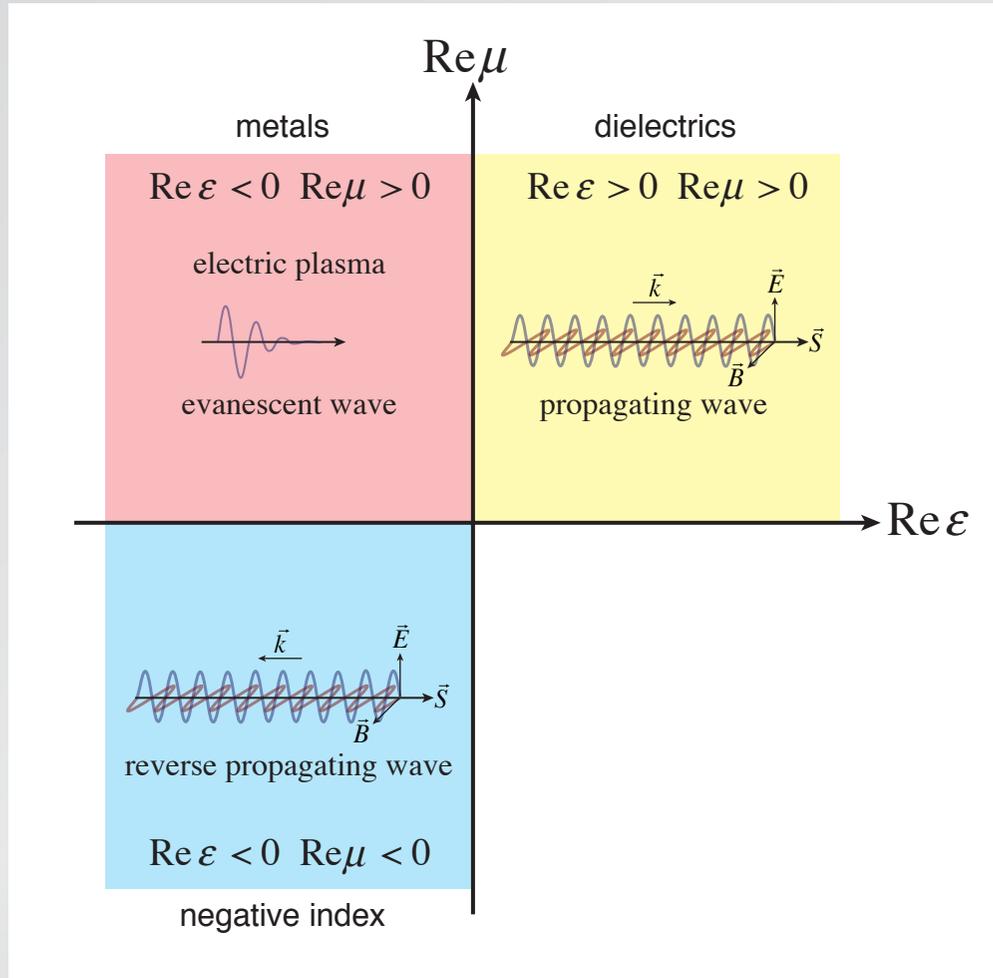


# classification of (non-lossy) materials

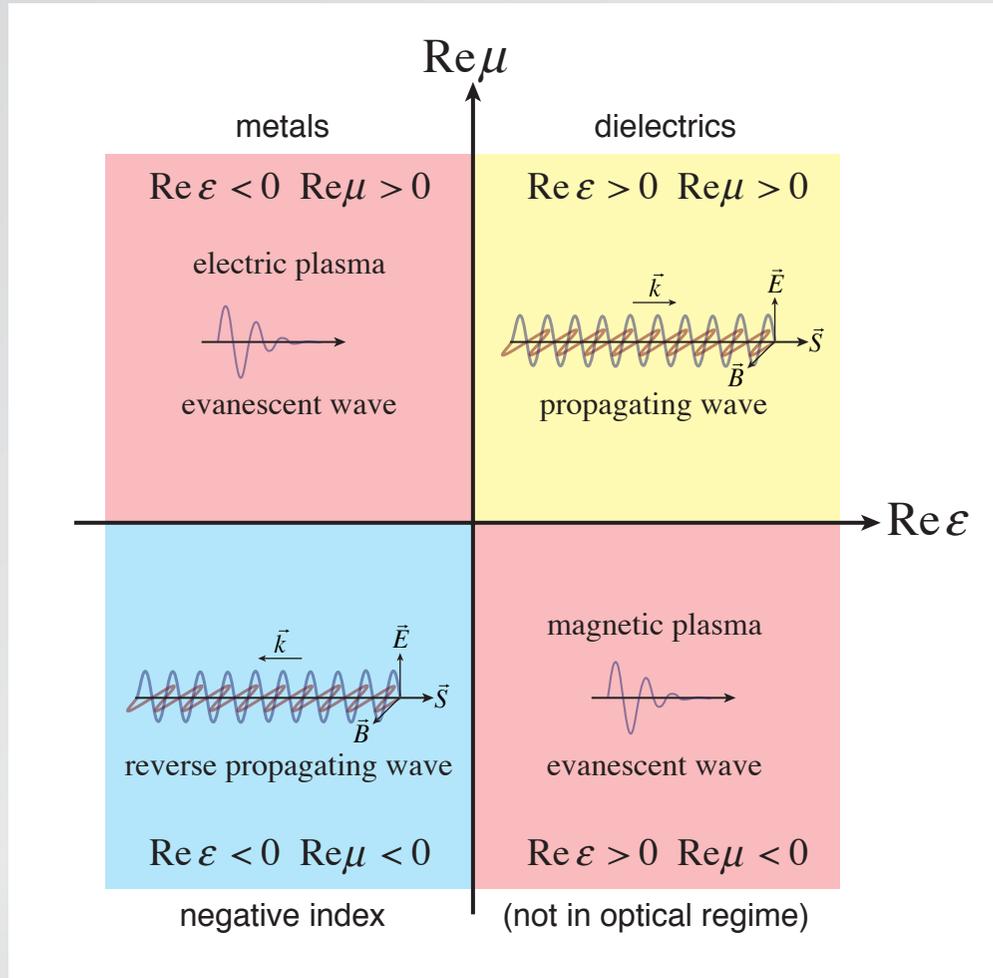

# common materials very limited

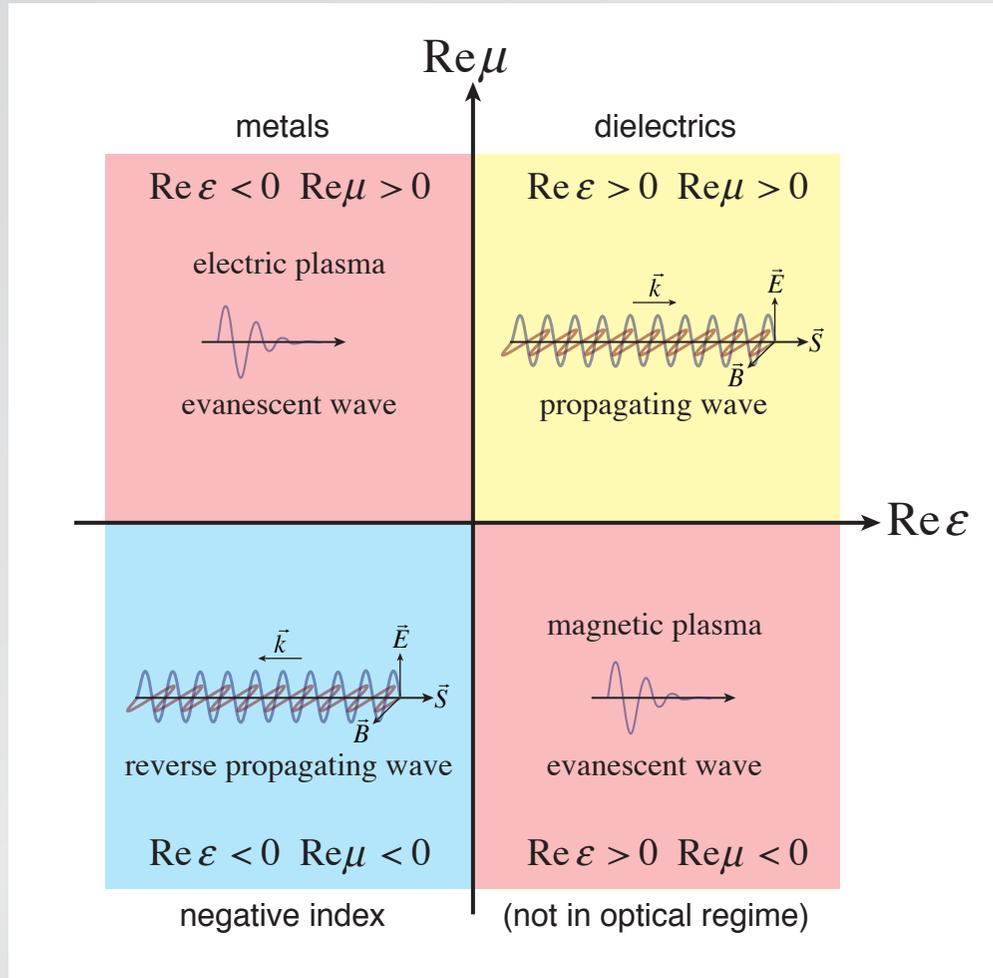


# common materials very limited

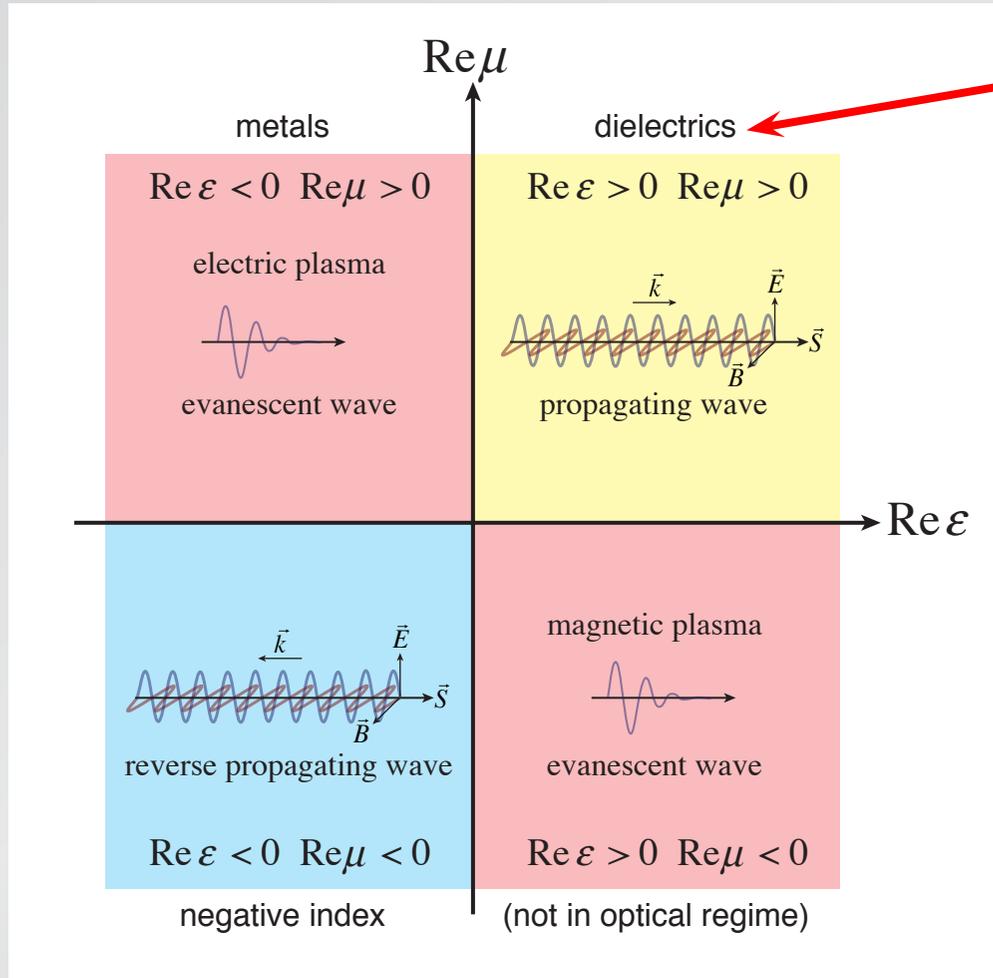


# common materials very limited

lossy & no propagation

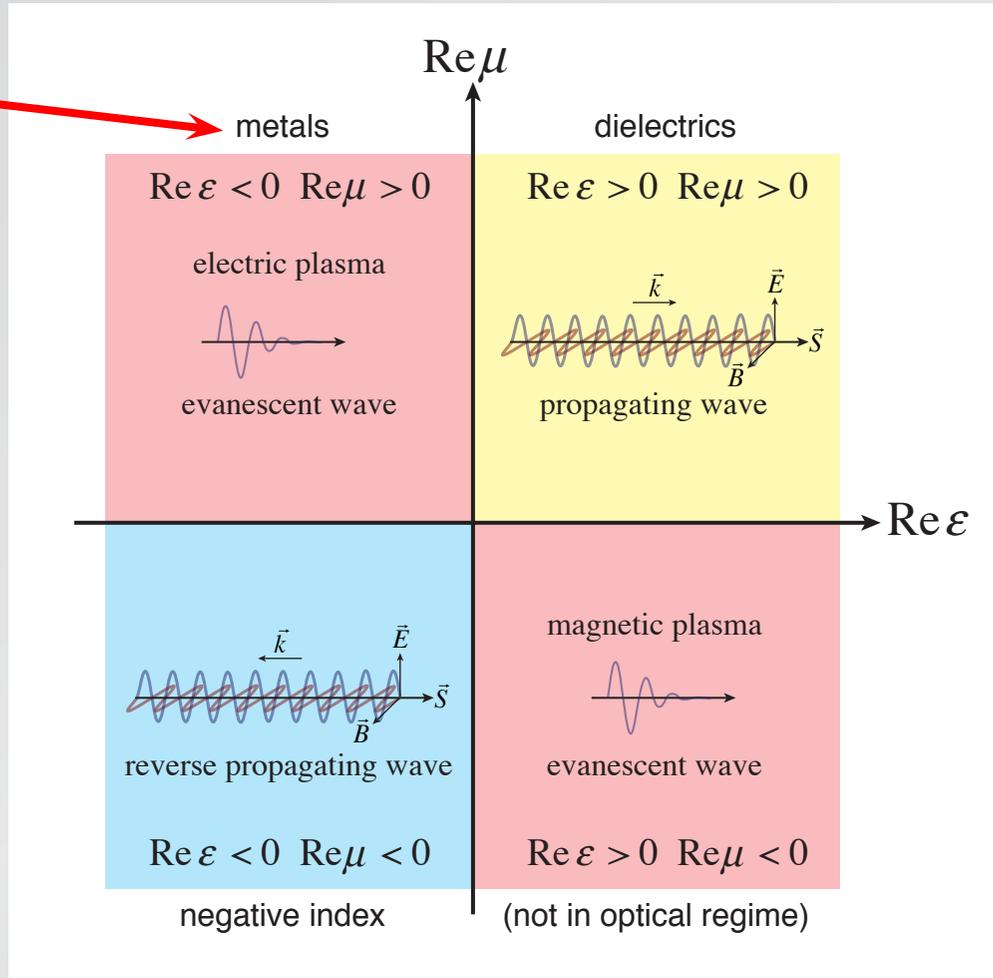


# common materials very limited

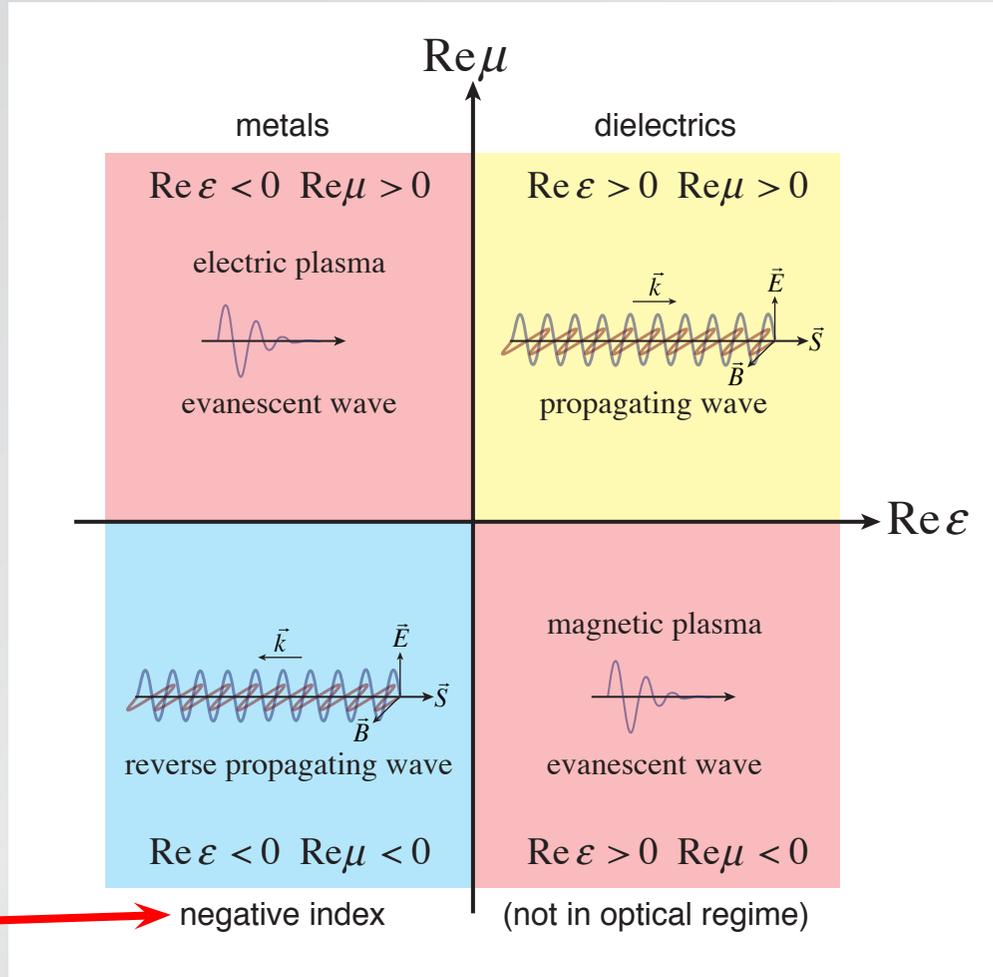


superlensing  
but...


# common materials very limited

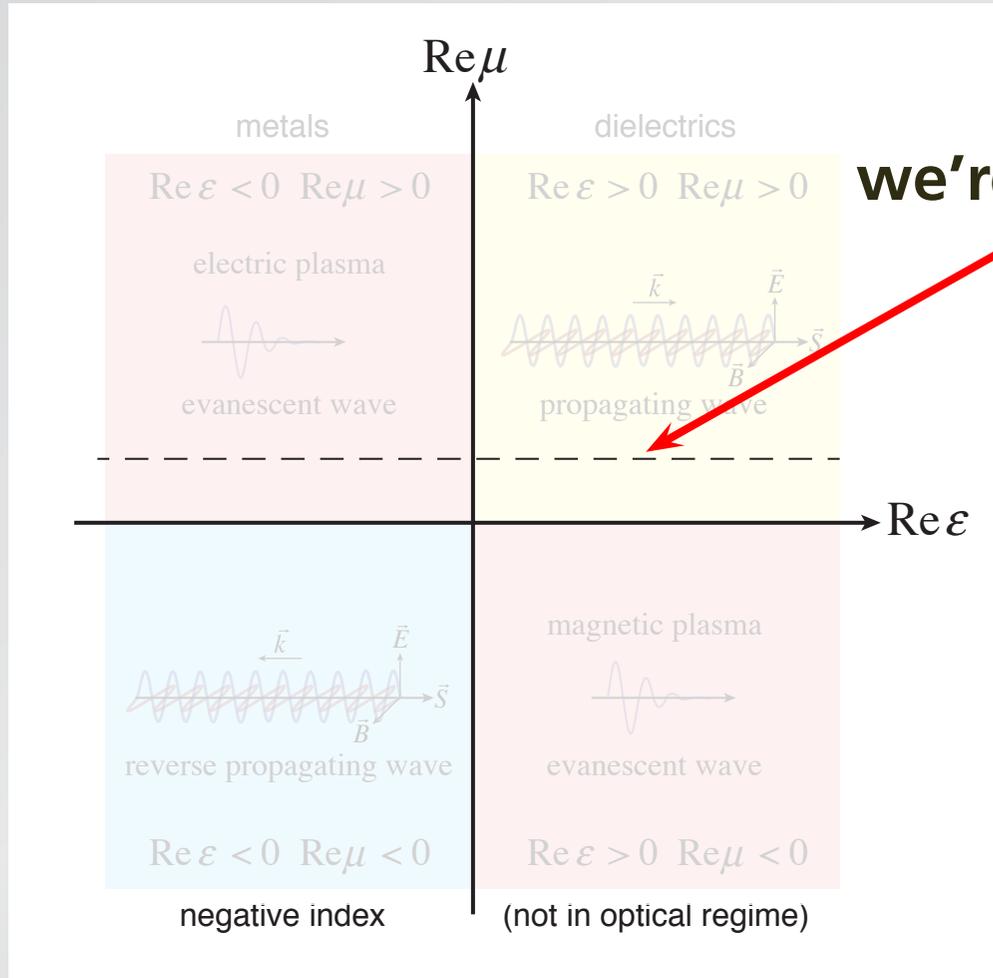


# What happens on the axes?

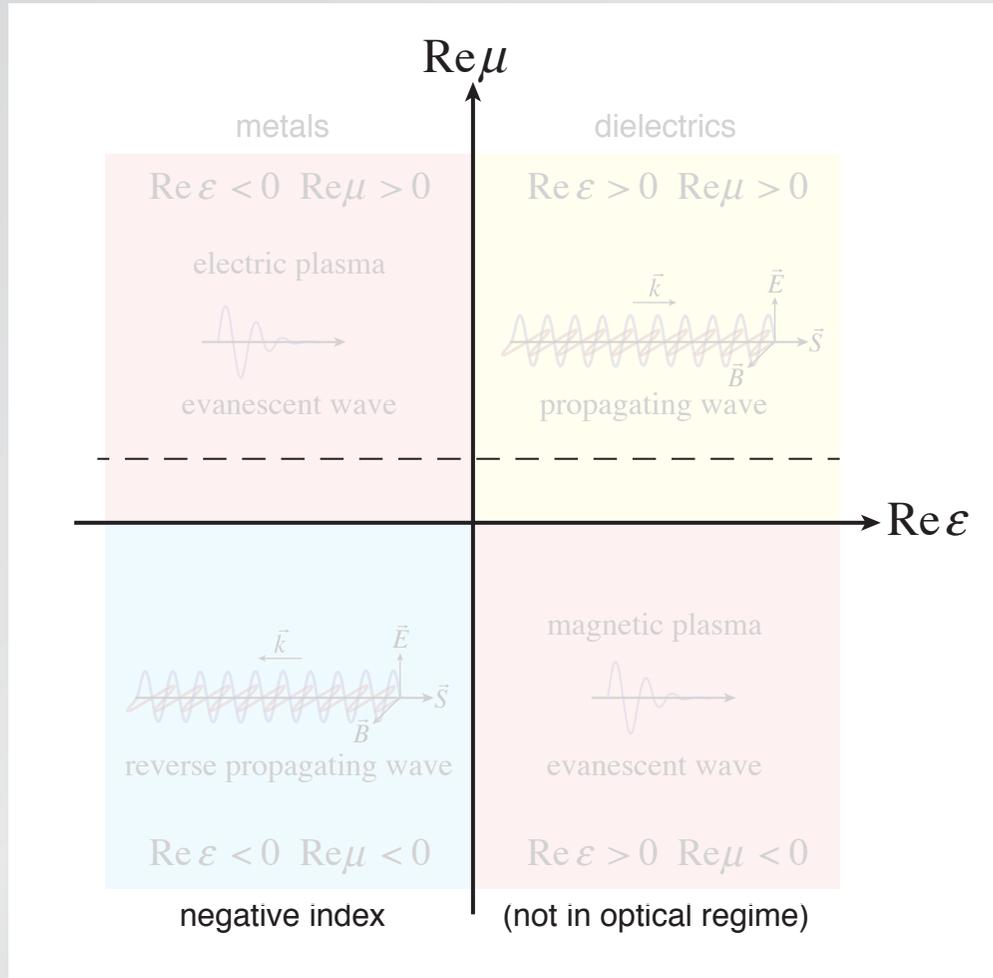

# what if we let $\varepsilon = 0$ ?

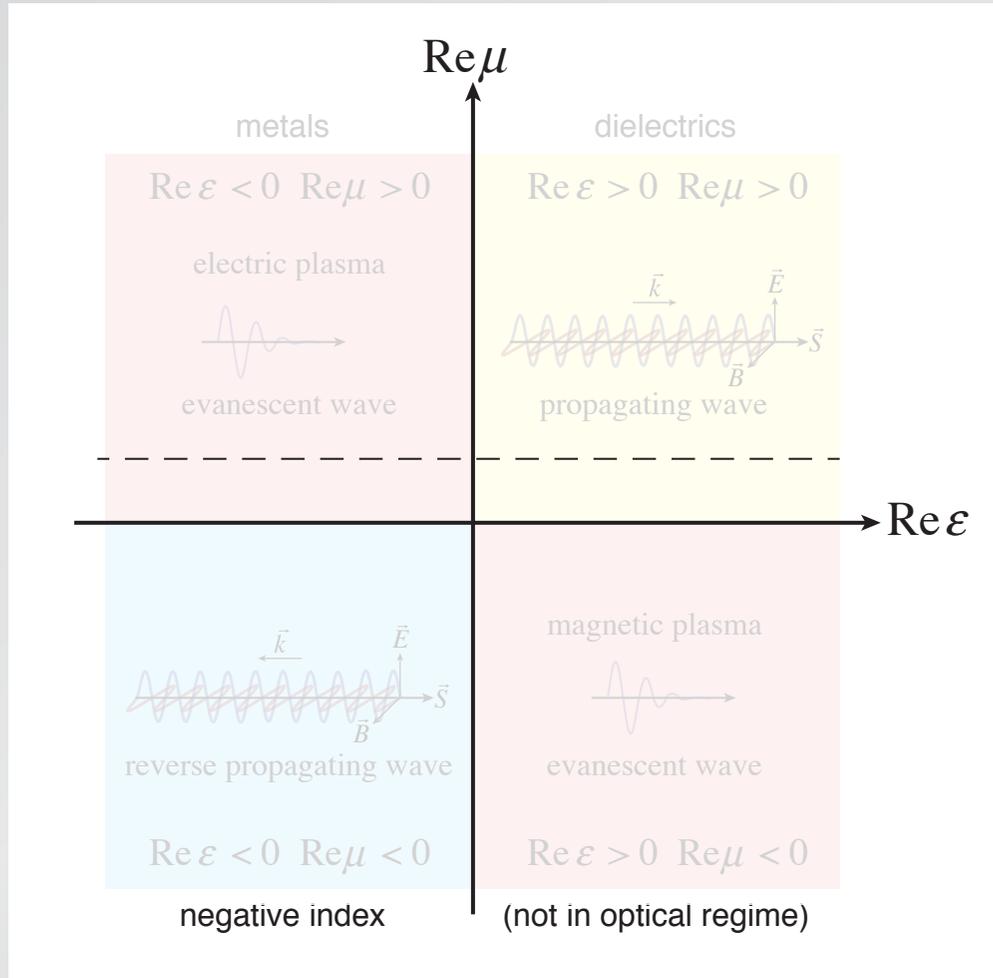

what if we let  $\varepsilon = 0$ ?

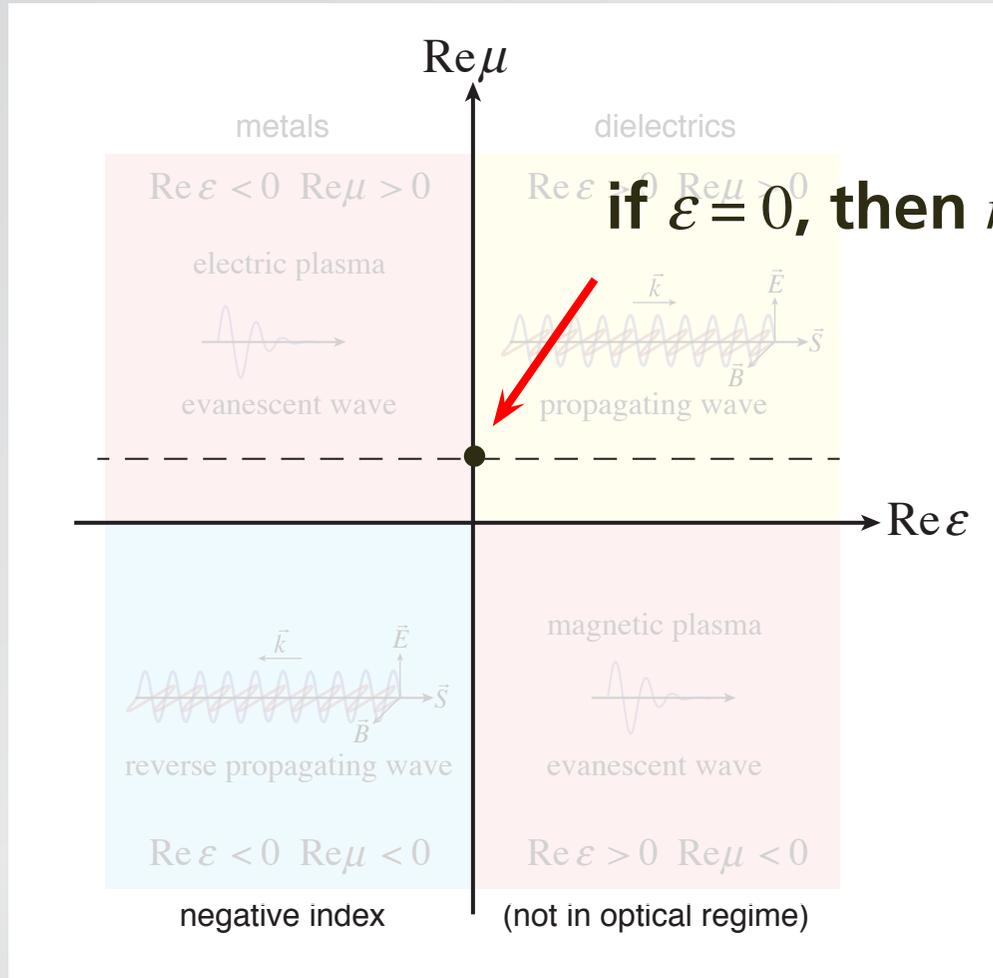

1 index

2 zero index

**Q: If  $n = 0$ , which of the following is true?**

- 1. the frequency goes to zero.**
- 2. the phase velocity becomes infinite.**
- 3. both of the above.**
- 4. neither of the above.**

## wave equation

$$\nabla^2 \vec{E} - \frac{\mu\epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

## solution

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)}$$

## where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c$$

wave equation

$$\nabla^2 \vec{E} - \frac{\mu \epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

solution

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)}$$

where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon \mu}} c = \frac{1}{n} c$$

wave equation

$$\nabla^2 \vec{E} - \frac{\mu \epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

solution

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)} \longrightarrow \vec{E} = \vec{E}_0 e^{-i\omega t}$$

where

$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c$$

wave equation

$$\nabla^2 \vec{E} - \frac{\mu \epsilon}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$

solution

$$\vec{E} = \vec{E}_0 e^{i(kx - \omega t)} \longrightarrow \vec{E} = \vec{E}_0 e^{-i\omega t}$$

where


$$\frac{\omega}{k} = \frac{1}{\sqrt{\epsilon\mu}} c = \frac{1}{n} c \longrightarrow \infty$$

1 index

2 zero index

**Q: If  $n = 0$ , which of the following is true?**


1. the frequency goes to zero.
- 2. the phase velocity becomes infinite. ✓**
3. both of the above.
4. neither of the above.

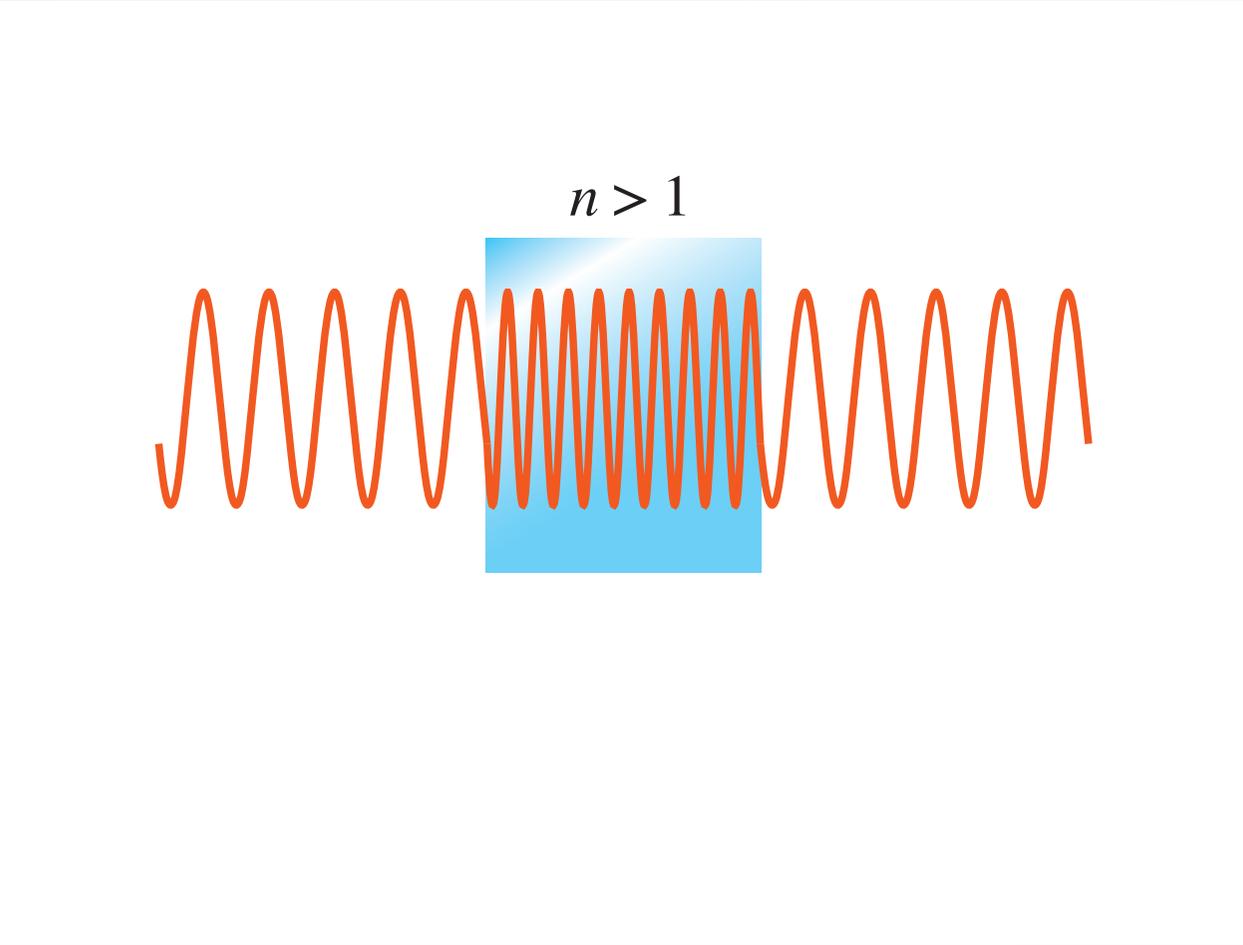

1 index


2 zero index

$$0 < n < 1$$

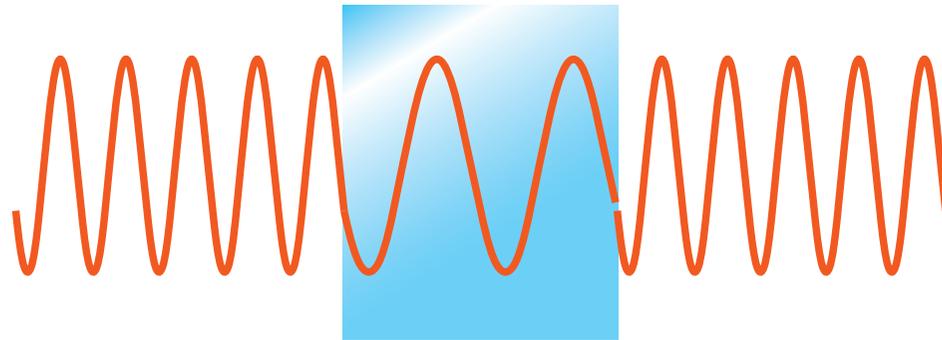


1 index

2 zero index

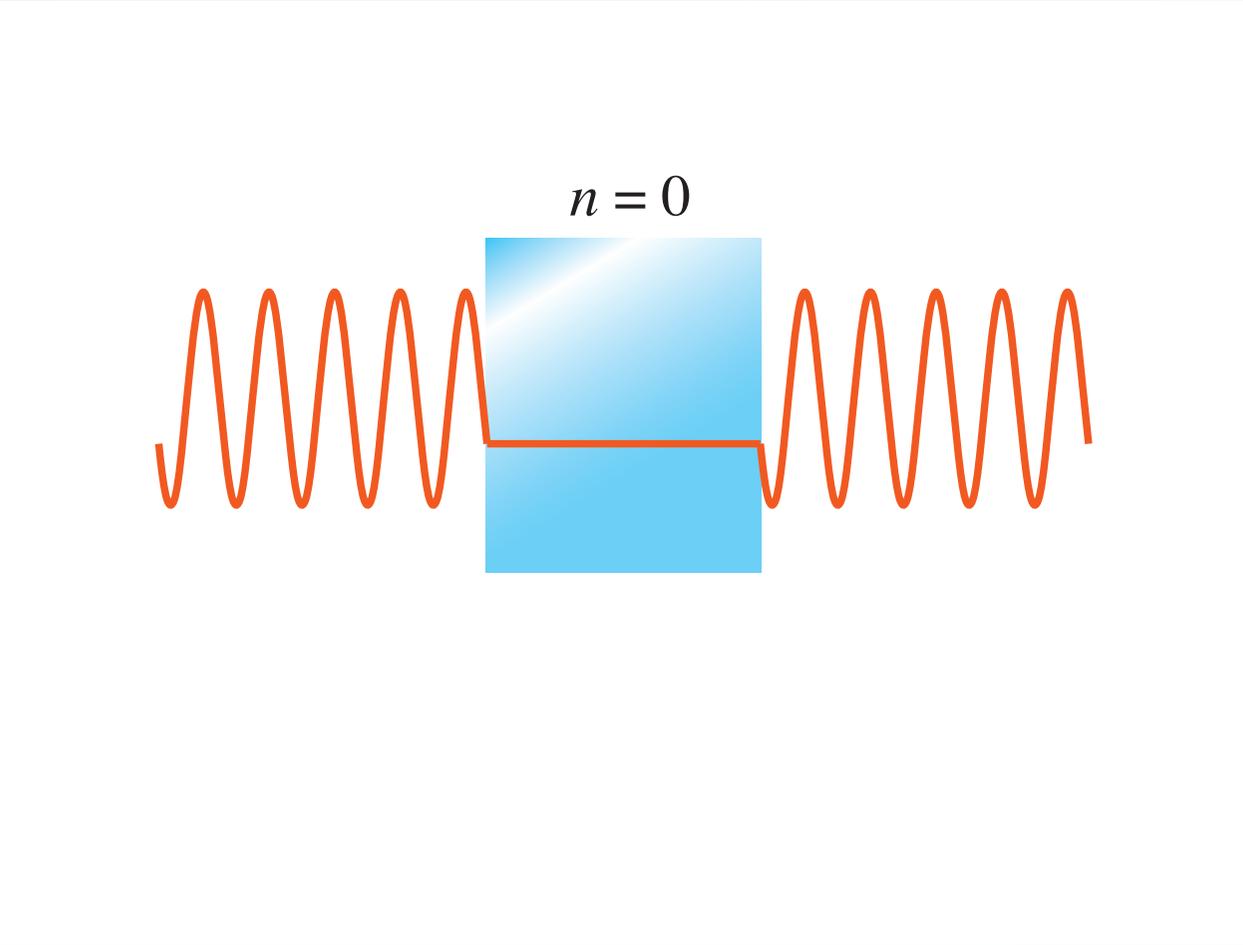

1 index

2 zero index

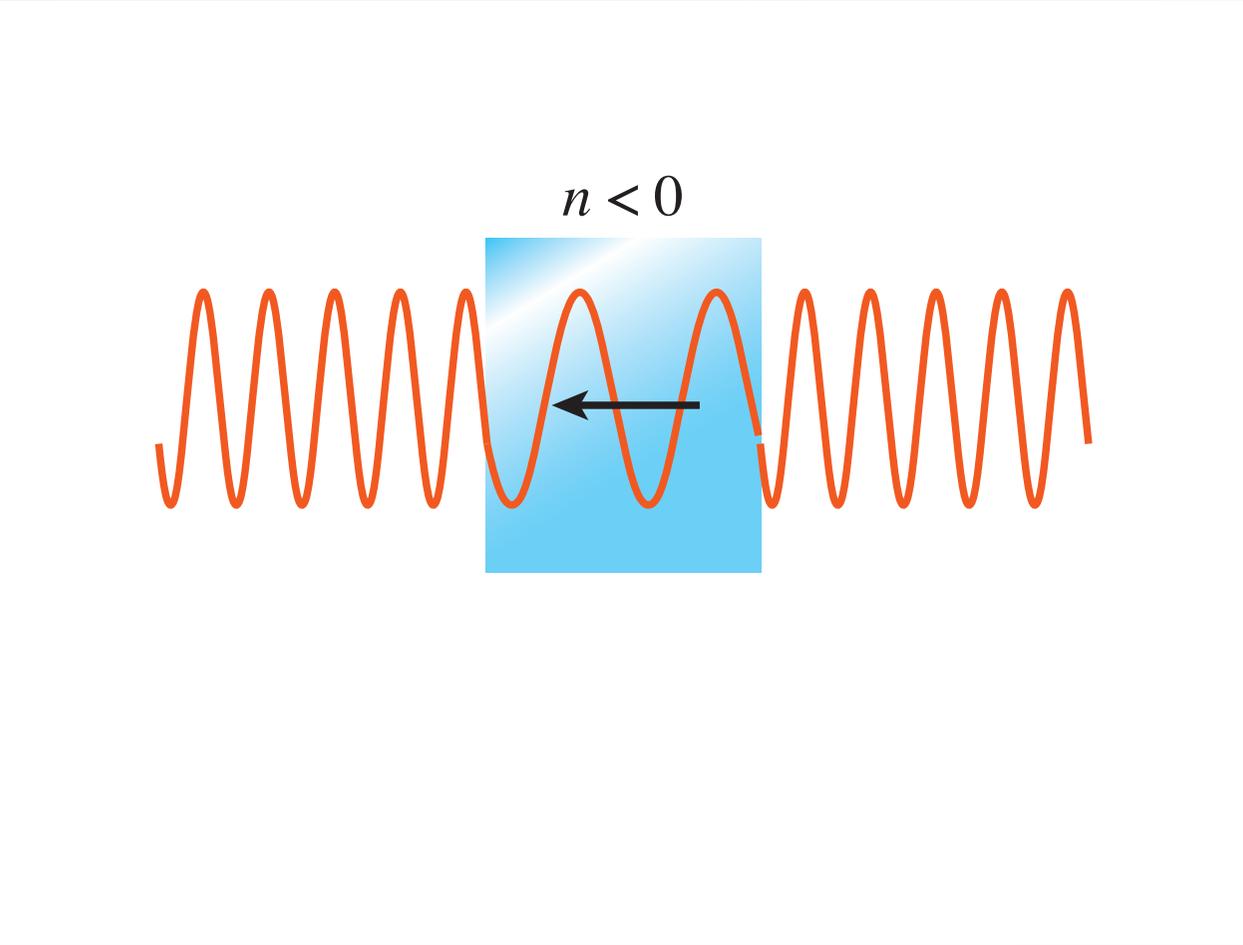

1 index


2 zero index



**1** index

**2** zero index


$$n = 0$$

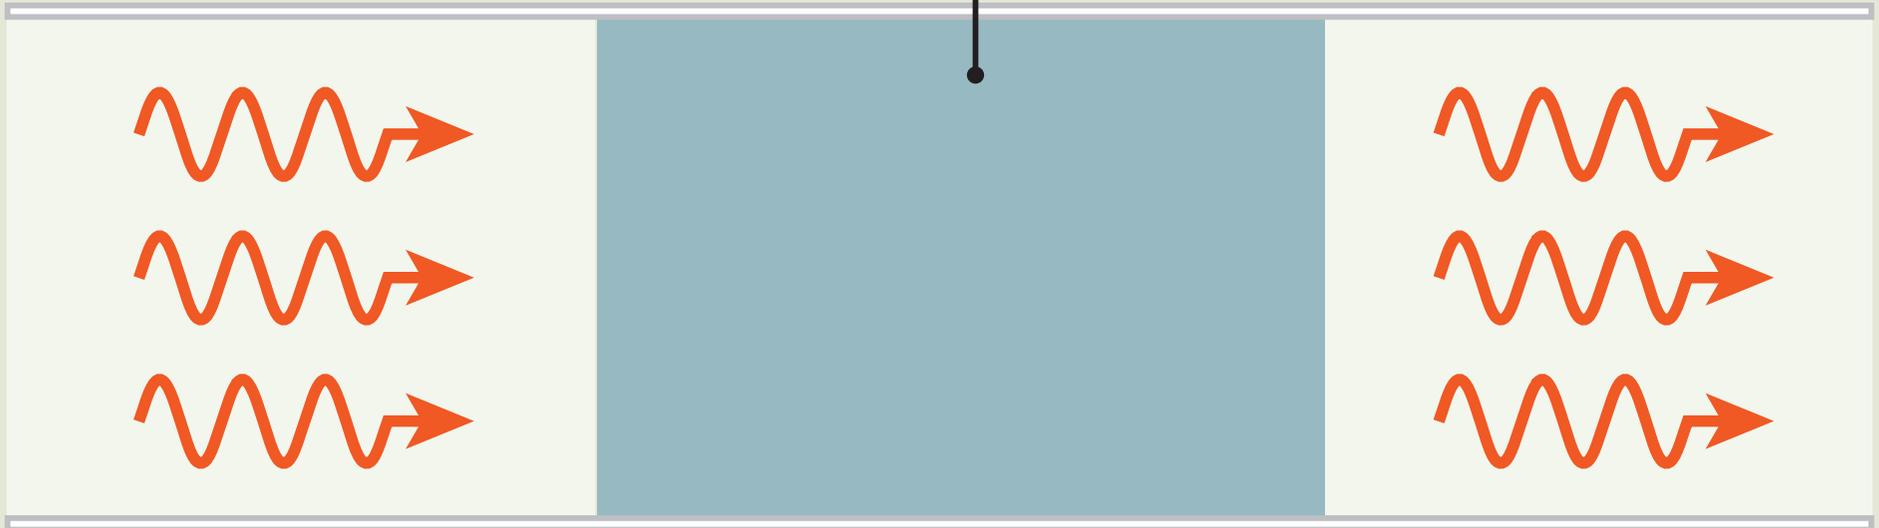

1 index


2 zero index

$$n = 0$$

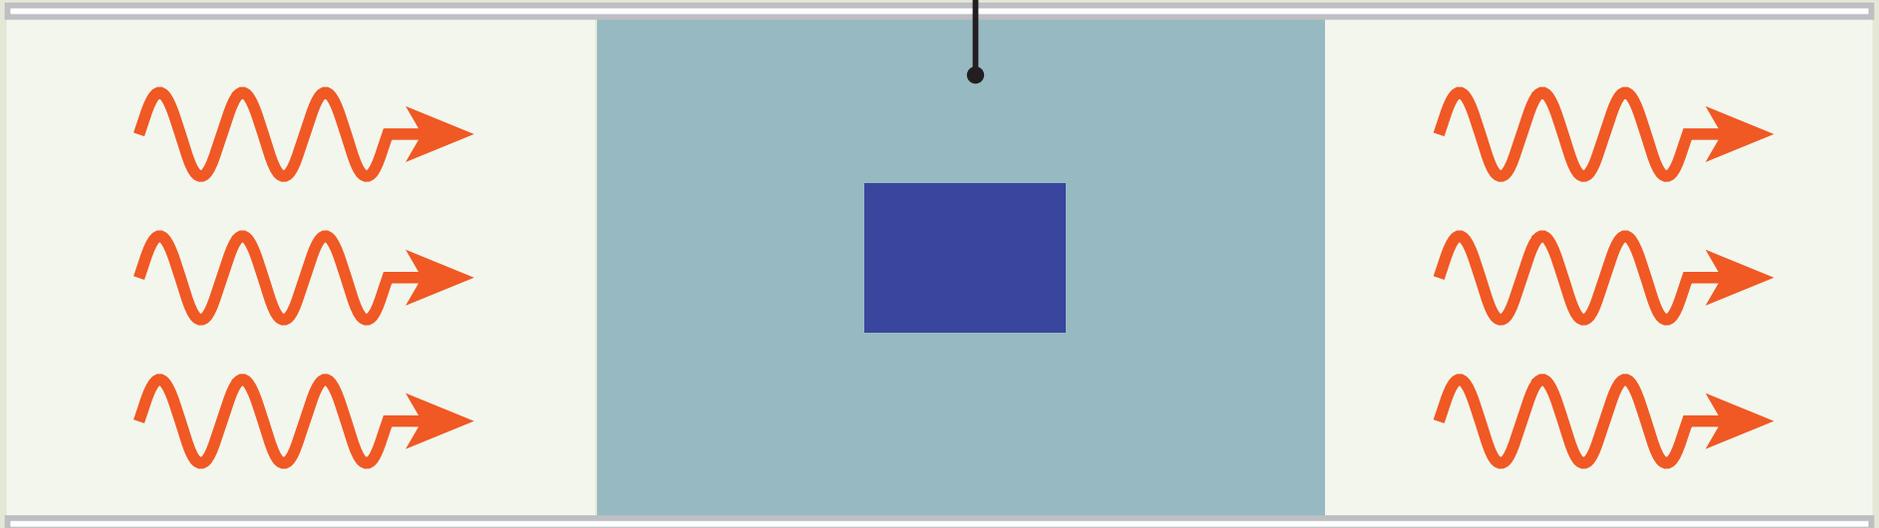

1 index


2 zero index

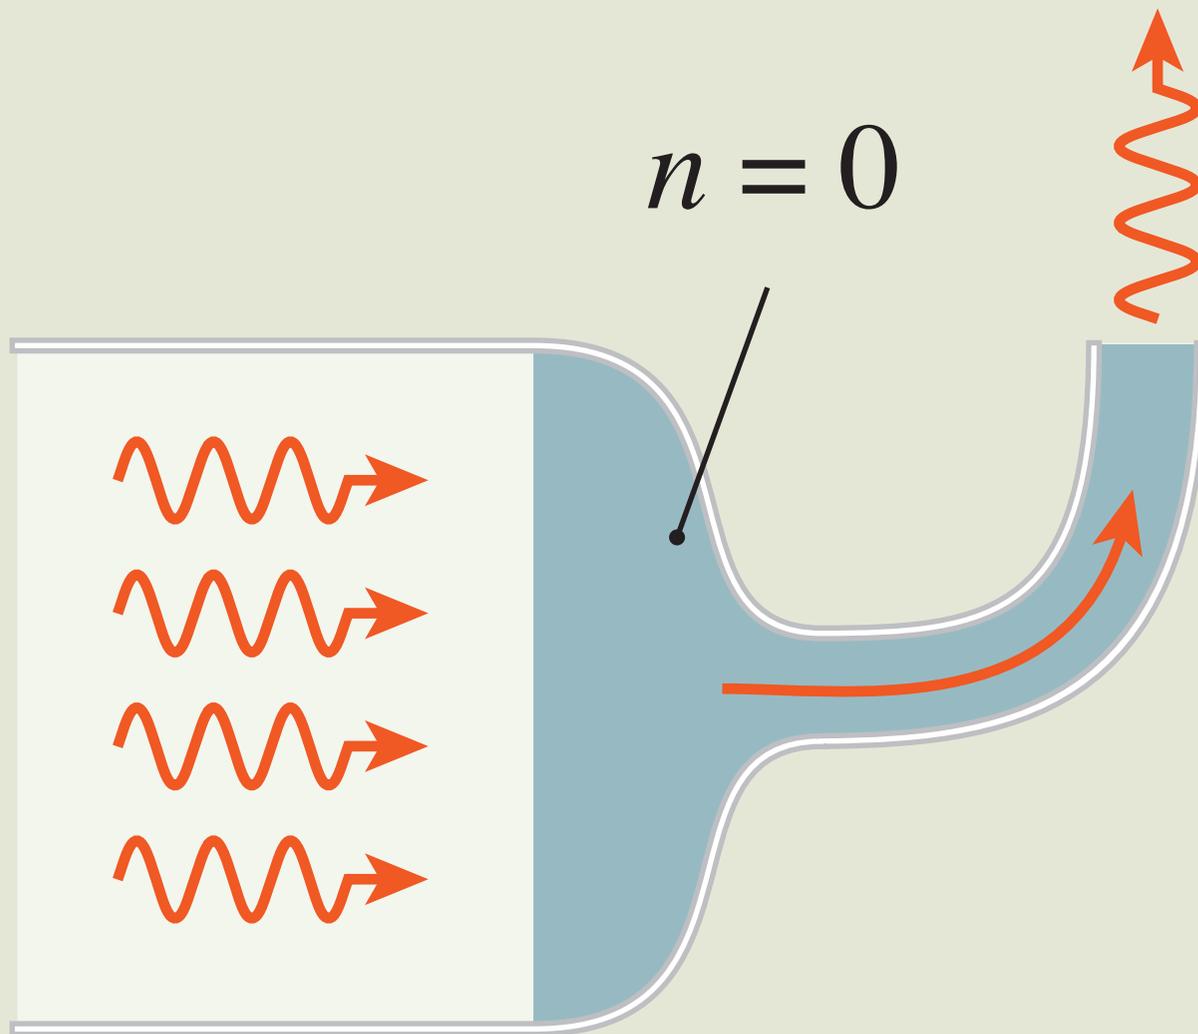

1 index

2 zero index

“tunneling with infinite decay length”

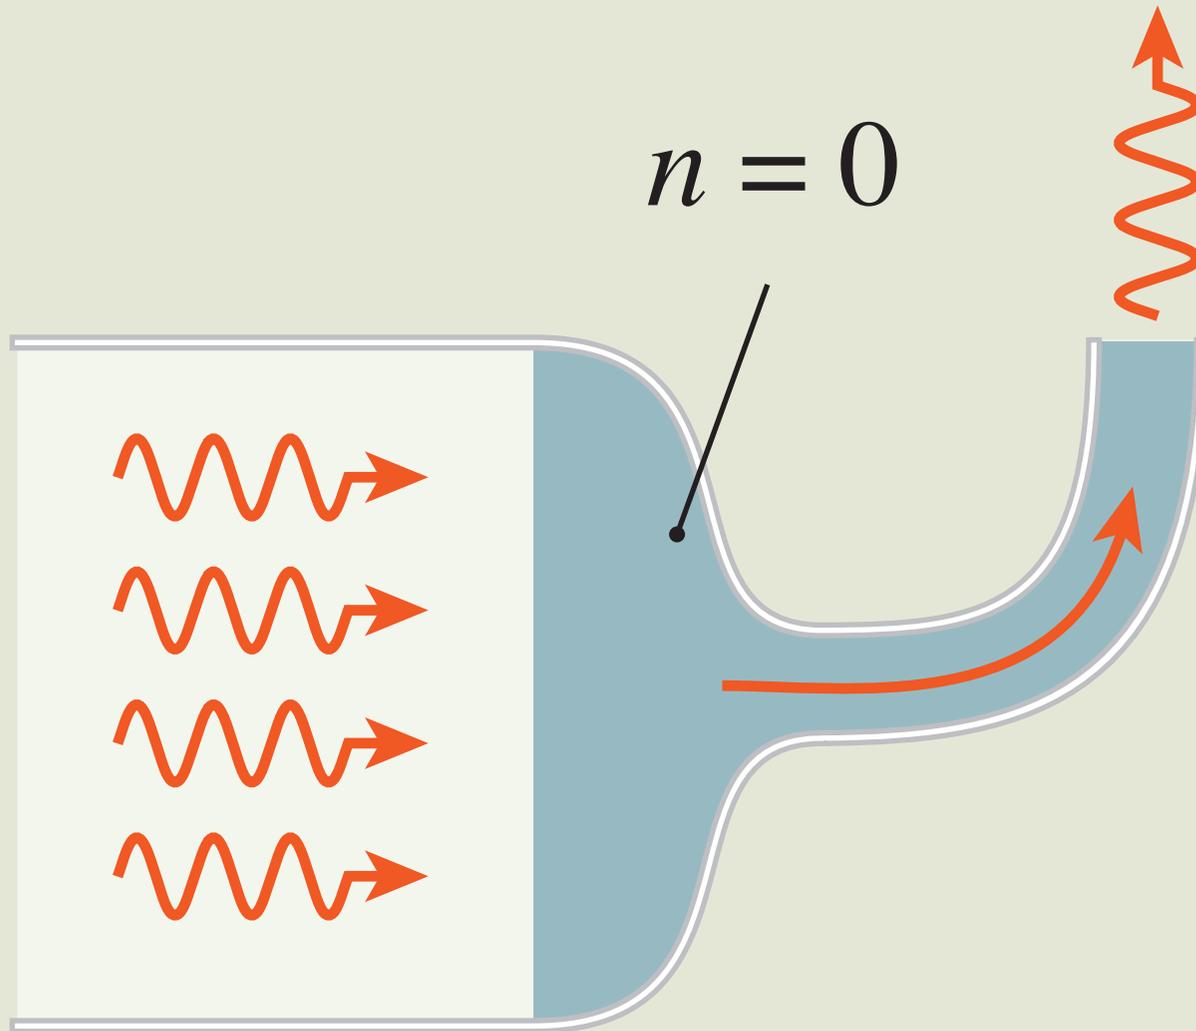

1 index

2 zero index

how?

$$n = \sqrt{\varepsilon\mu}$$

how?

$$n = \sqrt{\epsilon\mu}$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

how?

$$n = \sqrt{\epsilon\mu}$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}}$$

how?

$$\varepsilon \rightarrow 0$$

$$n = \sqrt{\varepsilon\mu} \rightarrow 0$$

but  $\varepsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\varepsilon}}$$

how?

$$\epsilon \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}} \rightarrow \infty$$

how?

$$\epsilon \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1} \rightarrow 1$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}} \rightarrow \infty$$

how?

$$\mu \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}}$$

how?

$$\mu \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}} \rightarrow 0$$

how?

$$\mu \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1} \rightarrow -1$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}} \rightarrow 0$$

how?

$$\epsilon, \mu \rightarrow 0$$

$$n = \sqrt{\epsilon\mu} \rightarrow 0$$

but  $\epsilon$  and  $\mu$  also determine reflectivity

$$r = \frac{Z_2 - Z_1}{Z_2 + Z_1}$$

where

$$Z = \sqrt{\frac{\mu}{\epsilon}} \quad \text{finite!}$$

but  $\mu \neq 1$  requires a magnetic response!

1 index

2 zero index

3 experiments

# Engineering a magnetic response


**1** index

**2** zero index

**3** experiments

# Engineering a magnetic response

use array of dielectric rods

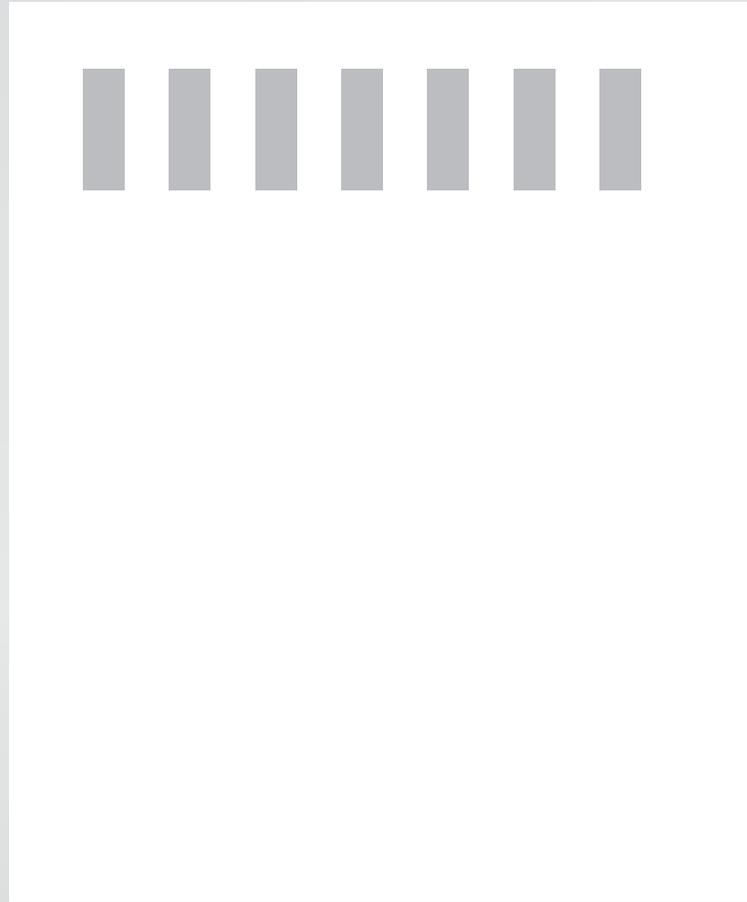


1 index

2 zero index

3 experiments

# Engineering a magnetic response

incident electromagnetic wave ( $\lambda_{\text{eff}} \approx d$ )

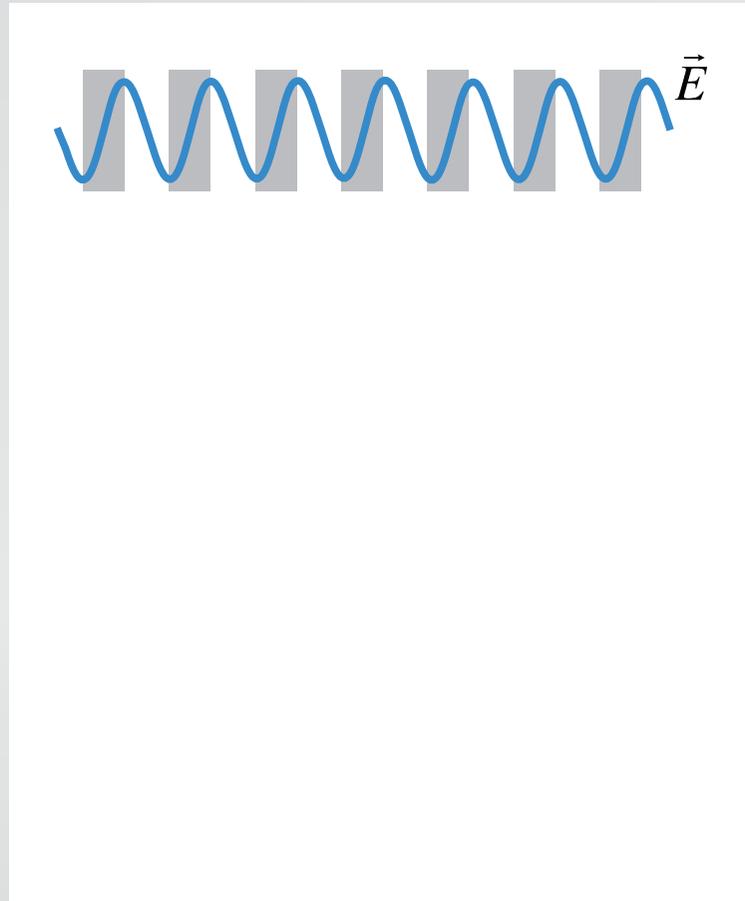


1 index

2 zero index


# Engineering a magnetic response

produces an electric response...

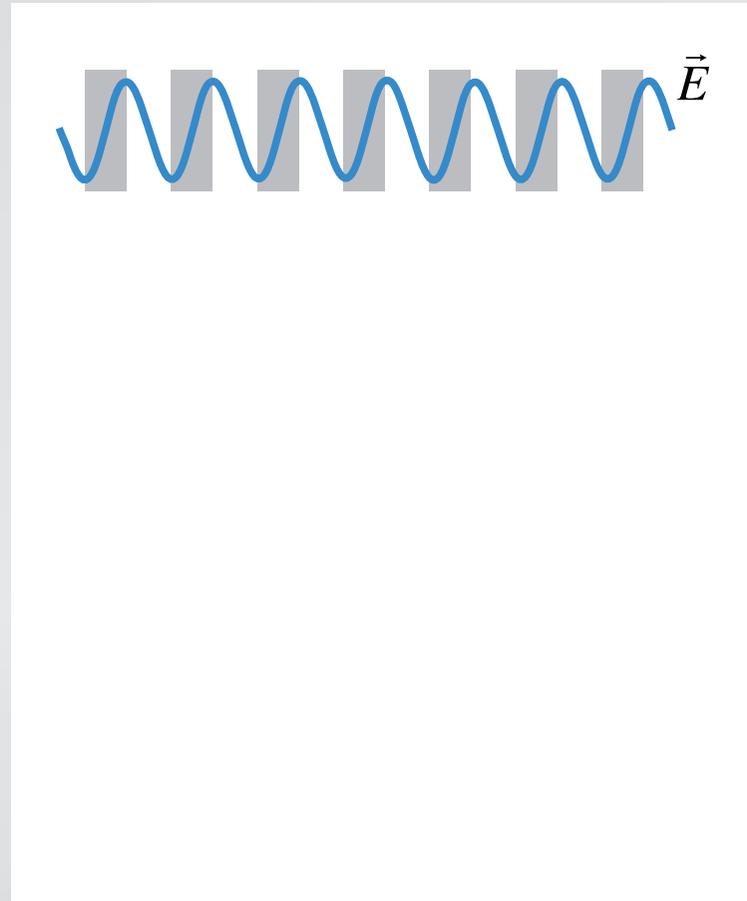

# Engineering a magnetic response

... but different electric fields front and back...

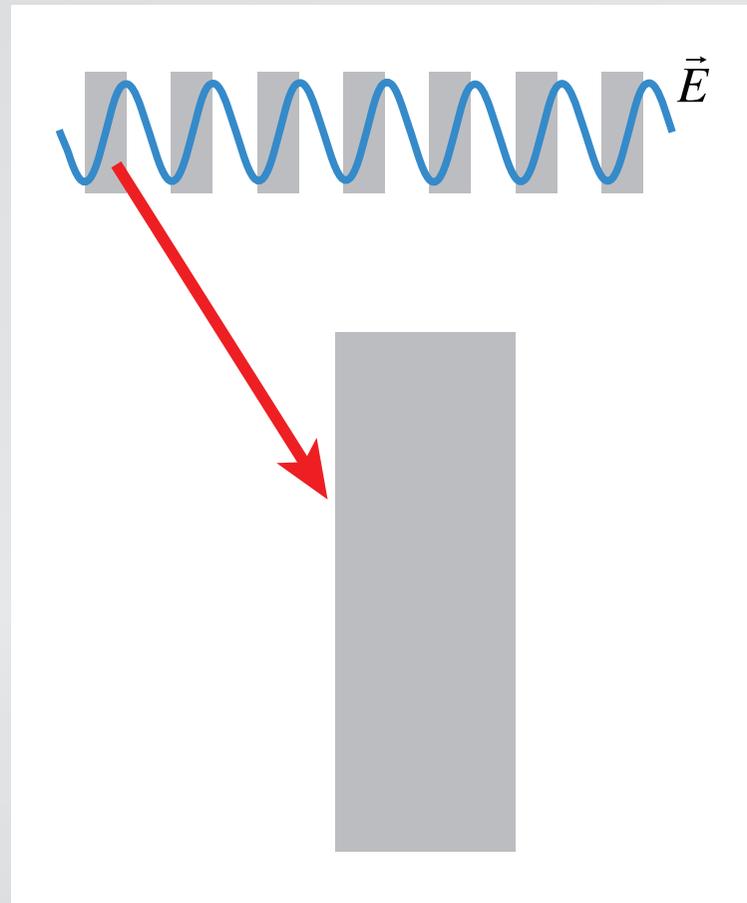


1 index

2 zero index

3 experiments

# Engineering a magnetic response

...induce different polarizations on opposite sides...

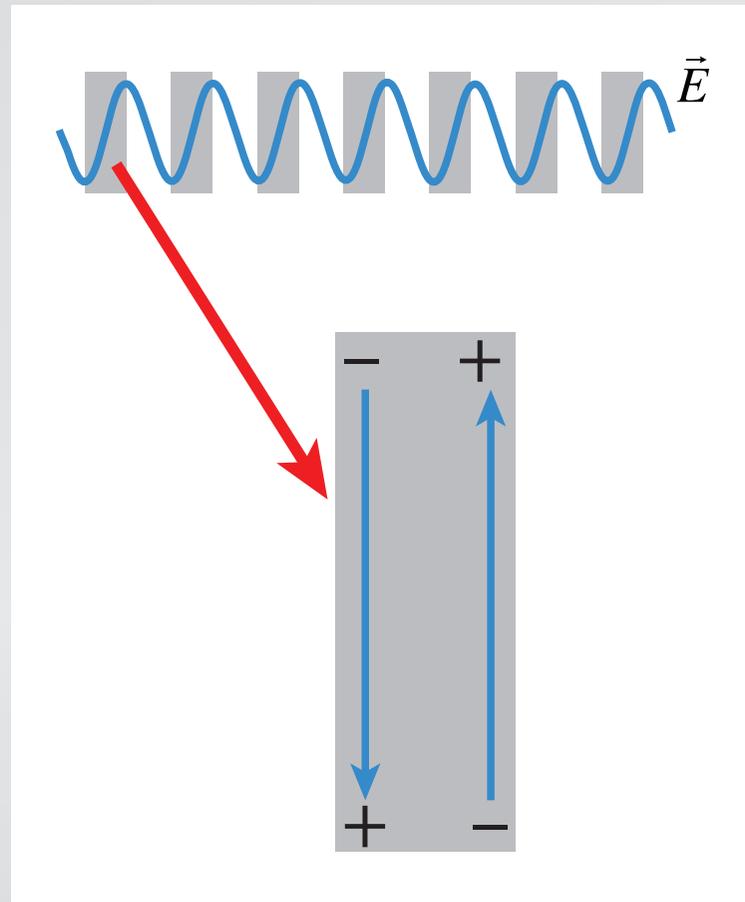


1 index

2 zero index

3 experiments

# Engineering a magnetic response

...causing a current loop...

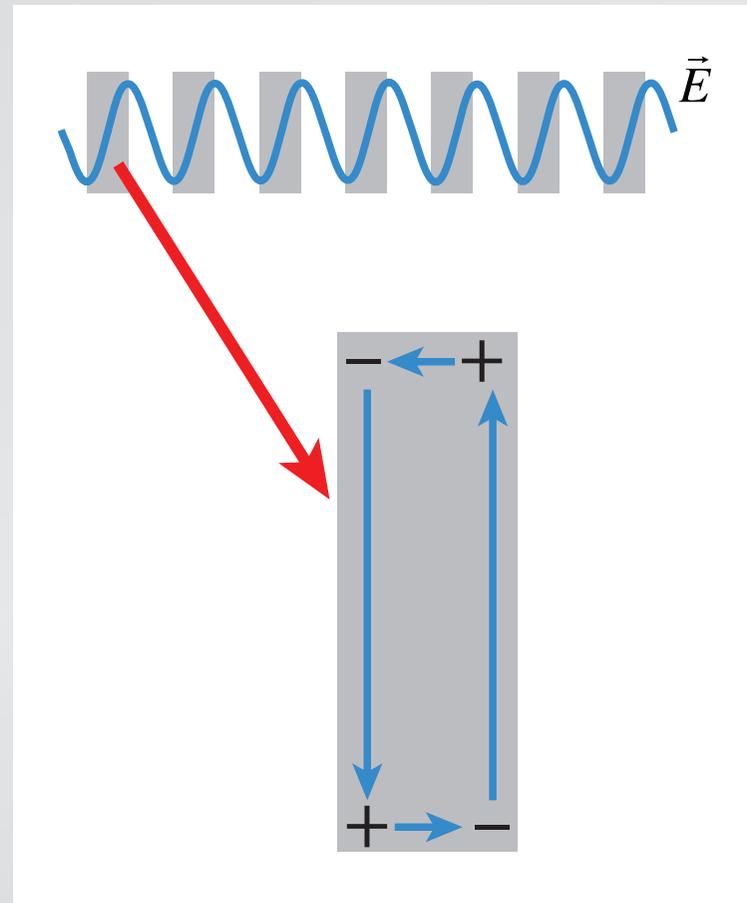


1 index

2 zero index

3 experiments

# Engineering a magnetic response

...which, in turn, produces an induced magnetic field

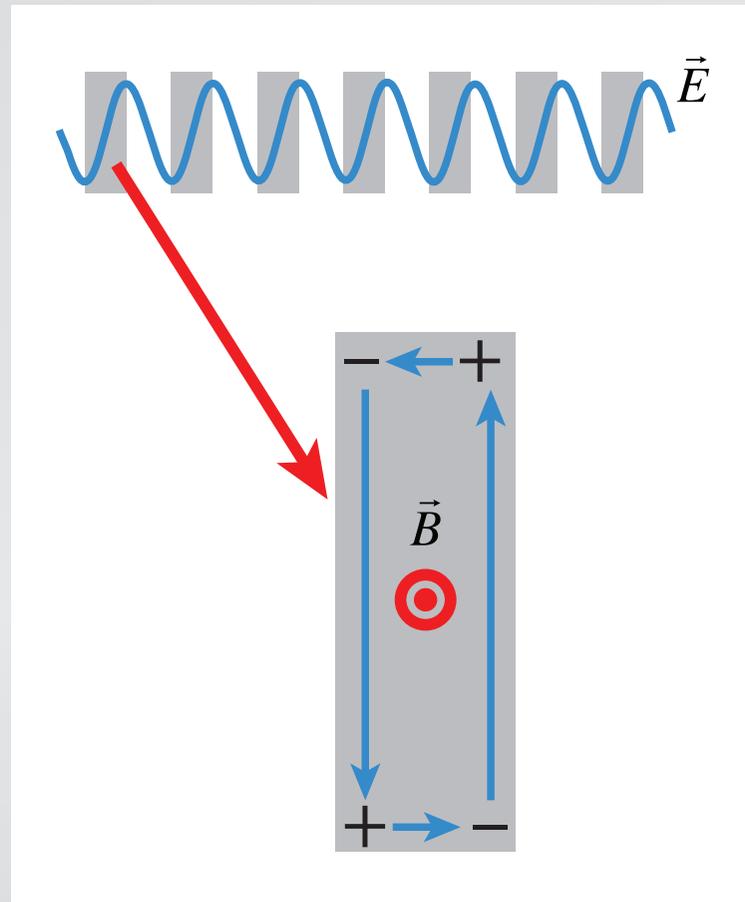


1 index

2 zero index

3 experiments

# Engineering a magnetic response

adjust design so electrical and magnetic resonances coincide

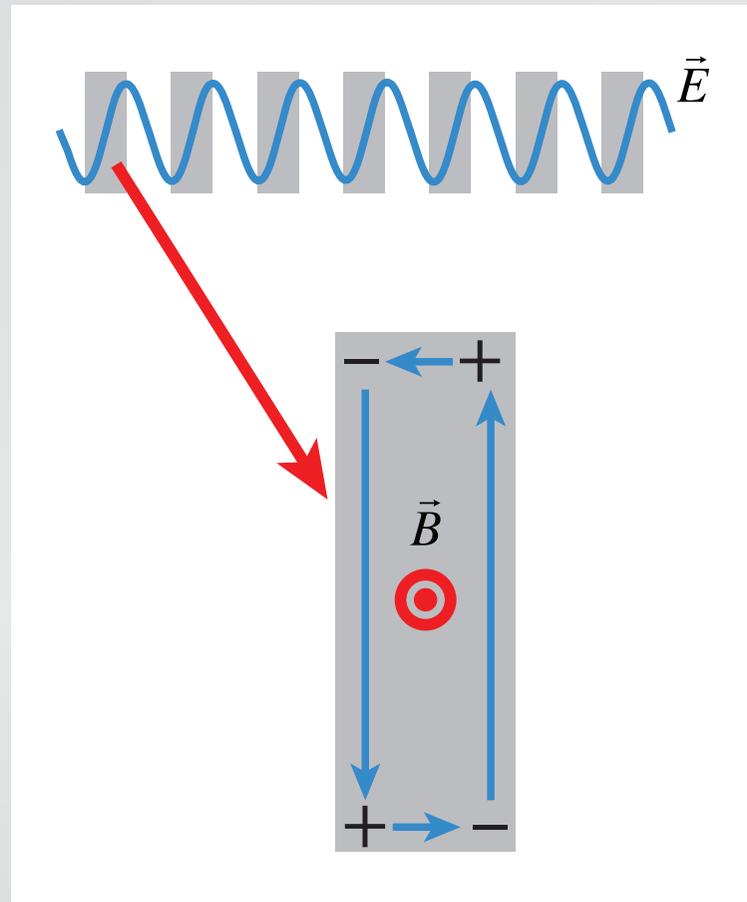


1 index

2 zero index

3 experiments

# Engineering a magnetic response

adjustable parameters

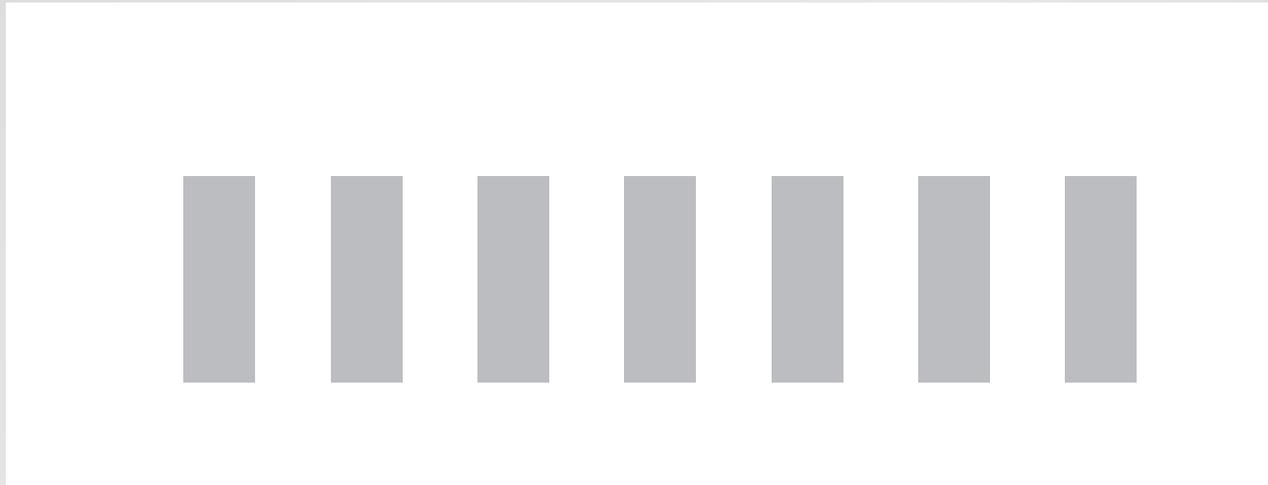


**1** index

**2** zero index

**3** experiments

# Engineering a magnetic response

adjustable parameters

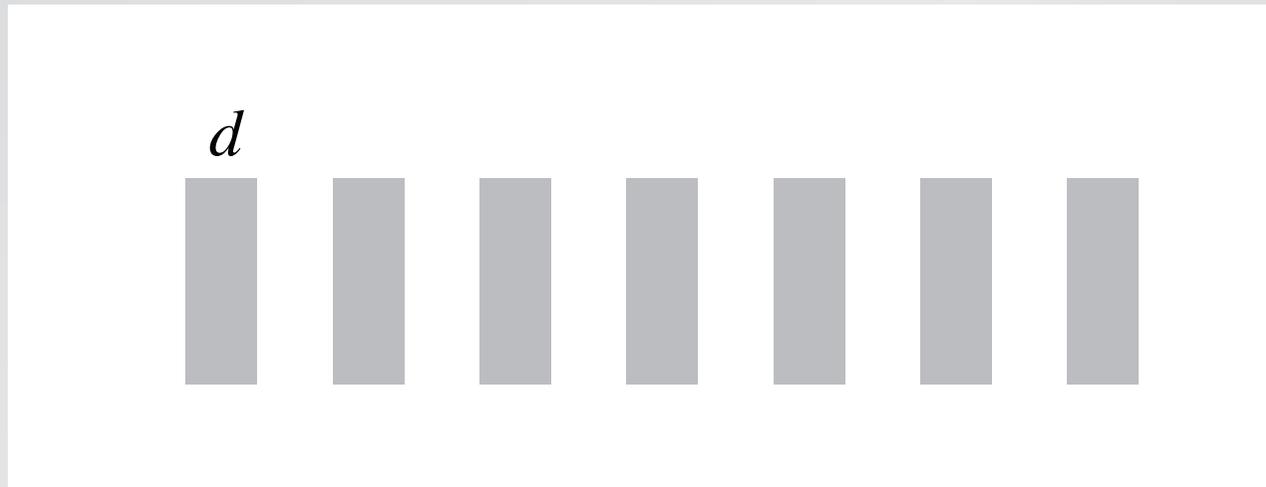


1 index

2 zero index

3 experiments

# Engineering a magnetic response

adjustable parameters

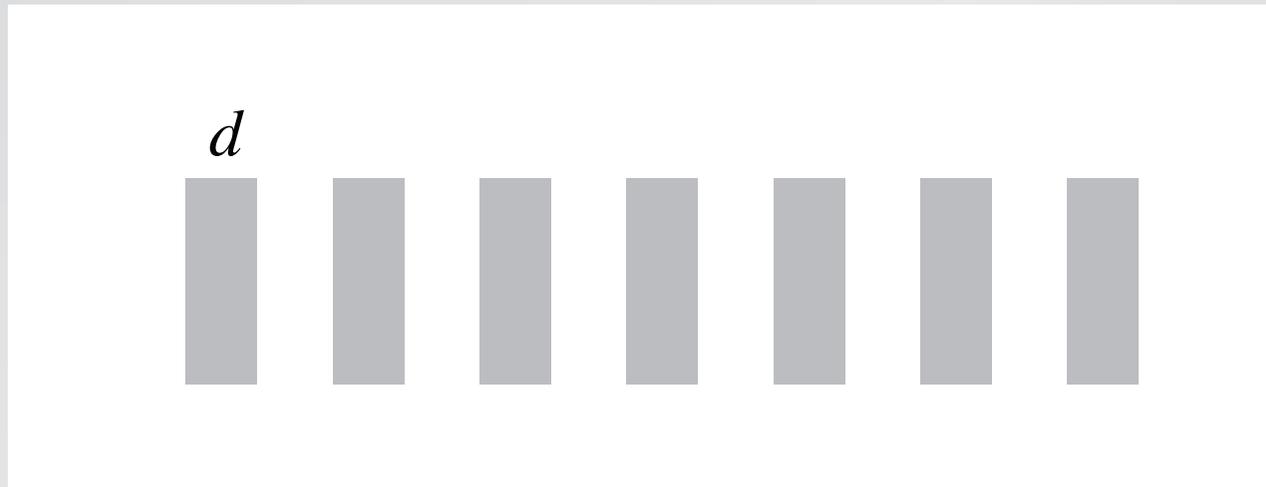


1 index

2 zero index

3 experiments

# Engineering a magnetic response

adjustable parameters

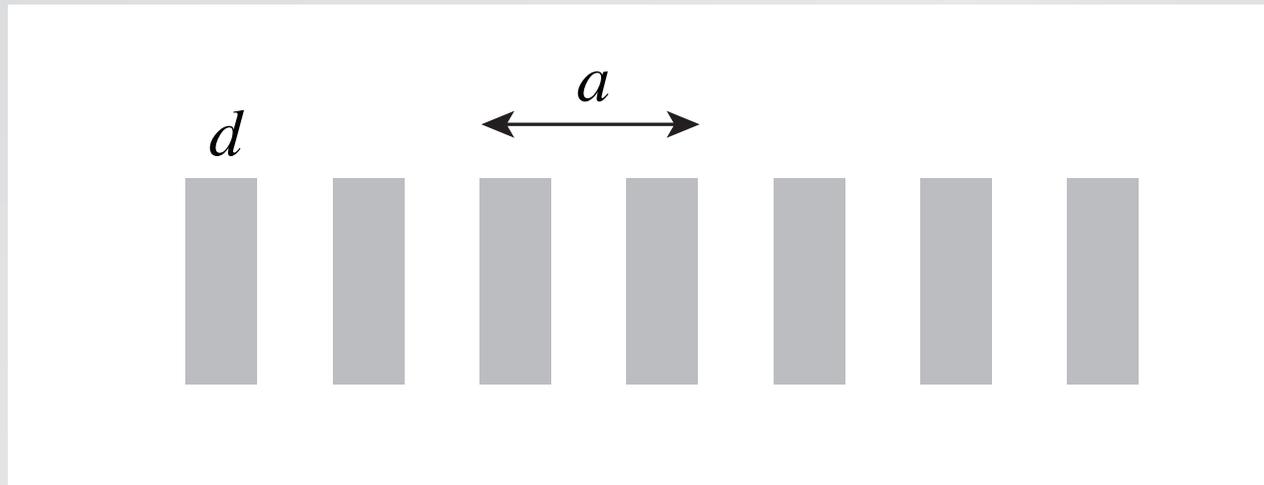


1 index

2 zero index

3 experiments

# Engineering a magnetic response


adjustable parameters

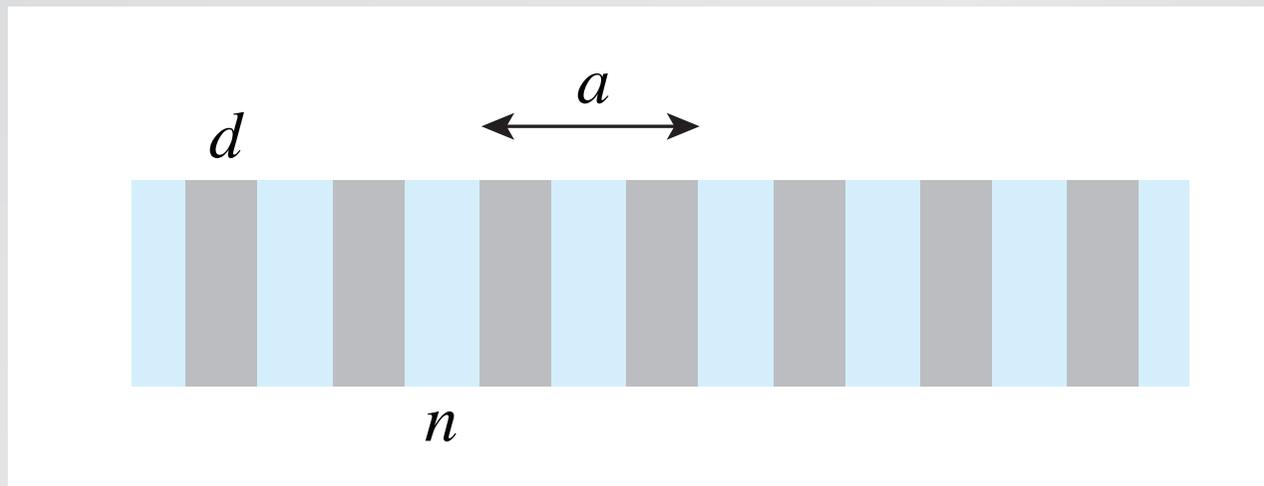

1 index

2 zero index


3 experiments

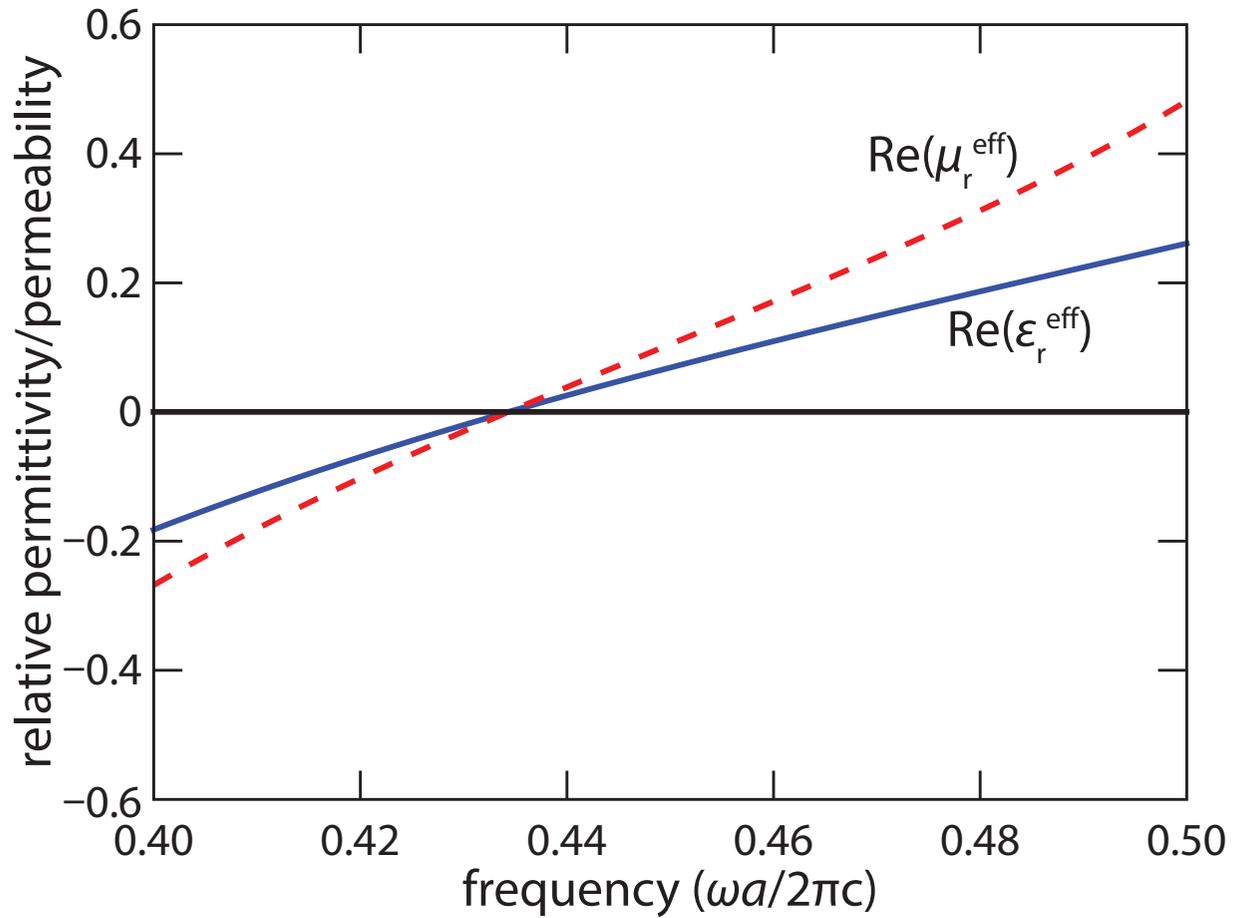

1 index

2 zero index

3 experiments

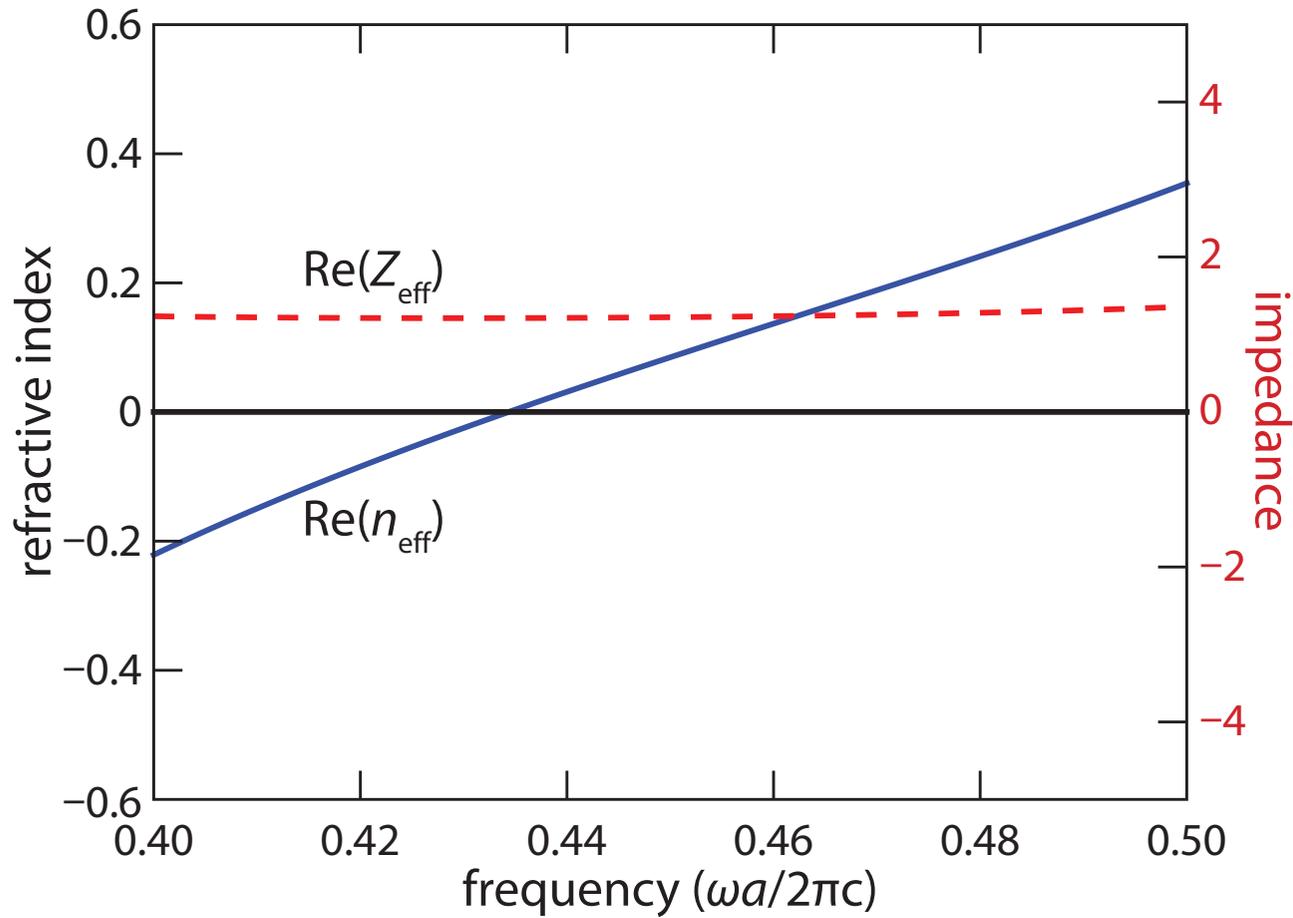


1 index

2 zero index

3 experiments

# How to fabricate?

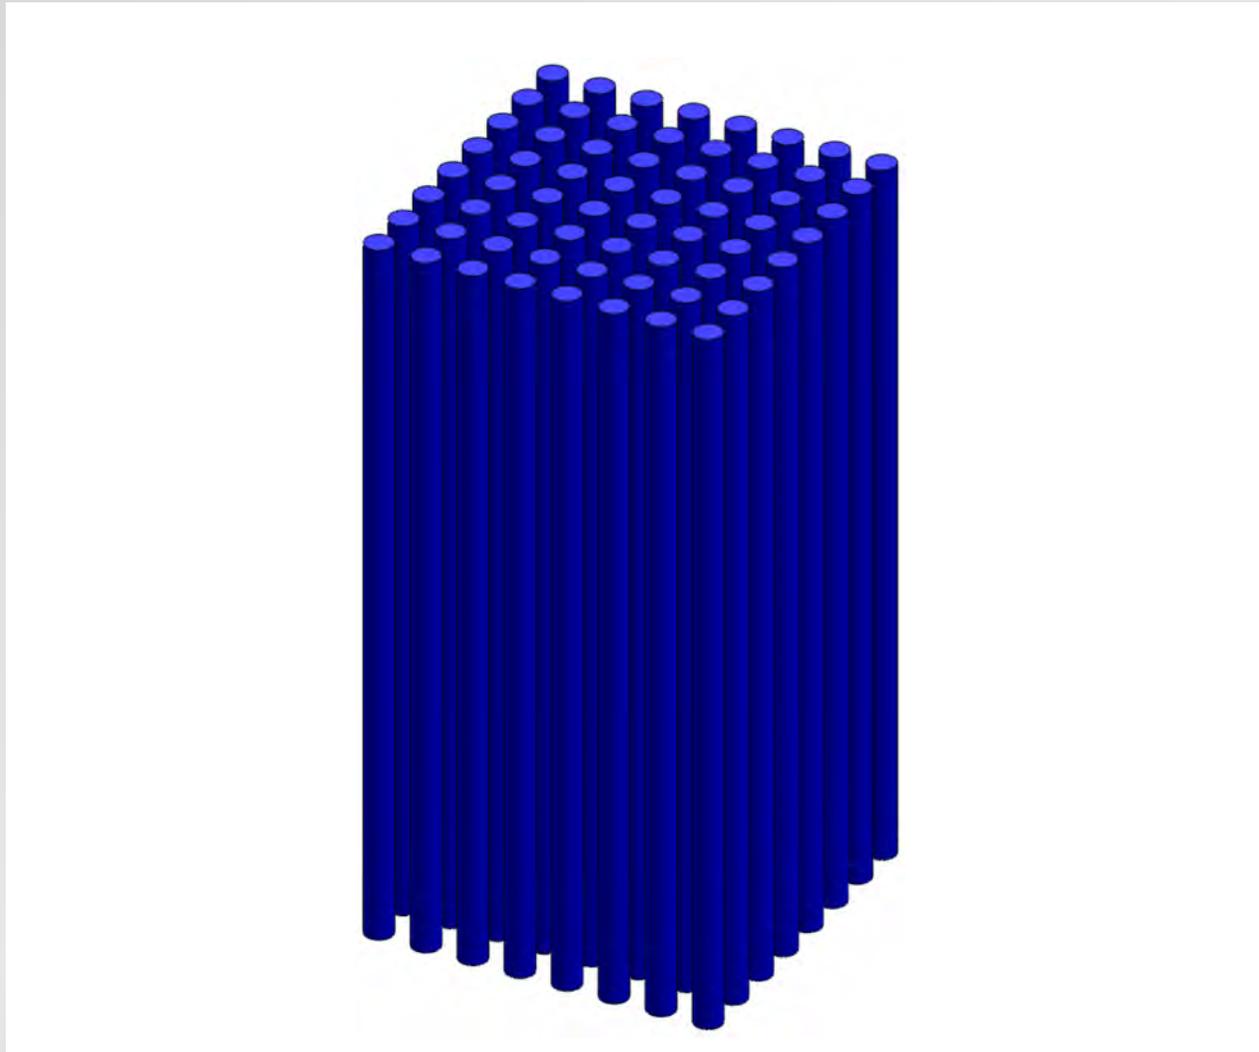


1 index

2 zero index

3 experiments

# On-chip zero-index fabrication

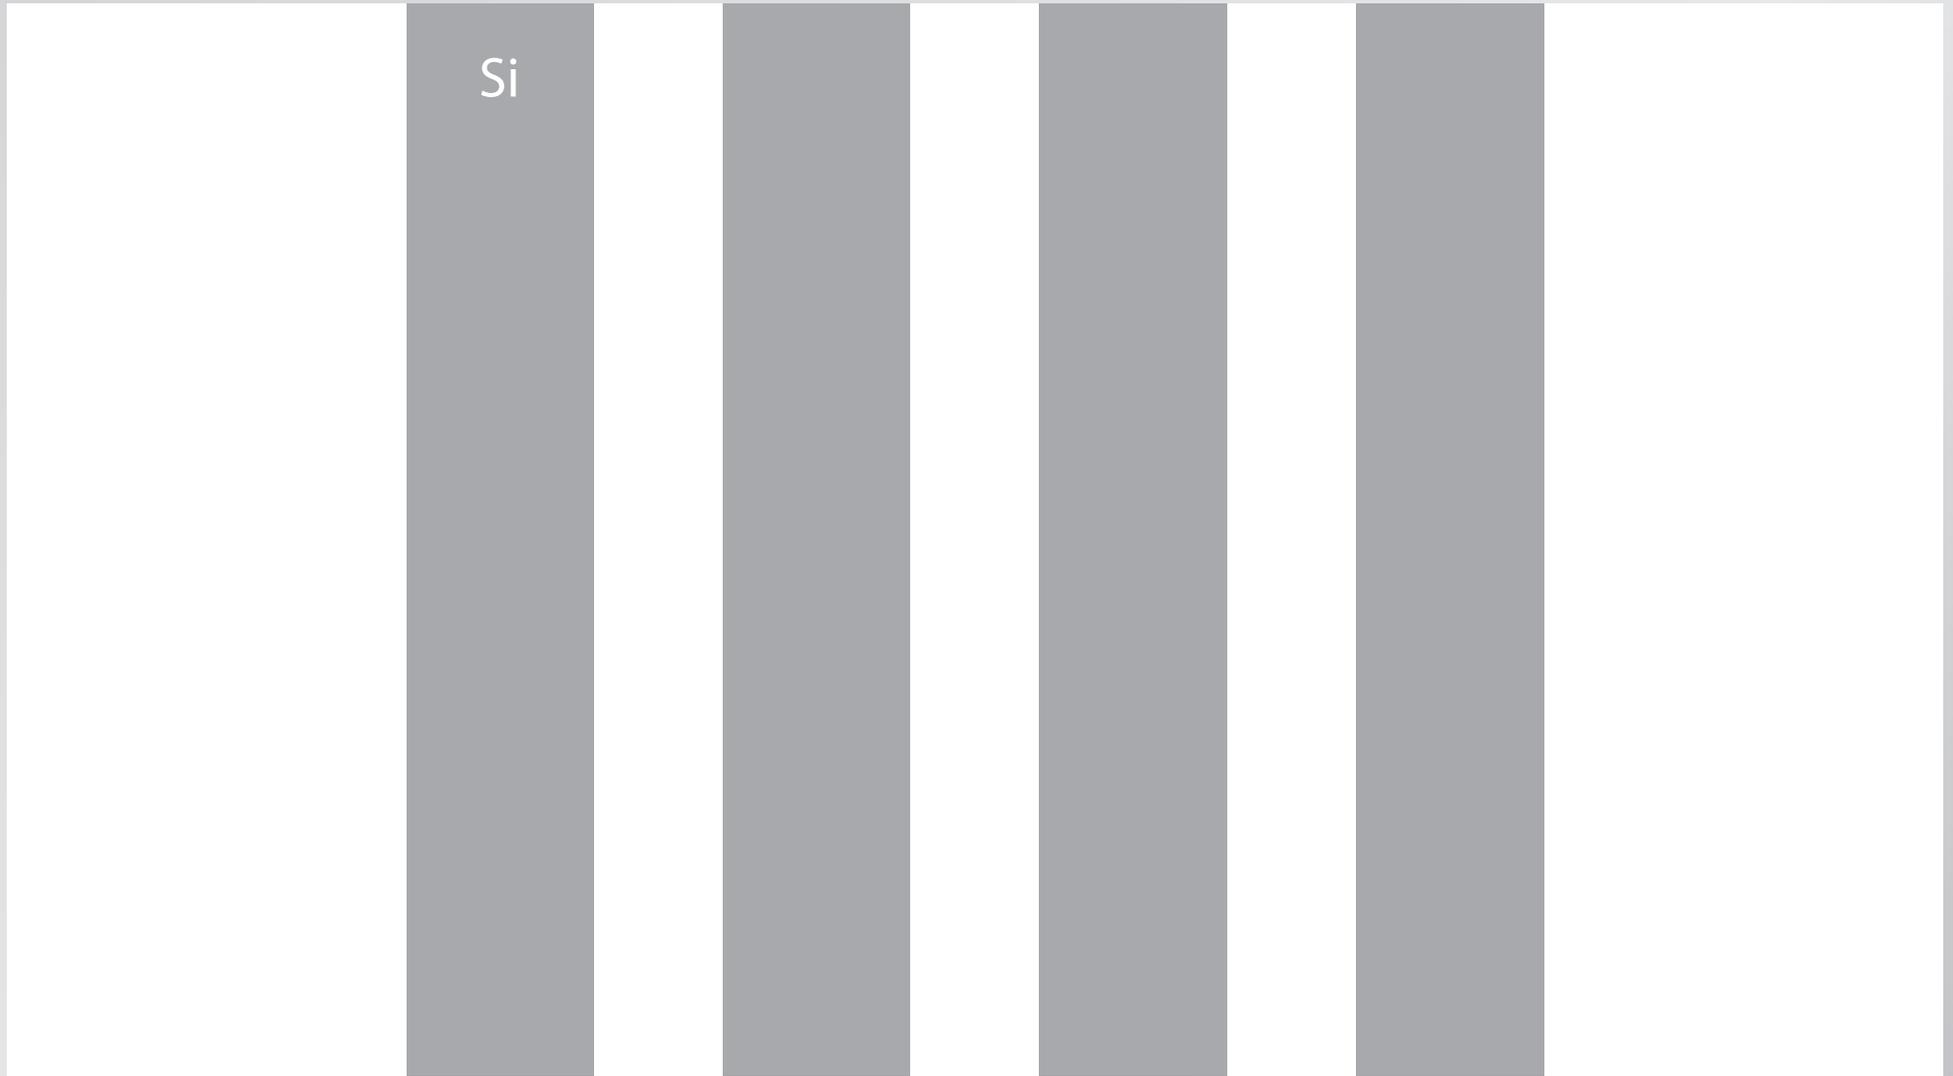


**1** index

**2** zero index

**3** experiments

# On-chip zero-index fabrication

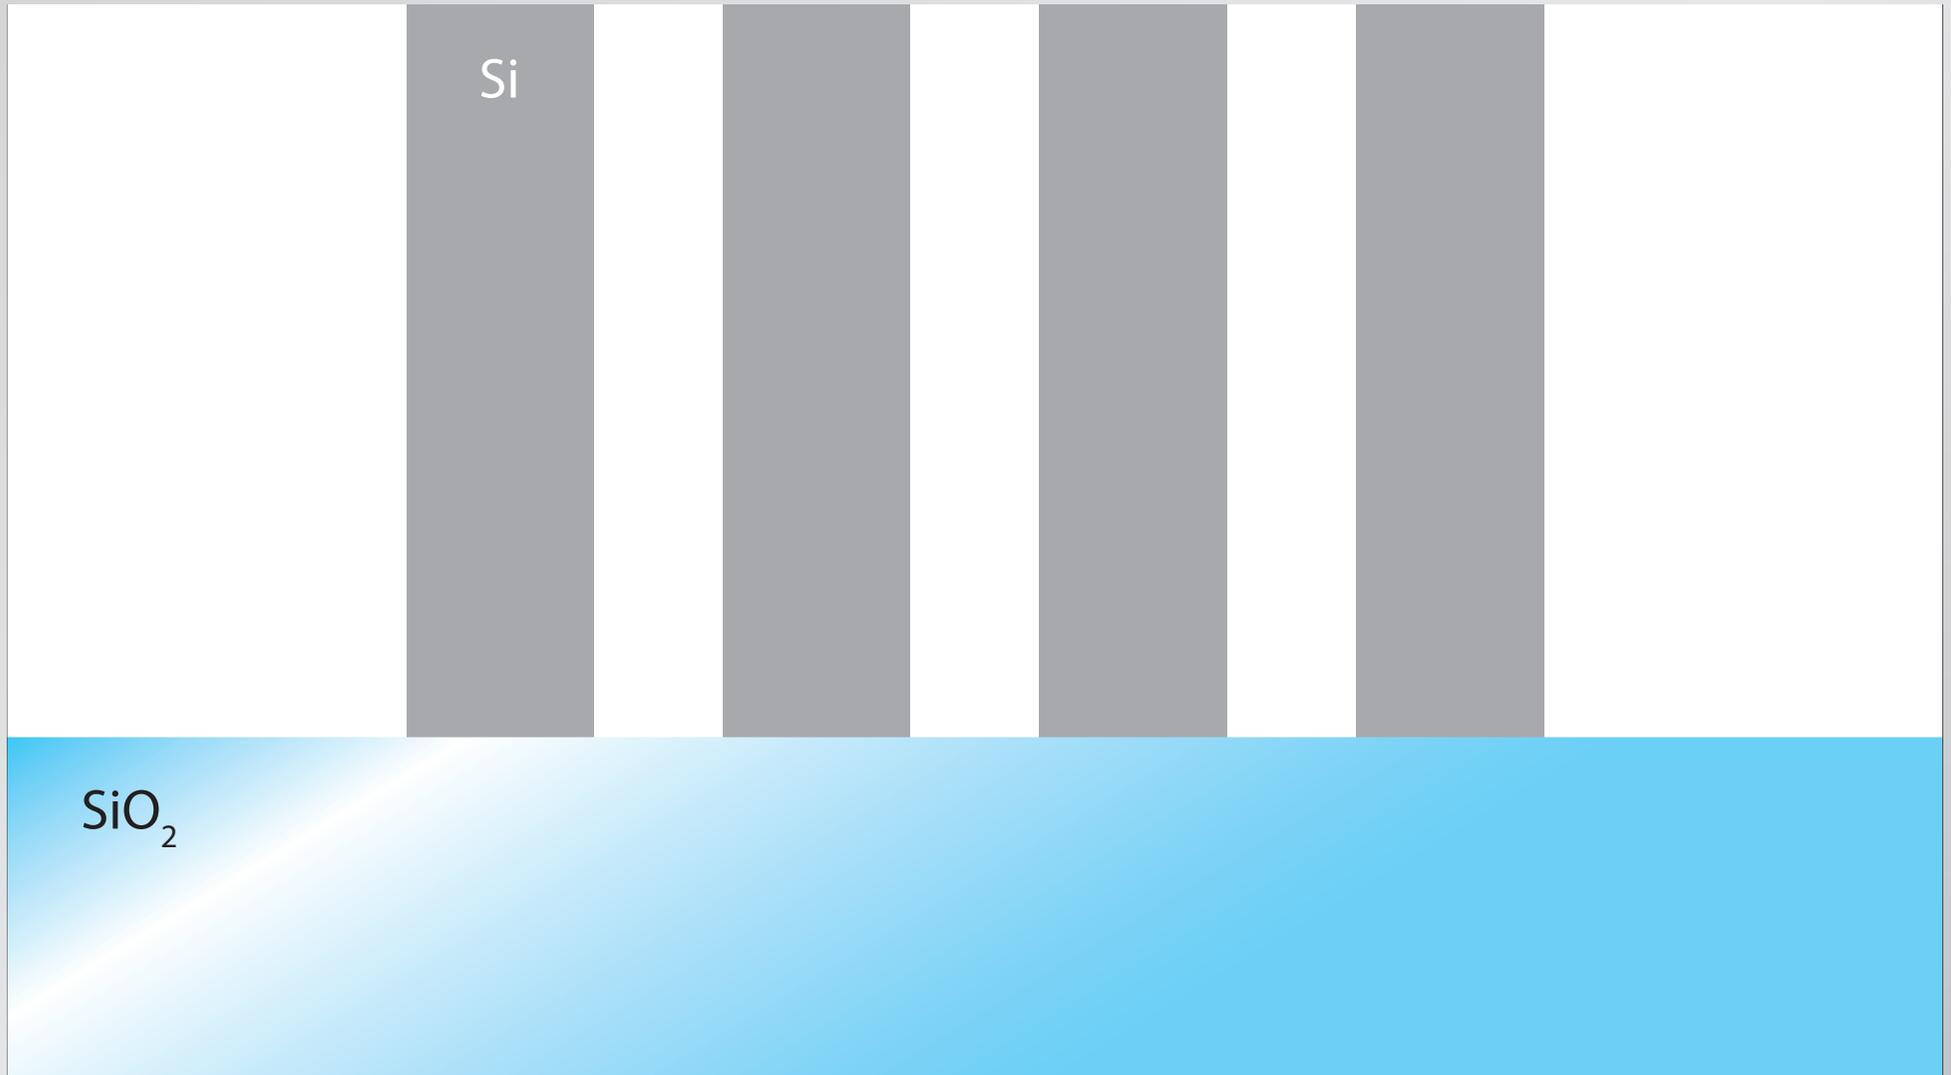

1 index

2 zero index

3 experiments

# On-chip zero-index fabrication




1 index

2 zero index

3 experiments

# On-chip zero-index fabrication

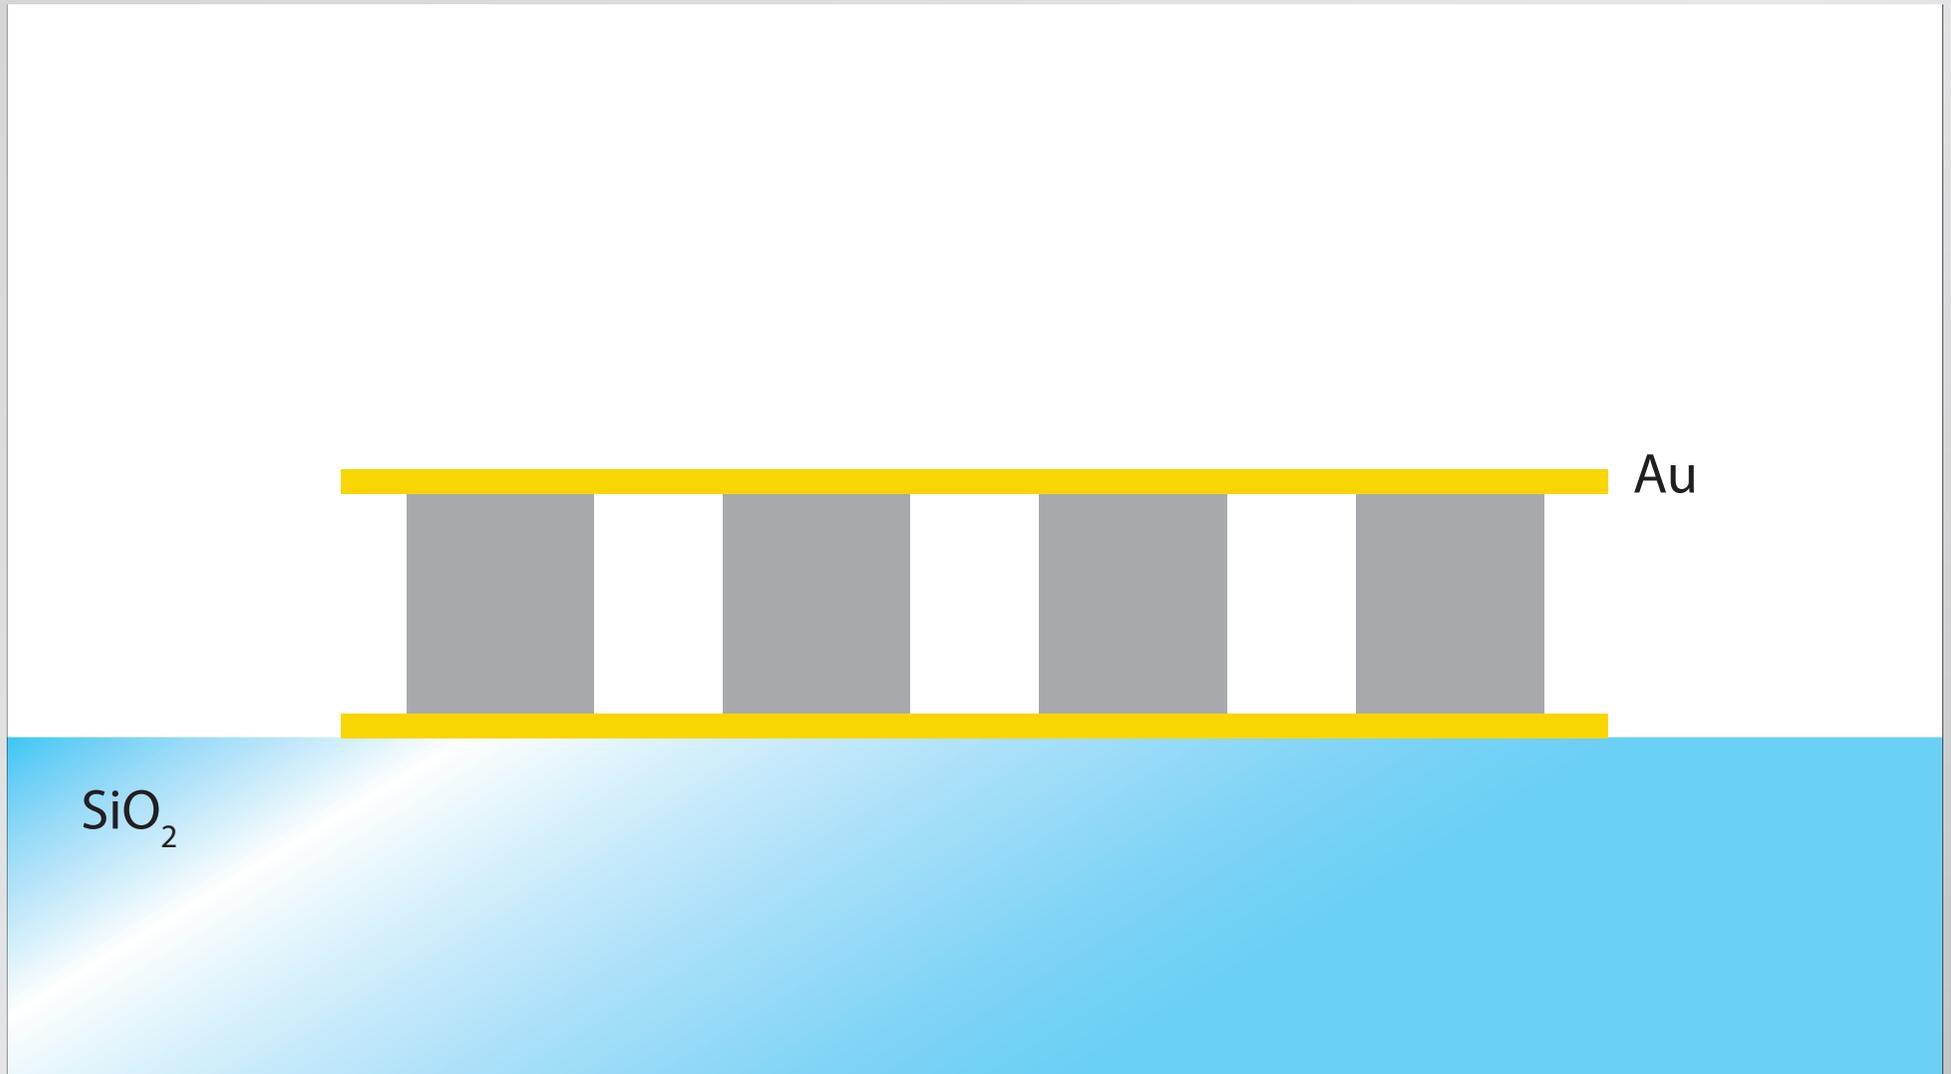


1 index

2 zero index

3 experiments

# On-chip zero-index fabrication

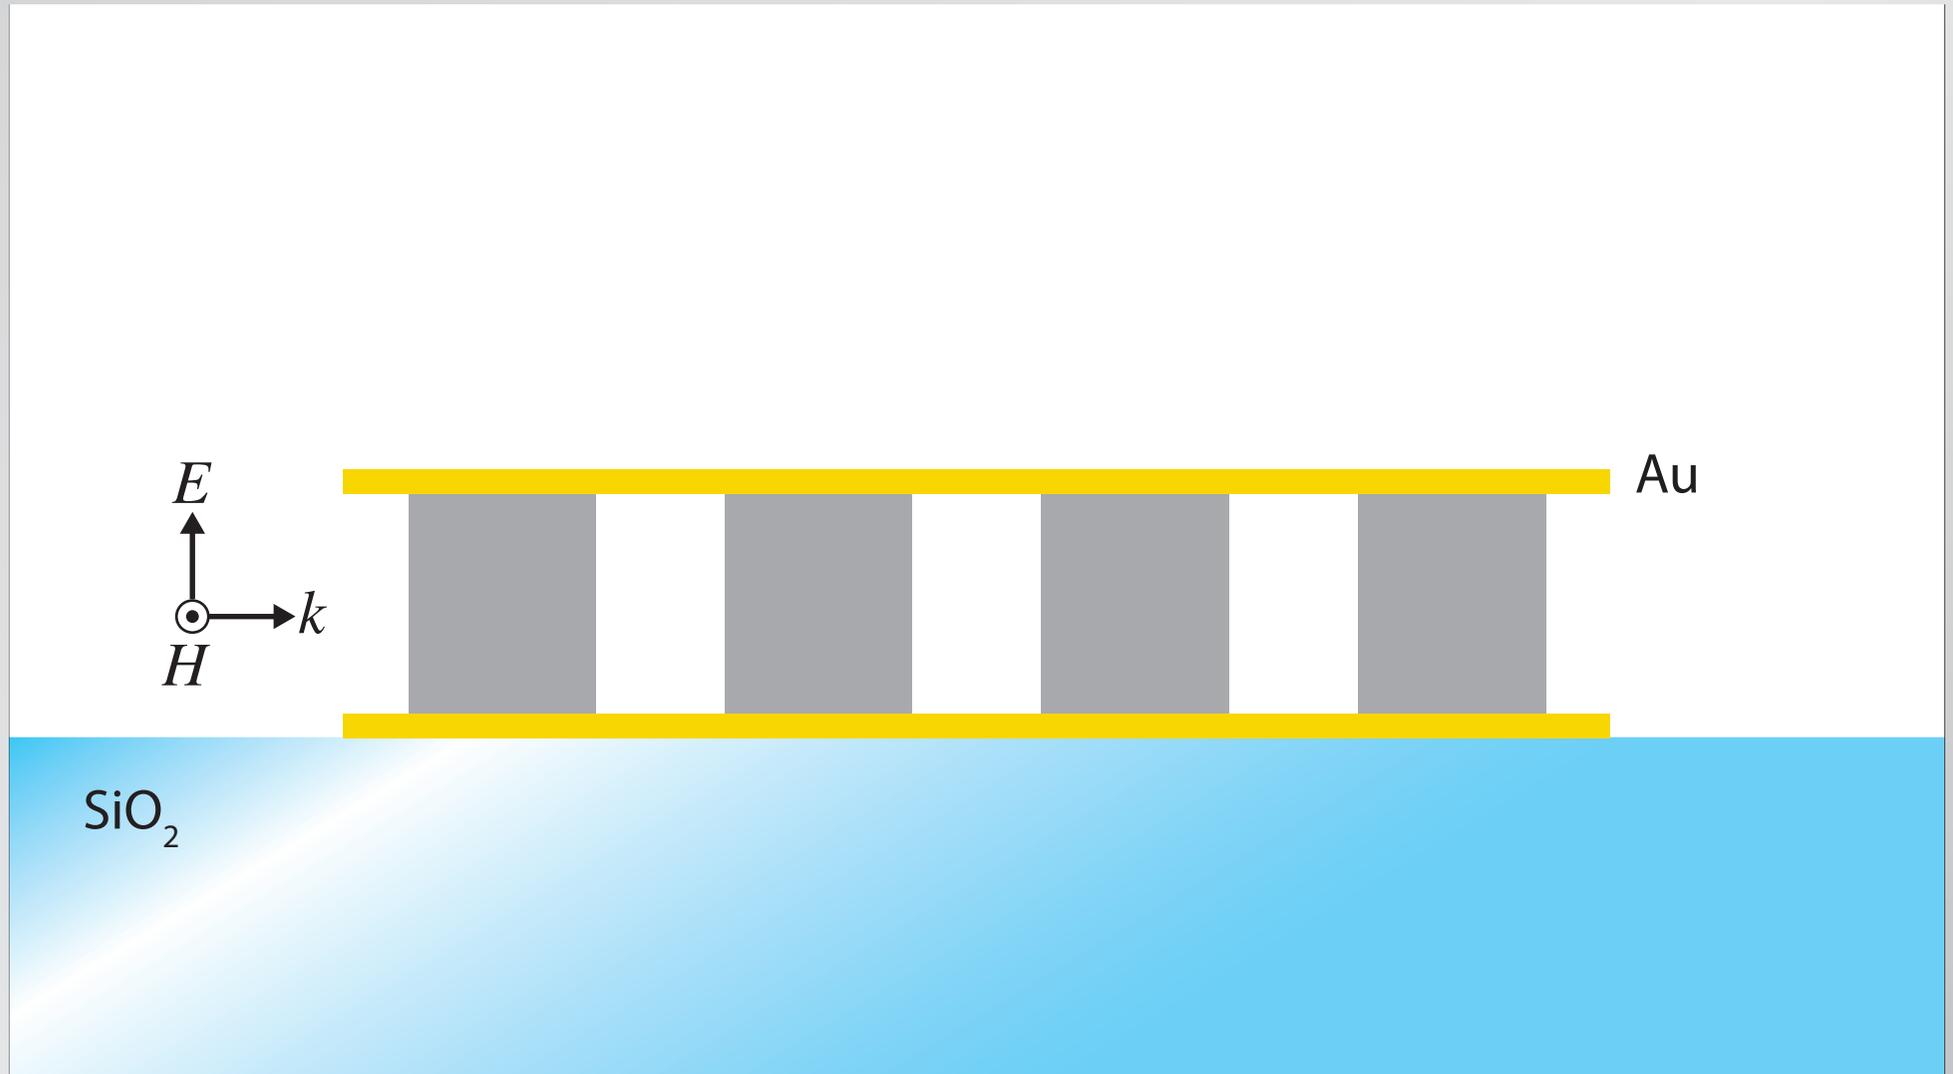


1 index

2 zero index

3 experiments


# On-chip zero-index fabrication

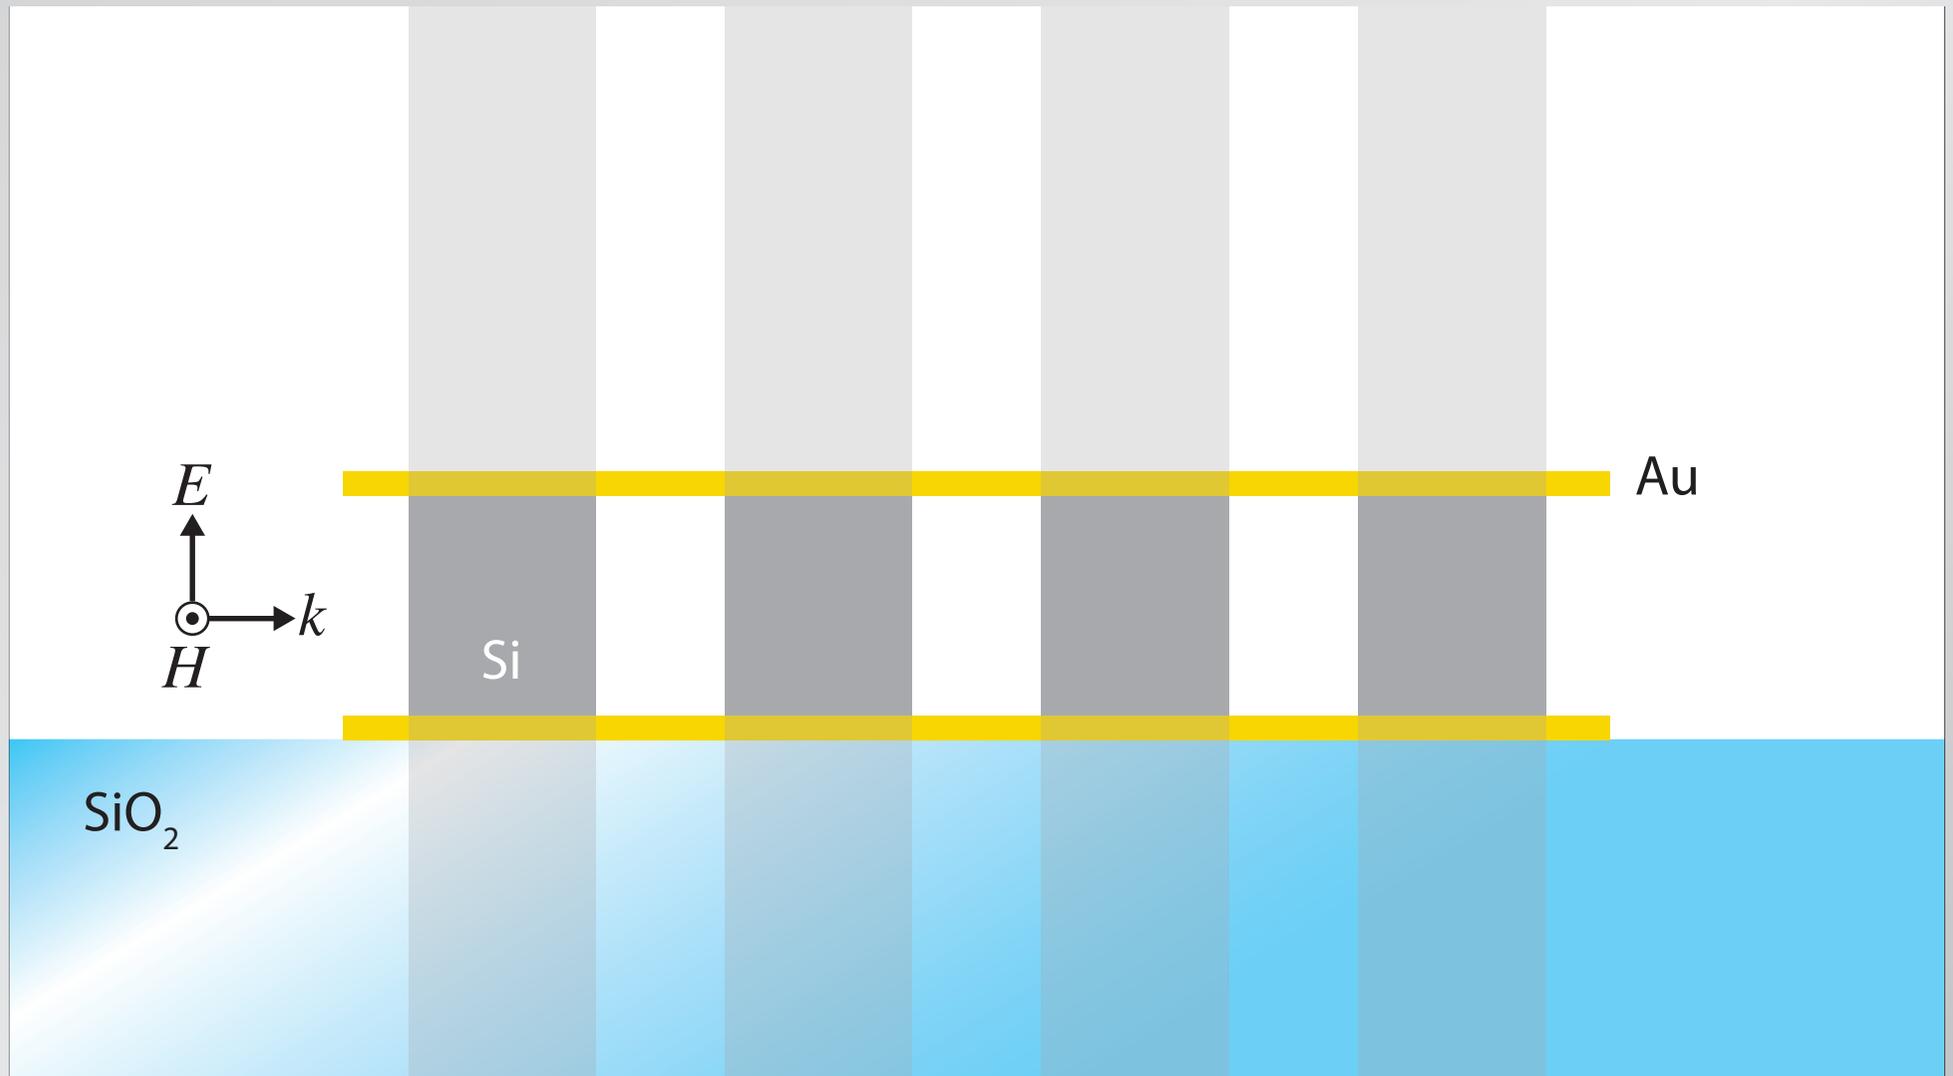

1 index

2 zero index

3 experiments

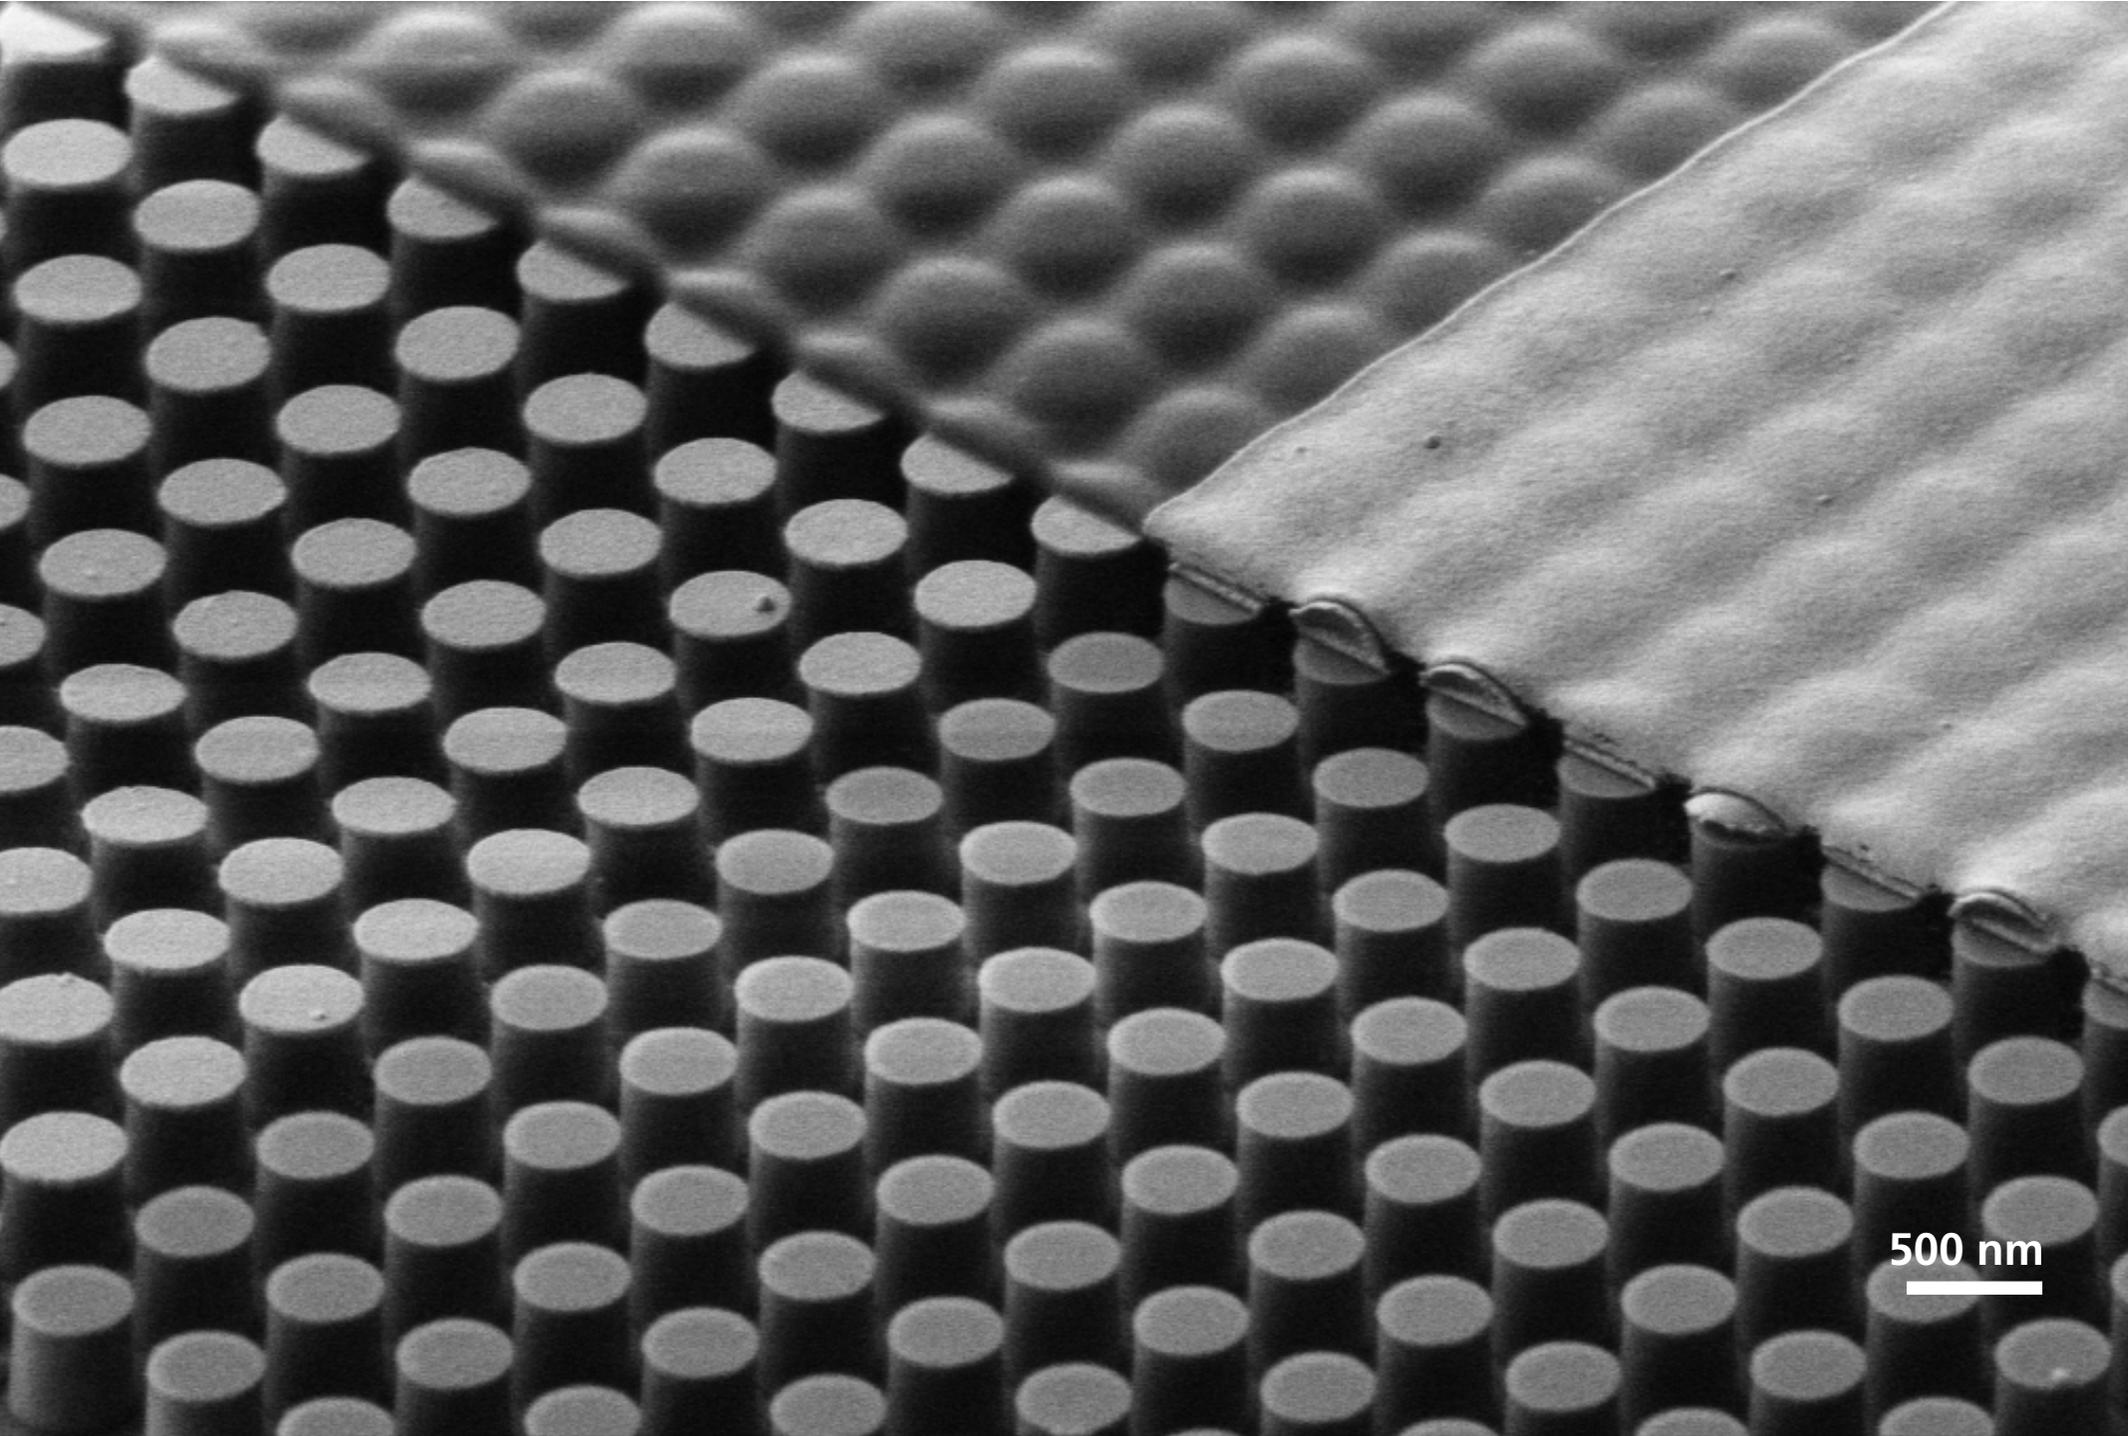


500 nm

**1** index

**2** zero index


**3** experiments

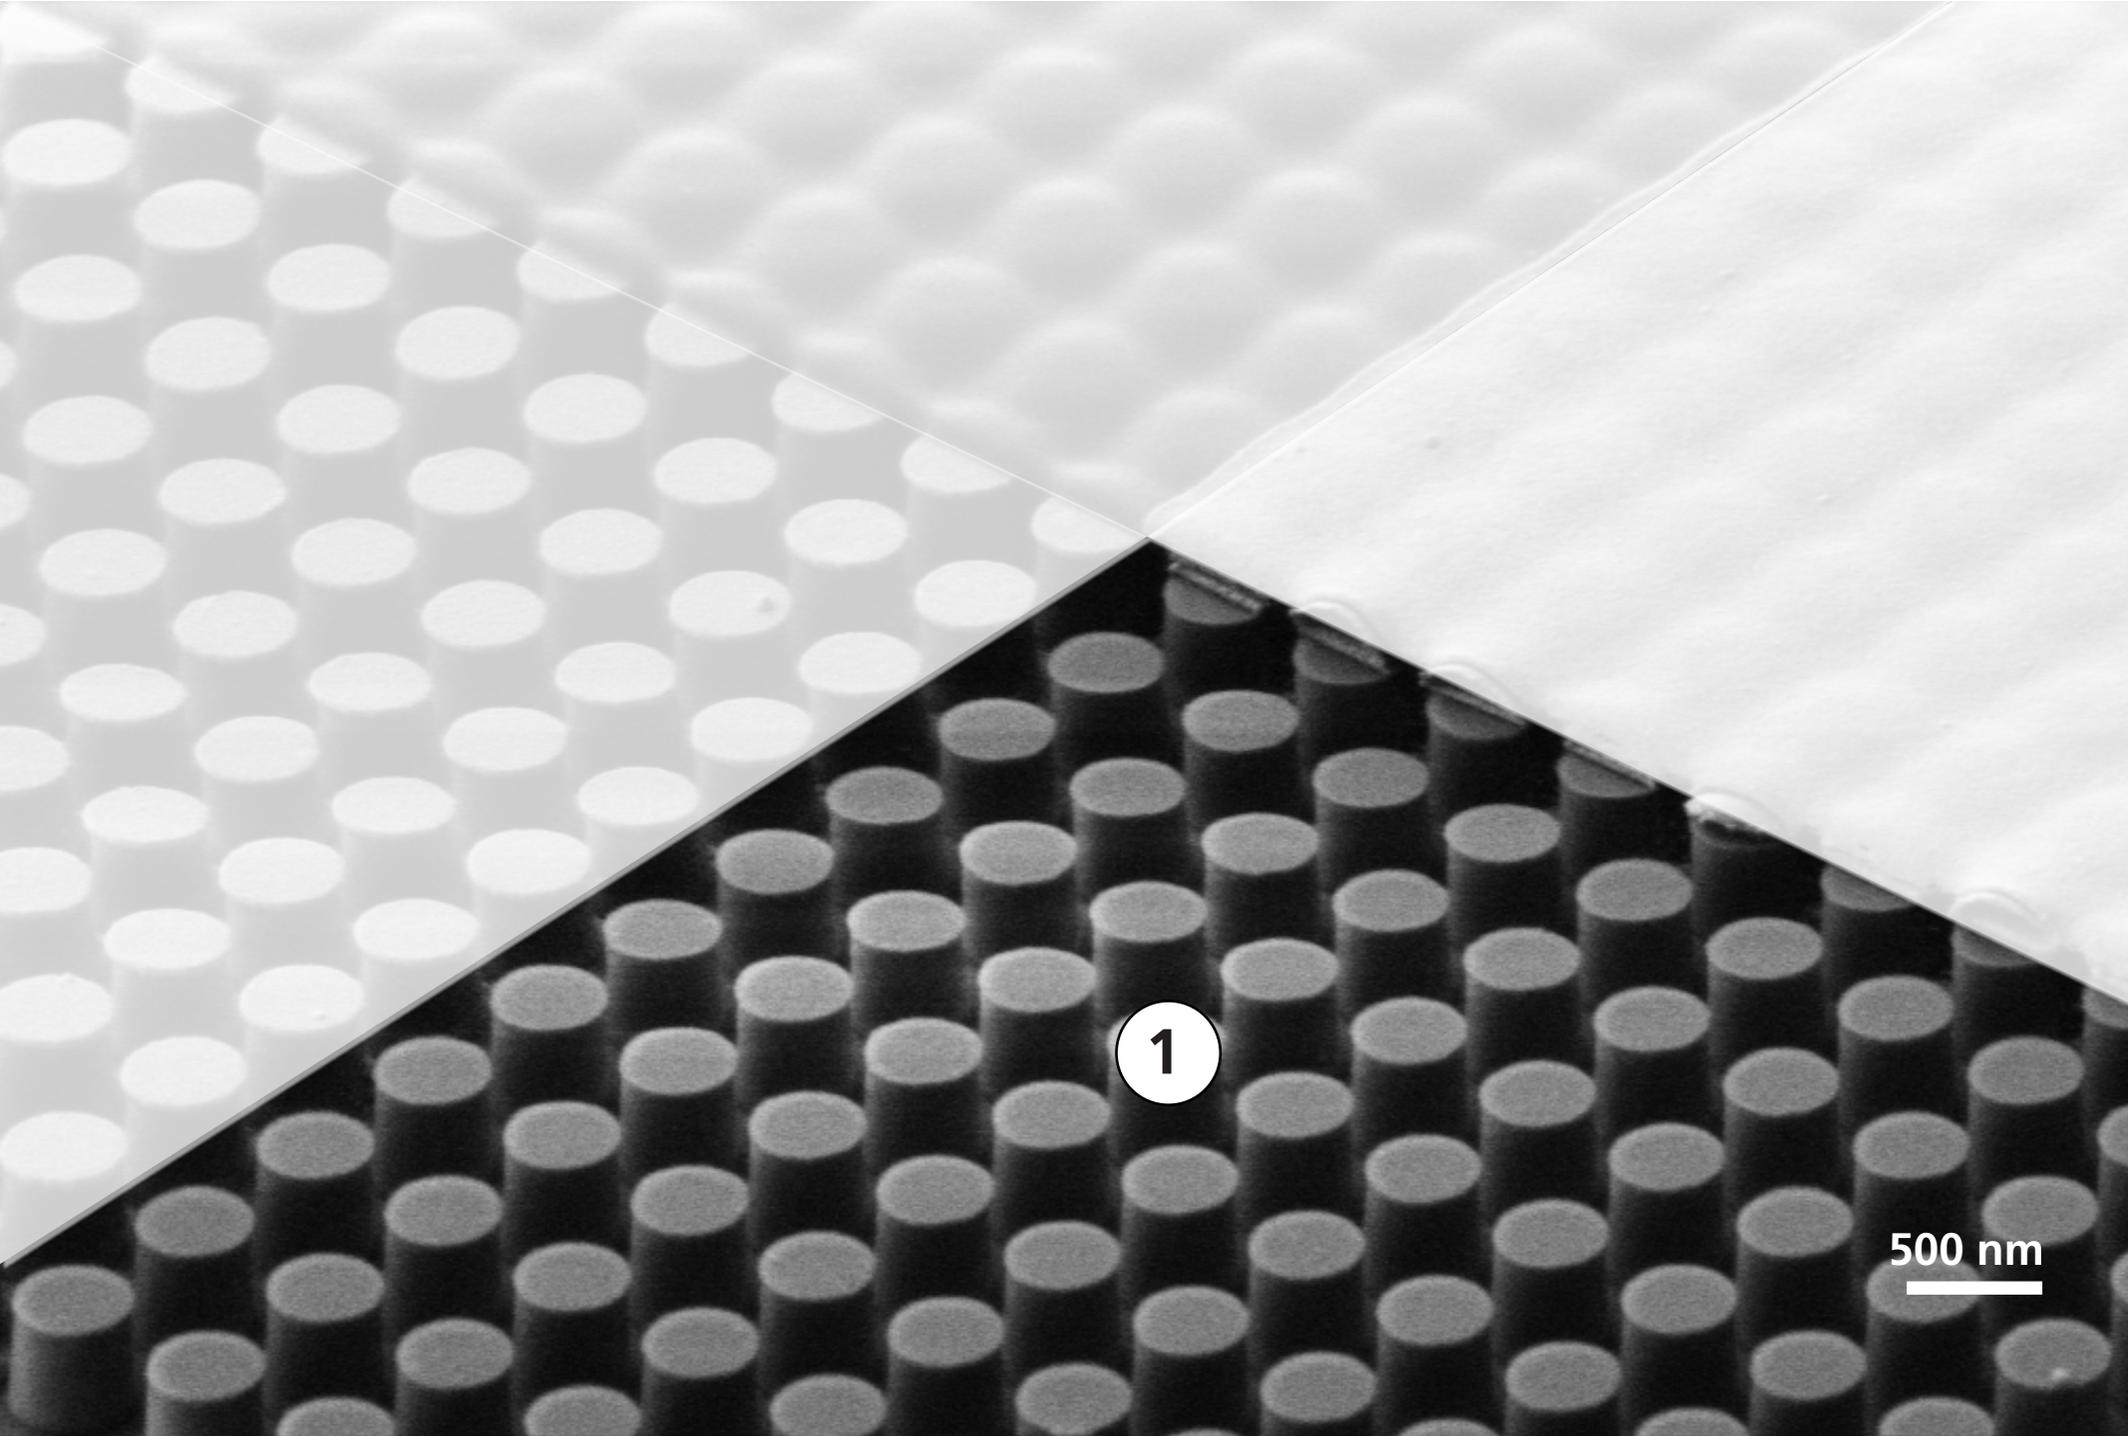

**1** index

**2** zero index


**3** experiments

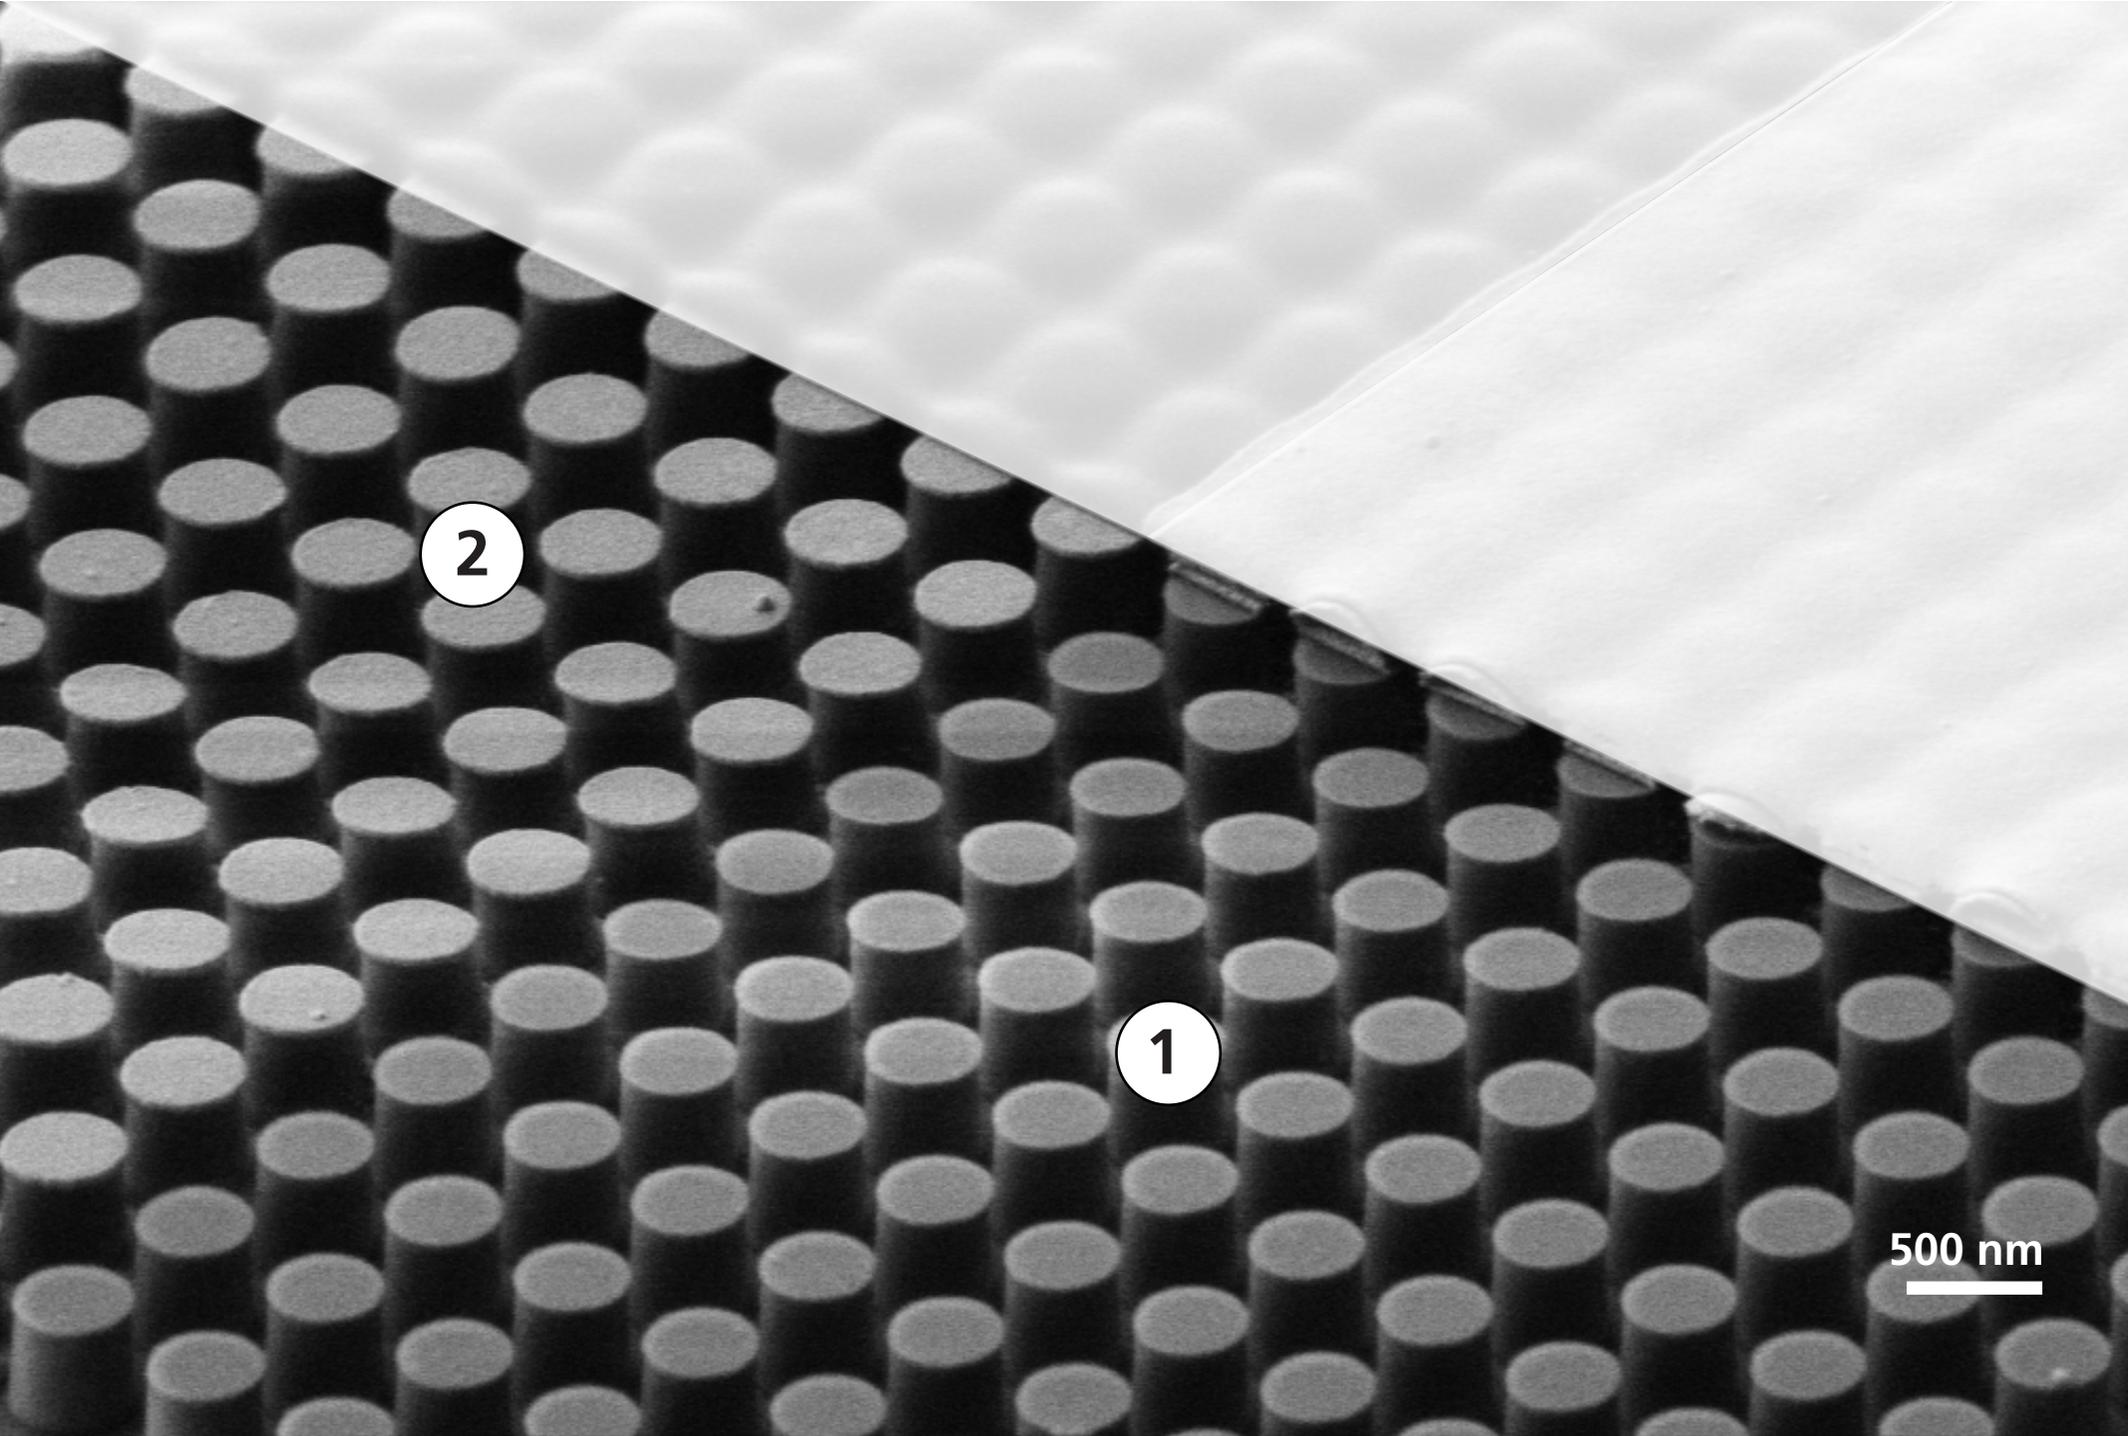

**1** index

**2** zero index


**3** experiments

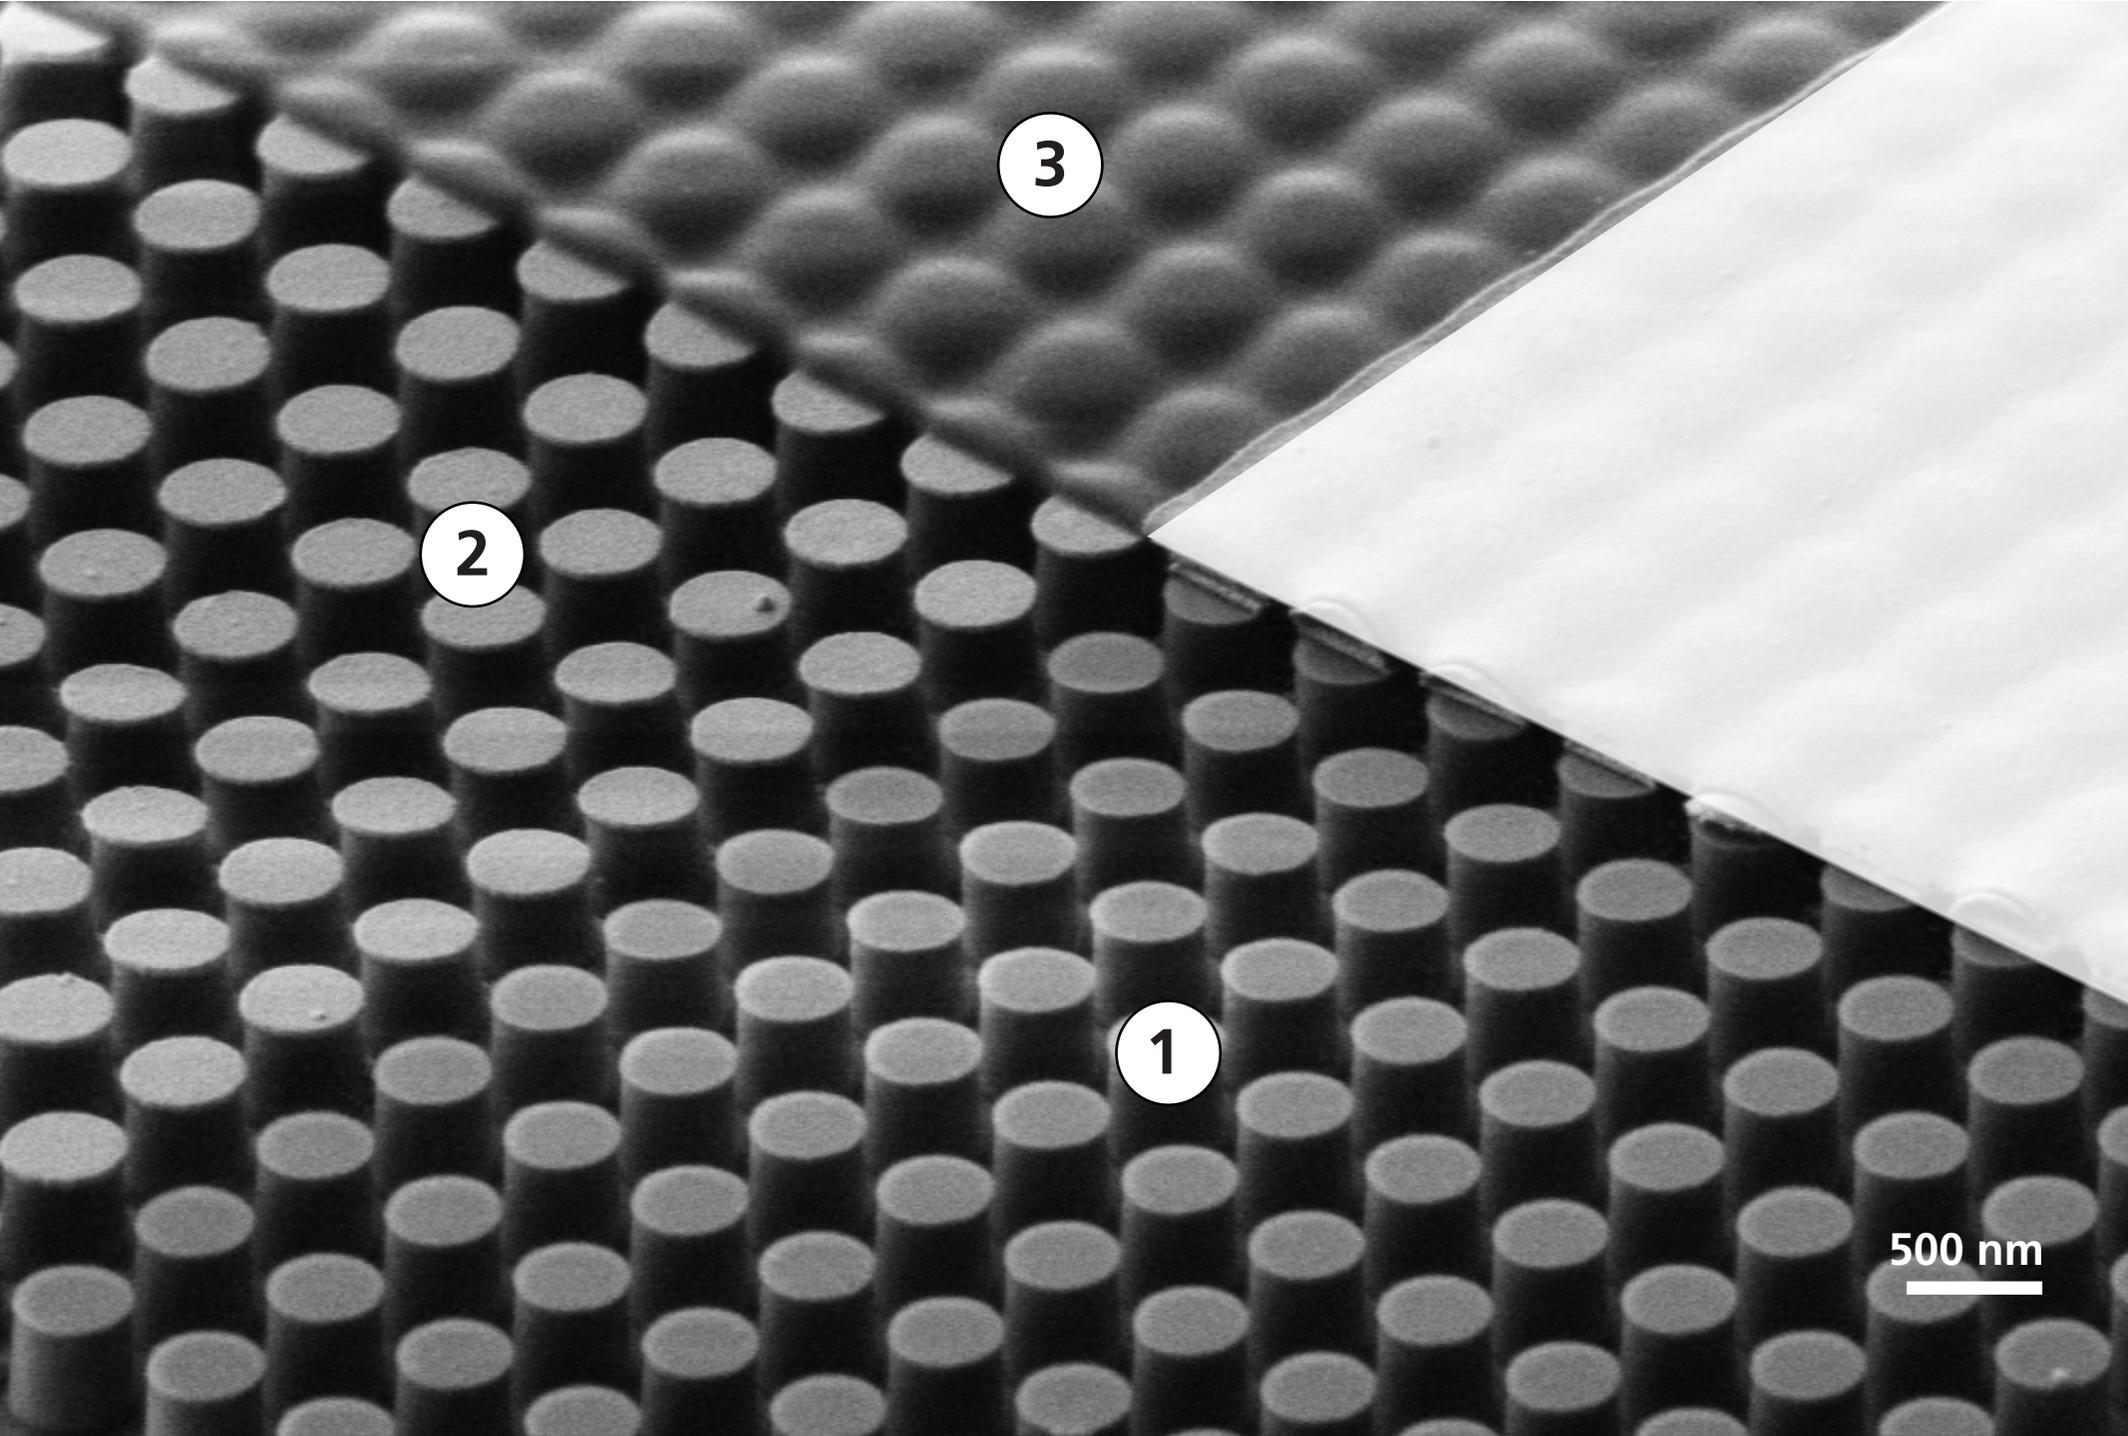

**1** index

**2** zero index


**3** experiments

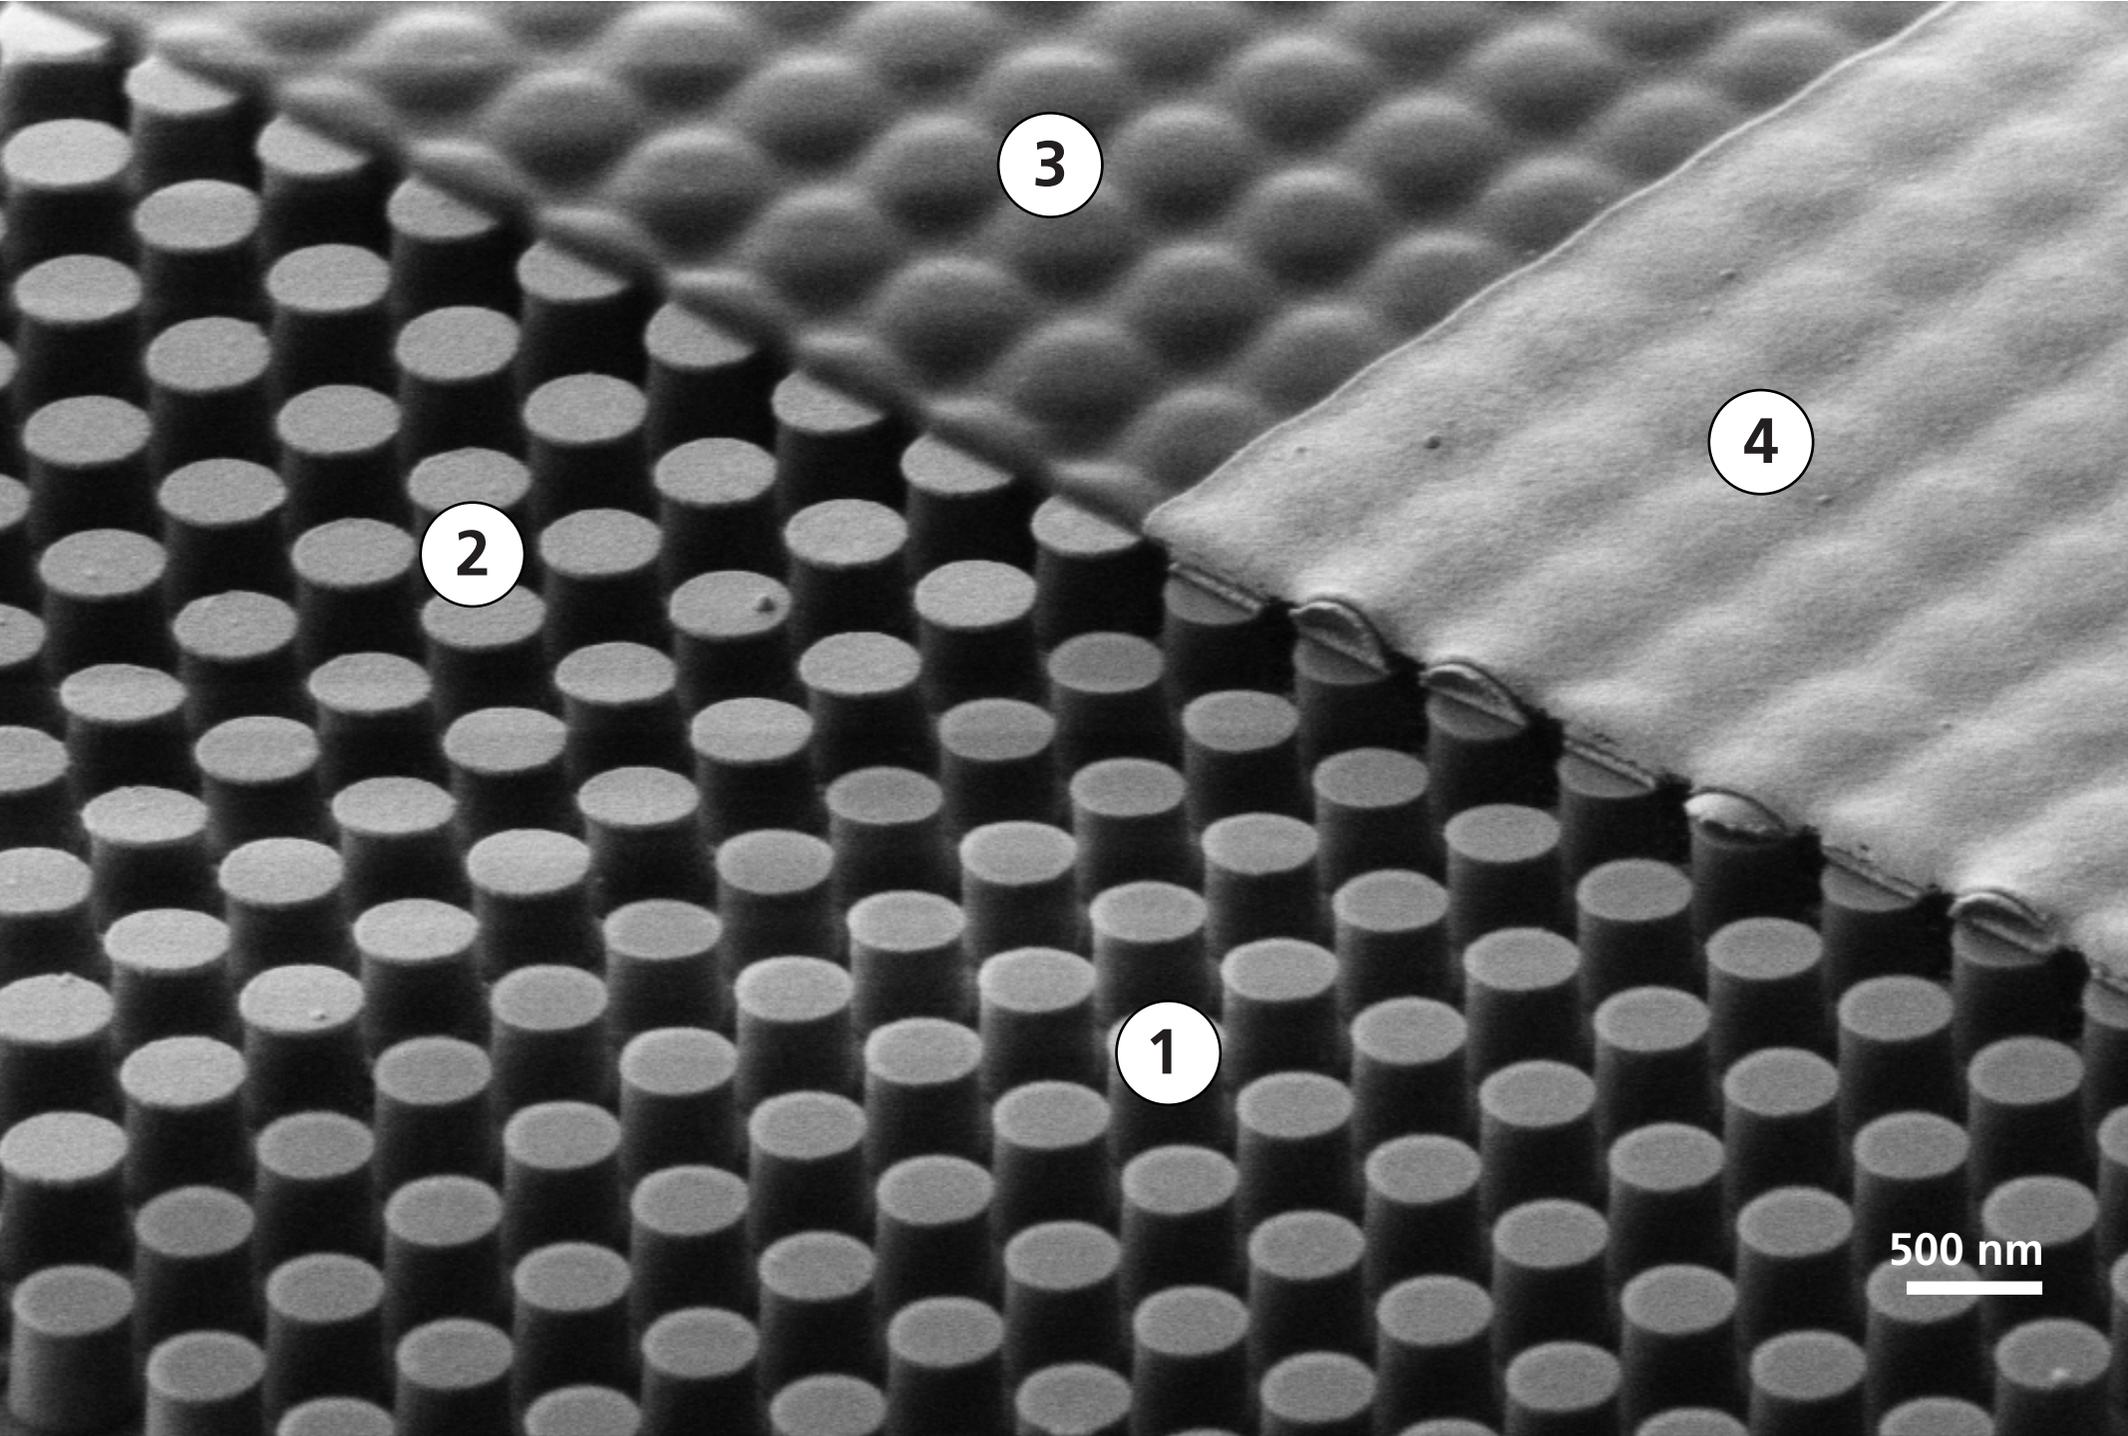

**1** index

**2** zero index

**3** experiments

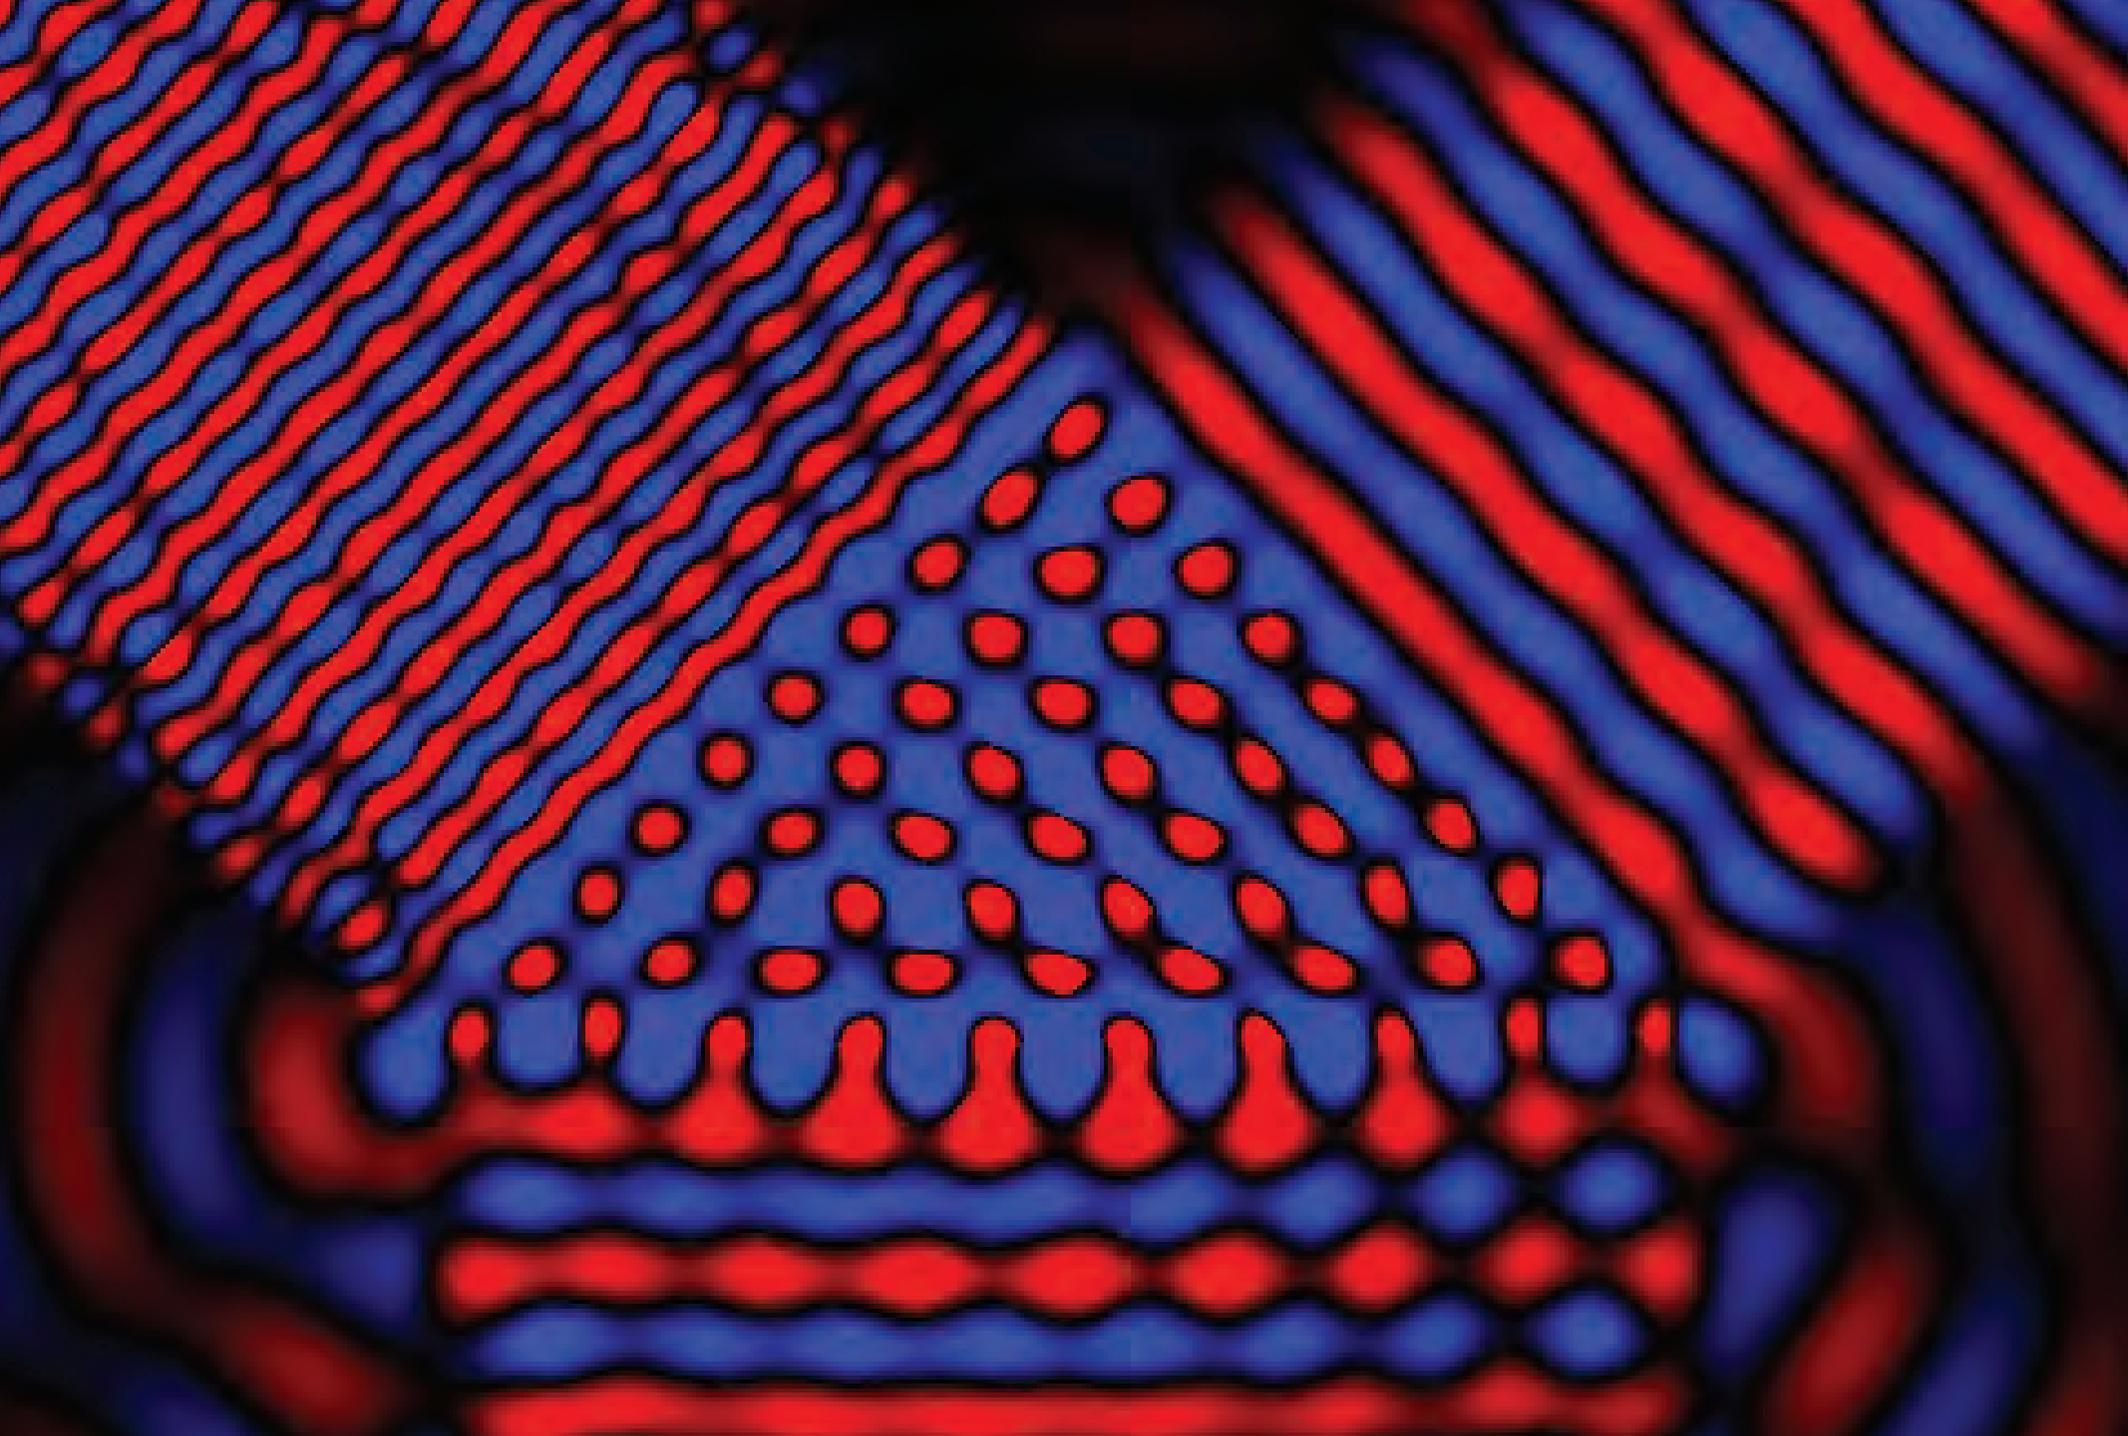

1 index

2 zero index

3 experiments

# On-chip zero-index prism




1 index

2 zero index

3 experiments

# On-chip zero-index prism

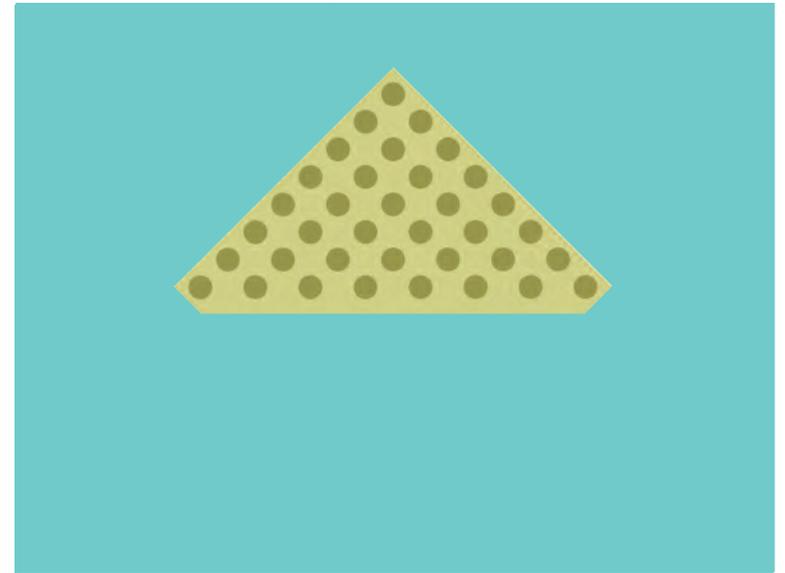


1 index

2 zero index

3 experiments

# On-chip zero-index prism

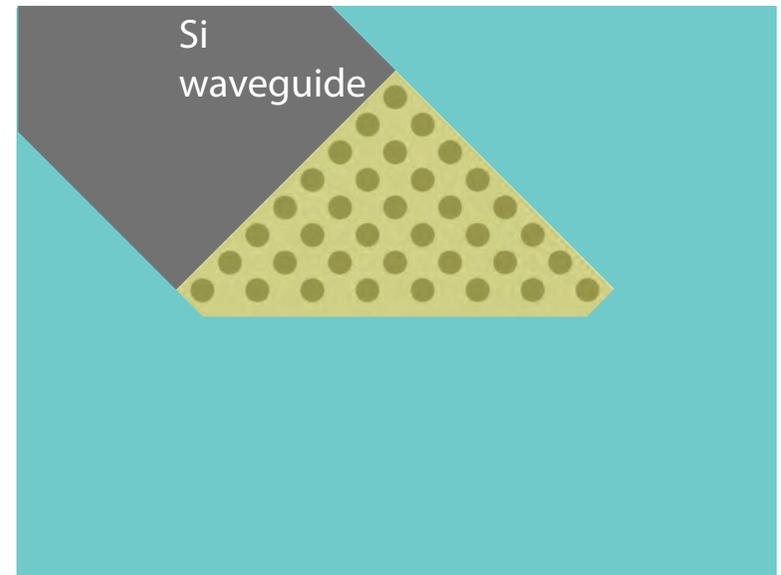


1 index

2 zero index

3 experiments

# On-chip zero-index prism

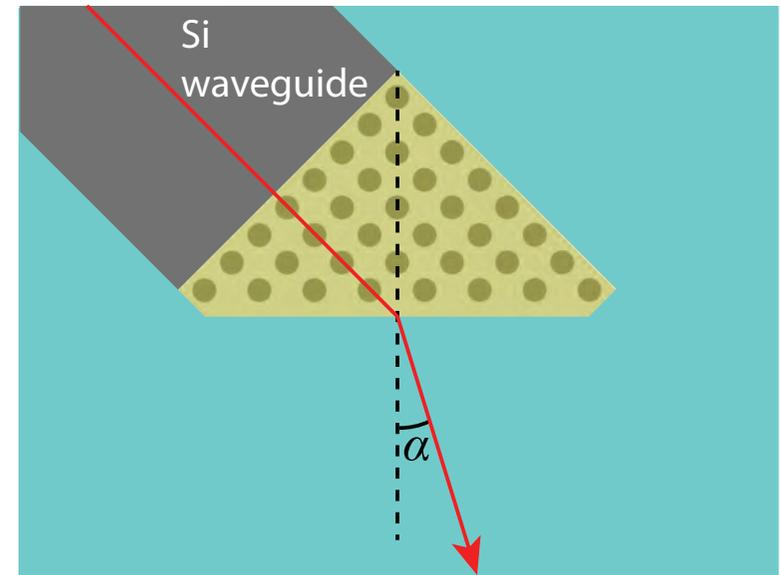


1 index

2 zero index

3 experiments

# On-chip zero-index prism

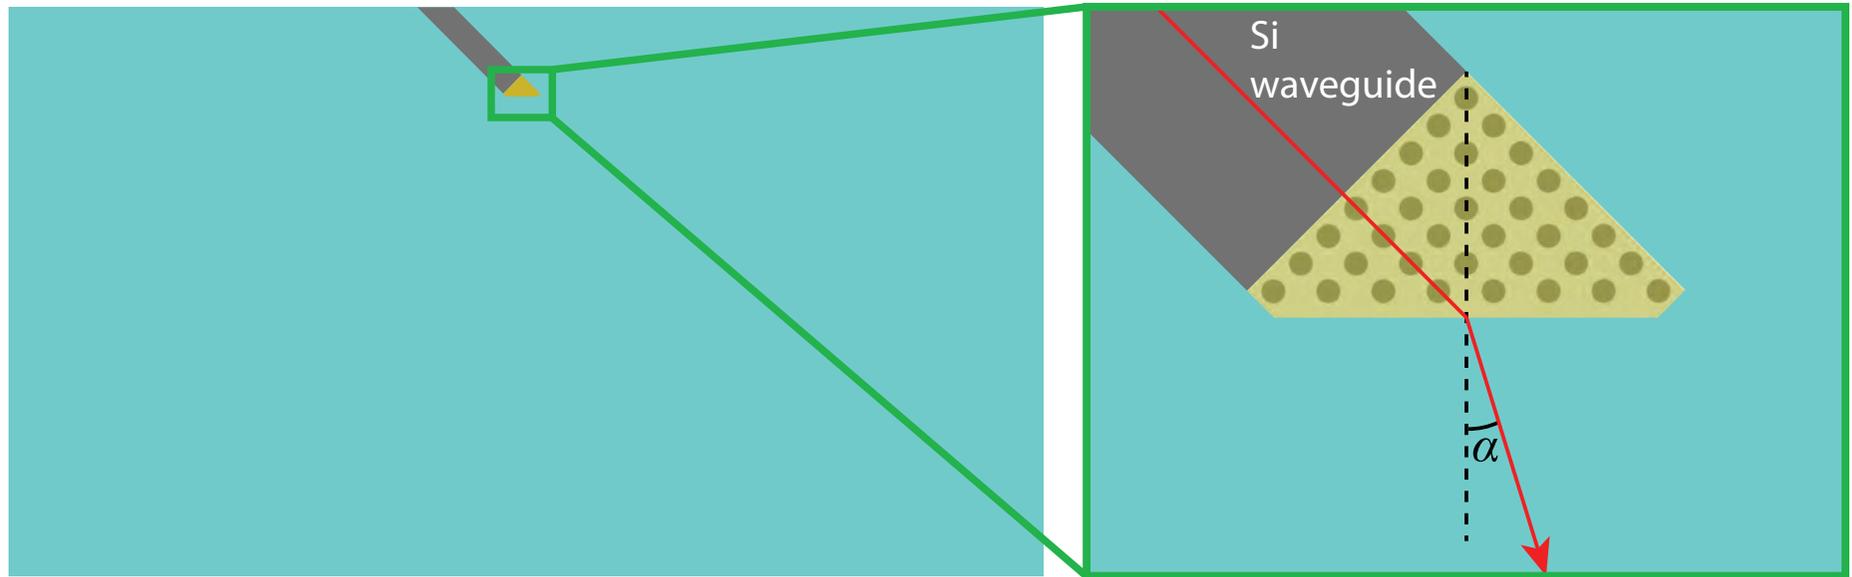


1 index

2 zero index

3 experiments

# On-chip zero-index prism

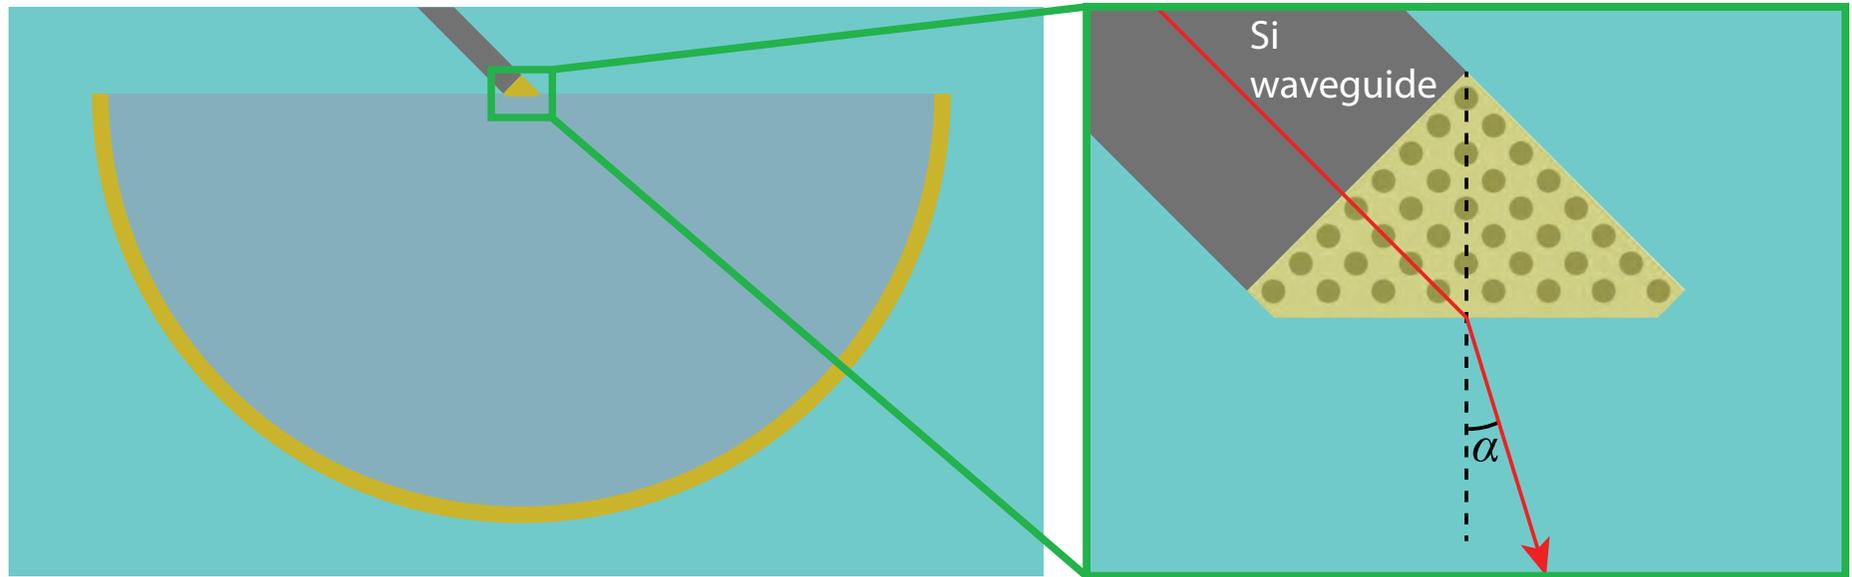


1 index

2 zero index

3 experiments

# On-chip zero-index prism

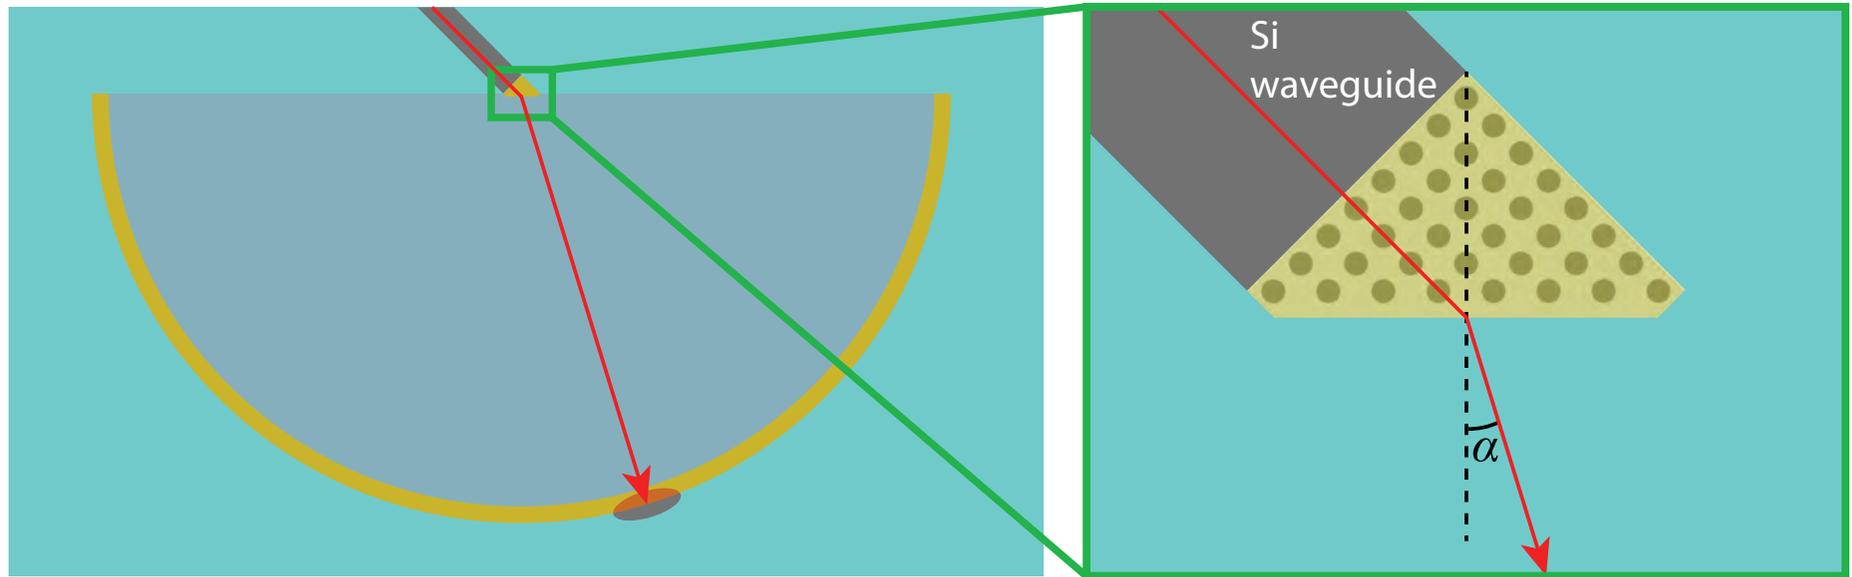


1 index

2 zero index

3 experiments

# On-chip zero-index prism

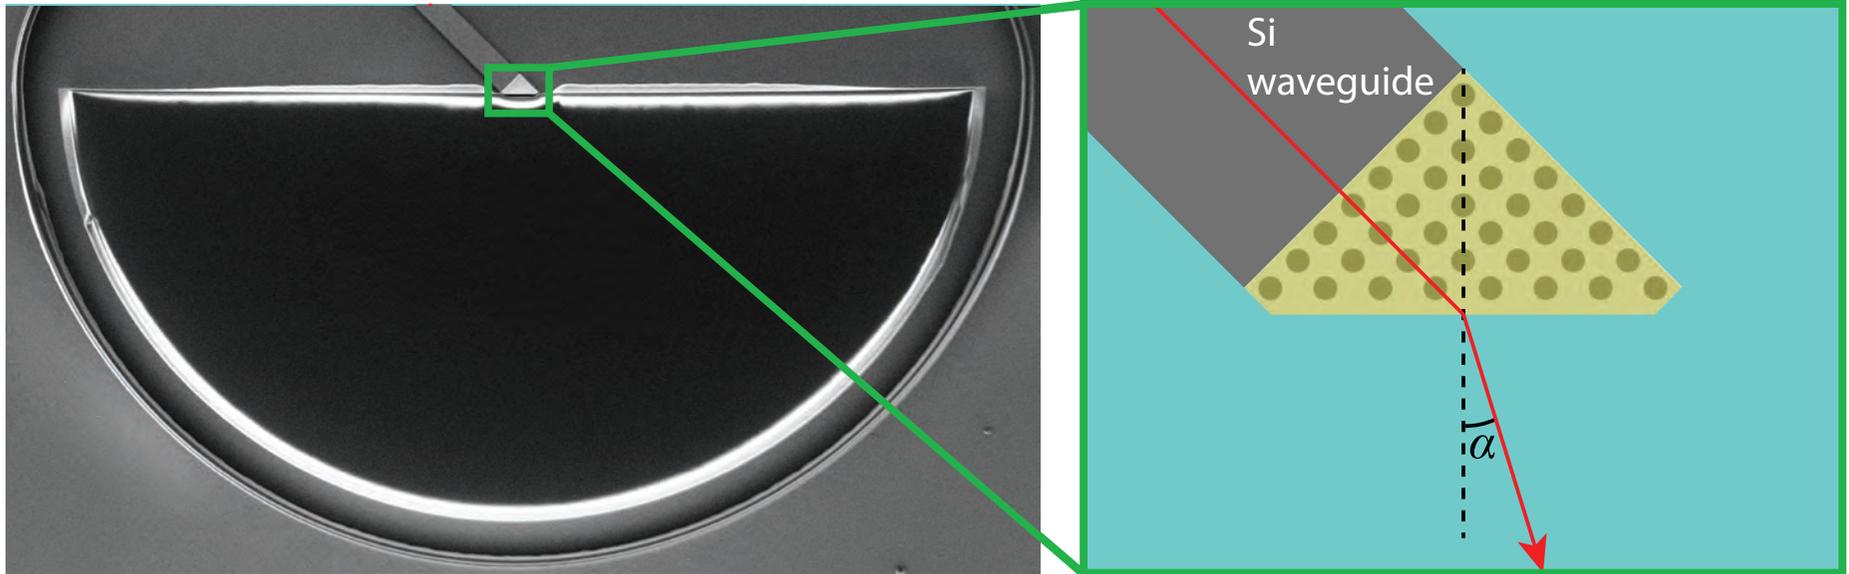


1 index

2 zero index

3 experiments


# On-chip zero-index prism

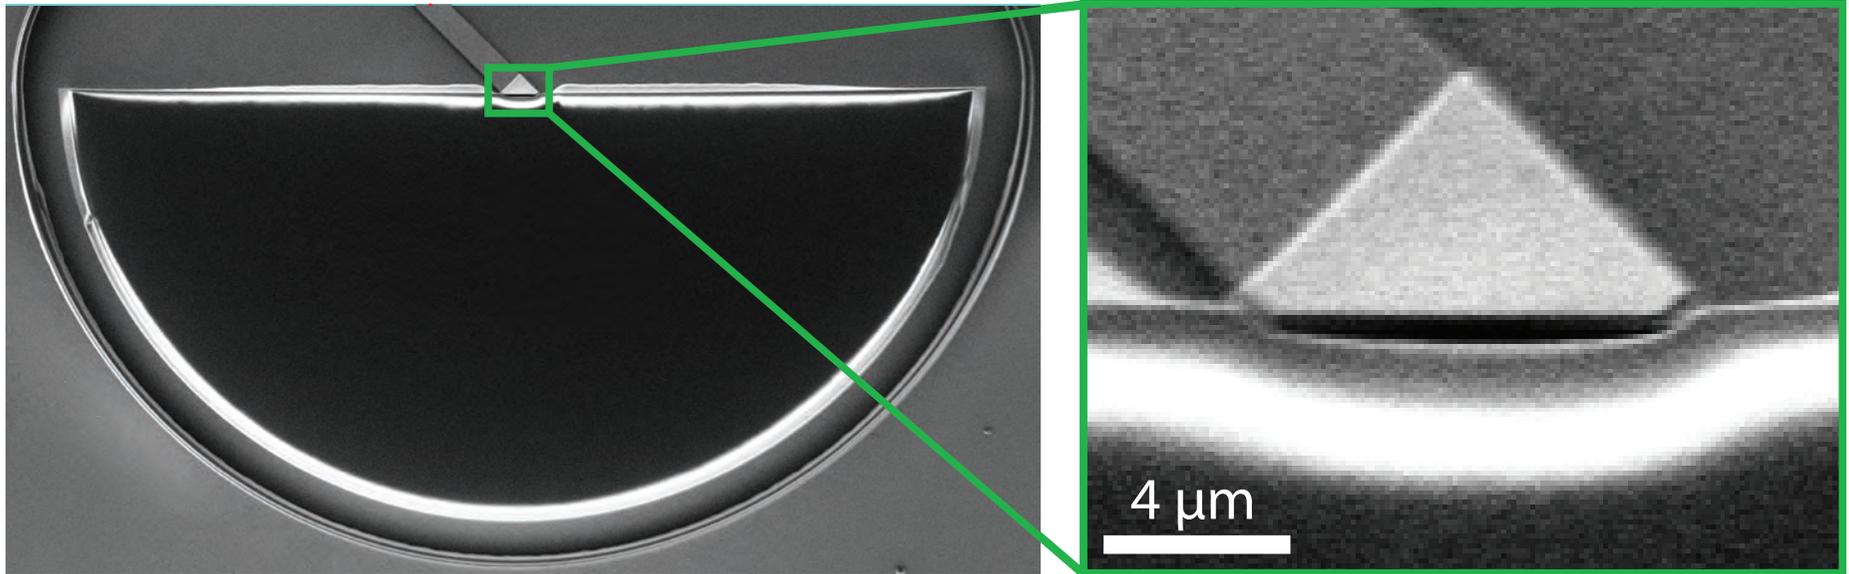

1 index

2 zero index


3 experiments

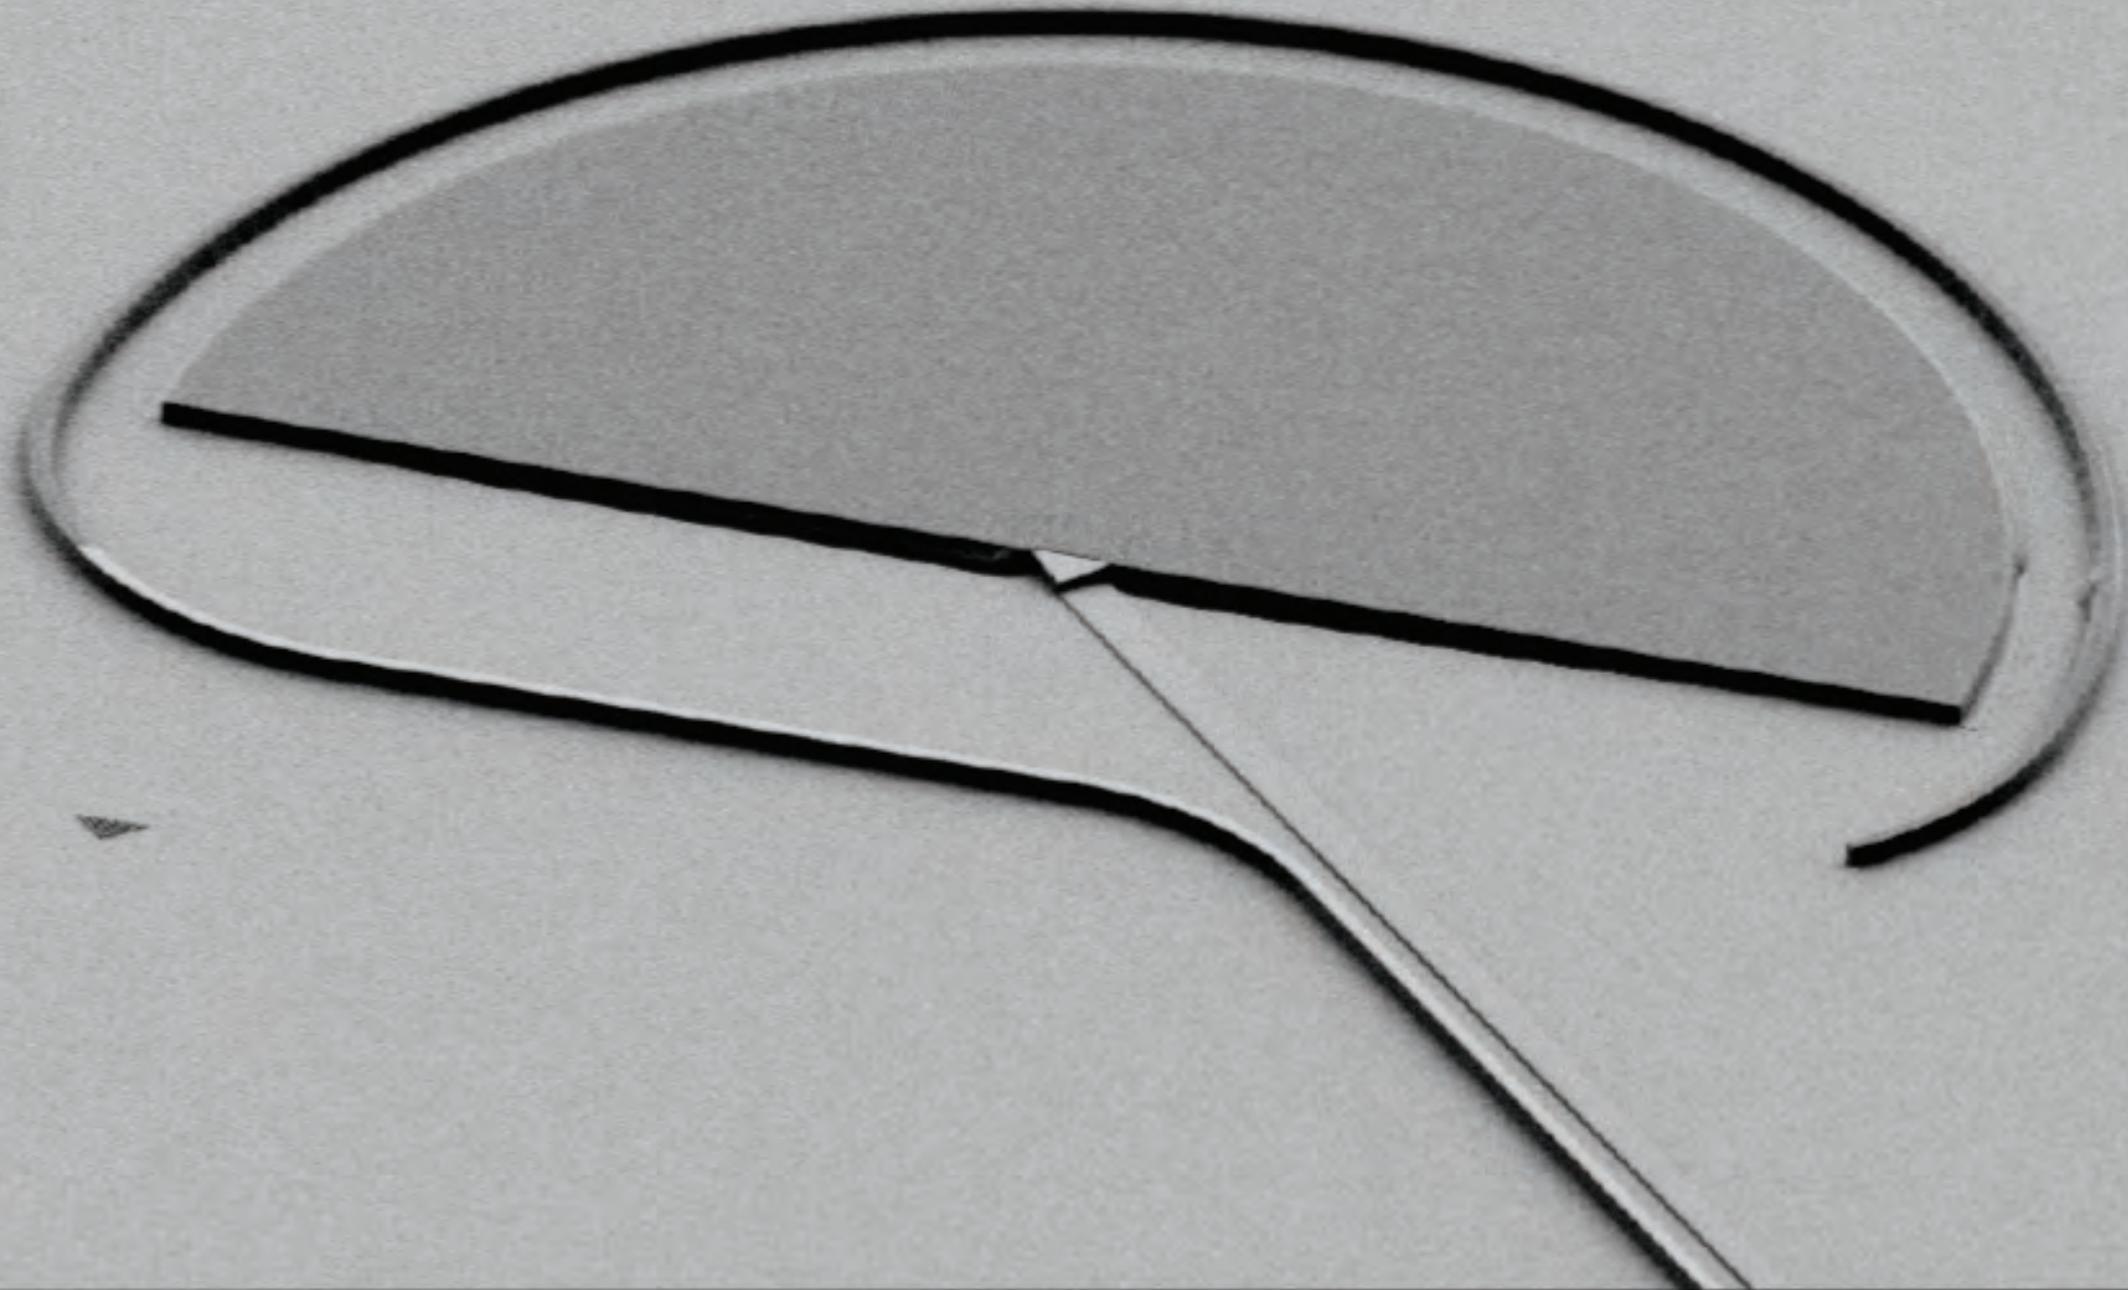

**1** index

**2** zero index


**3** experiments

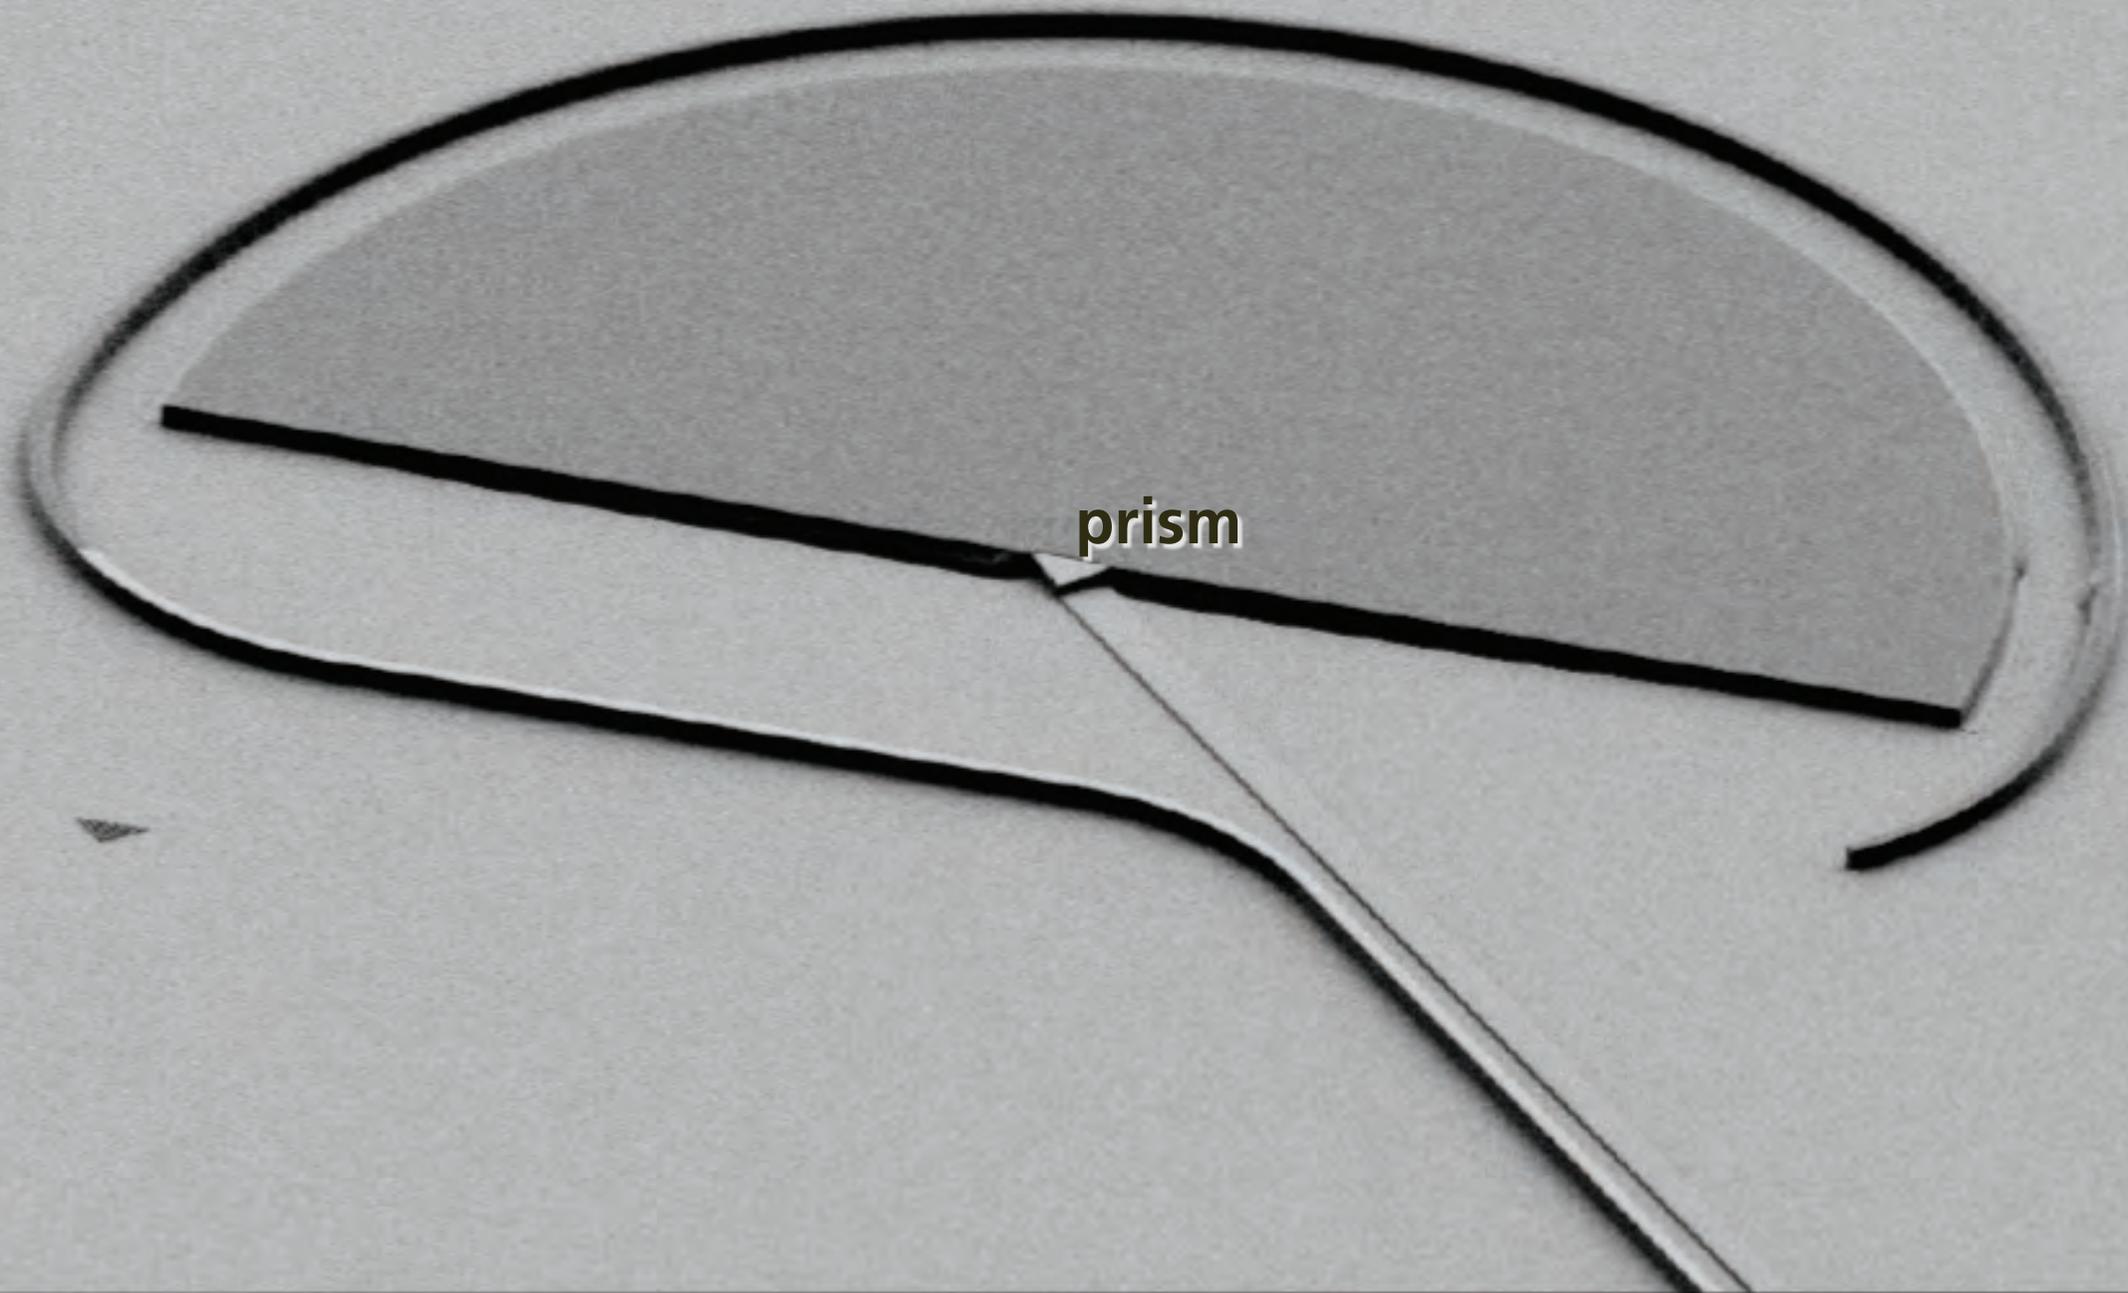

1 index

2 zero index


3 experiments

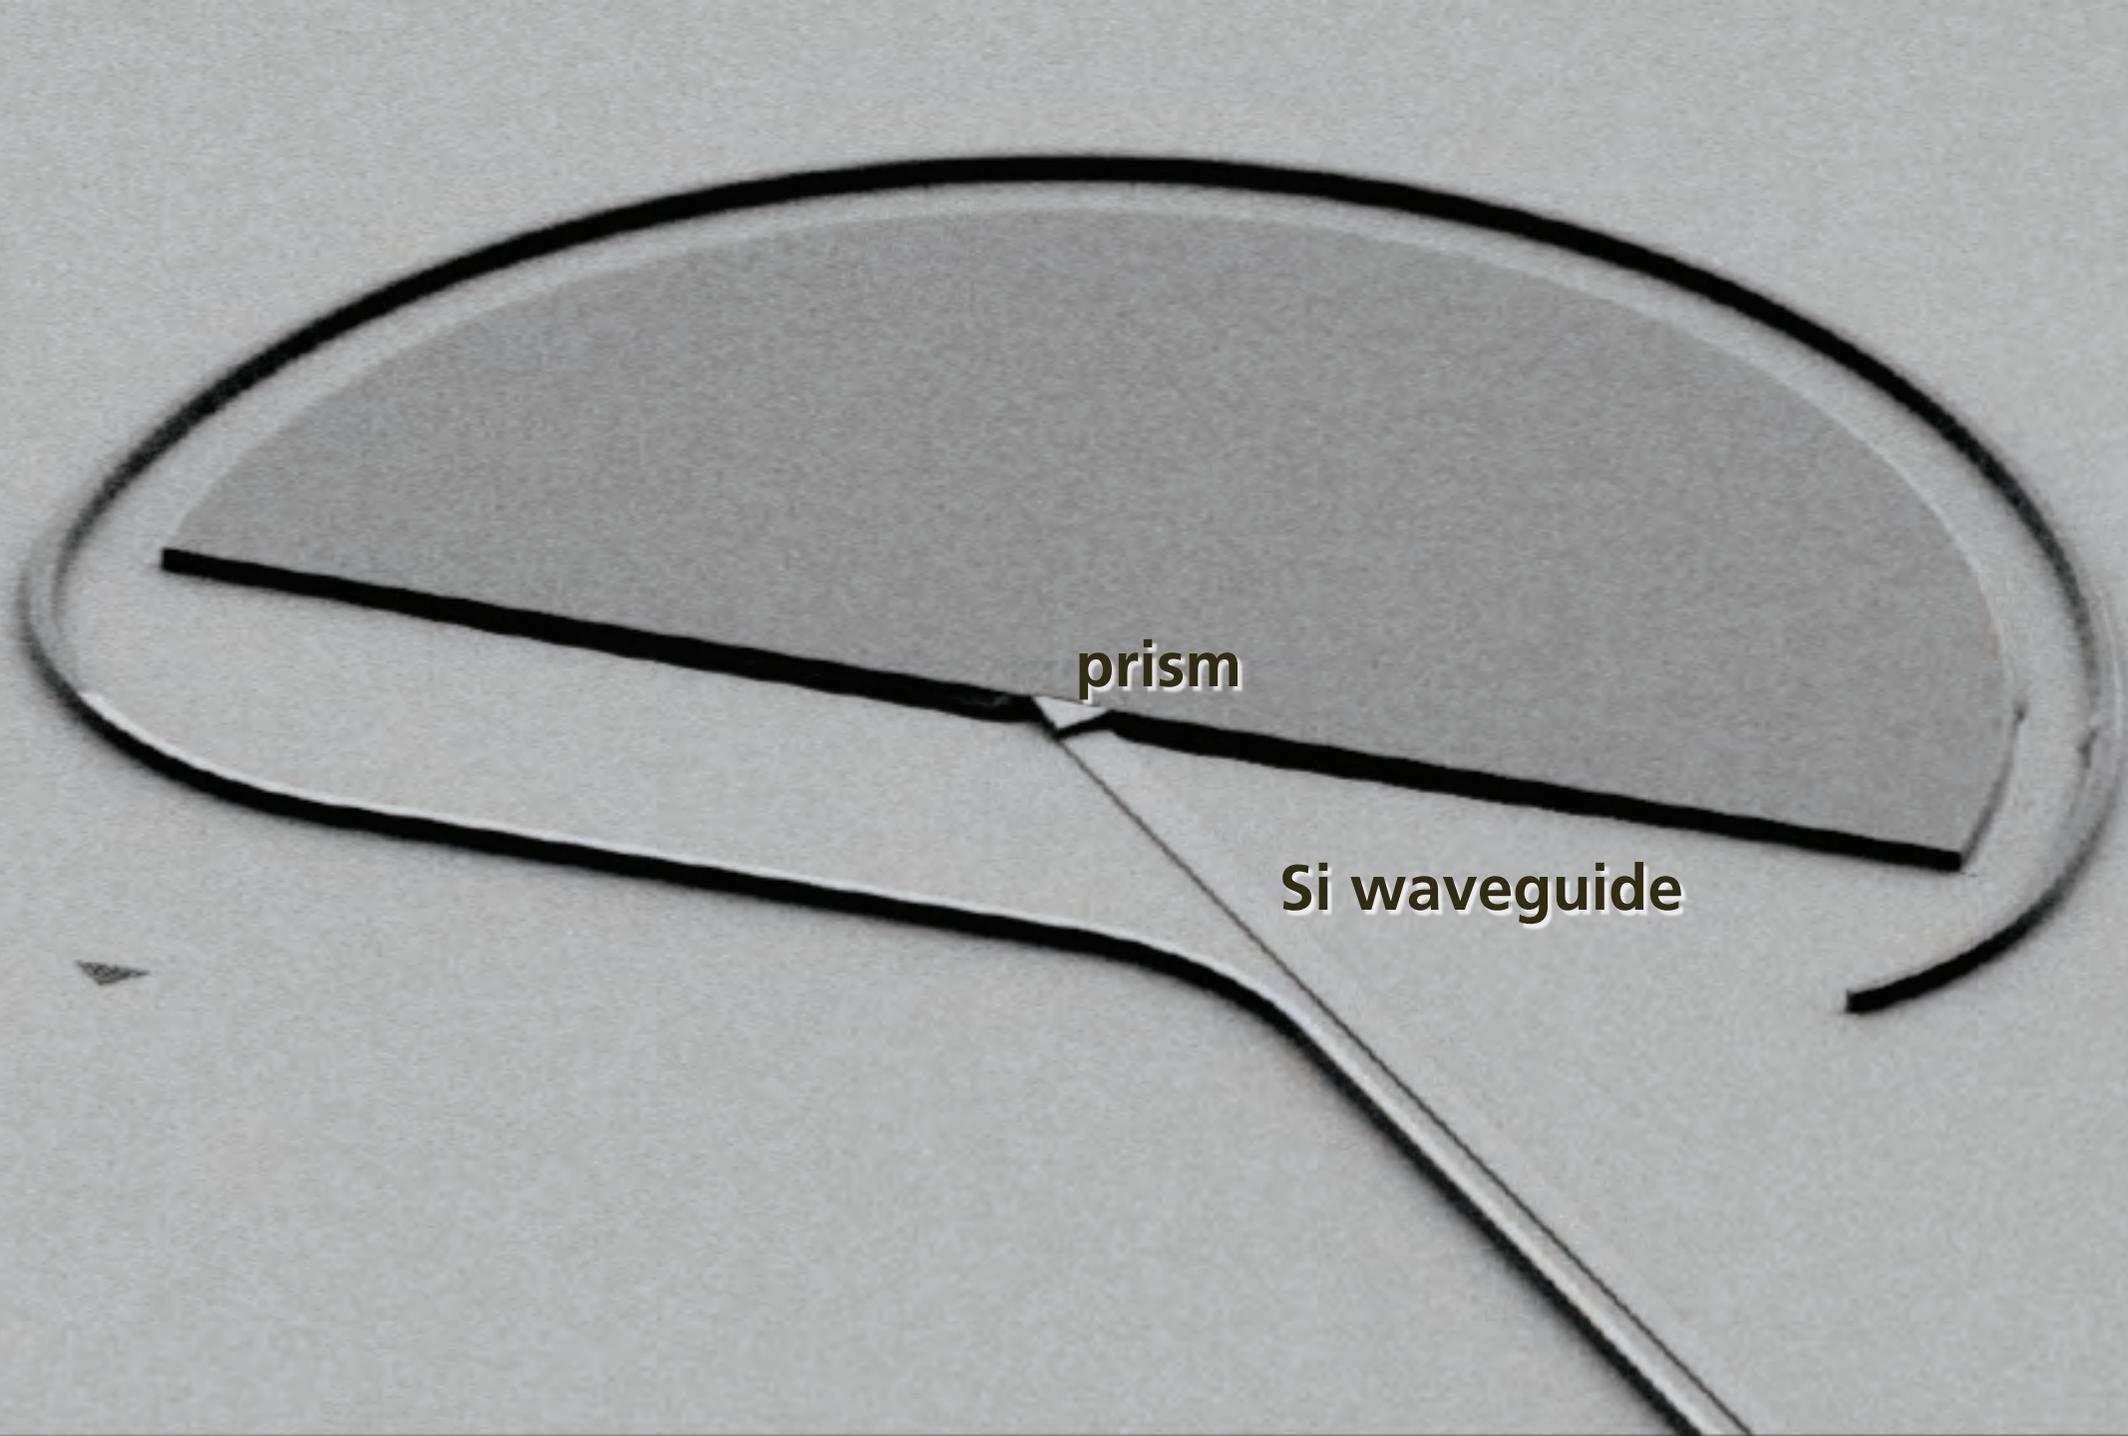

**1** index

**2** zero index

**3** experiments

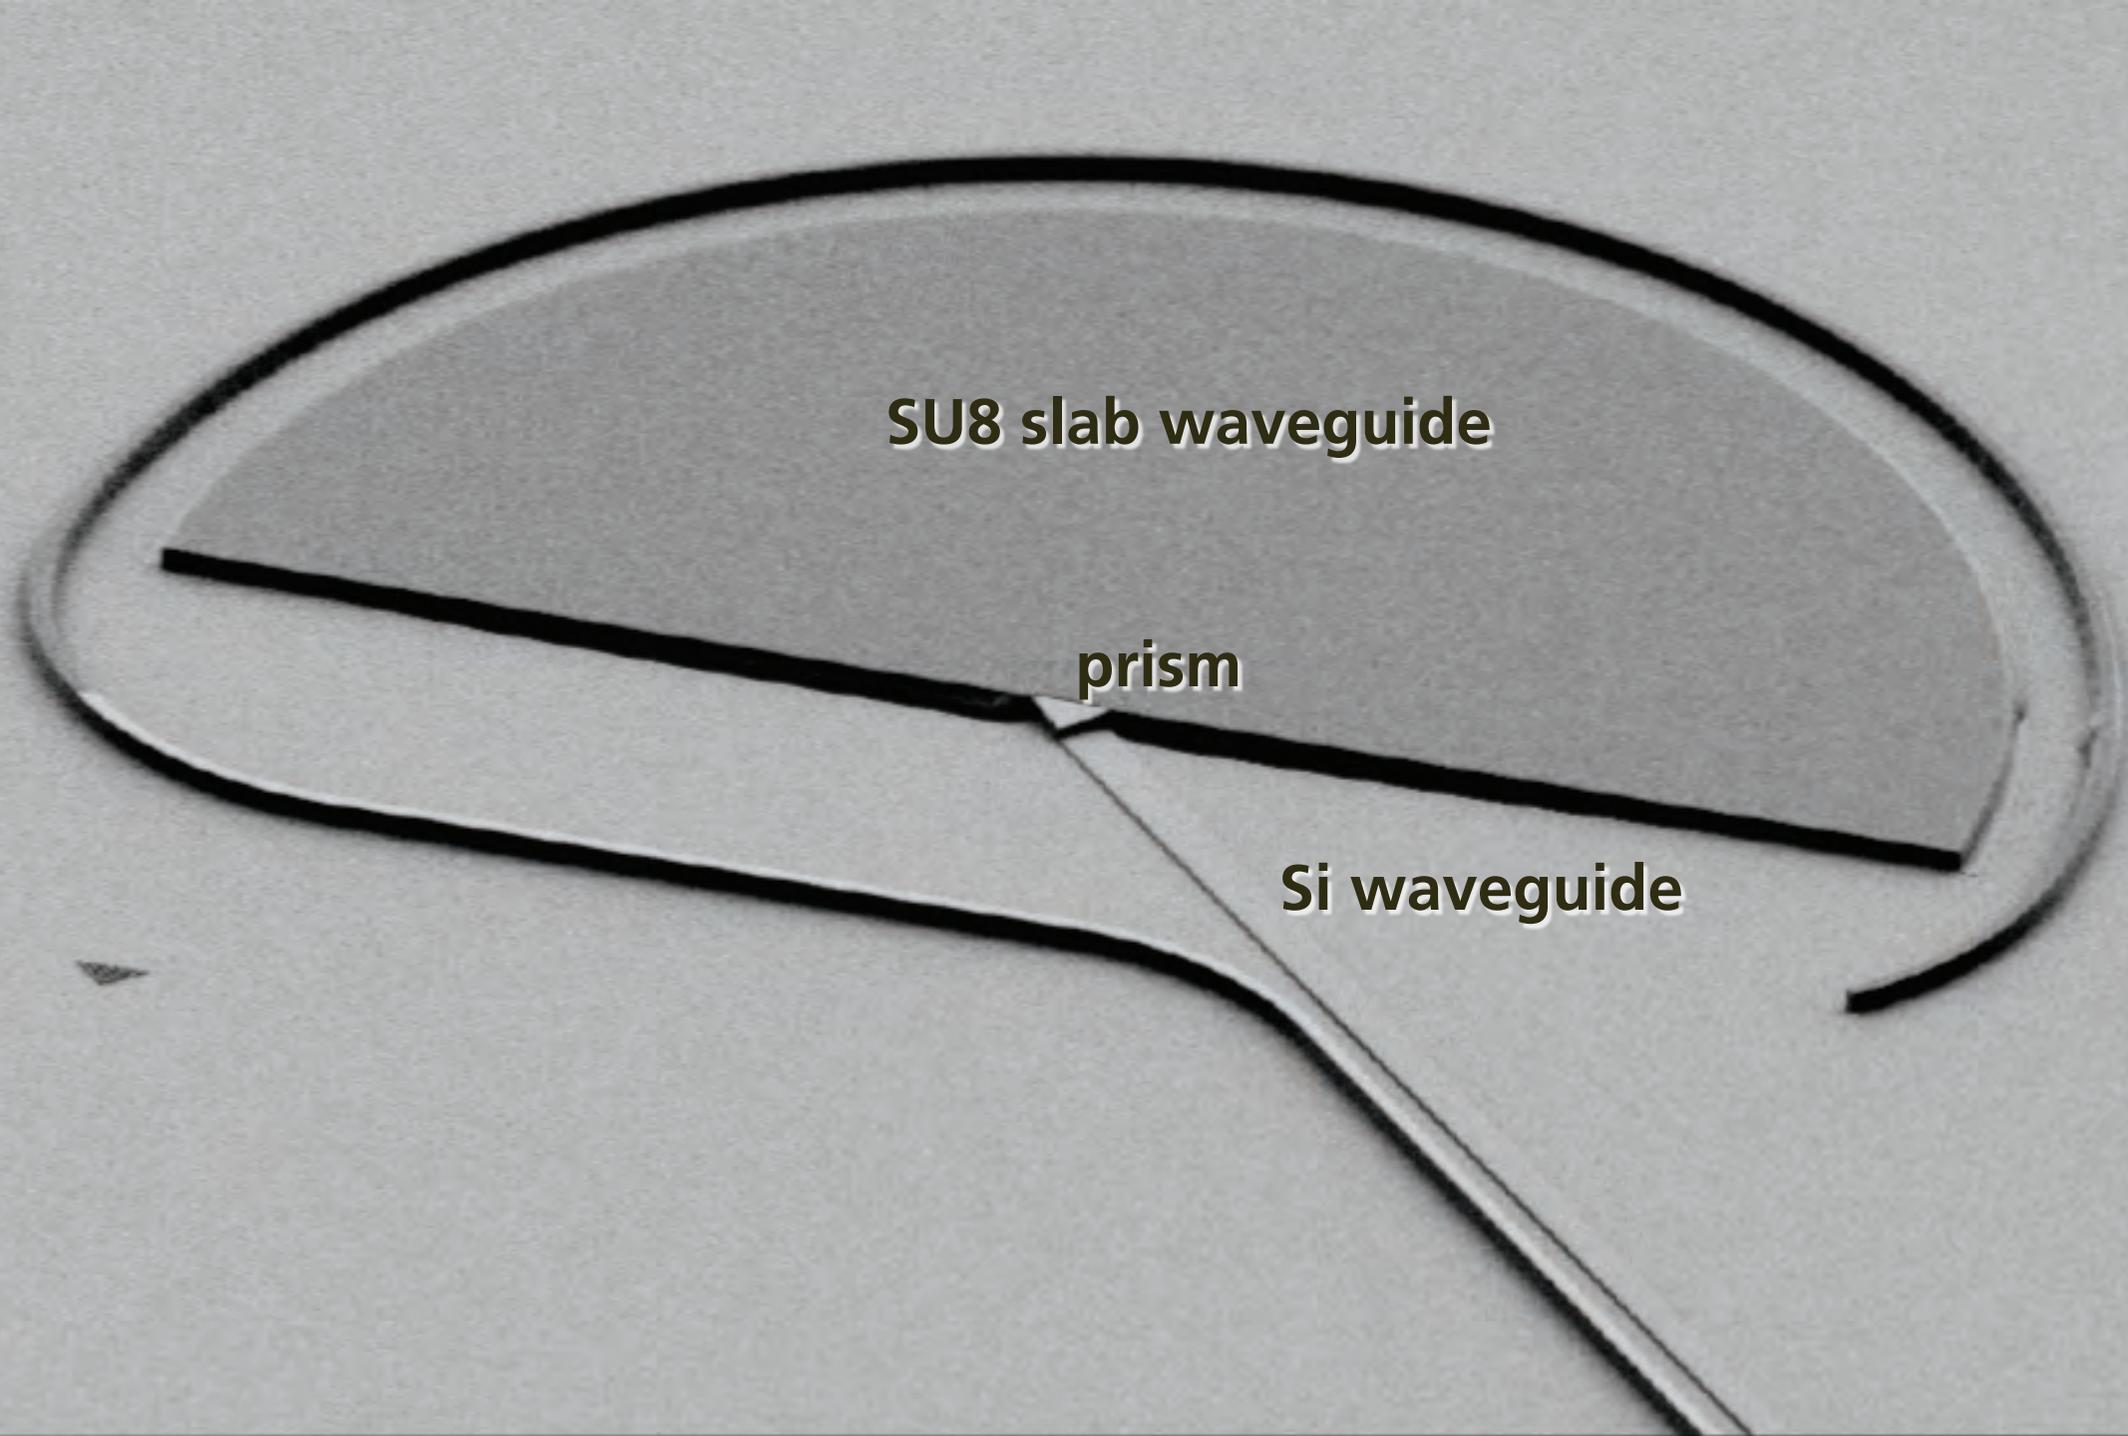

SU8 slab waveguide


prism

Si waveguide

1 index

2 zero index

3 experiments

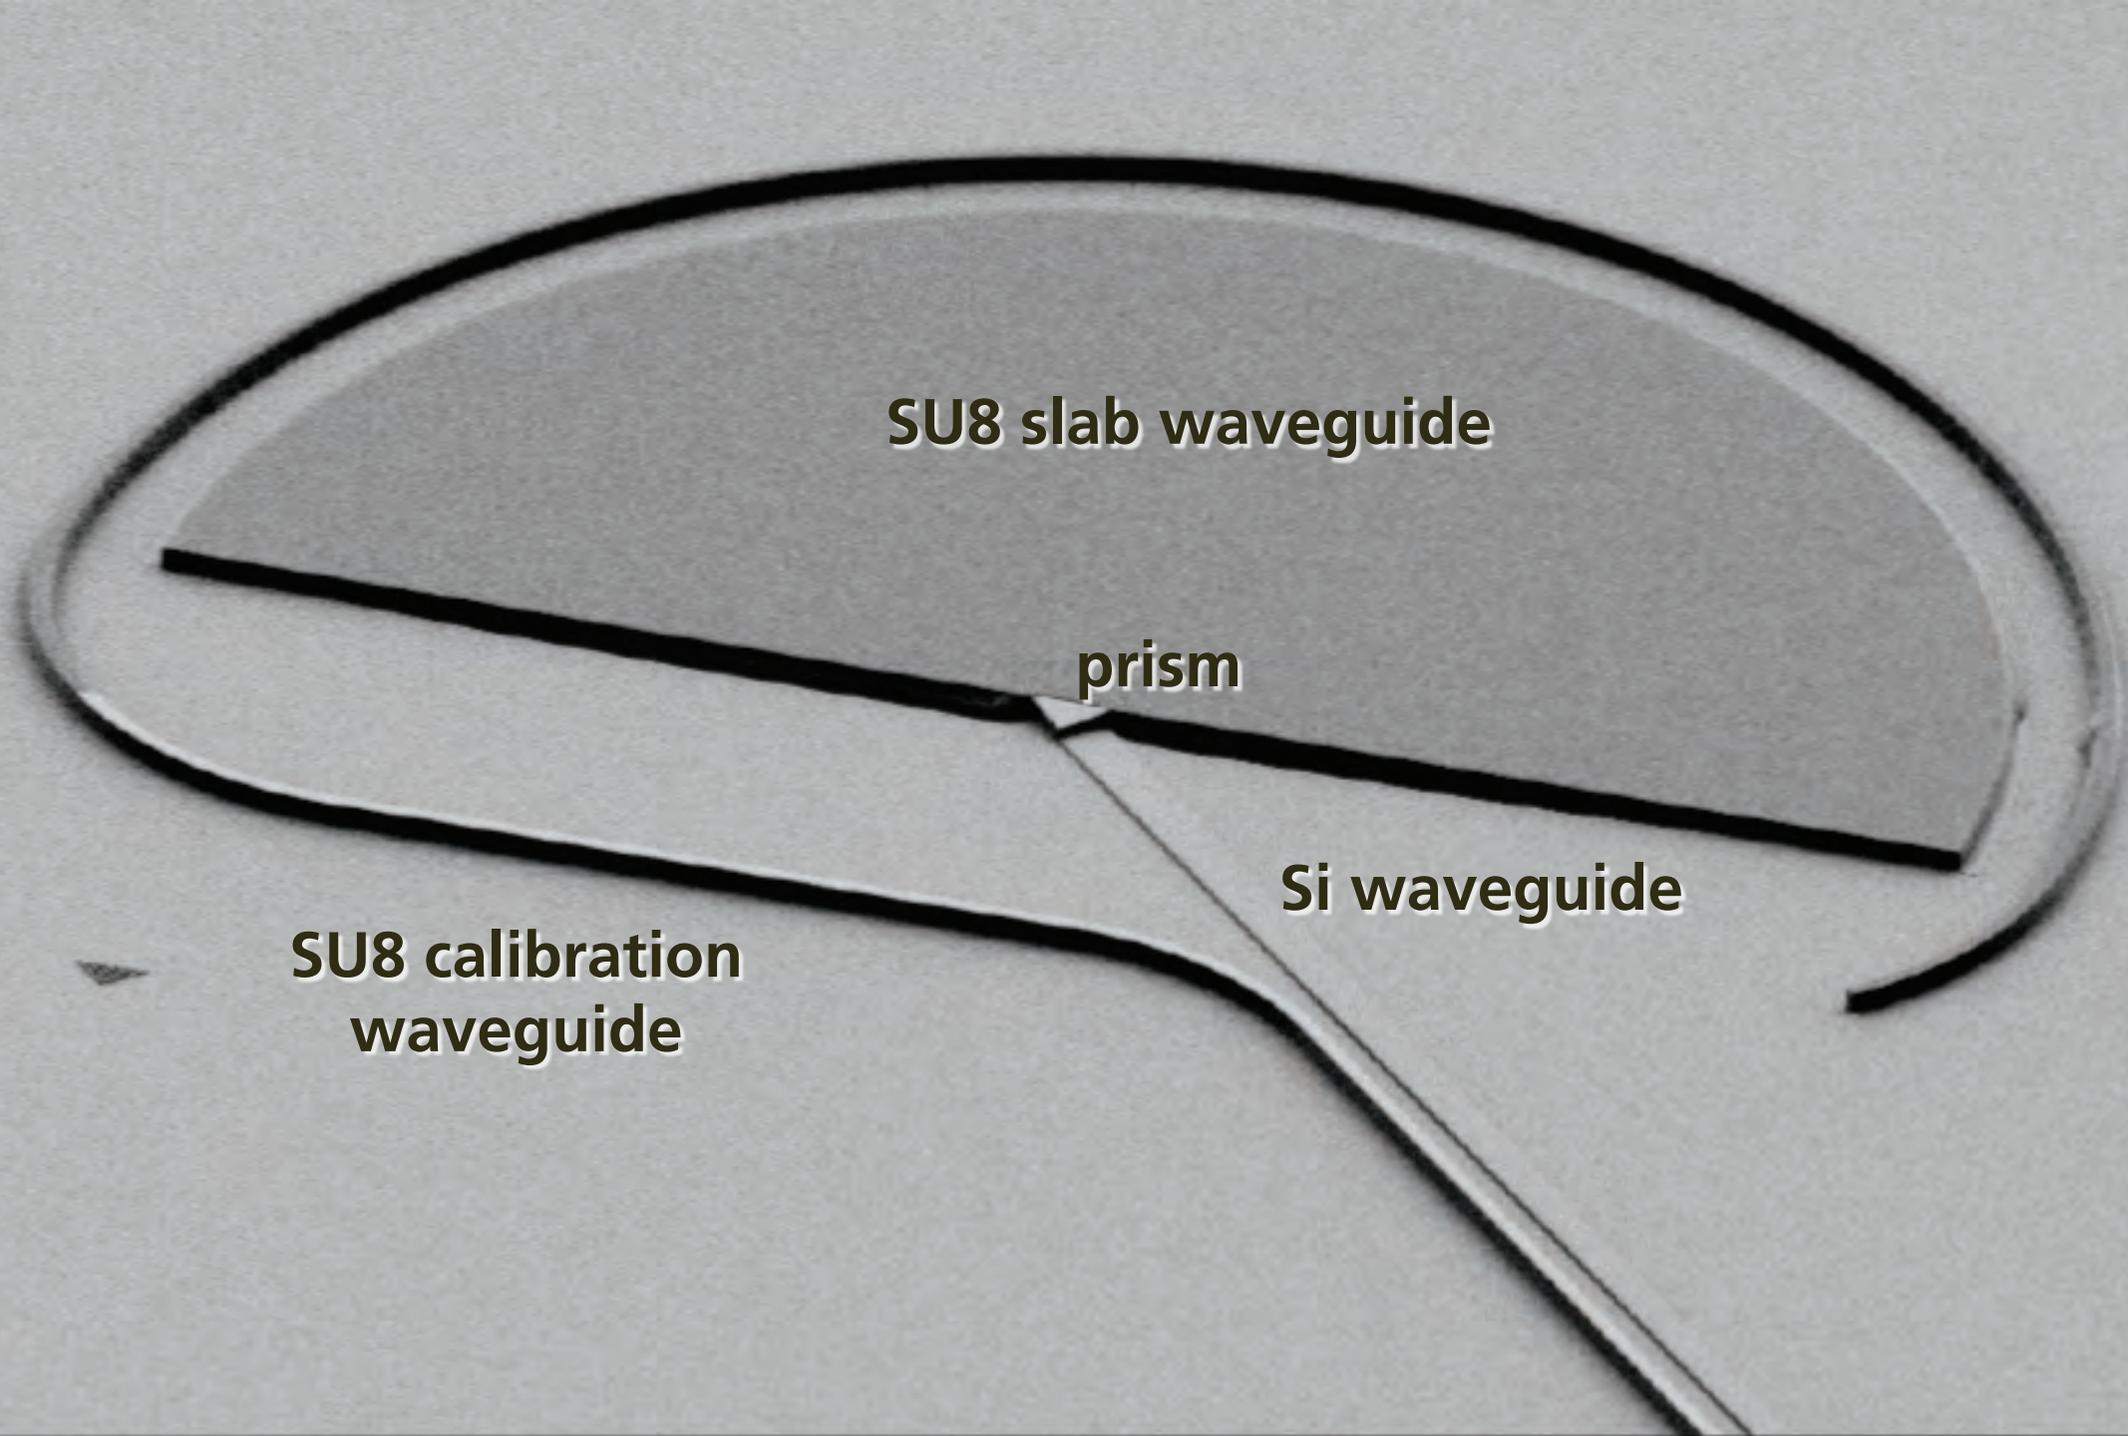

SU8 slab waveguide

prism


Si waveguide

SU8 calibration  
waveguide

1 index

2 zero index

3 experiments

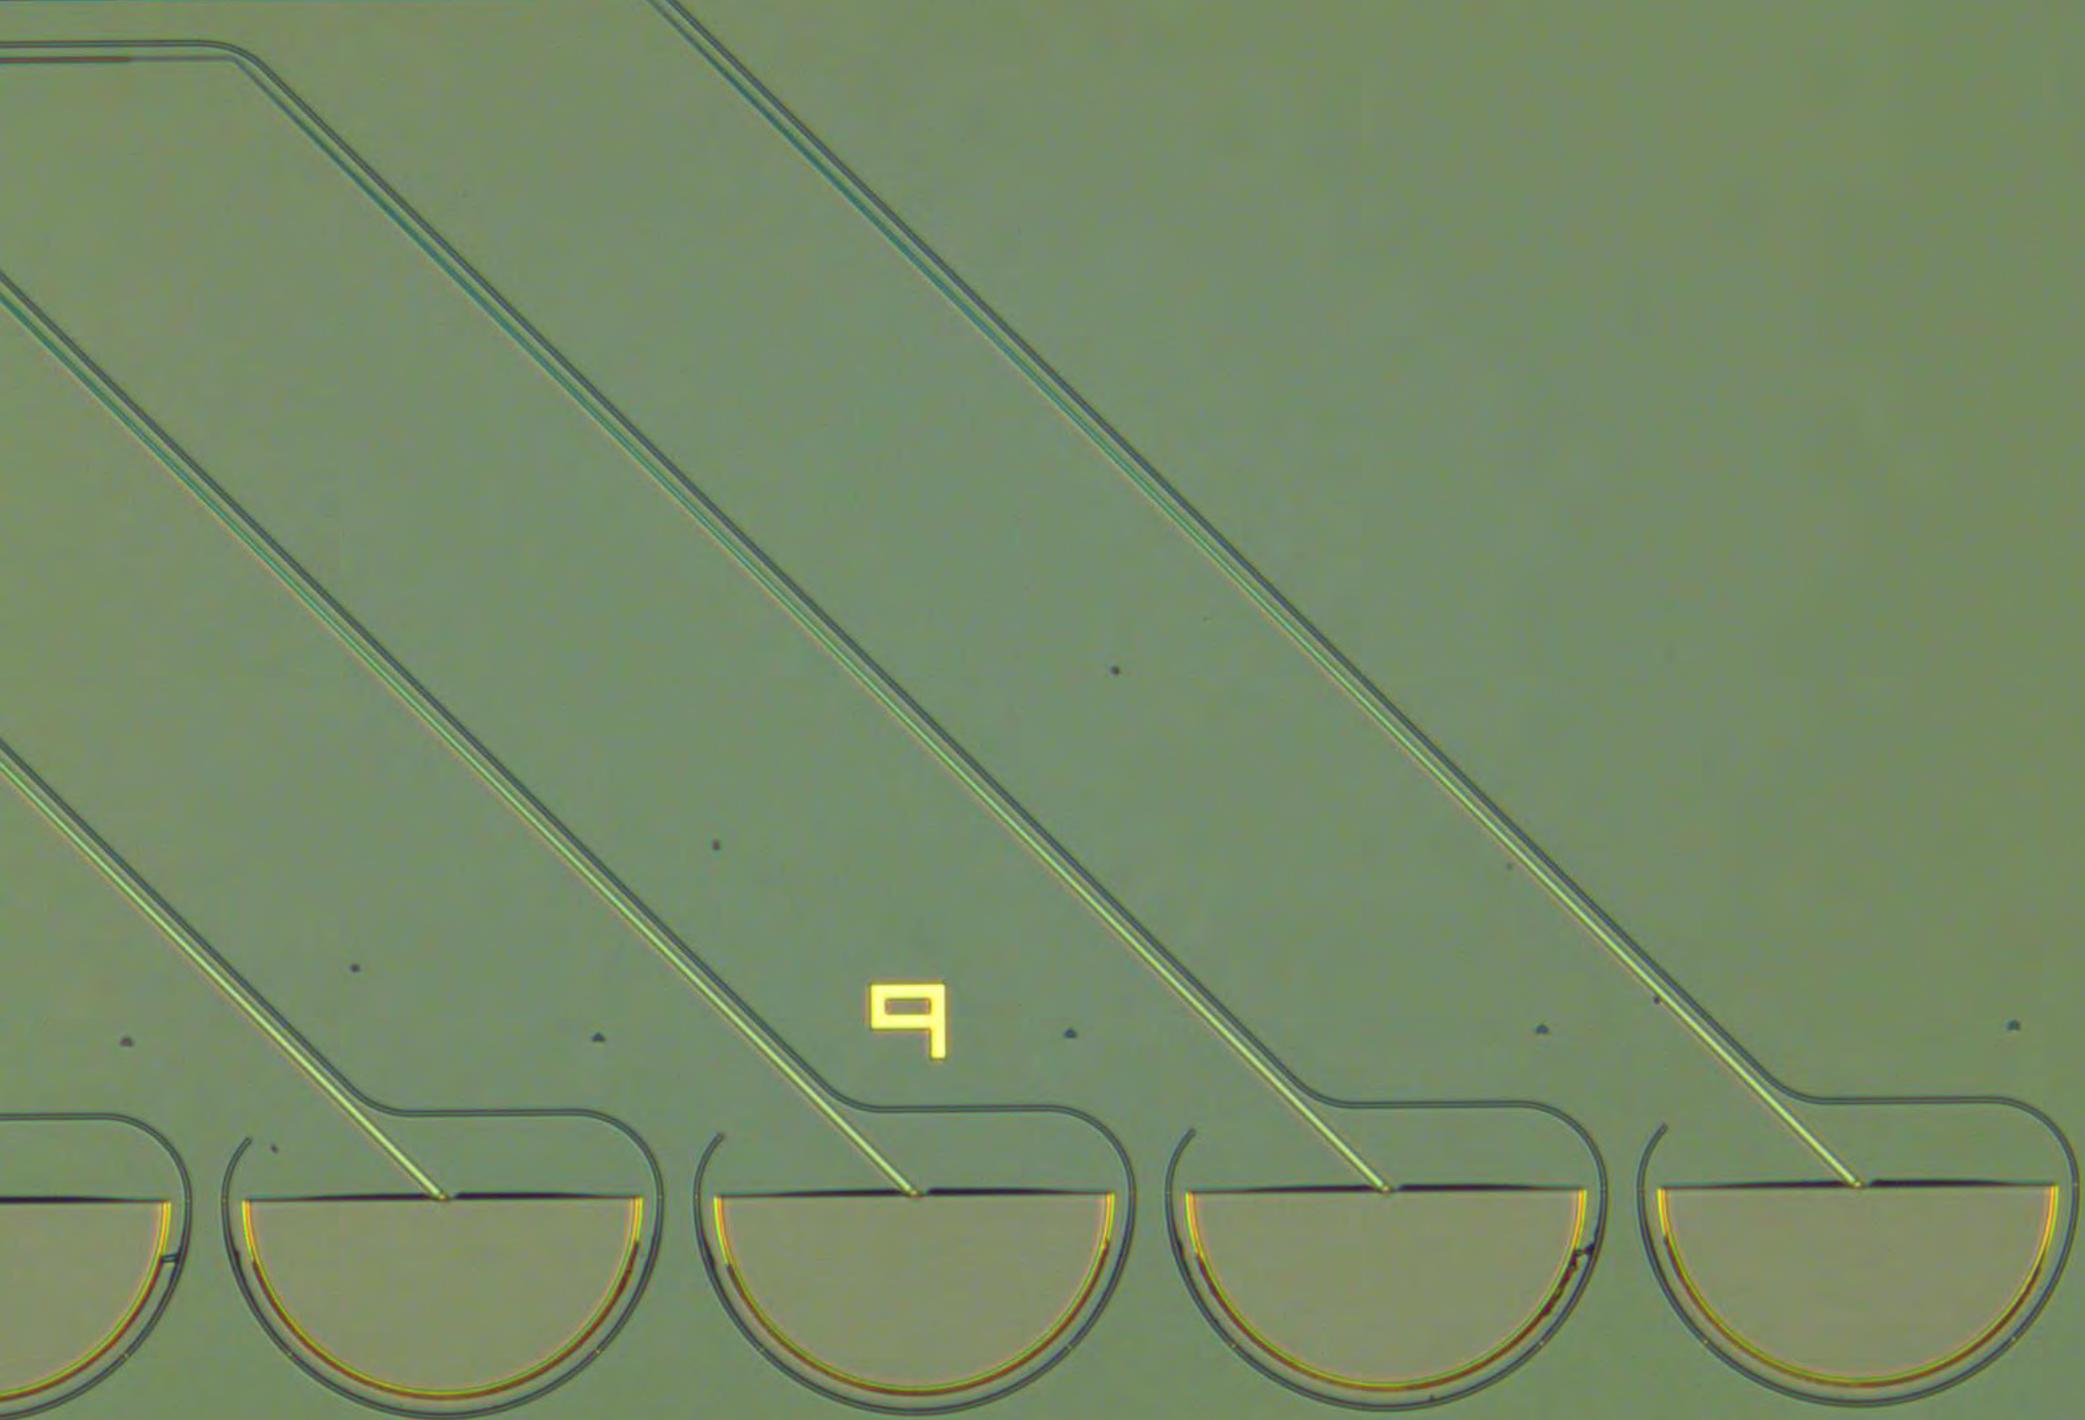


**1** index

**2** zero index

**3** experiments

at design wavelength (1590 nm)

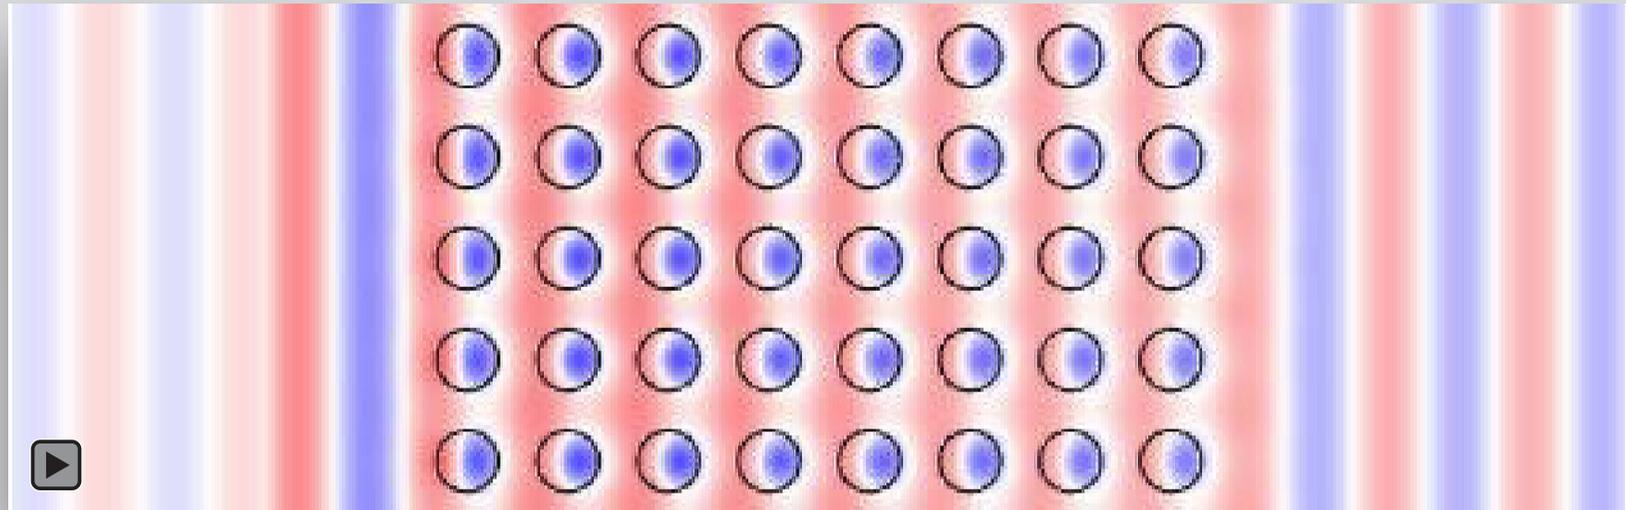


1 index

2 zero index

3 experiments

below design wavelength (1530 nm)

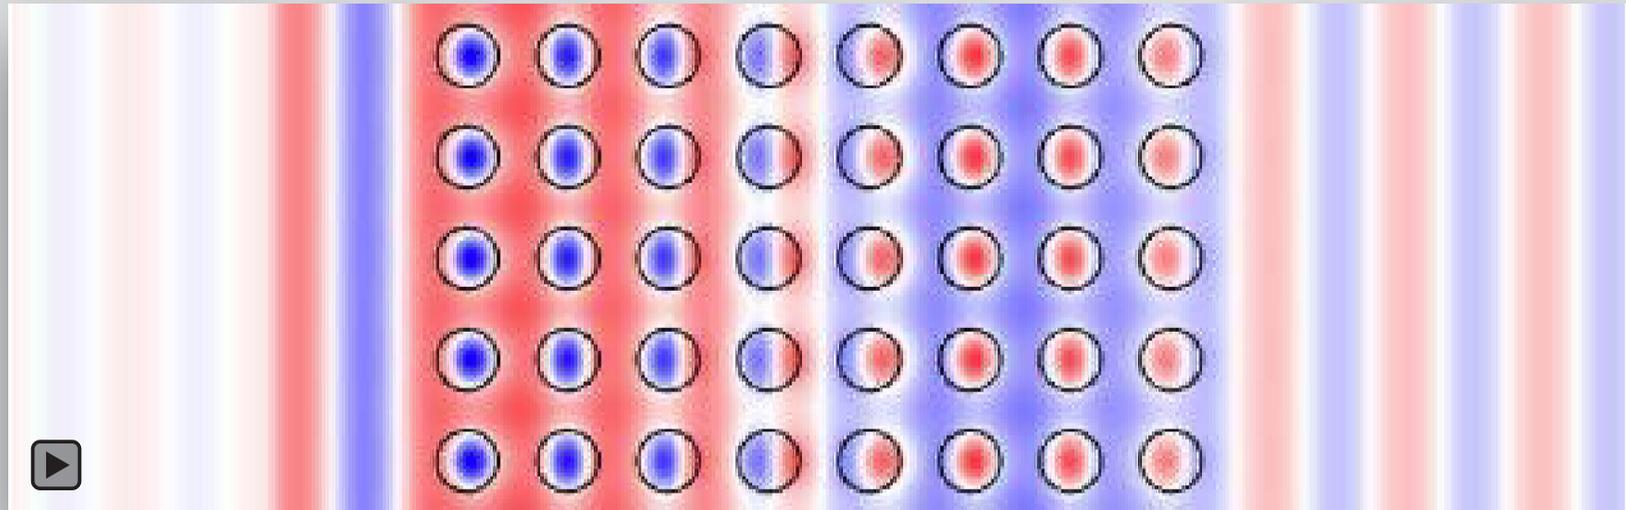


1 index

2 zero index

3 experiments

above design wavelength (1650 nm)

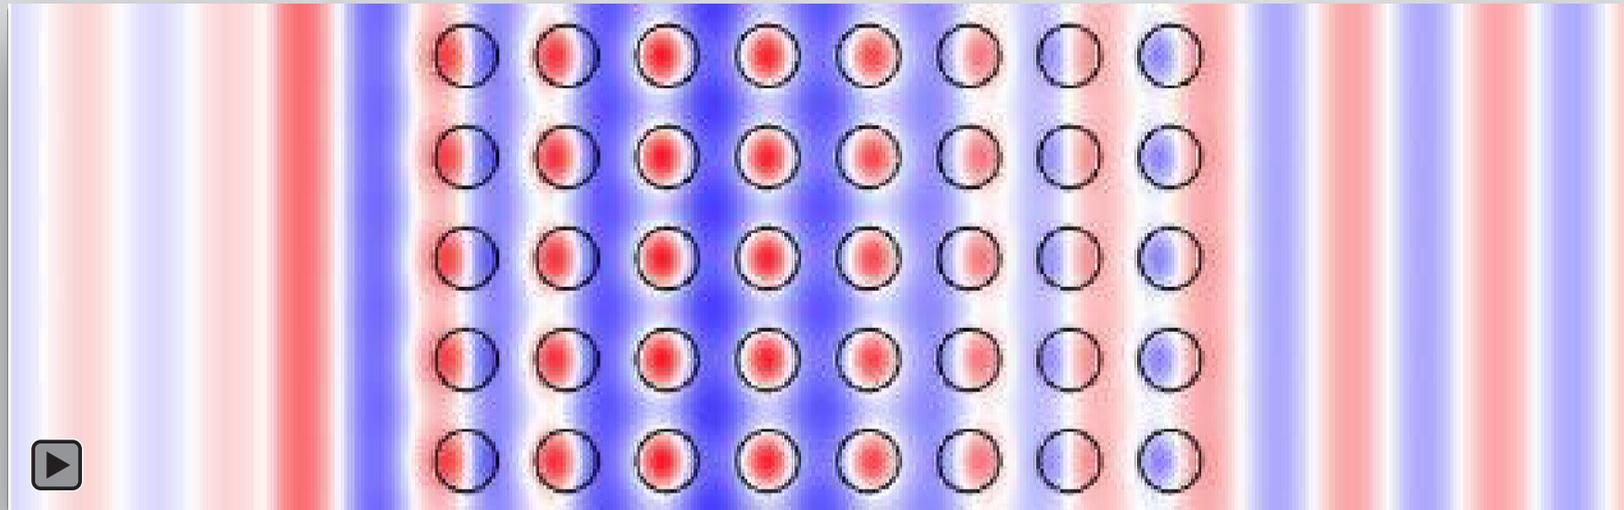


1 index

2 zero index

3 experiments


# On-chip zero-index prism

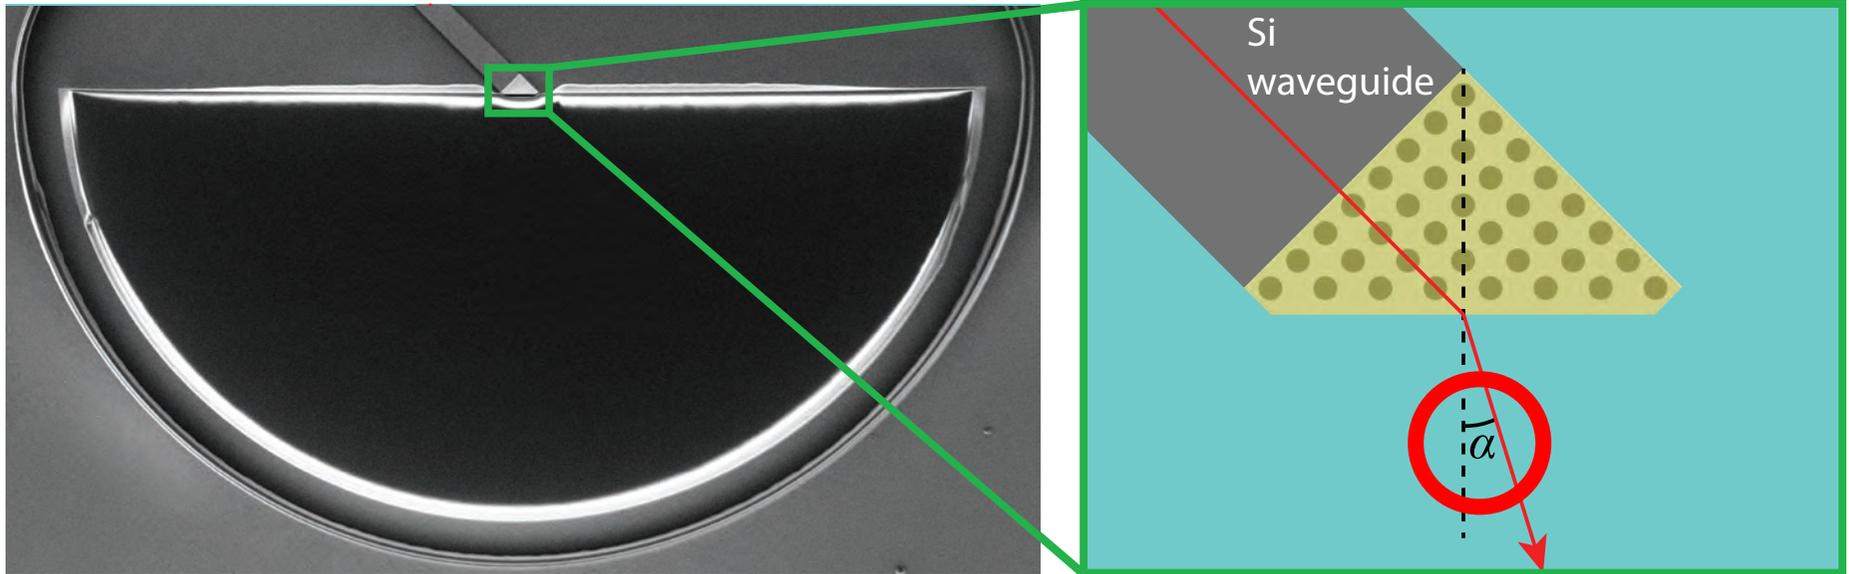

1 index

2 zero index


3 experiments

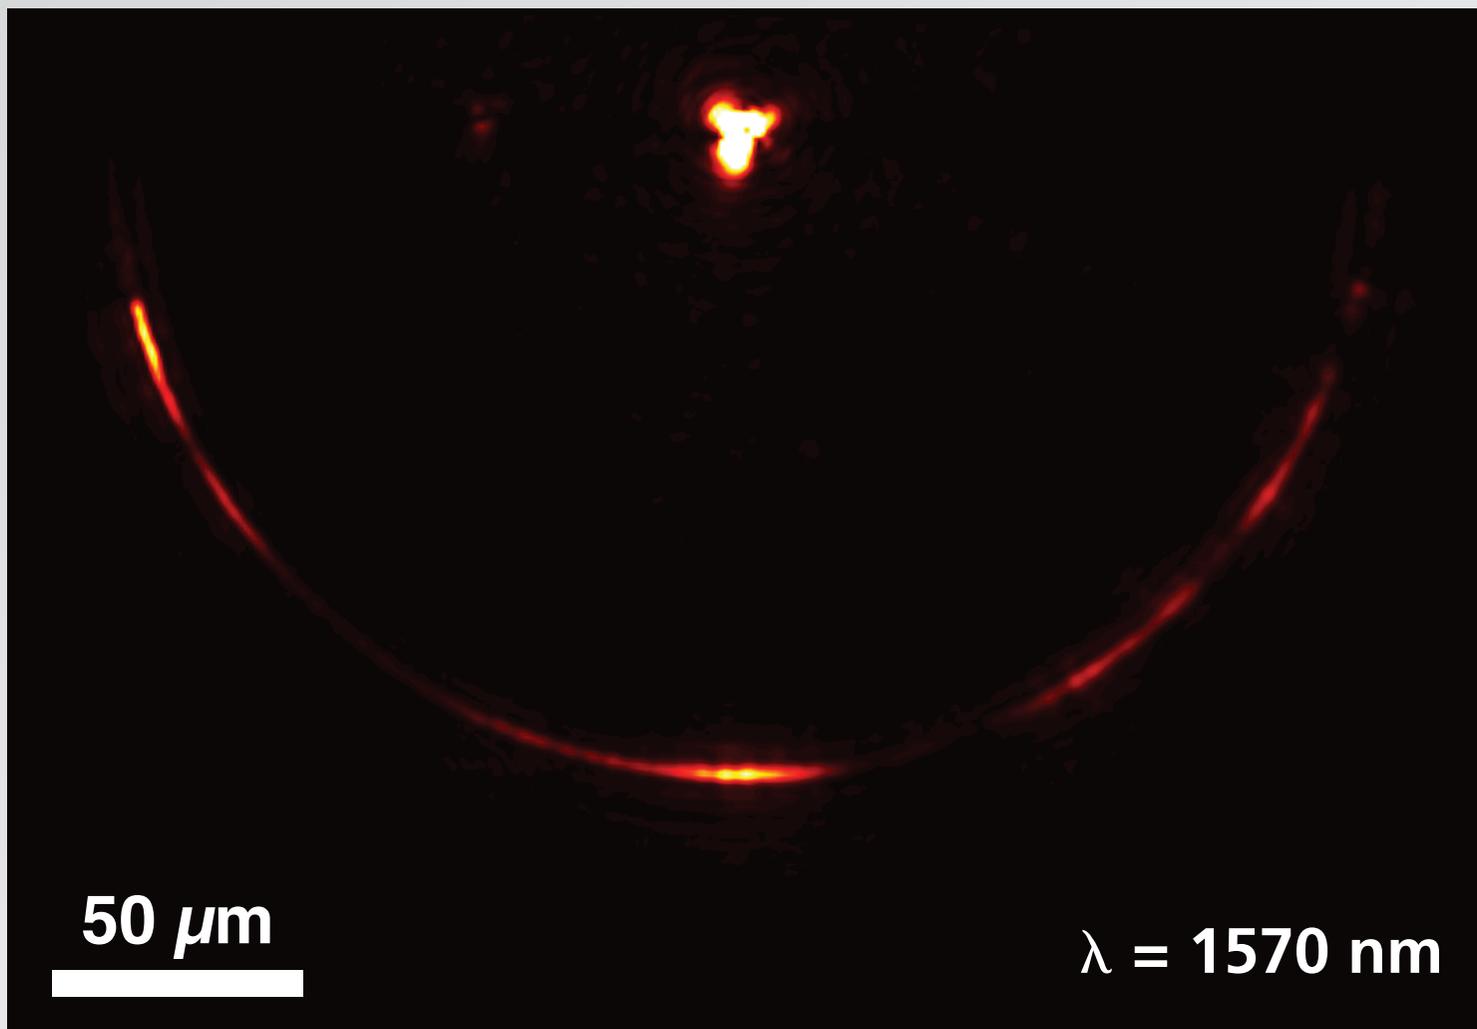

1 index

2 zero index


3 experiments

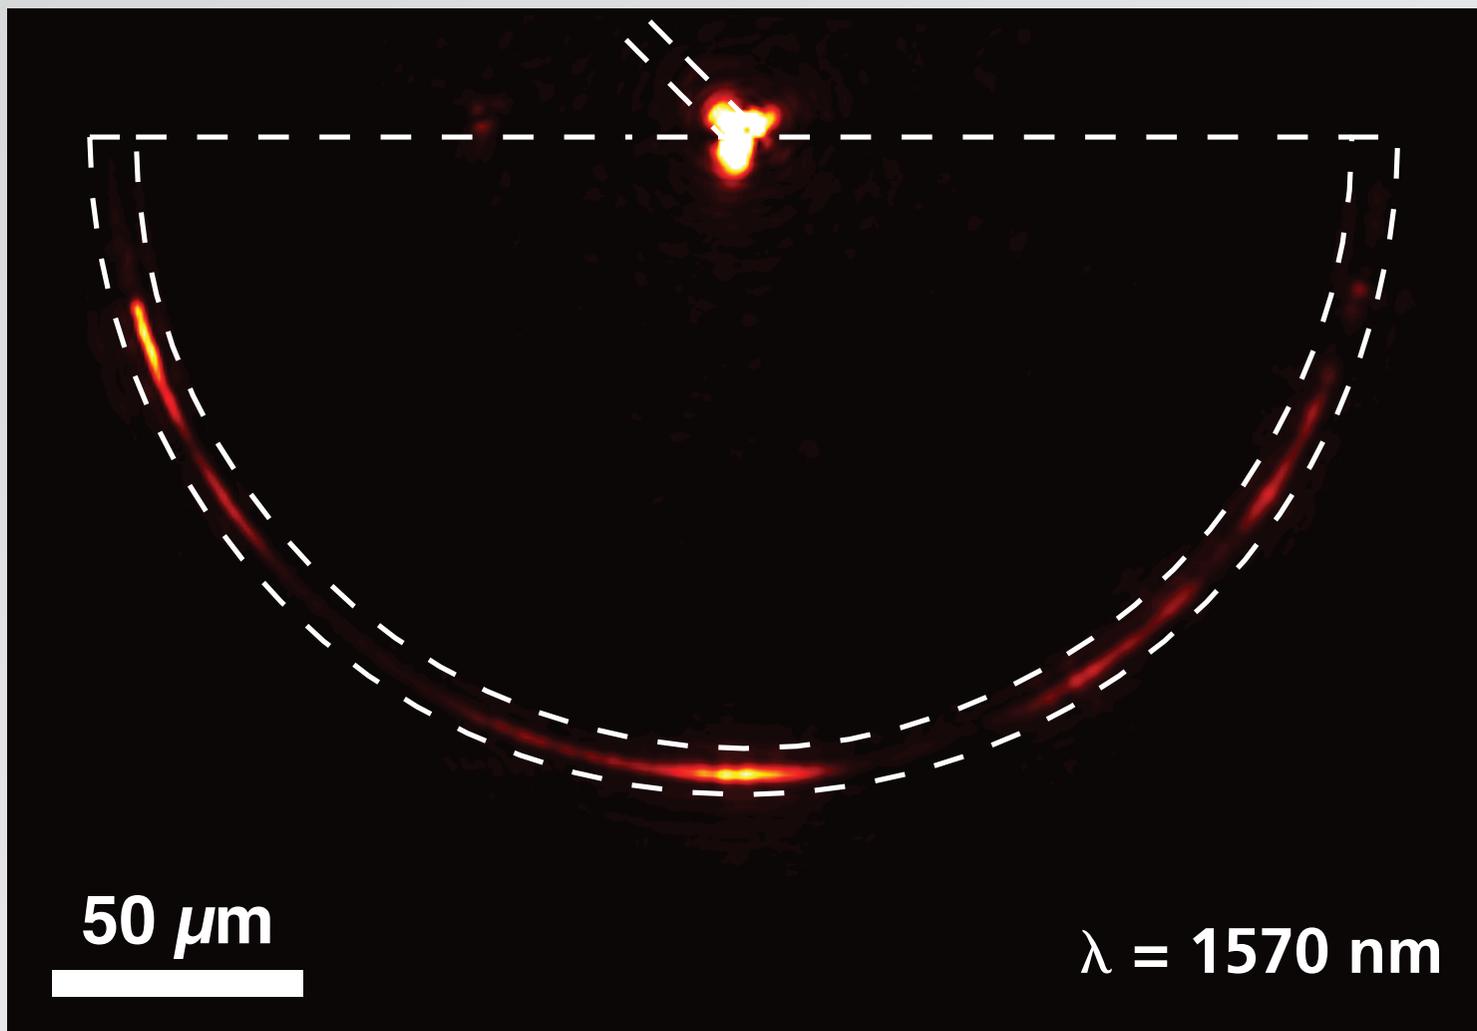

1 index

2 zero index


3 experiments

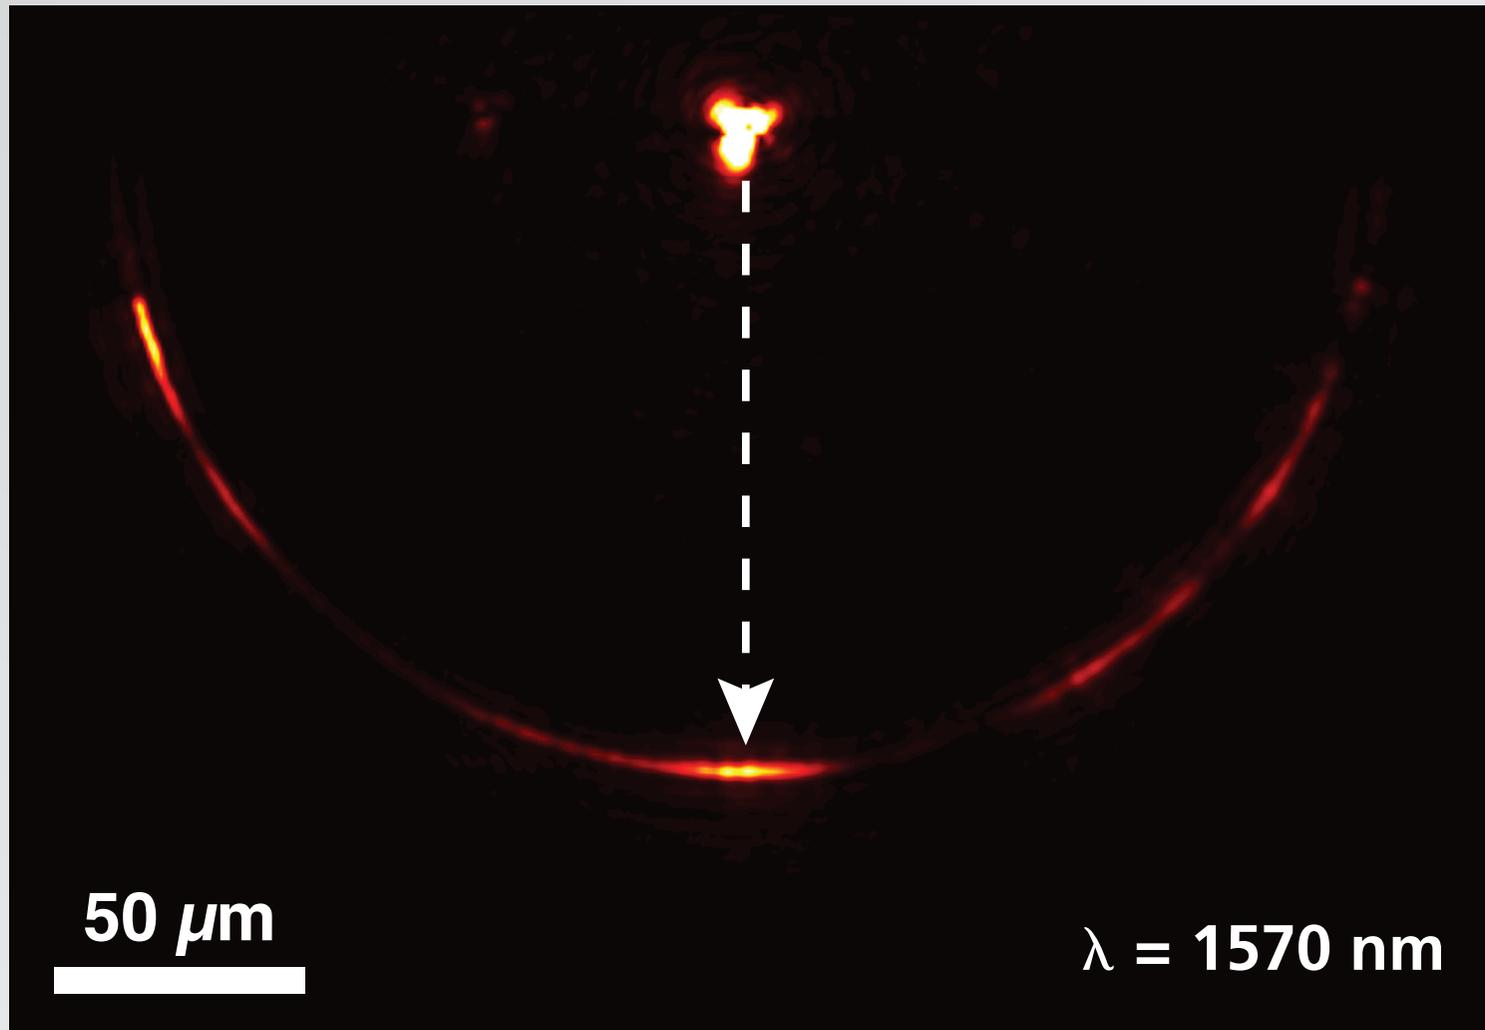

1 index

2 zero index

3 experiments

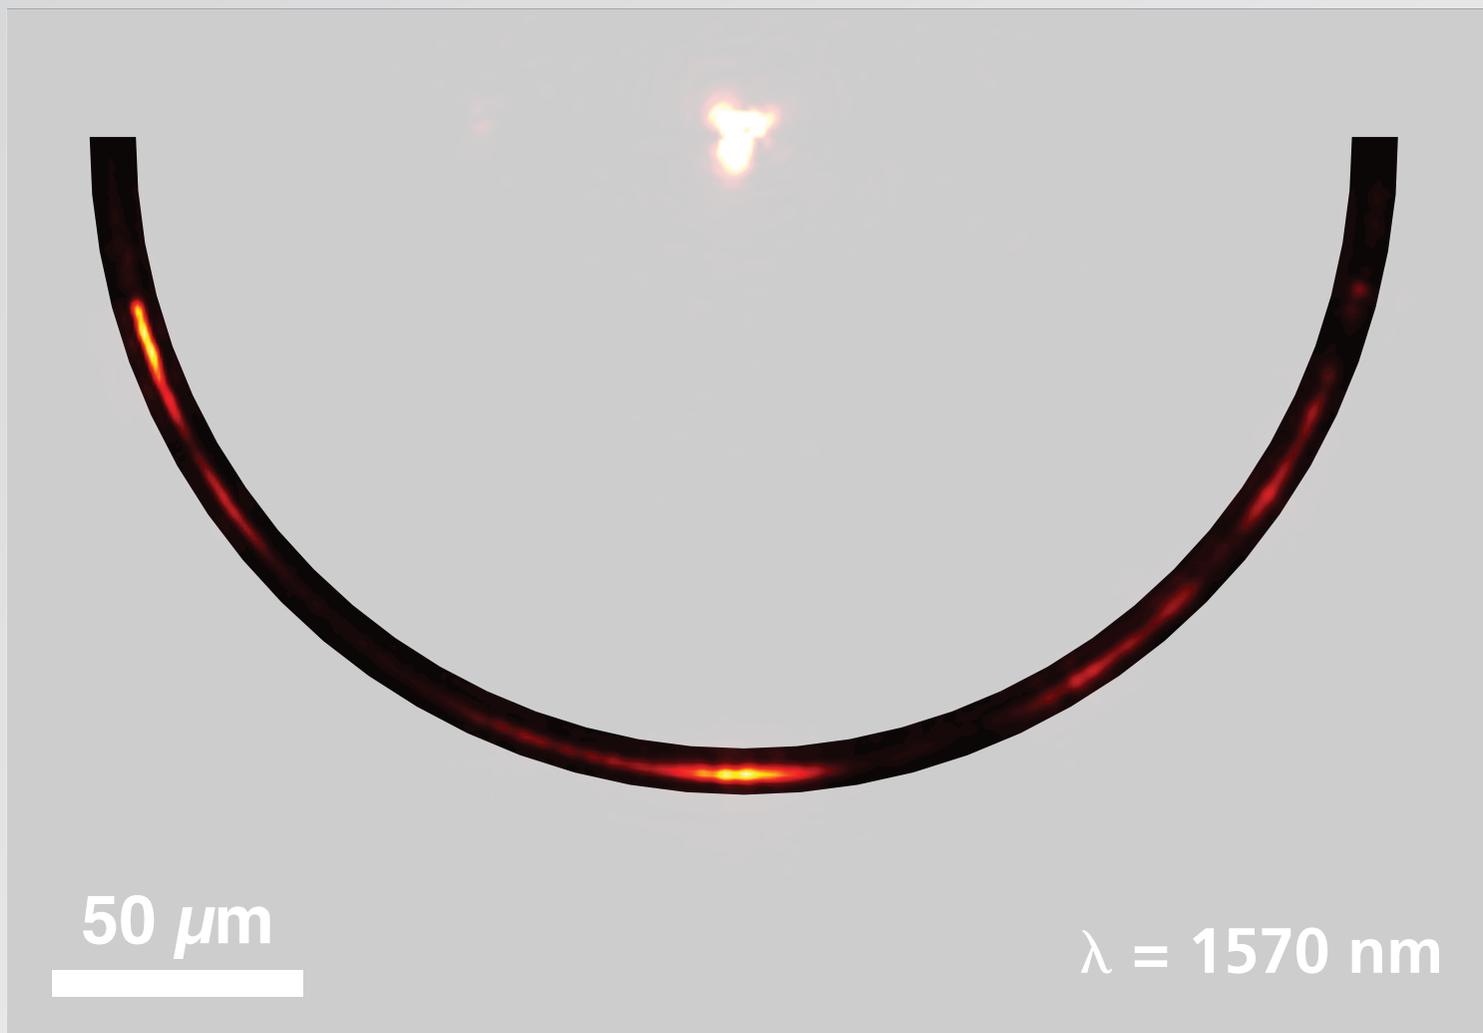


1 index

2 zero index

3 experiments

# Wavelength dependence of refraction angle

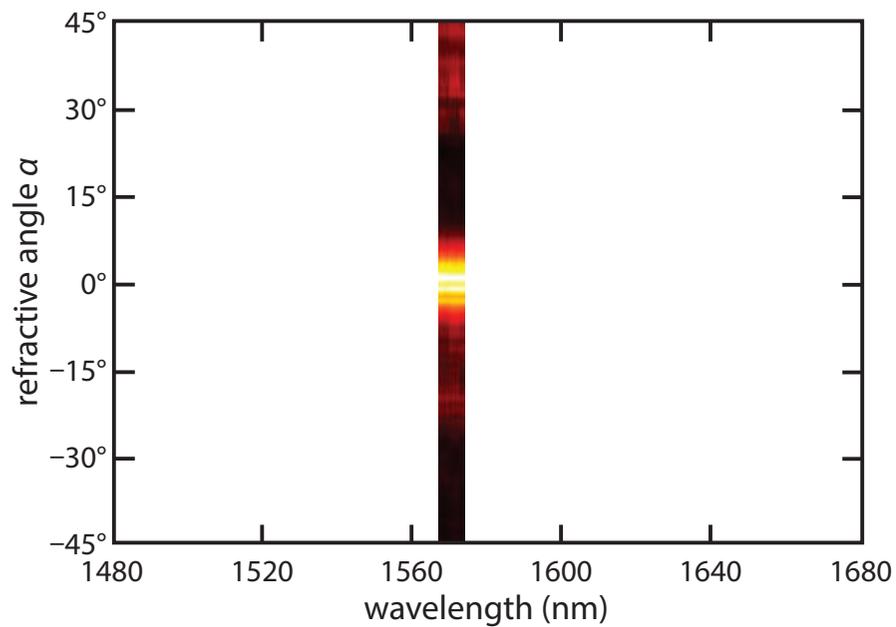


1 index

2 zero index

3 experiments

# Wavelength dependence of refraction angle

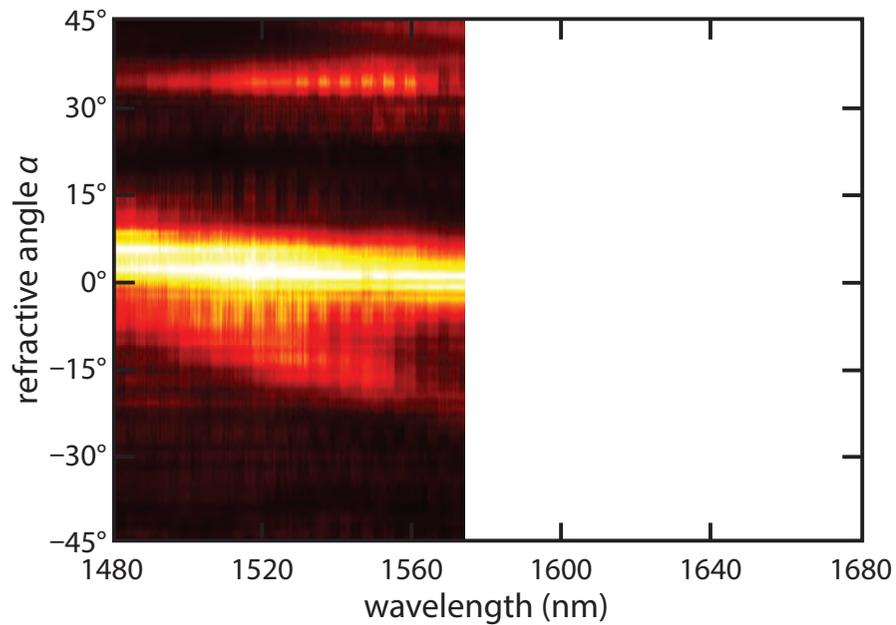


1 index

2 zero index

3 experiments

# Wavelength dependence of refraction angle

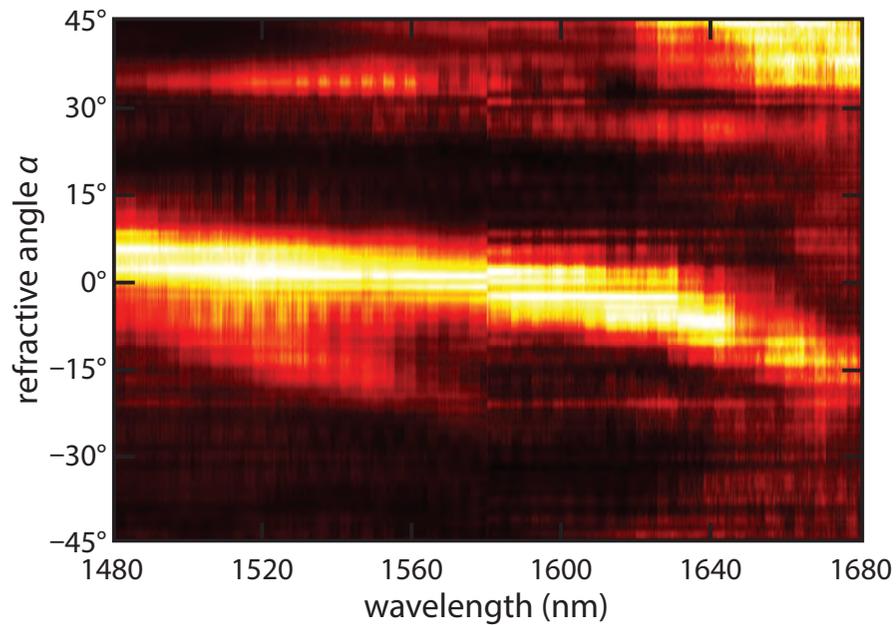


1 index

2 zero index

3 experiments

# Wavelength dependence of refraction angle

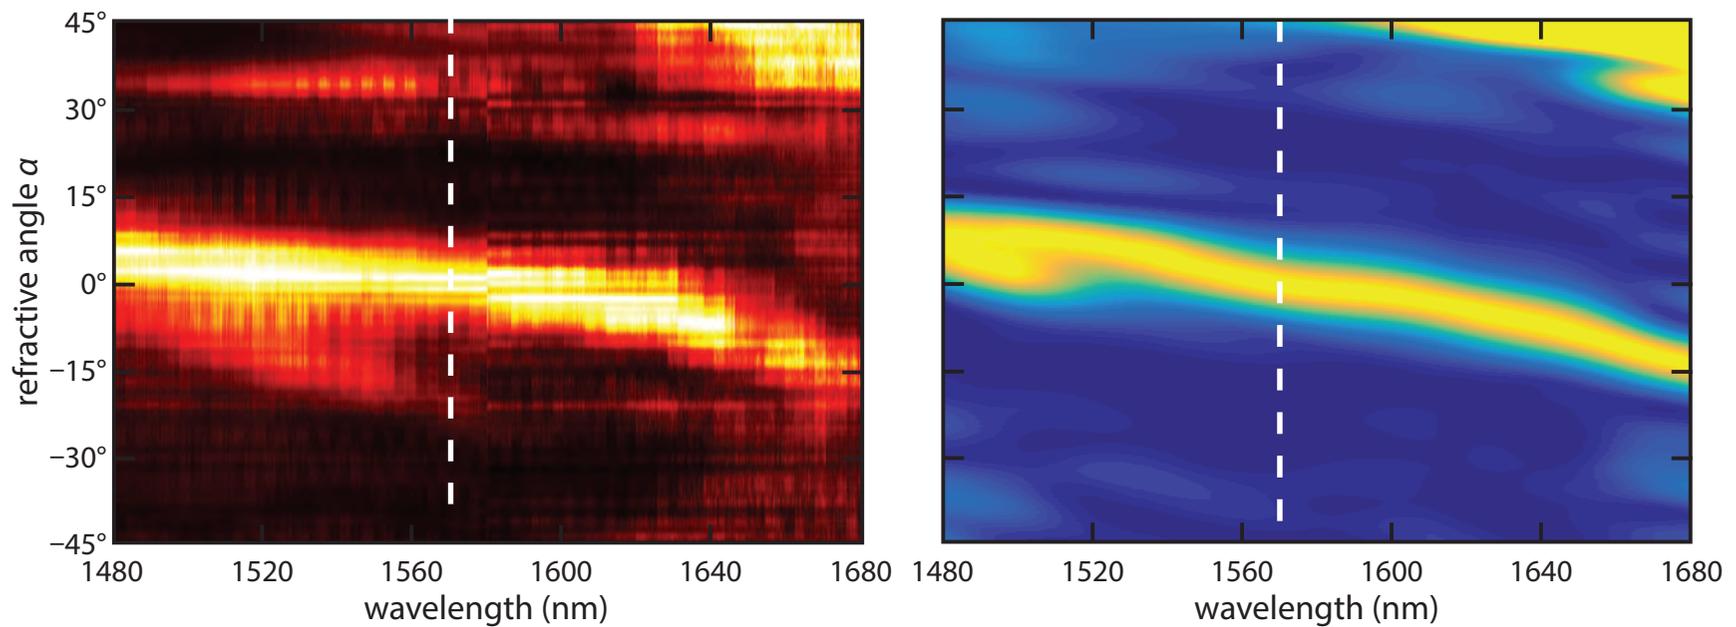


1 index

2 zero index

3 experiments

# Wavelength dependence of index

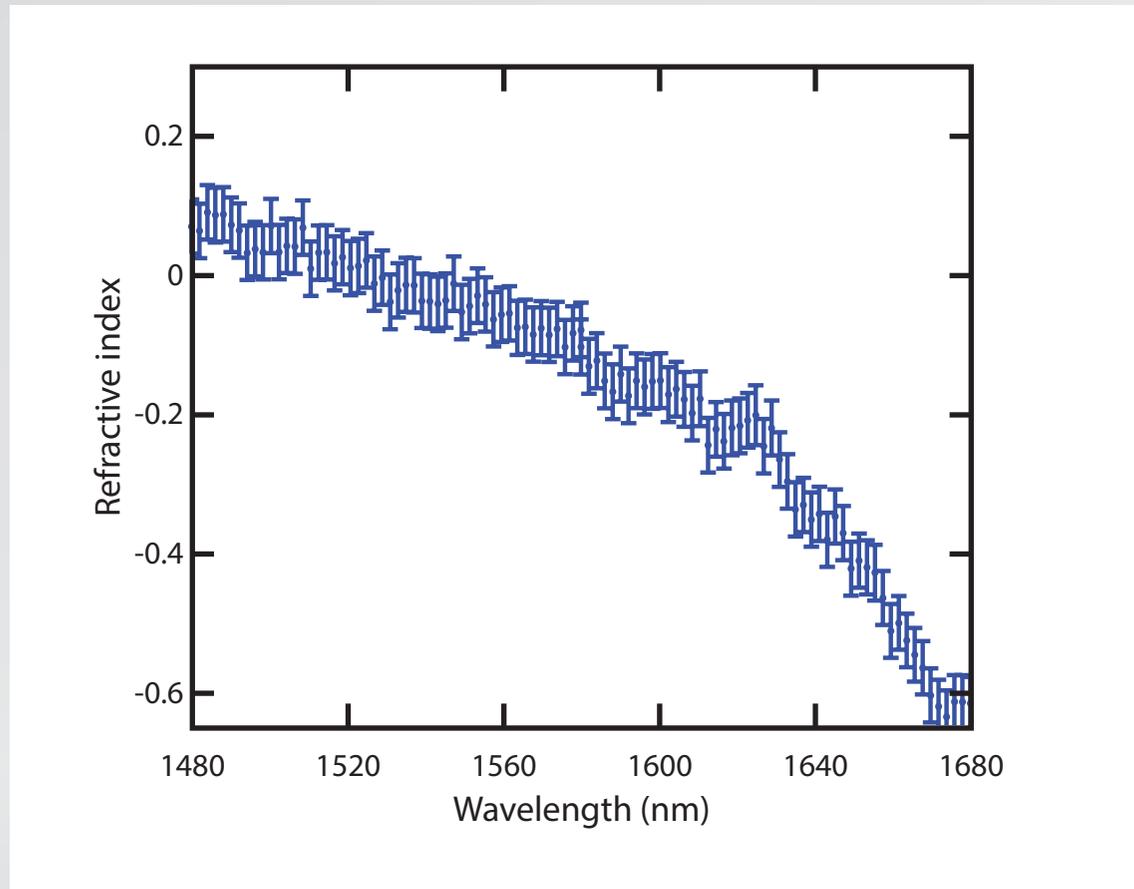


1 index

2 zero index

3 experiments

# Wavelength dependence of index

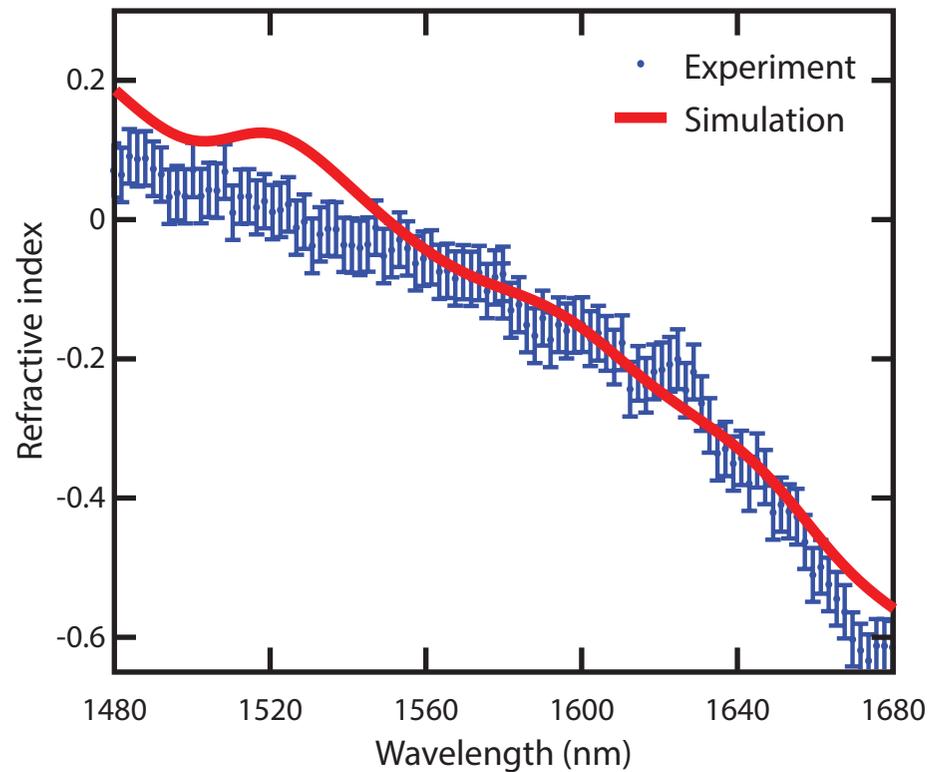


1 index

2 zero index

3 experiments

## More extreme optics


- **suppressing losses**
- **beam steering & supercoupling**
- **nonlinear optics**
- **quantum optics**

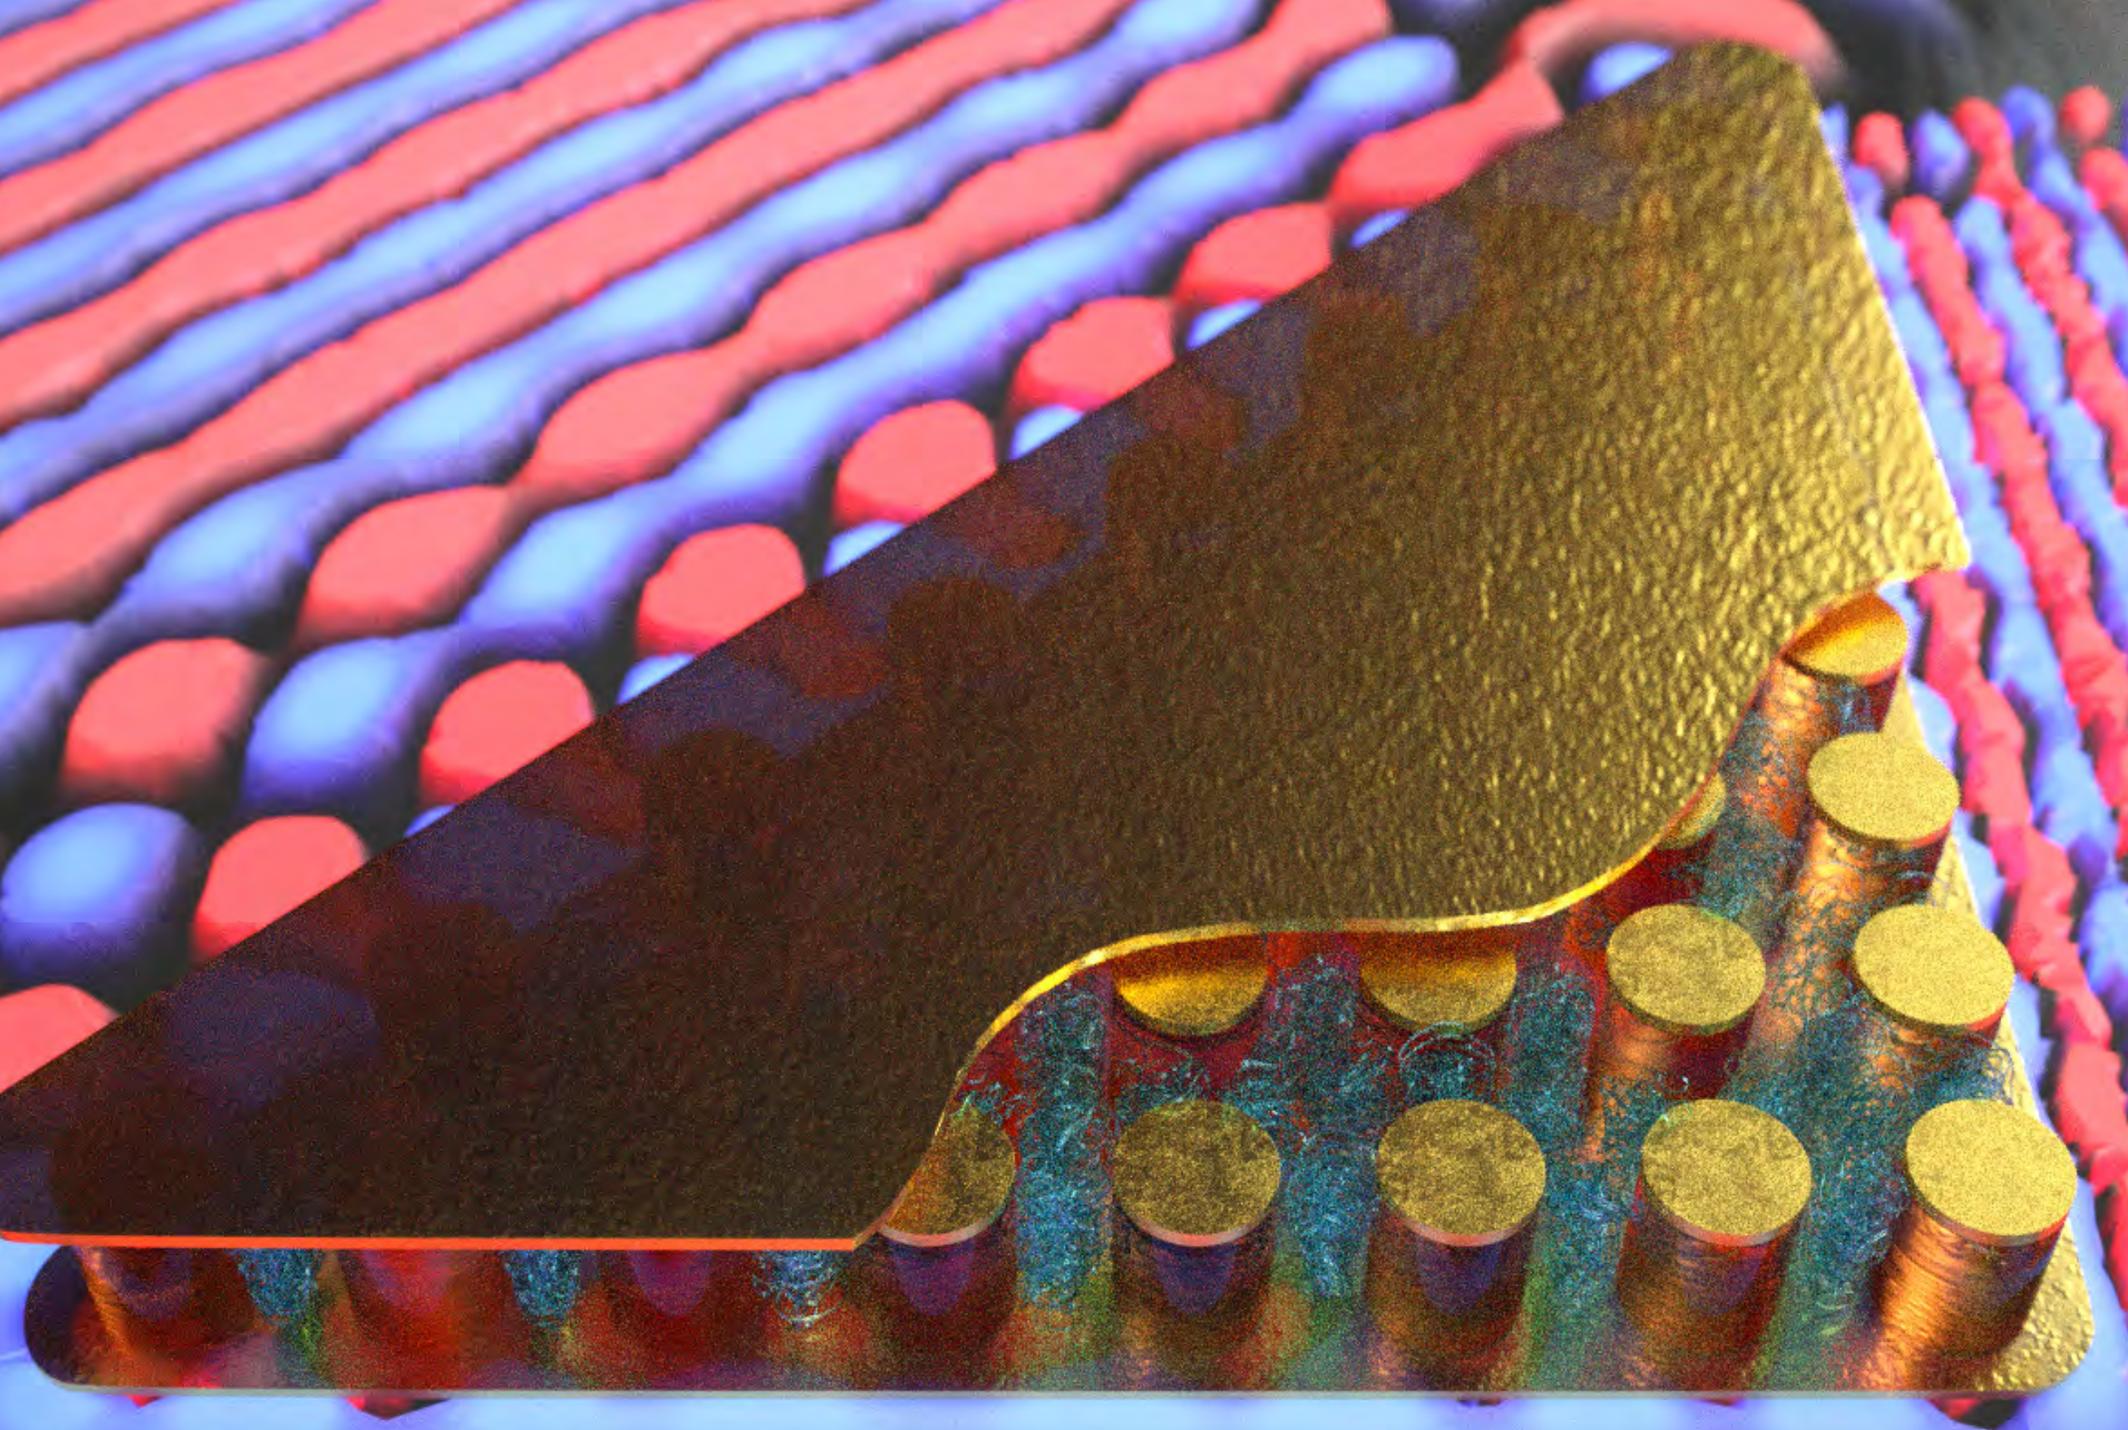

**1** index

**2** zero index

**3** experiments

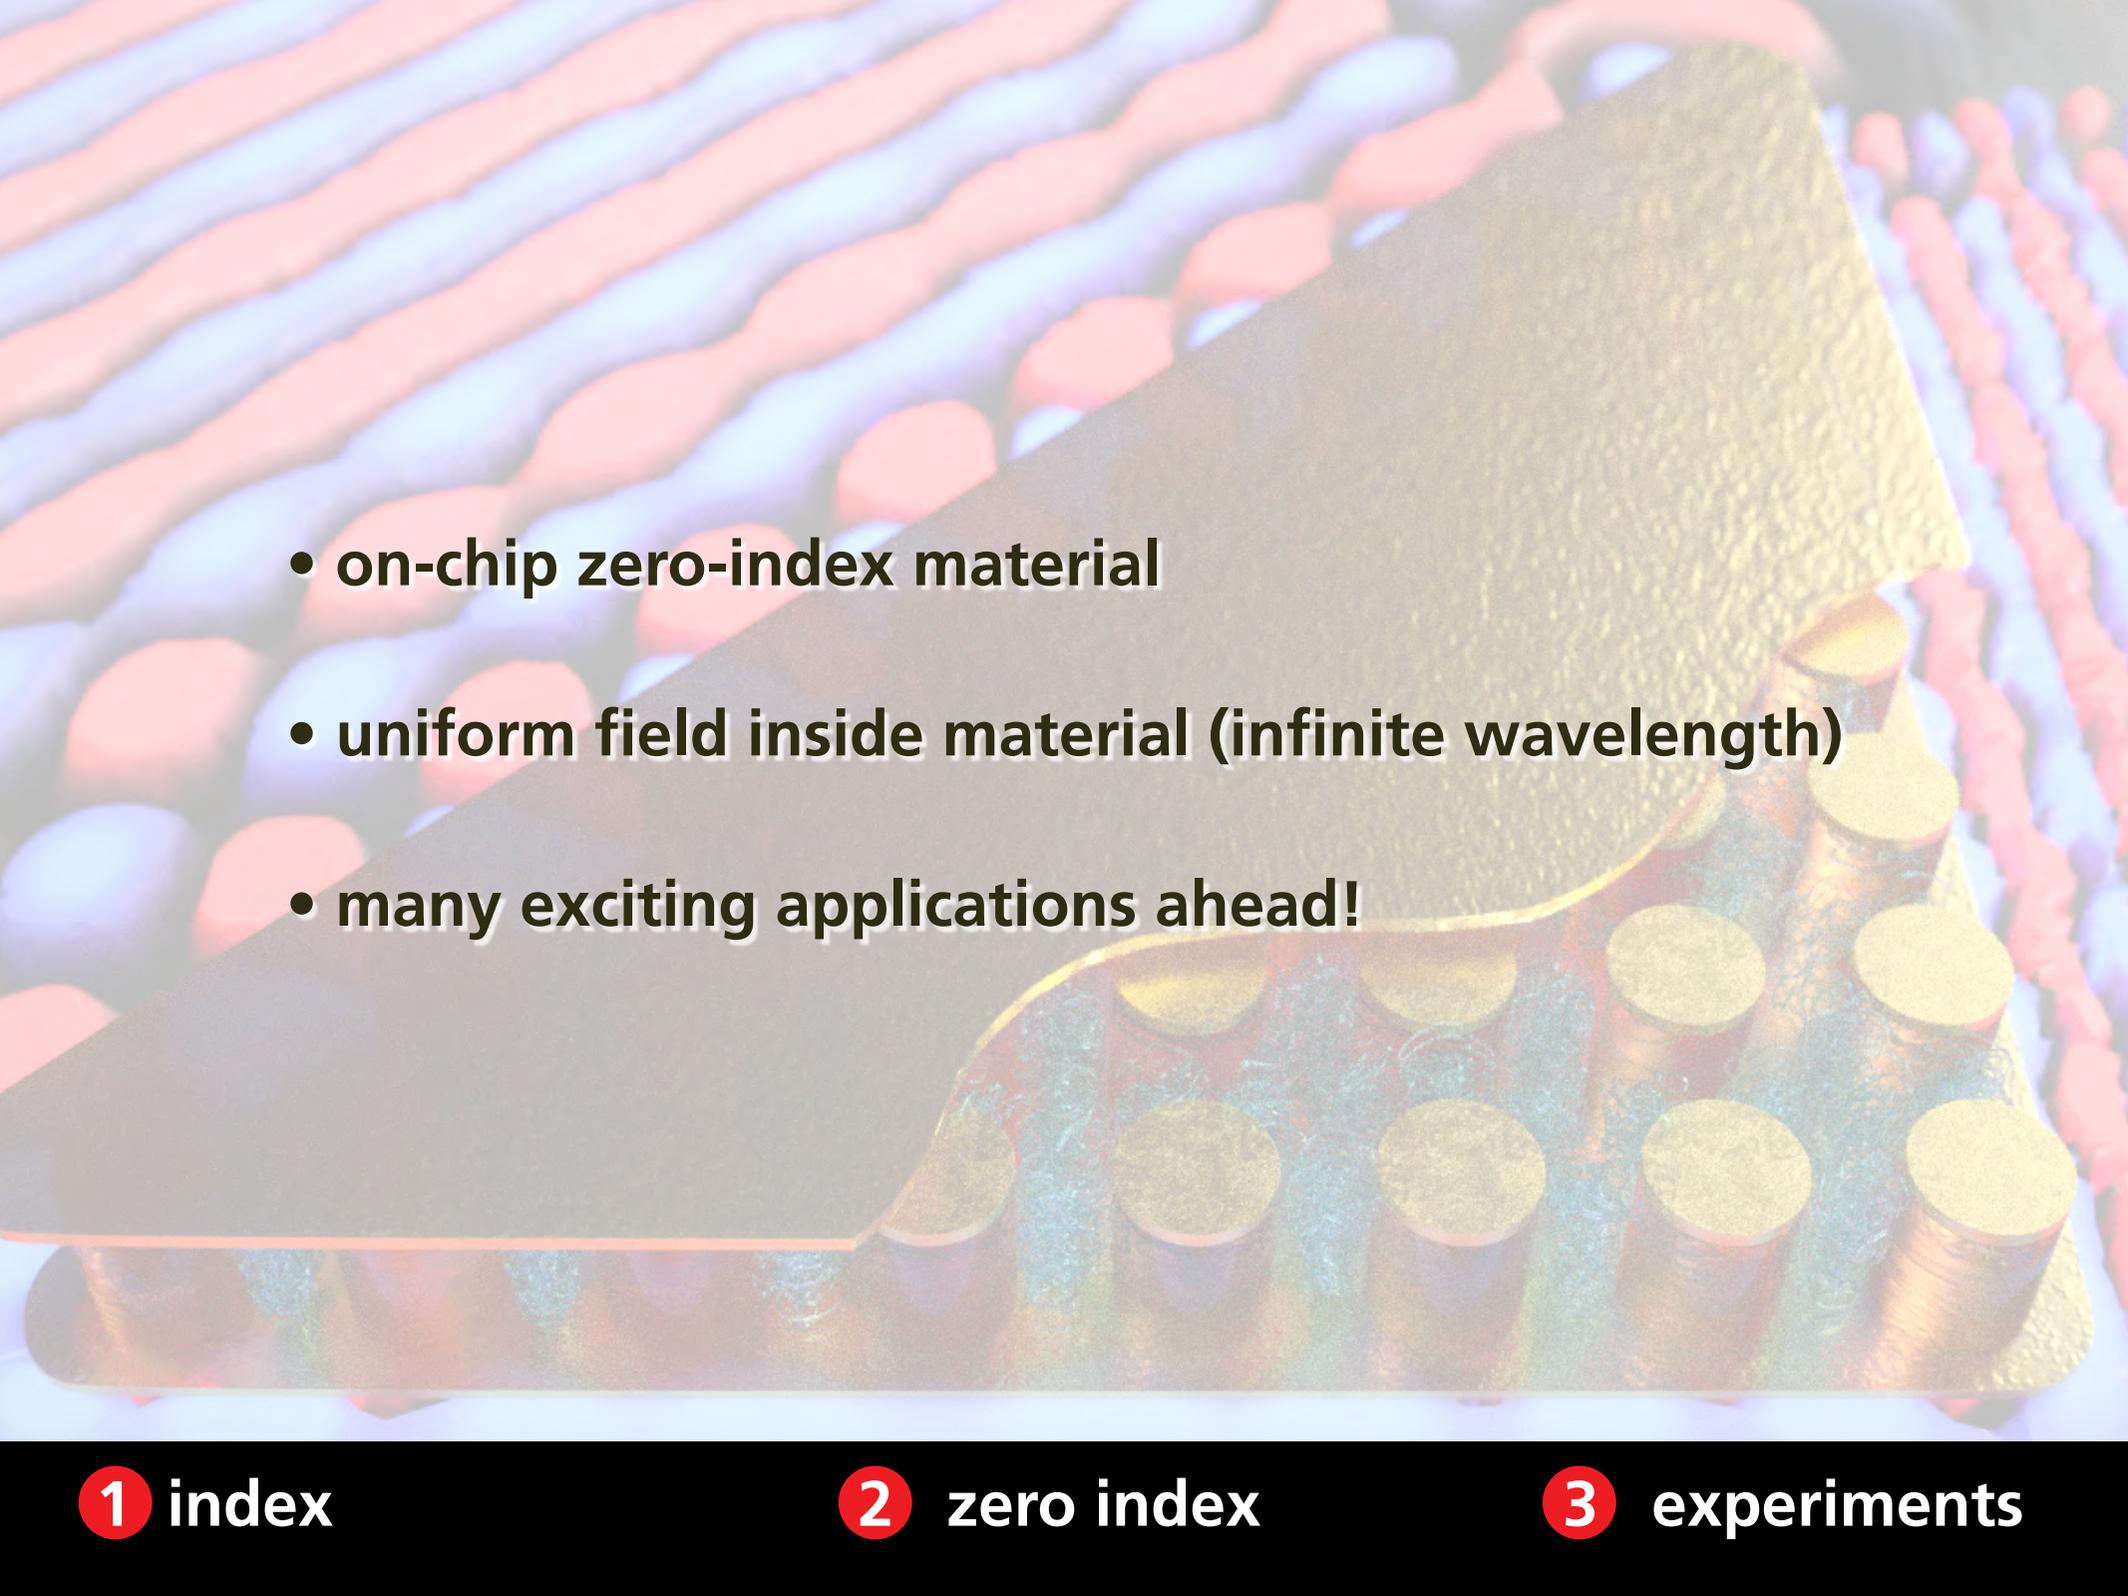
- 
- **on-chip zero-index material**
  - **uniform field inside material (infinite wavelength)**
  - **many exciting applications ahead!**

**1** index

**2** zero index

**3** experiments

More info: download paper!

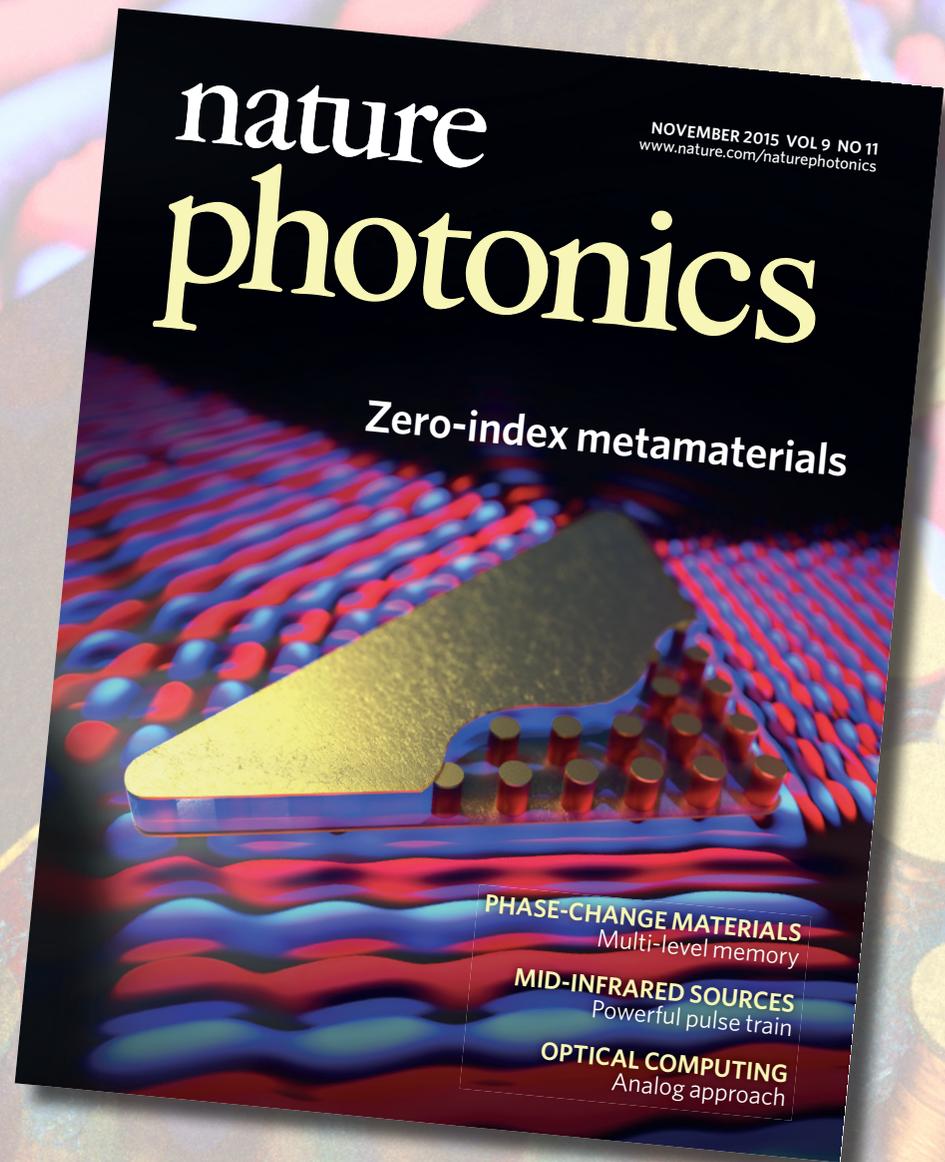

1 index

2 zero index

3 experiments

**The Team: Yang Li, Shota Kita,  
Orad Reshef, Philip Muñoz, Daryl Vulis, Marko Lončar**

**Funding: National Science Foundation**

**for a copy of this presentation:**

**<http://ericmazur.com>**

**Follow me!**



**eric\_mazur**